

# **NX Nastran 7.1**

## **Quick Reference Guide**

# Proprietary & Restricted Rights Notice

© 2010 Siemens Product Lifecycle Management Software Inc. All Rights Reserved.  
This software and related documentation are proprietary to Siemens Product Lifecycle Management Software Inc.

NASTRAN is a registered trademark of the National Aeronautics and Space Administration. NX Nastran is an enhanced proprietary version developed and maintained by Siemens Product Lifecycle Management Software Inc.

MSC is a registered trademark of MSC.Software Corporation. MSC.Nastran and MSC.Patran are trademarks of MSC.Software Corporation.

All other trademarks are the property of their respective owners.

## TAUCS Copyright and License

TAUCS Version 2.0, November 29, 2001. Copyright (c) 2001, 2002, 2003 by Sivan Toledo, Tel-Aviv University, stoledo@tau.ac.il. All Rights Reserved.

TAUCS License:

Your use or distribution of TAUCS or any derivative code implies that you agree to this License.

**THIS MATERIAL IS PROVIDED AS IS, WITH ABSOLUTELY NO WARRANTY EXPRESSED OR IMPLIED. ANY USE IS AT YOUR OWN RISK.**

Permission is hereby granted to use or copy this program, provided that the Copyright, this License, and the Availability of the original version is retained on all copies. User documentation of any code that uses this code or any derivative code must cite the Copyright, this License, the Availability note, and "Used by permission." If this code or any derivative code is accessible from within MATLAB, then typing "help taucs" must cite the Copyright, and "type taucs" must also cite this License and the Availability note. Permission to modify the code and to distribute modified code is granted, provided the Copyright, this License, and the Availability note are retained, and a notice that the code was modified is included. This software is provided to you free of charge.

### Availability

As of version 2.1, we distribute the code in 4 formats: zip and tarred-gzipped (tgz), with or without binaries for external libraries. The bundled external libraries should allow you to build the test programs on Linux, Windows, and MacOS X without installing additional

software. We recommend that you download the full distributions, and then perhaps replace the bundled libraries by higher performance ones (e.g., with a BLAS library that is specifically optimized for your machine). If you want to conserve bandwidth and you want to install the required libraries yourself, download the lean distributions. The zip and tgz files are identical, except that on Linux, Unix, and MacOS, unpacking the tgz file ensures that the configure script is marked as executable (unpack with `tar zxvpf`), otherwise you will have to change its permissions manually.



# Contents

<b>nastran Command and NASTRAN Statement</b> .....	<b>1-1</b>
The nastran Command .....	1-2
The NASTRAN Statement .....	1-12
NASTRAN .....	1-13
<b>File Management Statements</b> .....	<b>2-1</b>
Key to Descriptions .....	2-38
File Management Statement Descriptions .....	2-42
WHERE and CONVERT Clauses .....	2-44
\$ .....	2-46
ACQUIRE .....	2-47
ASSIGN .....	2-48
CONNECT .....	2-53
DBCLEAN .....	2-57
DBDICT .....	2-58
DBDIR .....	2-72
DBFIX .....	2-74
DBLOAD .....	2-75
DBLOCATE .....	2-79
DBSETDEL .....	2-83
DBUNLOAD .....	2-84
DBUPDATE .....	2-87
DEFINE .....	2-89
ENDJOB .....	2-92
EXPAND .....	2-93
INCLUDE .....	2-95
INIT .....	2-96
PROJ .....	2-101
RESTART .....	2-102
<b>Executive Control Statements</b> .....	<b>3-1</b>
Key to Descriptions .....	3-106
Executive Control Statement Descriptions .....	3-108
\$ .....	3-109
ALTER .....	3-110
APP .....	3-114

CEND	3-115
COMPILE	3-116
COMPILER	3-120
DIAG	3-122
DOMAINSOLVER	3-127
ECHO	3-130
ENDALTER	3-131
GEOMCHECK	3-132
ID	3-138
INCLUDE	3-139
LINK	3-140
MALTER	3-143
SOL	3-148
SOL 601,N or SOL 701	3-151
TIME	3-156

**Case Control Commands . . . . . 4-1**

Key to Descriptions	4-158
Format of Case Control Command Descriptions	4-160
Case Control Command Summary	4-161
Case Control Command Descriptions	4-173
\$	4-174
A2GG	4-175
ACCELERATION	4-177
ADACT	4-181
ADAMSMNF	4-182
ADAPT	4-195
ADMRECVR	4-196
AECONFIG	4-200
AEROF	4-201
AESYMX Y	4-202
AESYMXZ	4-203
AEUXREF	4-204
ANALYSIS	4-205
APRESSURE	4-207
AUXCASE	4-208
AUXMODEL	4-209
AXISYMMETRIC	4-210
B2GG	4-211
B2PP	4-212
BC	4-214
BCRESULTS	4-215
BCSET	4-217
BEGIN BULK	4-219

BGSET	4-221
BOLTLD (case control)	4-223
BOUTPUT	4-225
CLOAD	4-227
CMETHOD	4-228
CSSCHD	4-229
DATAREC	4-230
DEFORM	4-231
DEGLB	4-232
DESOBJ	4-233
DESSUB	4-235
DISPLACEMENT	4-236
DIVERG	4-240
DLOAD	4-241
DRSPAN	4-243
DSAPRT	4-245
DSYM	4-247
EBDSET	4-248
ECHO	4-249
EDE	4-252
EKE	4-255
ELSDCON	4-258
ELSTRAIN	4-259
ELSTRESS	4-260
ELSUM	4-261
ENTHALPY	4-263
ESE	4-264
EXTSEOUT	4-269
FLSFSEL	4-276
FLSPOUT	4-278
FLSTCNT	4-280
FLUX	4-282
FMETHOD	4-284
FORCE	4-285
FREQUENCY	4-289
GKRESULTS	4-290
GPFORCE	4-291
GPKE	4-294
GPRSORT	4-296
GPSDCON	4-297
GPSTRAIN	4-298
GPSTRESS	4-300
GROUNDCHECK	4-302
GUST	4-304
HARMONICS	4-305

HDOT	4-307
HOUTPUT	4-308
IC	4-309
INCLUDE	4-311
K2GG	4-312
K2PP	4-313
K42GG	4-315
LABEL	4-316
LINE	4-317
LOAD	4-318
LOADSET	4-320
M2GG	4-322
M2PP	4-324
MASTER	4-326
MAXLINES	4-328
MAXMIN	4-329
MBDEXPORT	4-332
MBDRECVR	4-359
MEFFMASS	4-363
METHOD	4-366
MFLUID	4-368
MODALE	4-369
MODCON	4-373
MODES	4-376
MODSEL	4-378
MODTRAK	4-379
MPC	4-380
MPCFORCES	4-381
MPRES	4-385
NLOAD	4-386
NLPARM	4-387
NLSTRESS	4-388
NONLINEAR	4-390
NOUTPUT	4-391
NSM	4-392
OFREQUENCY	4-393
OLOAD	4-395
OMODES	4-399
OTIME	4-401
OUTPUT	4-403
OUTRCV	4-405
P2G	4-406
PAGE	4-407
PANCON	4-408
PARAM	4-411



PARTN	4-412
PLOTID	4-413
PRESSURE	4-414
RANDOM	4-415
RCROSS	4-416
REPCASE	4-418
RIGID	4-419
RMAXMIN	4-421
RMETHOD	4-424
RSMETHOD	4-425
SACCELERATION	4-427
SDAMPING	4-429
SDISPLACEMENT	4-430
SEALL	4-432
SEDR	4-434
SEDV	4-436
SEEXCLUDE	4-438
SEFINAL	4-440
SEKREDUCE	4-441
SELGENERATE	4-443
SELREDUCE	4-445
SEMGENERATE	4-447
SEMREDUCE	4-449
SENSITY	4-451
SERESP	4-452
SET	4-454
SET	4-456
SET2	4-458
SETMC	4-460
SETS DEFINITION	4-462
SHELLTHK	4-463
SKIP	4-464
SMETHOD	4-465
SPC	4-466
SPCFORCES	4-467
STATSUB	4-471
STRAIN	4-473
STRESS	4-477
STRFIELD	4-482
SUBCASE	4-483
SUBCOM	4-484
SUBSEQ	4-486
SUBTITLE	4-487
SUPER	4-488
SUPPORT1	4-490

SURFACE	4-491
SVECTOR	4-495
SVELOCITY	4-496
SYM	4-498
SYMCOM	4-499
SYMSEQ	4-501
TEMPERATURE	4-502
TFL	4-506
THERMAL	4-508
TITLE	4-510
TRIM	4-511
TSTEP	4-512
TSTEPNL	4-514
TSTRU	4-515
VECTOR	4-516
VELOCITY	4-517
VOLUME	4-521
VUGRID	4-523
WEIGHTCHECK	4-524
Case Control Applicability Tables	4-526

**Case Control OUTPUT(PLOT) Commands . . . . . 5-1**

AXES	5-546
CAMERA	5-548
CONTOUR	5-549
CSCALE	5-552
DISTORTION	5-553
FIND	5-554
MAXIMUM DEFORM	5-556
OCULAR SEPARATION	5-557
ORIGIN	5-558
ORTHOGRAPHIC, etc.	5-559
PAPER SIZE	5-560
PEN	5-561
PERSPECTIVE	5-562
PLOT	5-563
PLOTTER	5-573
PROJECTION	5-574
PTITLE	5-575
SCALE	5-576
SEPLOT	5-578
SET	5-579
SEUPLOT	5-580
STEREOSCOPIC	5-581

VANTAGE POINT	5-582
VIEW	5-583

**Case Control X-Y PLOT Commands . . . . . 6-1**

X-Y Output Command Summary	6-588
ALLEDGE TICS	6-592
BALL EDGE TICS	6-593
BLEFT TICS	6-594
BRIGHT TICS	6-595
CAMERA	6-596
CLEAR	6-597
CSCALE	6-598
CURVELINESYMBOL	6-599
DENSITY	6-600
LEFT TICS	6-601
LONG	6-602
LOWER TICS	6-603
PENSIZE	6-604
PLOTTER	6-605
RIGHT TICS	6-606
TALL EDGE TICS	6-607
TCURVE	6-608
TLEFT TICS	6-609
TRIGHT TICS	6-610
UPPER TICS	6-611
XAXIS	6-612
XBAXIS	6-613
XBGRID LINES	6-614
XDIVISIONS	6-615
XGRID LINES	6-616
XINTERCEPT	6-617
XLOG	6-618
XMAX	6-619
XMIN	6-620
XPAPER	6-621
XTGRID LINES	6-622
XTITLE	6-623
YYPAPLOT	6-624
YPEAK	6-625
YYPLOT	6-626
XYPRINT	6-630
YYPUNCH	6-631
XVALUE PRINT SKIP	6-632
YAXIS	6-633

YBDIVISIONS	6-634
YBINTERCEPT	6-635
YBGRID LINES	6-636
YBLOG	6-637
YBMAX	6-638
YBMIN	6-639
YBTITLE	6-640
YBVALUE PRINT SKIP	6-641
YDIVISIONS	6-642
YINTERCEPT	6-643
YGRID LINES	6-644
YLOG	6-645
YMAX	6-646
YMIN	6-647
YPAPER	6-648
YTAXIS	6-649
YTDIVISIONS	6-650
YTGRID LINES	6-651
YTINTERCEPT	6-652
YTITLE	6-653
YTLOG	6-654
YTMAX	6-655
YTMIN	6-656
YTTITLE	6-657
YTVALUE PRINT SKIP	6-658
YVALUE PRINT SKIP	6-659

**Parameters and Parameter Applicability Tables** ..... 7-1

Parameter Descriptions	7-662
Parameter Applicability Tables	7-759

**Item Codes** ..... 8-1

Element Stress (or Strain) Item Codes	8-786
Element Force Item Codes	8-881
Fluid Virtual Mass Pressure Item Codes	8-906
Slideline Contact Item Codes	8-907
Element Strain Energy Item Codes	8-908

**Degree-of-Freedom Sets** ..... 9-1

Degree-of-Freedom Set Definitions	9-910
Degree-of-Freedom Set Bulk Data Entries	9-914
User Defined Degree-of-Freedom Sets	9-916

<b>Bulk Data Entries</b> .....	<b>10-1</b>
Key to Descriptions .....	10-918
Bulk Data Entry Descriptions .....	10-920
Format of Bulk Data Entries .....	10-921
Bulk Data Entry Summary .....	10-929
\$ .....	10-963
/ .....	10-964

**Bulk Data Entries A—B** ..... **11-1**

ACCEL .....	11-966
ACCEL1 .....	11-968
ACMODL .....	11-970
ACSRCE .....	11-975
ADAPT .....	11-977
ADUMi .....	11-981
AECOMP .....	11-982
AECOMPL .....	11-984
AEDW .....	11-985
AEFACT .....	11-986
AEFORCE .....	11-987
AELINK .....	11-989
AELIST .....	11-991
AEPARM .....	11-992
AEPRESS .....	11-993
AERO .....	11-994
AEROS .....	11-996
AESTAT .....	11-998
AESURF .....	11-1000
AESURFS .....	11-1002
ASET .....	11-1003
ASET1 .....	11-1004
AXIC .....	11-1006
AXIF .....	11-1008
AXSLOT .....	11-1010
BAROR .....	11-1011
BCONP .....	11-1013
BCPROP .....	11-1016
BCPROPS .....	11-1017
BCRPARA .....	11-1018
BCTADD .....	11-1021
BCTPARA .....	11-1022
BCTPARM .....	11-1035
BCTSET .....	11-1040
BDYLIST .....	11-1043

BDYOR	11-1045
BEAMOR	11-1047
BFRIC	11-1048
BGADD	11-1049
BGPARM	11-1050
BGSET	11-1054
BLSEG	11-1056
BNDFIX	11-1059
BNDFIX1	11-1061
BNDFREE	11-1063
BNDFREE1	11-1065
BNDGRID	11-1067
BOLT	11-1069
BOLTFOR	11-1071
BOLTLD (bulk entry)	11-1073
BOUTPUT	11-1075
BSET	11-1077
BSET1	11-1079
BSURF	11-1081
BSURFS	11-1083
BWIDTH	11-1084

**Bulk Data Entries CA—CM . . . . . 12-1**

CAABSF	12-1088
CAERO1	12-1090
CAERO2	12-1093
CAERO3	12-1096
CAERO4	12-1099
CAERO5	12-1101
CAXIF1	12-1105
CBAR	12-1107
CBARAO	12-1112
CBEAM	12-1114
CBEND	12-1119
CBUSH	12-1122
CBUSH1D	12-1126
CCONEAX	12-1128
CDAMP1	12-1129
CDAMP2	12-1131
CDAMP3	12-1133
CDAMP4	12-1134
CDAMP5	12-1135
CDUMi	12-1136
CELAS1	12-1137

CELAS2	12-1139
CELAS3	12-1141
CELAS4	12-1142
CFAST	12-1143
CFLUIDi	12-1145
CGAP	12-1147
CHACAB	12-1150
CHACBR	12-1152
CHBDYE	12-1154
CHBDYG	12-1159
CHBDYP	12-1163
CHEXA	12-1168
CLOAD	12-1172
CMASS1	12-1174
CMASS2	12-1176
CMASS3	12-1178
CMASS4	12-1179

**Bulk Data Entries CO—CY . . . . . 13-1**

CONM1	13-1182
CONM2	13-1184
CONROD	13-1187
CONV	13-1189
CONVM	13-1191
CORD1C	13-1193
CORD1R	13-1195
CORD1S	13-1197
CORD2C	13-1199
CORD2R	13-1202
CORD2S	13-1204
CORD3G	13-1206
CPENTA	13-1208
CPLSTN3	13-1212
CPLSTN4	13-1214
CPLSTN6	13-1216
CPLSTN8	13-1218
CPLSTS3	13-1220
CPLSTS4	13-1222
CPLSTS6	13-1224
CPLSTS8	13-1226
CPYRAM	13-1228
CQUAD	13-1231
CQUAD4	13-1233
CQUAD8	13-1238

CQUADR	13-1243
CQUADX	13-1247
CQUADX4	13-1249
CQUADX8	13-1251
CRAC2D	13-1253
CRAC3D	13-1256
CREEP	13-1260
CROD	13-1267
CSET	13-1269
CSET1	13-1271
CSHEAR	13-1273
CSLOT3	13-1275
CSLOT4	13-1277
CSSCHD	13-1279
CSUPER	13-1281
CSUPEXT	13-1283
CTETRA	13-1284
CTRAX3	13-1288
CTRAX6	13-1290
CTRIA3	13-1292
CTRIA6	13-1296
CTRIAR	13-1300
CTRIAX	13-1303
CTRIAX6	13-1305
CTUBE	13-1308
CVISC	13-1309
CWELD	13-1310
CYAX	13-1320
CYJOIN	13-1322
CYSUP	13-1324
CYSYM	13-1326

**Bulk Data Entries D—E . . . . . 14-1**

DAREA	14-1328
DCONADD	14-1330
DCONSTR	14-1331
DDVAL	14-1334
DEFORM	14-1336
DEFUSET	14-1337
DELAY	14-1338
DEQATN	14-1339
DESVAR	14-1346
DIVERG	14-1348
DLINK	14-1349



DLOAD	14-1351
DMI	14-1353
DMIAX	14-1357
DMIG	14-1359
DMIG,UACCEL	14-1363
DMIJ	14-1365
DMIJI	14-1369
DMIK	14-1373
DOPTPRM	14-1377
DPHASE	14-1384
DRESP1	14-1385
DRESP2	14-1396
DRESP3	14-1401
DSCONS	14-1406
DSCREEN	14-1408
DTABLE	14-1410
DTI	14-1411
DTI,DFRFNC	14-1413
DTI,ESTDATA	14-1416
DTI,INDTA	14-1420
DTI,SETREE	14-1423
DTI,SPECSEL	14-1425
DTI,SPSEL	14-1426
DTI,UNITS	14-1428
DVAR	14-1431
DVBSHAP	14-1432
DVCREL1	14-1433
DVCREL2	14-1435
DVGEOM	14-1437
DVGRID	14-1438
DVMREL1	14-1440
DVMREL2	14-1442
DVPREL1	14-1444
DVPREL2	14-1446
DVSET	14-1448
DVSHAP	14-1451
EBDADD	14-1452
EBDSET	14-1453
ECHOFF	14-1455
ECHOON	14-1456
EIGB	14-1457
EIGC	14-1459
EIGP	14-1467
EIGR	14-1468
EIGRL	14-1473

ELIST	14-1479
ENDDATA	14-1480
EPOINT	14-1481
EXTRN	14-1482

**Bulk Data Entries F—L . . . . . 15-1**

FEEDGE	15-1484
FEFACE	15-1487
FLFACT	15-1489
FLSYM	15-1491
FLUTTER	15-1493
FORCE	15-1495
FORCE1	15-1497
FORCE2	15-1499
FORCEAX	15-1501
FREEPT	15-1502
FREQ	15-1503
FREQ1	15-1504
FREQ2	15-1506
FREQ3	15-1508
FREQ4	15-1511
FREQ5	15-1514
FSLIST	15-1516
GENEL	15-1517
GMBC	15-1521
GMBNDC	15-1529
GMBNDS	15-1531
GMCORD	15-1533
GMCURV	15-1535
GMINTC	15-1543
GMINTS	15-1545
GMLOAD	15-1547
GMSPC	15-1550
GMSURF	15-1551
GRAV	15-1559
GRDSET	15-1561
GRID	15-1562
GRIDB	15-1564
GRIDF	15-1566
GRIDS	15-1567
GUST	15-1569
INCLUDE	15-1571
ITER	15-1572
LOAD	15-1577

LOADCYH	15-1579
LOADCYN	15-1581
LOADCYT	15-1583
LSEQ	15-1585

**Bulk Data Entries M—N . . . . . 16-1**

MAT1	16-1588
MAT2	16-1593
MAT3	16-1596
MAT4	16-1599
MAT5	16-1601
MAT8	16-1603
MAT9	16-1606
MAT10	16-1609
MAT11	16-1611
MATG	16-1613
MATHE	16-1615
MATHP	16-1621
MATS1	16-1624
MATSMA	16-1630
MATT1	16-1632
MATT2	16-1634
MATT3	16-1636
MATT4	16-1638
MATT5	16-1640
MATT8	16-1642
MATT9	16-1645
MATT11	16-1647
MATTC	16-1649
MFLUID	16-1650
MKAERO1	16-1653
MKAERO2	16-1655
MODTRAK	16-1656
MOMAX	16-1657
MOMENT	16-1658
MOMENT1	16-1660
MOMENT2	16-1662
MONPNT1	16-1664
MPC	16-1666
MPCADD	16-1668
MPCAX	16-1669
NLPARM	16-1671
NLPCI	16-1677
NLRGAP	16-1680

NOLIN1	16-1683
NOLIN2	16-1685
NOLIN3	16-1687
NOLIN4	16-1689
NSM	16-1691
NSM1	16-1692
NSMADD	16-1694
NSML	16-1695
NSML1	16-1697
NXSTRAT	16-1699

**Bulk Data Entries O—P . . . . . 17-1**

OMIT	17-1718
OMIT1	17-1719
OMITAX	17-1720
OUTPUT	17-1721
OUTRCV	17-1724
PAABSF	17-1728
PACABS	17-1730
PACBAR	17-1732
PAERO1	17-1733
PAERO2	17-1734
PAERO3	17-1737
PAERO4	17-1739
PAERO5	17-1742
PANEL	17-1746
PARAM	17-1748
PBAR	17-1749
PBARL	17-1752
PBCOMP	17-1758
PBEAM	17-1764
PBEAML	17-1770
PBEND	17-1777
PBUSH	17-1784
PBUSH1D	17-1787
PBUSHT	17-1793
PCOMP	17-1795
PCOMPG	17-1800
PCONEAX	17-1805
PCONV	17-1807
PCONVM	17-1809
PDAMP	17-1811
PDAMP5	17-1812
PDAMPT	17-1813

PDUMi	17-1814
PELAS	17-1815
PELAST	17-1817
PFAST	17-1819
PGAP	17-1821
PHBDY	17-1826
PINTC	17-1828
PINTS	17-1829
PLOAD	17-1830
PLOAD1	17-1833
PLOAD2	17-1837
PLOAD4	17-1839
PLOADX1	17-1843
PLOTEL	17-1846
PLPLANE	17-1847
PLSOLID	17-1849
PMASS	17-1850
POINT	17-1851
POINTAX	17-1852
PPLANE	17-1853
PRAC2D	17-1855
PRAC3D	17-1857
PRESAX	17-1858
PRESPT	17-1859
PROD	17-1860
PSET	17-1862
PSHEAR	17-1864
PSHELL	17-1866
PSOLID	17-1870
PTUBE	17-1882
PVAL	17-1884
PVISC	17-1886
PWELD	17-1887

**Bulk Data Entries Q—S . . . . . 18-1**

QBDY1	18-1892
QBDY2	18-1894
QBDY3	18-1896
QHBDY	18-1898
QSET	18-1900
QSET1	18-1901
QVECT	18-1902
QVOL	18-1905
RADBC	18-1907

RADBND	18-1909
RADCAV	18-1910
RADLST	18-1913
RADM	18-1915
RADMT	18-1917
RADMTX	18-1918
RADSET	18-1919
RANDPS	18-1920
RANDT1	18-1922
RBAR	18-1923
RBE1	18-1926
RBE2	18-1928
RBE3	18-1931
RCROSS	18-1934
RELEASE	18-1936
RFORCE	18-1938
RINGAX	18-1943
RINGFL	18-1945
RLOAD1	18-1946
RLOAD2	18-1949
ROTORB	18-1952
ROTORD	18-1954
ROTORG	18-1959
RROD	18-1961
RSPLINE	18-1963
RSSCON	18-1965
RTRPLT	18-1969
SEBNDRY	18-1971
SEBSET	18-1972
SEBSET1	18-1974
SEBULK	18-1976
SECONCT	18-1978
SECSET	18-1980
SECSET1	18-1982
SECTAX	18-1984
SEELT	18-1985
SEEXCLD	18-1986
SELABEL	18-1987
SELOC	18-1988
SEMPLN	18-1990
SENQSET	18-1991
SEQEP	18-1992
SEQGP	18-1993
SEQSEP	18-1994
SEQSET	18-1996

SEQSET1	18-1998
SESET	18-2000
SESUP	18-2002
SET1	18-2003
SET2	18-2005
SET3	18-2007
SETREE	18-2008
SEUSET	18-2010
SEUSET1	18-2011
SLBDY	18-2013
SLOAD	18-2014
SNORM	18-2015
SPC	18-2017
SPC1	18-2019
SPCADD	18-2021
SPCAX	18-2022
SPCD	18-2023
SPCOFF	18-2025
SPCOFF1	18-2026
SPLINE1	18-2028
SPLINE2	18-2031
SPLINE3	18-2034
SPLINE4	18-2037
SPLINE5	18-2039
SPOINT	18-2042
SUPAX	18-2043
SUPPORT	18-2044
SUPPORT1	18-2046
SWLDPRM	18-2048

**Bulk Data Entries T—V . . . . . 19-1**

TABDMP1	19-2052
TABLE3D	19-2055
TABLED1	19-2057
TABLED2	19-2060
TABLED3	19-2063
TABLED4	19-2065
TABLEM1	19-2067
TABLEM2	19-2070
TABLEM3	19-2072
TABLEM4	19-2074
TABLES1	19-2075
TABLEST	19-2078
TABRND1	19-2079

TABRNDG	19-2082
TEMP	19-2084
TEMPAX	19-2086
TEMPBC	19-2087
TEMPD	19-2089
TEMPF	19-2091
TEMPP1	19-2092
TEMPP3	19-2095
TEMPRB	19-2096
TF	19-2099
TIC	19-2101
TLOAD1	19-2103
TLOAD2	19-2106
TMCPARA	19-2109
TRIM	19-2113
TSTEP	19-2115
TSTEPNL	19-2117
USET	19-2122
USET1	19-2124
UXVEC	19-2126
VIEW	19-2127
VIEW3D	19-2130



Chapter

# 1 nastran Command and NASTRAN Statement

1  
nastran

- *The nastran Command*
- *The NASTRAN Statement*

## 2 The nastran Command

# 1 nastran

### 1.1 The nastran Command

NX Nastran is executed with a command called `nastran`. (Your system administrator may assign a different name to the command.) The `nastran` command permits the specification of keywords used to request options affecting NX Nastran job execution. The format of the `nastran` command is:

```
nastran input_data_file [keyword1 = value1 keyword2 = value2 ...]
```

where `input_data_file` is the name of the file containing the input data and `keywordi=valuei` is one or more optional keyword assignment arguments. For example, to run a job using the data file `example1.dat`, enter the following command:

```
nastran example1
```

Keyword assignments can be specified as command line arguments and/or included in RC files.

There are two RC files controlled by you:

- The user RC file is in your home (or login) directory. This file should be used to define parameters that are applied to all jobs run by you.
  - The local RC file is `.nast#rc` (# designates release number), in the same directory as the input data file. If the “`rcf`” keyword is used, this local RC file is ignored. This file should be used to define parameters that are applied to all jobs contained in the input data file directory.
1. The tilde (~) character is not recognized within RC files.
  2. Environment variables are only recognized when used in the context of a logical symbol (see “Using Filenames and Logical Symbols” in the *NX Nastran Installation and Operations Guide*).
  3. When a keyword is specified on the command line, embedded spaces or special characters that are significant to the shell must be properly quoted; quotes should not be used within RC files.

The keywords listed below are the most common ones for various computers, but are not available on all computers. Also, the defaults may be site dependent. Please consult the **Keywords and Environment Variables** in the *NX Nastran Installation and Operations Guide* for keyword applicability, specialized keywords, and further discussion of keywords and their defaults. Also see the *NX Nastran Parallel Processing User’s Guide* for details on all parallel processing keywords. Keywords that use yes/no values accept partial specification and case-independent values. For example, “yes” may be specified as “y”, “ye”, or “yes” using uppercase or lowercase letters.

- after**    `after=time`                      Default: None  
Holds the job until the time specified by time. See the description of the “at” command in your system documentation for the format of time.  
Example:                                      `nastran example after=10:00`  
The job is held until 10:00 A.M.
- append**    `append={yes | no}`                      Default: no  
Controls the combining of the F04, F06, and LOG files into a single file after the run completes. If “no” is specified, the files are not combined. If “yes” is specified, the files are combined into one file with the suffix “.out”.  
Example:                                      `nastran example append=yes`  
The F04, F06, and LOG files are combined into a file named example.out.
- batch**    `batch={yes | no}`                      Default: yes  
Indicates how the job is to be run. If “yes” is specified, the job is run as a background process. If “no” is specified, the job is run in the foreground. If the “aft” or “queue” keywords are specified, the batch keyword is ignored.
- Note**
- If the job is already running in an NQS or NQE batch job, the default is “no”.
- Example:                                      `nastran example batch=no`  
The job is run in the foreground.
- dbs**    `dbs=pathname`                              Default=input\_data\_file directory  
Creates database files using an alternate file prefix. (See “Default DBsets and Their Default Attribute” in the *NX Nastran Installation and Operations Guide*.) If “dbs” is not specified, database files are created in the current directory using the base name of the input data file as the prefix. If the “dbs” value is a directory, database files are created in the specified directory using the base name of the input data file as the filename.

**Note**

If “dbs” is specified and “scratch=yes” is specified, a warning will be issued and “scratch=no” assumed. This is a change from the behavior of prior releases, which would ignore the “dbs” keyword if “scratch=yes” was set.

In the following examples, assume the following directory contents and the job is running in a UNIX operating system:

```
example.dat  mydir/  other/
other/example.dat
```

where “mydir” and “other” are directories.

Example: `nastran example`

or: `nastran other/example`

Database files are created in the current directory with name example, e.g., ./example.DBALL.

Example: `nastran example dbs=myfile`

Database files are created in the current directory with name myfile, e.g., ./myfile.DBALL.

Example: `nastran example dbs=mydir`

Database files are created in the mydir directory with name example, e.g., mydir/example.DBALL.

Example: `nastran example dbs=mydir/myfile`

Database files are created in the mydir directory with name myfile, e.g., mydir/myfile.DBALL.

**memory**    `memory=memory_size`    Default=estimate

Specifies the amount of open core memory to allocate. If “memory=estimate” is specified, ESTIMATE will be used to determine size. Otherwise, the size can be entered as a specific memory size. This *memory\_size* can be specified either as the number of words or as a number followed by one of the following modifiers:

G or Gw	Multiply <i>memory_size</i> by $1024^{**3}$ .
Gb	Multiply <i>memory_size</i> by $(1024^{**3})/bytes\_per\_word$ .
M or Mw	Multiply <i>memory_size</i> by $1024^{**2}$ .
Mb	Multiply <i>memory_size</i> by $(1024^{**2})/bytes\_per\_word$ .
K or Kw	Multiply <i>memory_size</i> by 1024.
Kb	Multiply <i>memory_size</i> by $1024/bytes\_per\_word$ .
w	Use <i>memory_size</i> as is.
b	Divide <i>memory_size</i> by <i>bytes_per_word</i> .

where *bytes\_per\_word* is 4 using ILP-32 and LP-64 executables, and 8 using ILP-64 executables. The modifier may be specified using any case combination.

If you do not assign a value to the "memory" keyword, and ESTIMATE runs but fails to provide an estimate, the value specified by the "memorydefault" keyword will be used. If "memorydefault" is null, the nastran command will issue a fatal error and the job will end.

#### Note

NX Nastran uses standard computer units for K, M, and G.

Example: `nastran example memory=25mw`

The job is run using an open core memory size of 25 megawords, or 25 600 kilowords, or 26 214 400 words.

You may also run the 'estimate' command as a standalone utility prior to running NX Nastran then use the resulting values as input to the memory command. This also allows checking for sufficient disk space for the job. See Chapter 7 of the *NX Nastran Installation and Operations Guide* for usage.

## 6 The nastran Command

1  
nastran

The maximum *memory\_size* limits are included in the *NX Nastran Installation and Operations Guide* in the section titled “Maximum Memory Size”.

**news**            news={yes | no}            Default=yes  
Displays the news file in the F06 file. If “yes” is specified, the news file is displayed in the F06 file regardless of when it was last changed. If “no” is specified, the news file is not displayed in the F06 file.

**Example:**                    `nastran example news=yes`

The news file is displayed in the F06 file after the title page block.

**notify**            notify={yes | no}            Default=yes  
Sends notification when the job is completed. See also the “ncmd” keyword in the *NX Nastran Installation and Operations Guide*.

### **Note**

If the job is queued using the queue keyword, or the job is already running in an NQS batch job, the default is “no”.

**Example:**                    `nastran example notify=yes`

A message is sent when the job is completed.

**old**                old={yes | no}                Default=yes  
Saves previous copies of the F04, F06, LOG, OP2, OUT, PCH, and PLT output files using sequence numbers. Sequence numbers are appended to the keyword filename and are separated by a period. If “yes” is specified, the highest sequence number of each of the output files is determined. The highest sequence number found is incremented by one to become the new sequence number. Then, all current output files that do not include sequence numbers are renamed using the new sequence number as a suffix.

**Example:**                    `nastran v2401 old=yes`

For example, in a UNIX operating system, the user’s directory contains the following files:

```

v2401.dat          v2401.log
v2401.f04          v2401.log.1
v2401.f04.1       v2401.log.2
v2401.f04.2       v2401.log.3
v2401.f06          v2401.f06.1

```

Apparently, the user ran the job four times, but deleted some of the files. When the next job is run, the following files are renamed: v2401.f04 is renamed to v2401.f04.4, v2401.f06 is renamed to v2401.f06.4, and v2401.log is renamed to v2401.log.4. The sequence number 4 is used because it is one greater than the highest sequence number of all of the selected files (the highest being v2401.log.3). Using this method, all files related to a single run will have the same sequence number.

out

out=pathname     Default=input\_data\_file directory

Saves the output files using a different file prefix or in a different directory. If “out” is not specified, the output files are saved in the current directory using the base name of the input data file as a prefix.

If the “out” value is a directory, output files are created in the specified directory using the base name of the input data file as the filename. In the following examples, assume the following directory contents and that the job is running on a UNIX operating system:

```

example.data mydir/ other/
other/example.dat

```

where “mydir” and “other” are directories.

Example:             nastran example

or:                    nastran other/example

Output files are created in the current directory with name example, e.g., ./example.f06.

Example:             nastran example out=myfile

Output files are created in the current directory with name myfile, e.g., ./myfile.f06.

Example:             nastran example out=mydir

Output files are created in the mydir directory with name example, e.g., mydir/example.f06.

Example:             nastran example out=mydir/myfile

## 8 The nastran Command

1  
nastran

Output files are created in the mydir directory with name myfile, e.g., mydir/myfile.f06.

parallel Same as `smp` keyword.

prt `prt={yes | no}` Default=no  
Prints the output files F04, F06, and LOG at the end of the run. See also the “pcmd” and “pdel” keywords in “Keywords and Environment Variables” in the *NX Nastran Installation and Operations Guide*.

Example: `nastran example prt=yes`

The files example.f04, example.f06, and example.log are printed using the default print command.

rcf `rcf=pathname` Default=no  
Specifies the name of the local RC file. If this keyword is not specified, then the .nast#rc (# designates release number) file from the data file directory is used.

Example: `$ nastran example rcf=nast.rc`

scratch `scratch={yes | no | mini}` Default=no  
Deletes the database files at the end of the run. If the database files are not required, “scratch=yes” can be used to remove them. If “mini” is specified, a reduced size database (that can only be used for data recovery restarts) will be created. See “Mini-Database Restarts” in the *NX Nastran User’s Guide* for further details on the “mini” database.

Example: `nastran example scratch=yes`

All database files created by the run are deleted at the end of the job in the same way as the FMS statement INIT MASTER(S).

sdirectory `sdirectory=directory` Default: See the description below.  
Specifies the directory to use for temporary scratch files created during the run. As NX Nastran can create very large scratch files, the scratch directory should contain sufficient space to store any scratch files created during a run. You must have read, write, and execute privileges to the directory.

See “Determining Resource Requirements” in the *NX Nastran Installation and Operations Guide* for information on estimating a job’s total disk space requirements.



The default value is taken from the TMPDIR environment variable if it is set to a non-null value. Otherwise, the computer's default temporary file directory is chosen; this is usually /tmp, but on SGI systems, it is /var/tmp.

Example: `nastran example sdir=/scratch`

Scratch files are created in the directory /scratch.

smemory smemory=*value* Default: 100

### Note

This keyword is overridden by the FMS statement INIT SCRATCH(MEM=*value*).

Specifies the memory to reserve for scratch memory. The keyword smemory can be specified either as the number of GINO blocks (default), or as a number followed by one of the following modifiers:

G or Gw Multiply *entered\_value* by  $1024^{**3}$ .

Gb Multiply *entered\_value* by  $(1024^{**3})/bytes\_per\_word$ .

M or Mw Multiply *entered\_value* by  $1024^{**2}$ .

Mb Multiply *entered\_value* by  $(1024^{**2})/bytes\_per\_word$ .

K or Kw Multiply *entered\_value* by 1024.

Kb Multiply *entered\_value* by  $1024/bytes\_per\_word$ .

w Use *entered\_value* as is.

b Divide *entered\_value* by *bytes\_per\_word*.

where *bytes\_per\_word* is 4 using ILP-32 and LP-64 executables, and 8 using ILP-64 executables. The modifier may be specified using any case combination.

### Note

NX Nastran uses standard computer units for K, M, and G.

Example: `nastran example smem=200`

This example reserves 200 GINO blocks for scratch memory since no modifier exists.

Example: `nastran example smemory=25mw`

This example will use a scratch memory size of 25 megawords, or 25 600 kilowords, or 26 214 400 words.

smp            smp=value            Default=0

Same as [parallel](#) keyword.

Example:                    nastran example smp=2

Specifies the maximum number of CPUs selected for shared-memory parallel (SMP) processing in several numeric modules. SMP processing reduces elapsed time at the expense of increased CPU time. The default is 0, which specifies no SMP processing. If “parallel=1”, the parallel algorithms are used on one processor.

Note: If you need to vary the number of SMP CPUs during a job, you must set either the “smp” keyword or SYSTEM(107) on a NASTRAN statement to the maximum number of SMP CPUs that will be requested. Some systems cannot process a DMAP request for CPUs in excess of this initial value.

See the *NX Nastran Parallel Processing User’s Guide* for details on all parallel processing options.

symbol            symbol=*symbolic\_name*=*string* Default: *None*

Defines a symbolic (or logical) name used on ASSIGN and INCLUDE statements and in command line arguments. This statement can only be specified in initialization or RC files. It *cannot* be specified on the command line (although logical symbols defined using this keyword may be used on the command line). Symbolic names must be 16 characters or less, the value assigned to the symbolic name must be 256 characters or less. If the symbolic name used in ASSIGN or INCLUDE statements or in command line arguments is not defined, it is left in the filename specification as is.

For example, many of the TPL and DEMO input data files have ASSIGN statements, such as the following:

```
ASSIGN MASTER=DBSDIR:abc.master
```

The string “DBSDIR:” specifies a symbolic name that is to be replaced by another string. The replaced string is defined by the “symbol” keyword in the initialization or RC file or as an environment variable. For example,

```
SYMBOL=DBSDIR=/dbs
```

When the previous ASSIGN statement is processed, the filename assigned to the logical name MASTER is “/dbs/abc.master”. An alternate way of defining symbolic names is through the use of environment variables. For example, issuing the following command at a Bourne or Korn shell prompt:

```
DBSDIR=/dbs; export DBSDIR
```

or the following at a C shell prompt:

```
setenv DBSDIR /dbs
```

is equivalent to the above “symbol” keyword.

### Note

If a symbolic name is defined by both an RC file and an environment variable, the symbol statement value will be used.

Keywords and Environment Variables in the *NX Nastran Installation and Operations Guide* contains a list of environment variables that are automatically created by the driver program. Of particular importance to the logical symbol feature are the OUTDIR and DBSDIR variables. These variables refer to the directory that will contain the output files (set using the “out” keyword) and the directory that will contain the permanent database files (set using the “dbs” keyword), respectively.

## 12 The NASTRAN Statement

**1**  
nastran

### 1.2 The NASTRAN Statement

The NASTRAN statement is used to specify values for certain Executive System operational parameters. These parameters are also called system cells. The NASTRAN statement is used for exceptional circumstances and is therefore not needed in most runs. The NASTRAN statement may also be specified in the Runtime Configuration (RC) files at the system, user, and job level as described in the *NX Nastran Installation and Operations Guide*.

**NASTRAN** Executive System Parameter Modification

Specifies values for certain Executive System operational parameters called system cells.

**Format:**

NASTRAN cellname1=expression1, ..., cellnamen=expressionn

or

NASTRAN SYSTEM(i)=expression1, ..., SYSTEM(n)=expressionn

**Describers**

<b>Describer</b>	<b>Meaning</b>
cellnamei	System cell names from <a href="#">Table 1-1</a> .
SYSTEM	Specifies the system cell number.
expression	See DEFINE statement for description.
i	System cell number from <a href="#">Table 1-1</a>

**Remarks:**

1. The NASTRAN statements may appear anywhere in the File Management Section. The NASTRAN statement may also be specified in Runtime Configuration (RC) files. See “Customizing the Runtime Configuration Files” in the *NX Nastran Installation and Operations Guide*.
2. System cell values and their associated cell names may also be set with the DEFINE statement. They may also be set or values returned with the DMAP PUTSYS and GETSYS functions and the PARAM module. See “PUTSYS, GETSYS” of the *NX Nastran DMAP Programmer’s Guide*.
3. More than one NASTRAN statement and/or DEFINE statement may be present and, if a system cell is specified more than once among these statements, then the last specification takes precedence.
4. The expression will use type conversion rules based on the type (i.e., integer, real, or logical) of the cellname, as defined on a previous DEFINE statement (see the DEFINE statement for conversion rules).
5. If the expression is omitted, the system cell associated with the cellname will be assigned the value as set on a previous DEFINE statement.
6. Only integers are allowed when using the system cell numbers. Thus, when a real number is requested, use the system cell name.

## NASTRAN Executive System Parameter Modification

1  
nastran

### Examples:

1. Either of the following statements could be used to change the default value for block size.

```
NASTRAN SYSTEM (1)=4097
or
NASTRAN BUFFSIZE=4097
```

Or, if a prior DEFINE statement had defined a keyword MY\_SYSBUF to the value 4097 then the following code could be used:

```
NASTRAN SYSTEM(1=MY_SYSBUF
```

or

```
NASTRAN BUFFSIZE=MY_SYSBUF
```

The following statement is used to request execution of MSGMESH:

```
NASTRAN MESH
```

2. [Table 1-1](#) gives a summary of the recommended system cells.

<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
1	BUFFSIZE	Specifies the number of words in a physical record. Also called block length.
2	F06	Specifies FORTRAN unit number for standard output file (.f06). (Integer > 0; Default = 6)
9	NLINES	Specifies the number of lines printed per page of output. See <a href="#">LINE</a> .
14	MAXLINES	See <a href="#">MAXLINES</a> .
19	ECHO	See <a href="#">ECHO</a> .
20	METIME	Minimum time for execution summary table message.
21	APP	Approach Flag. See <a href="#">APP</a> of the Executive Control section. If APP HEAT is specified, then this system cell is set to 1.
22	MACHTYPE	Machine type.
25	DIAGA	Alternate method to set DIAGs 1 through 32. See <a href="#">DIAG</a> .
28	CONFIG	Machine subtype.
31	MESH	Requests execution of MSGMESH.
46 - 54	ADUMi	Dummy element flag., i=1 through 9.

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
56	HEAT	See <a href="#">APP</a> .  0: Structural analysis. (Default)  1: Heat transfer.
57	HICORE	Working Memory. “ See Managing Memory in the <i>NX Nastran Installation and Operations Guide</i> .
61	DIAGB	Alternate method to set diagnostics 33 through 64. See <a href="#">DIAG</a> .
64	PUNCH	Specifies FORTRAN unit number for PUNCH file (.f07). (Default = 7)
66	MPYAD	Selects/deselects multiplication methods. See MPYAD in the <i>NX Nastran DMAP Programmer’s Guide</i> .
69	SOLVE	Controls matrix decomposition. Same as DECOMP in the <i>NX Nastran DMAP Programmer’s Guide</i> and Option Selection in the <i>NX Nastran Numerical Methods User’s Guide</i> .  0 or -1: Prints up to 50 messages for null columns and zero diagonals. (Default = -1)  1: Terminates execution when first null column is encountered.  2: Suppresses printing of message when a null column is encountered.  4: Terminates execution when first zero diagonal term is encountered.  16: Places 1.0 in diagonal position for all null columns and proceeds with the decomposition.  32: Terminates execution on zero diagonal term.  64: Exits after execution of preface for symmetric decomposition.

Table 1-1. System Cell Summary		
System Cell Number	System Cell Name	Function and Reference
70	FBSOPT	Selects forward-backward substitution methods. FBS in the <i>NX Nastran DMAP Programmer's Guide</i> and the FBS Method Selection in the <i>NX Nastran Numerical Methods User's Guide</i> .
77	DELFF	Deletes form feeds.
81	REAL	Specifies the amount of open core memory that certain numerical modules will be restricted to.
- - -	DBSET	Database neutral file set. SubDMAP DBFETCH in the <i>NX Nastran DMAP Programmer's Guide</i> .
82	DMAP	Allows NOGO to operate. See Processing of User Errors in the <i>NX Nastran DMAP Programmer's Guide</i> .
86	F04	Specifies FORTRAN unit number for Execution Summary Table (.f04). See "Understanding the .f04 File" in the <i>NX Nastran User's Guide</i> .  (Integer > 0; Default = 4)
87	RADMTX	Type of radiation exchange coefficient, See <a href="#">RADMTX</a> .
88	RADLST	Print radiation area summary. See <a href="#">RADLST</a> .
107	PARALLEL	Parallel processing deselection (deactivation) for matrix operations. See Keywords in the <i>NX Nastran Installation and Operations Guide</i> .  0: Deactivate parallel processing.  1 through 1023: Number of processors. The desired number of processors is summed with the values below in order to deactivate parallel processing methods in the following matrix operations:  1024: Forward-backward substitution.  2048: Decomposition.  4096: Multiplication.  8192: Householder in eigenvalue extraction.  65536: Element matrix assembly.



<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
		<p>262144: Sparse decomposition.</p> <p>524288: Sparse forward-backward substitution.</p> <p>If PARALLEL is set simply to the number of processors, then parallel processing is selected in all operations above.</p>
108	NEWHESS	Request complex eigenvalue method. See <a href="#">EIGC</a> .
109	- - -	<p>Controls DMAP execution:</p> <p>0: Do not execute DMAP instruction if all outputs are previously computed.</p> <p>1: Always execute DMAP instruction. (Default)</p>
114	BUFFPOOL	Sets bufferpool size. See “Keywords and Environment Variables” in the <i>NX Nastran Installation and Operations Guide</i> .
124	ATTDEL	<p>Controls the automatic assignment of the delivery database. See “Delivery Database” in the <i>NX Nastran User’s Guide</i> and “Creating and Attaching Alternate Delivery Databases” in the <i>NX Nastran Installation and Operations Guide</i>.</p> <p>0: Enables automatic assigning. (Default)</p> <p>-1: Disables automatic assigning.</p>
125	NOKEEP	<p>Controls NOKEEP option of the RESTART File Management statement.</p> <p>0: Disable NOKEEP</p> <p>1: Enable NOKEEP</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
126	SPARSE	<p>Selects the sparse matrix method. For unsymmetrical sparse matrix decomposition method selection, see cell number 209. The following values may be summed in order to select sparse matrix methods in the operations listed below:</p> <p>0: Deactivate sparse methods.</p> <p>1: Multiplication.</p> <p>8: Symmetric decomposition.</p> <p>16: Forward-backward substitution.</p> <p>The default is 25, which is the sum of all values.</p>
128	UPDTTIM	<p>Specifies database directory update time. See <a href="#">DBUPDATE</a> .</p> <p>0: Do not update.</p> <p>&gt;0: Time, in minutes, between database directory updates.</p>
129	SMPYAD67	<p>Select pre-<i>MSC.Nastran</i><sup>®</sup> (<i>MSC.Nastran</i> is a registered trademark of <i>MSC.Software Corporation</i>) Version 67 method in the SMPYAD module. SMPYAD in the <i>NX Nastran DMAP Programmer's Guide</i>.</p> <p>0: Use current method. (Default)</p> <p>1: Use pre-<i>MSC.Nastran</i> Version 67 method.</p>
- - -	MAXDBSET	<p>The maximum number of online DBsets attached to the run.</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
133	AUTOASGN	<p>Controls auto-assigning of dbsets. Sum the desired values. (Default = 7). See “Database Autoassignment” in the <i>NX Nastran User’s Guide</i>.</p> <p>0: No databases are automatically assigned.</p> <p>1: Only the primary database is automatically assigned.</p> <p>2: Only the delivery database is automatically assigned.</p> <p>4: Only located databases are automatically assigned.</p>
135	TSTAMP	<p>Controls timestamp checking of DBsets..</p> <p>0: Do not check.</p> <p>1: Check. (Default)</p> <p>2: Same as 1 and print diagnostics.</p>
141	QUADINT	<p>Specifies quadratic or linear interpolation for the line search method in nonlinear analysis.</p> <p>0: Quadratic interpolation. (Default)</p> <p>1: Linear interpolation.</p>
142	SCR300	<p>Requests creation of SCR300 partition on SCRATCH DBset. See “INIT” .</p> <p>1: Do not create SCR300 partition.</p> <p>2: Create SCR300 partition. (Default)</p>

Table 1-1. System Cell Summary		
System Cell Number	System Cell Name	Function and Reference
143	LOCBULK	LOCBULK=1 or 2 specifies that Bulk Data is being obtained via the DBLOCATE FMS statement. NASTRAN LOCBULK=2 is specified when no Bulk Data entries, except for PARAM entries, are to be deleted or added. All PARAM entries must be respecified. All other entries will be ignored and, if present, may increase CPU times in XSORT and IFP. With LOCBULK=2, the XSORT and IFP modules will not reprocess the Bulk Data Section stored in the SEMAP run. Also, GP1, TASN2, SEP1 and SEP1X modules will be skipped. 0 is the default, which assumes the RESTART FMS statement. This system cell is recognized only in SOLs 101 through 200.
144	- - -	RESTART FMS statement existence flag. Set to 1 if RESTART statement is present.
145	BFGS	Selects strategies of BFGS updates for the arc-length methods in nonlinear analysis. Please see the <i>NX Nastran Nonlinear Handbook</i> .  0: Update $\Delta u_R$ and $\Delta u_P$ at every iteration with $g^*$ . (Default)  1: Update $\Delta u_R$ only with $g$  2: Update $\Delta u_R$ only with $g^*$ .
146	- - -	Reserves (n x BUFFSIZE x 3) memory for faster solution in the Lanczos method of eigenvalue extraction. Default=1. A value of 2 increases the memory reserved by 200%, a value of 3 increases the memory reserved by 300%, etc. See <a href="#">EIGRL</a> . See system cell 229 for a disk space saving feature.
147	UWM	SYSTEM(147)=1 issues User Warning Message for a DMAP parameter appearing on a CALL statement that has an inconsistent authorization in the called subDMAP. 0 is the default, which means no message is issued.

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
148	DBVERCHK	<p>In general, databases are not compatible between major releases, thus a check is performed in NX Nastran to ensure that the major version which created the database is the same as that being executed. Since specific data on the database may be compatible, SYSTEM(148) allows this check to be circumvented. However, circumventing the check may lead to problems later in the run.</p> <p>0 (Default): Check is performed.</p> <p>1: Check is not performed.</p>
150	SCR300DEL	<p>Sets minimum number of blocks of SCR300 partition of SCRATCH DBset at which it is deleted. See <b>"INIT"</b>. (Default = 100)</p>
151	- - -	<p>Requests spill or no spill of the SCR300 partition of SCRATCH DBset. See <b>"INIT"</b> . FMS statement. (Default = 1)</p>
155	DBLAMKD	<p>Sets differential stiffness formulation for CBEAM element.</p> <p>0: Current formulation. (Default)</p> <p>1: Pre-MS.CNastran 67 formulation.</p>
166	- - -	<p>Controls sparse symmetric decomposition. Sum the desired values. (See the section "Matrix Decomposition" in the <i>Numerical Methods User's Guide</i> for more options)</p> <p>0: No action (Default)</p> <p>1: If insufficient core is encountered, then switch to conventional decomposition and continue.</p> <p>2: Print diagnostics</p> <p>4: Do not issue fatal message if maximum ratios are exceeded. Although high maximum ratios may be printed, they will not cause job termination. This applies to the DCMP, DECOMP, REIGL, and LANCZOS modules.</p> <p>128: Diagonal scaling.</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
- - -	OLDQ4K	Requests the pre-MSC.Nastran 68 CQUAD4 element stiffness formulation. No value is required after the keyword. Equivalent to SYSTEM(173)=1.
170	LDQRKD	Selects the differential stiffness method for CQUAD4 and CTRIA3 elements.  0: MSC.Nastran Version 68, improved method. (Default)  1: Pre-MSC Nastran Version 68 method.
173	- - -	0: Default.  1: Requests pre-MSC.Nastran V68 QUAD4 Formulation.  2: Requests MSC.Nastran V68 - V70.5 QUAD4 Formulation.
189	Q4TAPER	Specifies the maximum allowable value of taper for the CQUAD4 element. Taper is computed by connecting opposite grid points and computing the area of the enclosed triangles. Another way to think of taper is the ratio of the areas on the two sides of a diagonal. (Real $\geq$ 0.0; Default = 0.5)
190	Q4SKEW	Specifies the minimum allowable value of skew for the CQUAD4 element. Skew is the angle measured in degrees between the lines that join opposite midsides. (Real $\geq$ 0.0; Default = 30.0)
191	TETRAAR	Specifies the maximum allowable aspect ratio of the longest edge to the shortest altitude for the CTETRA element. (Real $\geq$ 0.0; Default = 100.0)
193	DISKSAVE	Lanczos High Performance Option: Controls whether the matrix/vector multiplication is saved in a scratch file or recomputed at every iteration.  0: Save (Default for all machines)  1: No save  2: Save  3: No Save

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
194	FASTIO	Lanczos High Performance Option: Controls input/output in orthogonalization/renormalization routines.  0: UNPACK/PACK  1: GINO READ/WRITE (Default)
195	FRQSEQ	Lanczos High Performance Option: 100 < Exponent for the rational function used to determine segment boundaries. See also the ALPH field on the See <b>“EIGRL”</b> . (Integer; Default = 0, which means equal segments.)
196	SCRSAVE	Lanczos High Performance Option: Controls reuse of scratch files in segment logic.  0: Do not reuse. (Default)  1: Reuse.
197	NUMSEG	Lanczos High Performance Option: Selects number of segments. See also the NUMS field on the <b>“EIGRL”</b> . (Default = 1)
198	MINFRONT	Lanczos High Performance Option: Sets minimum front size. (The default value is machine dependent.) This can also be set with the “rank” keyword. See “Keywords and Environment Variables” for more information on the “rank” keyword, and Computer-Dependent Defaults in the <i>NX Nastran Installation and Operations Guide</i> for the machine dependent default values.
199	MASSBUF	Lanczos High Performance Option: Sets half the number of buffers to set aside for storing the mass matrix in core. (Default = 1, which means 2 buffers will be used.)
200	NSEGADD	Number of segments in the element error table that is generated in adaptive analysis. (Default = 2)
204	CORDM	Specifies the default value for CORDM field on the PSOLID entry. (Integer ≥ -1; Default = 0)

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
205	- - -	Defines the number of rows that will be simultaneously updated during a sparse symmetric decomposition. This can also be set with the “rank” keyword. See “Keywords and Environment Variables” and for more information on the “rank” keyword, and Computer-Dependent Defaults in the <i>NX Nastran Installation and Operations Guide</i> for the machine dependent default values.
206	DCMPSEQ	<p>Selects ordering method for sparse matrix decomposition.</p> <p>0: EXTREME for 3D, Metis or MMD for 2D</p> <p>1: MMD – definite matrices</p> <p>2: MMD – indefinite matrices</p> <p>3: No sequencing</p> <p>4: EXTREME (Default)</p> <p>8: Metis</p> <p>9: Better of Metis and MMD</p> <p>32: MLV</p> <p>+ 64 (adding 64 to any of the above values): Turns on Supernodal Compression Scheme. For example, sys(206)=72 would indicate Metis (8) + Supernodal Compression Scheme (64).</p>
209	USPARSE	<p>Unsymmetric sparse matrix method selection for the decomposition and forward-backward substitution operations.</p> <p>0: Deactivate.</p> <p>1: Activate. (Default)</p>



<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
210	- - -	<p>Option to revert back to the “old” punch algorithm.</p> <p>0: Writes the “old” punch file. Default until version 5.0. This punch file does not use NDDL definitions and hence some data in the punch file can come out incorrectly.</p> <p>1: Writes the "new" punch file. Default in NX Nastran version 5.0 and beyond. This uses NDDL definition and hence produces a correct punch file.</p>
212	CHEXAINT	<p>Specifies CHEXA element’s integration rule for p-adaptive analysis and p = 2x2x2 (only).</p> <p>0: Reduced. (Default)</p> <p>1: Full.</p>
213	DISTORT	<p>Element distortion fatal termination override. Applies to all p-elements and the TETRA h-elements.</p> <p>0: Terminate run. (Default)</p> <p>1: Do not terminate run.</p>
216	ITER	<p>Controls execution of global iterative solver in SOLs 101,106,108,111,153 and the element iterative solver in SOL 101.</p> <p>YES: Execute global iterative solver.</p> <p>NO: Do not execute global iterative solver (Default).</p> <p>See bulk card ITER.</p> <p>To run the element iterative solution, see Nastran function ELEMITER.</p>
218	T3SKEW	<p>Allows the user to control the minimum vertex angle for TRIA3 elements at which USER WARNING MESSAGE 5491 is issued. See the description of CTRIA3.</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
229	MEMSAVE	<p>Specifies space-saving method for the old Lanczos method of eigenvalue extraction (system(273)=1). <b>“EIGRL”</b>.</p> <p>0: No space savings. (Default)</p> <p>1: Does not write factors to disk which reduces scratch space usage by 67%. However, CPU costs will increase.</p>
242	- - -	<p>Controls module BEGN and END messages in .f04 file.</p> <p>0: Print everything. (Default)</p> <p>1: Print major modules only.</p> <p>2: Print sub-modules only.</p> <p>3: Do not print.</p>
252	- - -	<p>Used to select or deselect triple loop kernels in triple MPYAD operations.</p> <p>0 = do not use</p> <p>1 = use triple loop numerical kernels</p>
253 - 262	- - -	<p>SYSTEM(253) to (262) have been set aside for user DMAPS. The software does not use these values in its code in present or future versions. The SSSAlter library may use this range.</p>
270	QUARTICDLM	<p>A value of 1 selects the new quartic formulation of the doublet lattice kernel (N5KQ) while 0 selects the original quadratic form. (Default=0)</p>
273	- - -	<p>A value of 1 selects the old Lanczos shift logic from V70 and prior systems. (Default=0)</p>
303	MINDEF	<p>Indefinite Mass Matrix Check, the Default=1 does not perform the check.</p> <p>If MINDEF&gt;0, then check is not performed.</p> <p>If MINDEF&lt;0, then epsilon = -1.E(MINDEF).</p> <p>If MINDEF=0, then MINDEF defaults to -6.</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
304	MPERTURB	<p>Perturbation factor for indefinite mass matrix. The default=1 does not perturb the mass.</p> <p>If MPERTURB&gt;0, then the mass is not perturbed.</p> <p>If MPERTURB&lt;0, then the mass <math>1.E^{**}(MPERTURB)</math> is added to the diagonal terms of the mass matrix.</p> <p>If MPERTURB=0, then MPERTURB defaults to -6. The perturbed mass matrix is used in the subsequent eigenvalue analysis.</p>
309	- - -	<p>If set to 1, requests the pre-MSC.Nastran Version 70.7 HEXA8 element stiffness formulation. (Default=0)</p>
310	- - -	<p>If set to 1, requests the pre-MSC.Nastran Version 70.7 RBE3 formulation. (Default=0)</p>
319	XMSG	<p>If set to 1, gives extended error messages. (Default=0)</p>
320	- - -	<p>Controls the conversion of DAREA Bulk Data entries for grid and scalar points to equivalent FORCE/MOMENT/SLOAD Bulk Data entries as appropriate.</p> <p>0: Perform the conversion, but do not give details of the conversion. (Default)</p> <p>N: Perform the conversion and give details of the first N such conversions.</p> <p>-1: Do not perform the conversion.</p>
357	RSEQCONT	<p>Resequence all continuations (useful to eliminate conflicts with auto-continuation capability).</p> <p>0: Do not resequence continuations.</p> <p>1: Resequence all continuations. (Default)</p>

Table 1-1. System Cell Summary		
System Cell Number	System Cell Name	Function and Reference
359	- - -	= 0: Use the user-requested eigensolution method. <> 0: When LAN is requested, switch to AHOU if the number of DOFs sent to the eigensolver is ≤ “nswitch”, an input parameter to the READ module. This parameter has an MPL default of 20. It may be set to other values in the solution sequences, depending on the context. When HOU, MHOU, or AHOU is selected, switch to the new Householder-QL solution. (Default=1)
368	- - -	Reserved
370	QRMETH	Selects the formulation used by the QUADR/TRIAR elements. 0: Selects the QUADR/TRIAR membrane formulation with active out of plane rotational dof. (default). 1: Selects the older, limited QUADR/TRIAR formulation. 3: Converts QUADR/TRIAR into QUAD4/TRIA3 formulation. 5: Converts QUAD4/TRIA3 into the newer QUADR/TRIAR formulation.
395-398	- - -	Reserved.
399	ELEMITER	Controls execution of element iterative solver in SOL 101. YES: Execute element iterative solver. NO: Do not execute element iterative solver (Default). Note that both ITER = YES and ELEMITER = YES are required to run element iterative solution.(See also bulk card ITER and Nastran function ITER.)
400-401	- - -	Reserved.

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
402	DPBLKTOL	<p>Tolerance to determine the removal of duplicate GRID IDs and/or CORD1C, CORD1R, CORD1S, CORD2C, CORD2R, CORD2S. (Real)</p> <p>Set DPBLKTOL &lt; 0.0 (default) to have the software abort a solve if a model contains duplicate GRID point IDs and/or coordinate system definitions.</p> <p>Set DPBLKTOL = 0.0 to have the software ignore duplicate GRID point IDs and/or coordinate system definitions and proceed with the solve.</p> <p>Set DPBLKTOL &gt; 0.0 to specify a tolerance value that determines whether the software ignores duplicate GRID IDs and/or coordinate systems and proceeds with the solve.</p> <p>GRIDS: Duplicates will be removed if their coordinates are within the specified tolerance, one (or none) has a local coordinate system defined, and all belong to the same superelement. If all conditions are met, the GRID using the local coordinate system will be used and the others ignored. If all conditions are not met, the solution stops with an error.</p> <p>Coordinate Systems: Duplicate coordinate system definitions will be removed if the coordinate system types are the same and their transformation matrices are within the specified tolerance and they are on the same superelement. If all conditions are met, the first coordinate system will be kept and subsequent duplicates ignored. If all conditions are not met, the solution will stop with an error.</p>
404	- - -	<p>Text file (.txt) generation for MNF/RFI via ADAMSMNF/RECURDYNRFI case control commands.</p> <p>0: Do not generate text file (Default).</p> <p>1: Generate text file.</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
405	- - -	<p>Complex eigenvalue solver options using ISRR method.</p> <p>0: Use ISRR special solver (higher memory requirement). (Default)</p> <p>1: Use NX NASTRAN general solver (small memory requirement).</p>
406	- - -	<p>Complex eigenvalue solver options using ISRR method.</p> <p>0: Do not calculate left eigenvectors (better performance). (Default)</p> <p>1: Calculate left eigenvectors (extra computational cost).</p>
407	- - -	<p>Determines if the version stamp header is written on the first line of the OP2 file.</p> <p>0: Version stamp written. (Default)</p> <p>1: Turns off the version stamp.</p>
409	- - -	<p>Changes how the RBE3 check for unconnected grid points is done. Normally the check will produce a fatal error when grids referenced by an RBE3 are unconnected, but if this system cell is set to 1, only a warning will be issued and the solution continues.</p> <p>The check for an unconnected node on a RBE3 element is not performed for a superelement or dmp solution.</p>
412	OLDGAPS	<p>Controls how CGAPs are treated in SOL 101 when linear contact is defined. (See the section on linear contact in the <i>NX Nastran User's Guide</i> for more information.)</p> <p>0: CGAPs are treated as contact elements. (Default)</p> <p>1: CGAPs are treated as linear springs.</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
413	OP2FMT	<p>Determines if OUTPUT2 binary results files are written as 32-bit or 64-bit when using an ILP-64 executable type.</p> <p>= 0 (default): The solution will automatically check if a PARAM, POST,<i>n</i> entry exists, and that <i>n</i> is less than 0. If this exists, the OP2 file is converted to 32-bit. If not, the OP2 file is written as 64-bit.</p> <p>= 1: The OP2 file will always be written as 32-bit.</p>
415	OP4FMT	<p>Determines if OUTPUT4 binary results files are written as 32-bit or 64-bit when using an ILP-64 executable type.</p> <p>0: The OP4 file is always written as 64-bit from an ILP-64 executable.</p> <p>1 (default): The OP4 file will always be written as 32-bit from an ILP-64 executable.</p>
416	INP4FMT	<p>When using an ILP-64 executable type, determines if 32-bit OP4 files are converted to 64-bit during import.</p> <p>0: No conversion is done.</p> <p>1 (default): 32-bit OP4 files are converted to 64-bit during import.</p>
417	REDORTH	<p>Controls if the reduced-orthogonalization option during Lanczos solutions is turned on or off.</p> <p>0: Reduced-orthogonalization option is turned off. (Default)</p> <p>1: Reduced-orthogonalization option is turned on.</p>
419	SVDSPC	<p>Determines which AUTOSPC method is used.</p> <p>0: Use the eigenvalue method (Default)</p> <p>1: Use the Singular Value Decomposition (SVD) method</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
421	SPARSEDR	<p>Selects if the sparse data recovery option is used for modal response solutions</p> <p>0: Sparse data recovery option not used.</p> <p>1: Sparse data recovery option used. (default)</p>
422	ENFMOTN	<p>Controls which formulation is used for enforced motion response analysis (and mode acceleration, if requested).</p> <p>0: Constraint mode method of enforced motion formulation (and new mode acceleration method)</p> <p>1: Absolute displacement enforced motion formulation (and old mode acceleration method) (Default). (ABS/REL option on DISPLACEMENT, VELOCITY, and ACCELERATION case control entries is disabled).</p> <p>2: Absolute displacement enforced motion formulation is used, but includes a modal viscous damping coupling term to improve accuracy.</p>
424	SPCHOL	<p>Select if sparse Cholesky decomposition technique is used in linear solutions.</p> <p>0: Sparse Cholesky technique is not used.</p> <p>1: Use Sparse Cholesky technique. If fail, fall back to option 0. (default)</p> <p>4: TAUCS is used. If fail, fall back to option 0.</p> <p>5: TAUCS is used. If fail, fall back to option 1.</p>
425	ADSOPT	<p>Controls which optimizer is selected for design optimization.</p> <p>0: Use DOT (default)</p> <p>1: Use Siemens-ADS (Analytic Design System)</p>



<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
426	REDMULT	Selects the REDMULT performance option when solving vibration problems with the Lanczos method.  0: REDMULT is not used.(default)  1: REDMULT is used.
442		Controls if Solution Monitor files are generated for NX and FEMAP. It is only valid on the platforms supported by NX and FEMAP.  0: Do not generate (default).  1: Generate files and delete after solution completes.  -1: Generate files and keep after solution completes.
444	TEMPWARN	Controls if temperature definitions on undefined grid points produce a fatal error (default) or a warning.  0: A fatal error occurs (default).  1: A warning occurs.
445	NREC	A positive number to determine the number of substructures in RDMODES. The efficiency of RDMODES requires carefully choosing m, which should not be too small or too large. A nrec value with power of 2 is preferable for better performance. For a large problem (>1M DOFs), nrec=128 or 256 is likely to be a good choice.
446	RDSCALE	A factor to modify the selected frequency range in the EIGRL specification for eigensolutions of each substructure in RDMODES. The default value is 1.0 for single-level RDMODES, i.e., using the same frequency range as EIGRL specification; and is 2.0 for multilevel RDMODES.

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
461		<p>For each constraint equation (user defined or generated from a rigid element), the software checks the magnitude of the coefficient of the dependent dof. If the value is relatively small, a warning message is output. If the value is very small, fatal message 5289 is issued. The reason for the check is that this value will be used in a denominator of an equation and, if very small, can lead to numerical round-off errors and poor answers.</p> <p>In rare occasions it might be permissible to allow this to happen and thus if system cell 461 is set to a "1", the message will only be a warning.</p> <p>0: A fatal error occurs (default).</p> <p>1: A warning occurs.</p>
462		<p>Options for SOL 111</p> <p>0: Original FRRD1 is used. (Default)</p> <p>1: In-core iterative FRRD1 is used.</p> <p>2: FRRDRU is used.</p>
463		<p>Determines if CBAR and CBEAM elements with offset vectors are permitted in solutions requiring a differential stiffness calculation. See remarks on CBAR/CBEAM bulk entries.</p> <p>0: A fatal error occurs (default).</p> <p>1: Solution is permitted to continue, but offset vector remains parallel to its original orientation.</p>
464		<p>Determines the CGAP normal and transverse stiffness when a BCSET case control command exists (contact conditions exist).</p> <p>0: (default) Stiffness is determined from the properties on the PGAP bulk data entry. (See remarks on the PGAP bulk data entry.)</p> <p>1: Stiffness is determined from PENN and PENT on the BCTPARM bulk data entry.</p>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
474		<p>Determines the CROD and CBAR element lumped mass calculation. The “old” calculation before NX Nastran 6.1 was inconsistent with the CBEAM.</p> <p>0: CROD and CBAR lumped mass calculation is consistent with CBEAM element (default).</p> <p>1: CBAR will use the old method.</p> <p>2: CROD will use the old method.</p> <p>3: CBAR and CROD will use the old method.</p>
476		<p>Determines if a non-converged contact condition in solution 101 continues with a warning, or ends with an error.</p> <p>0: (default) A warning is reported in the *.f06 file, the solution continues and results creation occurs.</p> <p>1: A fatal error is reported in the *.f06 file, and the solution ends immediately with no results creation.</p>
480		<p>Determines the linear contact processing defaults. See the BCTPARAM bulk entry.</p> <p>(default):</p> <ul style="list-style-type: none"> <li>– The elastic modulus of the softer material in each contact pair is used.</li> <li>– PENN and PENT are automatically calculated.</li> <li>– The "REFINE=2" source-refinement algorithm is used.</li> </ul> <p>1:</p> <ul style="list-style-type: none"> <li>– The modulus averaged over the entire model is used.</li> <li>– The automatic penalty factor calculation is turned off and PENN and PENT are used.</li> <li>– The "REFINE=1" source-refinement algorithm is used.</li> </ul>

<b>Table 1-1. System Cell Summary</b>		
<b>System Cell Number</b>	<b>System Cell Name</b>	<b>Function and Reference</b>
489	PERPTOL	<p>Determines the perpendicularity tolerance for shell element material orientations. (Real, Default = 1.0E-8 degrees)</p> <p>A fatal error will occur when the angle between a shell element face normal and the x-direction of the material coordinate system (MCID) is less than the value of SYSTEM(489).</p>
491		<p>When the GLUETYPE=2 option is used on the BGPARM bulk entry, reverts the surface-to-surface glue stiffness back to the NX Nastran 6.1 defaults.</p> <p>3 (default): Use current stiffness defaults.</p> <p>1: use the NX Nastran 6.1 stiffness defaults.</p>
495		<p>Determines if a shell element thickness value of "0.0" causes a fatal error.</p> <p>0 (default): A fatal error will occur if any Ti value of "0.0" exists on the elements CTRIA3, CTRIA6, CTRIAR, CQUAD4, CQUAR8, CQUADR, CPLSTS3, CPLSTS4, CPLSTS6, CPLSTS8. This thickness check default began in NX Nastran 7.1.</p> <p>1: The solution proceeds as it did before version 7.1.</p>


Chapter

# 2 File Management Statements

2  
FMS

- *Key to Descriptions*
- *File Management Statement Descriptions*

## 2.1 Key to Descriptions



Brackets [ ] indicate that a choice of describers is optional.

A brief sentence about the function of the statement is given.

If the describers are stacked vertically, then only one may be specified.

**RESTART** Reuse Database From a Previous Run

Requests that data stored in a previous run be retrieved for this run.

**Format:**

```
RESTART [ PROJECT = 'project-ID' VERSION = { version-ID } { KEEP } { NOKEEP } ]
```

Describers in uppercase letters are keywords that must be specified as shown.

The default describers are shaded.

Describers in lower case are variables.

Braces { } indicate that a choice of describers is mandatory.

**Describers:**

project-ID Project identifier. See Remarks. (Character string, maximum of 40 characters; specified on the PROJ FMS statement).

version-ID Version number. (Integer > 0).

LAST Specifies the last version under project-ID.

Each of the describers is discussed briefly. Further details may be discussed under Remarks.

PROJECT will remain on the database after the run is completed.

VERSION will be deleted from the database after the run is completed.

**Remarks:**

1. There may be only one PROJECT.
2. A new version-ID is assigned to each run.
3. If project-ID or version-ID is not specified, a message will be issued.
4. The RESTART statement is required to perform restarts in all structured solution sequences (21, 22, 23, 24, 25, 26, 27, 28, 29, 30) and in unstructured solution sequences (21, 22, 23, 24, 25, 26, 27, 28, 29, 30).

If the describer is in lower case, then it is a variable and the describer's type (e.g., Integer, Real, or Character), allowable range, and default value are enclosed in parentheses. If no default value is given, the describer must be specified by the user.

The remarks are generally arranged in order of importance and indicate such things as the statement's relationship to other statements, restrictions and recommendations on its use, and further details regarding the describers.

When the run will restart from the project-ID specified in the previous run (see Example 2 below.)

1. RESTART VERSION=7  
Version number 7 will be retrieved for this run (version 8). At the end of the run version 7 will be deleted.
2. PROJ='FENDER'  
RESTART  
The last version under project-ID FENDER will be used in the current run.

## The File Management Section (FMS)

The File Management Section (FMS) is primarily intended for the attachment and initialization of Database sets (DBsets) and FORTRAN files. The initialization of DBsets includes specification of their maximum size, member names, and physical filenames. The initialization of FORTRAN files includes the specification of their filenames, FORTRAN unit numbers, and FORTRAN attributes.

In most classes of problems that use NX Nastran solution sequences (SOL), no File Management statements are required because a default File Management Section is executed at the beginning of every run. If a restart is desired, then the RESTART statement is required in SOL 101 through 200. All other solutions may not be restarted. If the problem is large in terms of requiring significant amounts of memory or disk space, then the INIT, ASSIGN, and EXPAND statements may be required. If any FORTRAN files are required, then the ASSIGN statement is required; for example, the OUTPUT2 DMAP module. The ASSIGN statement is also required to assign databases for DBLOCATE, DBLOAD, and DBUNLOAD. Special database operations are performed by the DBLOCATE, DBLOAD, DBUNLOAD, DBLCLEAN, ACQUIRE, DBDIR, DBDICT, DBFIX, DBSETDEL, DBUPDATE, and PROJECT statements.

## File Management Statement Summary

The following is a summary of all File Management statements:

\$	Comment statement.
ACQUIRE	Selects NDDL schema and NX Nastran Delivery Database.
ASSIGN	Assigns physical files to DBset members or special FORTRAN files.
CONNECT	Groups geometry data by evaluator and database.
DBCLEAN	Deletes selected database version(s) and/or projects.
DBDICT	Prints the database directory in user-defined format.
DBDIR	Prints the database directory.
DBFIX	Identifies and optionally corrects errors found in the database.
DBLOAD	Loads a database previously unloaded by DBUNLOAD.
DBLOCATE	Obtains data blocks and parameters from databases.
DBSETDEL	Deletes DBsets.
DBUNLOAD	Unloads a database for compression, transfer, or archival storage.
DBUPDATE	Specifies the time between updates of the database directory.
ENDJOB	Terminates a job upon completion of FMS statements.

## 40 Key to Descriptions

2  
FMS

EXPAND	Concatenates additional DBset members to an existing DBset.
INCLUDE	Inserts an external file in the input file.
INIT	Creates a temporary or permanent DBset.
NASTRAN	Specifies values for system cells.
PROJ	Defines the current or default project identifier.

The FMS statements are executed in the following order regardless of their order of appearance in the input file:

NASTRAN, DEFINE  
RFINCLUDE, INCLUDE  
ASSIGN, INIT, EXPAND, DBUPDATE  
PROJECT  
DBCLEAN  
DBFIX  
DBDIR (1), DBDICT(1)  
DBSETDEL  
ACQUIRE  
RESTART  
DBLOCATE  
DBUNLOAD  
DBLOAD  
DBDIR (2), DBDICT(2)  
ENDJOB

If DBDIR or DBDICT is specified before any of the FMS statements DBSETDEL through DBLOAD, then the directory printout will reflect the processing of DBCLEAN and DBFIX only. If DBDIR or DBDICT is specified after DBSETDEL through DBLOAD, then the directory printout will reflect the processing of all statements in the FMS Section. It is recommended that the DBDIR and DBDICT statements be specified last in the FMS Section. Multiple DBLOCATE, DBLOAD,



or DBUNLOAD statements are processed in the order in which they appear. If the ENDJOB statement is specified, then only the File Management Section is processed and the Executive Control, Case Control, and Bulk Data Sections are ignored.

## 2.2 File Management Statement Descriptions

File Management statements may be abbreviated down to the first four characters as long as the abbreviation is unique relative to all other statements. Each statement is described as follows:

**2**  
**FMS**

### Description

A brief sentence about the function of the statement is given.

### Format

Describers in uppercase are keywords that must be specified as shown. In addition, describers in lowercase indicate that the user must provide a value.

Braces { } indicate that a choice of describers is mandatory. If the describers are stacked vertically, then only one may be specified.

Brackets [ ] indicate that a choice of describers is optional. If the describers are stacked vertically, then only one may be specified.

Describers that are shaded indicate the defaults.

If the statement line is longer than 72 columns, then it may be continued to the next line with a comma as long as the comma is preceded by one or more spaces. For example:

```
DBLOCATE DATABLK=(KAA) ,
        WHERE (PROJECT='FRONT BUMPER' AND ,
              SEID>0 AND VERSION=4) ,
        LOGI=MASTER3
```

However, if a filename is to be continued on the next line, no space must precede the comma, and the continuation line must have no leading spaces.

For example:

```
ASSIGN      SDB='/jw/johannes/Projects/secret/Aero/Tests/wing/Modes/w,
            ing_modal.MASTER'
```

Note that all quotation marks shown under formats and examples are right-handed single quotation marks and must be entered as such. For example:

```
PROJ='MYJOB'
```

### Examples

One or more examples are given.

## **Describers**

Each of the describers is briefly discussed. The describer's type (e.g., Integer, Real, or Character), allowable range, and default value are enclosed in parentheses. The describer must be specified by the user if no default value is given.

## **Remarks**

The remarks are generally arranged in order of importance and indicate such things as the FMS statement's relationship to other commands, restrictions and recommendations on its use, and further descriptions of the describers.

## WHERE and CONVERT Clauses

The WHERE clause is used in the selection of items (data blocks and parameters) on the DBDICT, DBLOCATE, DBLOAD, and DBUNLOAD statements. The CONVERT clause modifies qualifier values of items selected by the WHERE clause on the DBLOCATE and DBLOAD statements.

The WHERE and CONVERT clauses specify values for PROJECT, VERSION, qualifiers, and DBSET. PROJECT specifies the project-ID that is originally defined on the PROJECT FMS statement at the time the project is created. VERSION specifies the desired version-ID under the project-ID. Qualifiers are used to uniquely identify items on the database with the same name. For example, data block KAA has SEID as one of its qualifiers, which is the superelement ID. An item may have more than one qualifier and the collection of all qualifiers assigned to an item is called a path.

All data blocks and parameters with qualifiers are defined in the NDDL (NASTRAN Data Definition Language) sequence. See the *NX Nastran DMAP Programmer's Guide*. Data blocks and parameters are defined on the DATBLK and PARAM NDDL statements. The DATBLK and PARAM statements specify the name of the data block, parameter, and also its pathname. The pathnames are defined on the PATH NDDL statement, which lists the qualifiers assigned to the path. Qualifiers are defined on the QUAL NDDL statement. DBSET specifies the desired DBset. The DBset of an item is specified after the LOCATION keyword on the DATBLK and PARAM NDDL statement.

The format of the WHERE clause is:

WHERE (where-expr)

where-expr is a logical expression that specifies the desired values of qualifiers, PROJECT, VERSION, and DBSET. If the result of the logical expression is TRUE for an item on the database then the item is selected. For example, WHERE(VERSION=4 AND SEID < > 2 AND SEID > 0) selects all items under version 4 for all values of SEID greater than 0 except 2.

A simple where-expr is a comparison using the following relational operators = , > , < , <= , >= , >< or <>. For example, SEID > 0 means if SEID is greater than zero, then the logical expression is true. Several simple where expressions may be joined into a single where-expression using the following logical operators: AND, OR, XOR, and EQV. The NOT operator may be used to negate a where expression. For example, NOT(SEID > 0) is the same as SEID <= 0. Arithmetic operations and DMAP functions may also be specified in the where-expression. (See the *NX Nastran DMAP Programmer's Guide* .)

If a qualifier in a where-expr is not a qualifier in the path of a specified item, then the where-expr is set to FALSE. If the where-expr does not contain a specification for all qualifiers in the path of an item, then the unspecified qualifiers will be wildcarded,

(i.e., quali= \* , all values will be selected). The default values of qualifiers, PROJECT, VERSION, and DBSET are described under the statement in which the WHERE clause is specified.

Examples of the WHERE clause are:

1. Select all items in the database for all superelements except 10 and 30 from Version 1.

```
WHERE (VERSION=1 AND SEID>=0 AND NOT (SEID=10 OR SEID=30))
```

2. Select all entries in the database on DBSET=DBALL from all projects and versions.

```
WHERE (PROJECT=PROJECT AND VERSION>0 AND DBSET='DBALL')
```

The CONVERT clause modifies project- and version-ID, DBset-name (see INIT statement), and qualifier values of items selected by the WHERE clause on the DBLOCATE and DBLOAD statements. It contains one or more assignment statements separated by semicolons. The format of the CONVERT clause is:

```
CONVERT(PROJECT=project-expr; VERSION=version-expr; ,
```

The PROJECT and VERSION statements modify the project-ID (see PROJECT FMS statement) and version-ID. The DBSET statement modifies the DBset-name. The value of quali will be replaced by qual-expri for selected items that have quali in their path. qual-expri is any valid expression (see “Expressions and Operators” in the *NX Nastran DMAP Programmer’s Guide*) containing constants or any qualifier name defined in the path of the item. If qual-expri contains names of qualifiers not in the path of the selected item, then a fatal message is issued. If project-expr and/or version-expr produces a project- or version-ID which does not exist, then one will be created. Also, all version-IDs less than version-expr that do not exist will be created; but they will be “empty.”

Examples of the CONVERT clause are:

1. Set qualifiers SEID, PEID, and SPC to constants 10, 20, 102 respectively.

```
CONVERT (SEID=10;PEID=20;SPC=102)
```

If more than one value of a qualifier is found for an item by the WHERE clause, then each value is processed in qual-expri to define the new qualifier value for each of the selected items. In the example below, if the original values of PEID were 1, 2, and 3; then the new values for the SEID qualifier will be 2, 4, and 6.

2. Set all values of qualifier SEID to be twice that of the values of qualifier PEID.

```
CONVERT (SEID=2*PEID)
```

**\$  
Comment****\$** Comment

Used to insert comments into the input file. Comment statements may appear anywhere within the input file.

**Format:**

**\$** followed by any characters out to column 80.

**Examples:**

```
$ TEST FIXTURE-THIRD MODE
```

**Remarks:**

1. Comments are ignored by the program.
2. Comments will appear only in the unsorted echo of the Bulk Data.

**ACQUIRE**     Selects NDDL Schema

Selects the NDDL schema and NX Nastran delivery database to be used for primary database creation.

**Format:**

$$\text{ACQUIRE NDDL} = \left\{ \begin{array}{c} \text{NDDL} \\ \text{nddl-name} \end{array} \right\}$$

**Describers:**

<b>Describer</b>	<b>Meaning</b>
NDDL	NX Nastran NDDL schema.
nddl-name	Name of a user NDDL schema specified on a COMPILE NDDL statement when the user NDDL was stored.

**Remarks:**

This statement is used to specify the delivery database when the user wishes to create his or her own solution sequence, yet use the subDMAP objects or NDDL schema or both from the delivery database supplied with the software.

**Examples:**

The following requests the NX Nastran NDDL schema to be used when creating a new database.

```
ACQUIRE NDDL
SOL MYDMAP
COMPILE DMAP=MYDMAP, SOUOUT=USROBJ
.
.
.
LINK MYDMAP, SOLOUT=USROBJ
```

## 48 ASSIGN Assigns Physical File

### ASSIGN Assigns Physical File

Assigns physical file names to DBset members or special FORTRAN files that are used by other FMS statements or DMAP modules.

#### Format:

##### Format 1

Assign a DBset member name

```
ASSIGN log-name='filename1' [ TEMP DELETE SYS='sys-spec' ]
```

##### Format 2

Assign a FORTRAN file

```
ASSIGN logical-key = 'filename2'  
  
[ STATUS = { NEW  
             OLD  
             UNKNOWN } ]  
  
[ FORM = { FORMATTED  
           UNFORMATTED  
           LITTLEENDIAN  
           BIGENDIAN } ]  
  
[ UNIT = u ] [ TEMP ] [ DELETE ] [ SYS = 'sys-spec' ]
```

#### Examples:

1. Assign the DBALL DBset:

```
ASSIGN DB1='filename of member DB1'  
INIT DBALL LOGI=(DB1)
```

2. Assign FORTRAN file 12 to the OUTPUT4 module using the ASCII option:

```
ASSIGN OUTPUT4='filename of FORTRAN file'  
UNIT=12, FORM=FORMATTED
```



**Describers:**

<b>Describer</b>	<b>Meaning</b>
log-name	The name of a DBset member name. log-name is also referenced on an INIT statement after the LOGICAL keyword.
filenamei	The physical filename assigned to the DBset member.
TEMP	Requests that filenamei is deleted at the end of the run.
DELETE	Requests that filenamei, if it exists before the start of the run, is to be deleted.
logical-key	Specifies defaults for STATUS, UNIT, and FORM of FORTRAN files for other FMS statements, DMAP modules, punching and plotting operations.
filename2	The physical file name assigned to the FORTRAN file.
STATUS	Specifies whether the FORTRAN file is being created (STATUS=NEW) or has been created prior to the run (STATUS=OLD). If its status is not known, then STATUS=UNKNOWN is specified.
UNIT=u	u is the FORTRAN unit number of the FORTRAN file. See Remark 9.
FORM	Indicates whether the FORTRAN file is written in ASCII (FORM=FORMATTED), binary (FORM=UNFORMATTED), little endian binary (LITTLEENDIAN), or big endian binary (BIGENDIAN) format.
DEFER	The specified file will not be opened/created during NX.Nastran initialization. The file must be opened by the module or DMAP accessing the file.
sys-spec	System specific or machine-dependent controls for IBM/MVS-type computers only. See Remark 1 .

**Remarks:**

1. The ASSIGN statement and its applications are discussed further in "Introduction to Database Concepts" in the *NX Nastran User's Guide*.

## ASSIGN

### Assigns Physical File

- The logical-key names and their default attributes that may be assigned by the user are as follows:

logical-key Name	Default Status	Default Unit	Default Form	Application
DBC	NEW	40	UNFORMATTED	DBC module — PARAM,POST,0
INPUTT2	OLD	none	UNFORMATTED	INPUTT2 module
INPUTT4	OLD	none	UNFORMATTED	INPUTT4 module
OUTPUT2	NEW	none	UNFORMATTED	OUTPUT2 module
OUTPUT4	NEW	none	UNFORMATTED	OUTPUT4 module
DBUNLOAD	NEW	50	UNFORMATTED	DBUNLOAD FMS statement
DBLOAD	OLD	51	UNFORMATTED	DBLOAD FMS statement
USERFILE	none	none	none	User-defined

The defaults may be overridden on the ASSIGN statement.

- Certain reserved names may not be used for log-names or logical-key names: SEMTRN, LNKS WH, MESHFL, LOGFL, INPUT, PRINT, INCLD1, and CNTFL. If they are used, then a fatal message is issued. Also, unit numbers 1 through 10, 14 and 16 should not be assigned. PUNCH and PLOT may be used but are not recommended.
- If one of the logical-key names indicated in Remarks 2. and 3. is not specified on this statement, then it is assumed to be a DBset member log-name as shown in Format 1.
- The logical-key names DBUNLOAD and DBLOAD may be assigned only once in the FMS section. The others may be assigned as many times as needed for the application. However, in all logical-key assignments, the unit number *u* must be unique. If it is necessary to execute the INPUTT4 and OUTPUT4 modules on the same unit, then specify ASSIGN OUTPUT4 only. The same is recommended for the INPUTT2 and OUTPUT2 modules.
- STATUS, UNIT, and FORM are ignored if assigning a log-name (DBset member name).
- FORM=FORMATTED must be specified for a unit when:
  - Ascii output is desired on the INPUTT4 and OUTPUT4 DMAP modules that process the unit. See the *NX Nastran DMAP Programmer's Guide*.
  - FORMAT=NEUTRAL is selected on the DBUNLOAD and DBLOAD FMS statements that process the unit. See "Database Archival and Retrieval" in the *NX Nastran User's Guide*.

- The neutral file format is desired for the INPUTT2 and OUTPUT2 modules.
8. See the *NX Nastran Installation and Operations Guide* for further information on machine-dependent aspects of the ASSIGN statement.
  9. The following unit numbers are reserved for specific tasks. Only use these numbers when performing the associated task. For example, UNIT=7 is used for punch files.

ASSIGN PUNCH='results\_output.pch',NEW,UNIT=7

UNIT NO	DESCRIPTION
1	Default UNIT for SCR.F01
2	Default UNIT for SCR.F02
3	Mesh file SCR.F03
4	Log File (typically standard out)
5	Input (deck) File
6	Print File (f06 file)
7	Punch File
8	Node-Locked License File
9	Include Files
10	Control File or the ASG File
11	INPUTT2 Unit
12	OP2 File
14	Plot File
15	Mesh File
16	Assembly File
18	Acoustics coupling file - 1
19	Acoustics coupling file - 2
20	Data base Migration Files
21	Adina input file
22	Adina output file - 1
23	Adina output file - 2
24-29	BCS Linear Solver
24-33	BCS Eigen Solver
31-35	Reserved for AMLS files
40	DBC (xdb) File1
46	Reserved for AMLS files
50	DBC (xdb) File2
51	DBC (xdb) File3

**52 ASSIGN**  
**Assigns Physical File**

66	Linear Contact Refinement File
70	Reserved for Akusmod files
151-153	Solution Monitor Files

**2**  
**FMS**

**CONNECT** Group Evaluator Data

Defines a group of external geometric or beam cross-section entities, or a DRESP3 second order response function external evaluator. These entities should belong to the same evaluator-class (set of routines that process them), and in the case of geometric data, should reside on the same database. The GMCURV, GMSURF, PBARL, PBEAML, and DRESP3 Bulk Data entries refer to the groups defined here.



**Format:**

```
CONNECT [ GEOMEVAL
          BEAMEVAL
          DRESP3 ] group evaluator 'path' 'data'
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
group	Group name referenced by the GROUP field on GMCURV, GMSURF, PBARL, PBEAML, and DRESP3 Bulk Data entries.
evaluator	Identifies the particular class of evaluator to which the geometric or beam cross-section entities belong, or is an alias for the path name to the DRESP3 evaluator. Entities belonging to one evaluator-class are handled by the same set of routines (either provided with the software or user-provided). For geometry, two classes of evaluators are provided internally with NX Nastran. They are MSCRPC (Rational Parametric Cubic) and MSCEQN (Generic Equation). For beam cross-sections, the class MSCBML (NX Nastran Beam Library) is provided internally. For the DRESP3 response evaluation, template subroutines are provided with NX Nastran, so that the users can customize them accordingly, modifying them and/or adding more subroutines called from these. Users may develop custom evaluator libraries for geometry, beam cross-sections, or DRESP3 functions and configure them for use with NX Nastran. See Remarks 3, 4 and, 5.
path	Optional pathname or filename used by evaluator. Path must be enclosed by single quotation marks if it contains lowercase characters.

Describer	Meaning
data	Optional character string passed to the evaluator. Data must be enclosed within single quotation marks if it contains lowercase characters or embedded blanks.

**Remarks:**

1. CONNECT requests:
  - an external database or evaluator,
  - or a user defined grouping for geometric data defined by GMCURV and GMSURF entries or beam cross-section data defined by PBARL and PBEAML entries.
2. Two reserved group names, MSCGRP0 and MSCGRP1, have been predefined for geometric entities. These names may be used in the GMCURV and GMSURF entries, without being defined explicitly by means of a CONNECT FMS statement. The group MSCGRP0 corresponds to the MSCRPC (Rational Parametric Cubic) evaluator and the group MSCGRP1 corresponds to the MSCEQN (Generic Equation) evaluator.
3. A single reserved group name, MSCBML0 has been predefined for beam cross-section entities. It may be used in the PBARL and PBEAML entries, without being defined explicitly by means of a CONNECT FMS statement. It corresponds to the MSCBML (Beam-Library) evaluator.
4. Custom beam cross-section or DRESP3 evaluator libraries developed by users should comply with the guidelines outlined in the *NX Nastran User's Guide*.
5. Once developed, an evaluator may be configured as:
  - internal, where the evaluator routines are linked with the rest of the NX Nastran object modules to comprise the NX Nastran executable program,
  - or external, where the evaluator routines are linked with a provided server program to constitute an independent geometry server, or DRESP3 server.
6. The NX Nastran provided DRESP3 external program development capability will result in an external program with the default name dr3serv.exe. Refer to Version 5.1 Release Guide and the DRESP3 bulk data definition on how to build and run this external program together with NX Nastran.
7. The file which has the resolution of the alias for the DRESP3 evaluator path name should be referred to from the nastran command line by the gmconn

keyword. For example, if the file name is xyz, then gmconn=xyz should be added to the nastran command. Thus, the nastran command refers to the file which contains the resolution of the alias for path to the evaluator, and the alias is contained in the CONNECT statement, completing the information necessary to refer to the evaluator program from inside the data file.

8. An example for the content of the file that resolves the alias for the DRESP3 evaluator path name is:

```
EXTRESP= ,-/network_drive/user_dir/dr3srv/dr3serv
```

where, for this example, EXTRESP is the evaluator alias used in the CONNECT statement (see also under Examples).

**Examples:**

1. CONNECT GEOMEVAL FENDER, CATIA, '/u/kiz/adp', 'Version=6 as of 1/31/93'

In this case, the user is requesting that all calculations on GMCURV and GMSURF Bulk Data entries that are grouped as FENDER use the CATIA database/evaluator. For each GMCURV and GMSURF entry where the group parameter is set to FENDER, appropriate evaluator routines will be called to initialize and perform computations on the curve or surface.

2. CONNECT GEOMEVAL HOOD, MSCRPC

In this case the user is requesting that all calculations on GMCURV and GMSURF Bulk Data entries that are grouped as HOOD use the NX Nastran RPC database/evaluator. There is no need for additional routines to be supplied by the user since the MSCRPC and MSCEQN evaluator libraries are included in the standard NX Nastran delivery.

3. CONNECT GEOMEVAL DOOR, MSCEQN

In this case, the user is requesting that all calculations on GMCURV and GMSURF Bulk Data entries that are grouped as DOOR use the MSC.Nastran® (MSC.Nastran is a registered trademark of MSC.Software Corporation) EQUATION database/evaluator. There is no need for additional routines to be supplied by the user since the MSCRPC and MSCEQN evaluator libraries are included in the NX Nastran standard delivery.

4. CONNECT BEAMEVAL HOIST, NEWBEAMS

In this case, the user is requesting that all calculations on PBARL and PBEAML Bulk Data entries that are grouped as HOIST use the NEWBEAMS evaluator. The user must supply the NEWBEAMS beam cross-section evaluator library, and configure it to function with the NX Nastran executable program.

5. CONNECT DRESP3 TESTGRP EXTRESP

## CONNECT

### Group Evaluator Data

In this case, the user is requesting that all DRESP3 calculations that are grouped as TESTGRP use the evaluator pointed at by the evaluator alias EXTRESP. EXTRESP is defined as in Remark 8 above, and the file containing this definition is pointed at as defined in Remark 7 above. The external program, with the default name dr3serv, contains NX Nastran supplied routines which the user may modify, and any user added routines called by the first set of routines.



**DBCLEAN**      Delete Database Versions and/or Projects

Deletes one or more versions and/or projects from the database.

**Format:**

DBCLEAN VERSION = {version-ID,\*} [PROJECT={project-ID,\*}]

**Describers:**

<b>Describer</b>	<b>Meaning</b>
version-ID	Version identifier of the database to be deleted.
*	Wildcard. All versions or projects to be deleted.
project-ID	Project identifier of the project to be deleted. (See the FMS statement, <b>“PROJ”</b> .)

**Remarks:**

1. There may be up to ten DBCLEAN statements in the FMS Section.
2. If no project-ID is given, the current project-ID is assumed.

**Examples:**

```
DBCLEAN VERS=7 PROJ = 'OUTER WING - LEFT'
```

The above example would delete from the database all data blocks and parameters stored under Version 7 of the project identified as OUTER WING – LEFT.

**DBDICT****Prints Database Directory Tables:****DBDICT** Prints Database Directory Tables:

Prints database directory tables.

**Database Directory Tables**

- Data blocks described by an NDDL DATABLEK statement.
- Parameters described by an NDDL PARAM statement.
- All unique paths (KEYs) and their qualifiers values.
- Qualifiers and their current values.
- Data blocks not described by an NDDL DATABLEK statement.
- Parameters not described by an NDDL PARAM statement.
- Project and version information.

**Basic Format:**

The basic format of DBDICT specifies which tables to print and prints all items (data blocks and parameters) found in the directory. Also, the attributes (colnames) to be printed and the print format are predefined. Note that more than one table may be specified on the same DBDICT statement.

```
DBDICT [DATABLEK PARAM PROJVERS QUALCURR QUALIFIERS]
```

**Examples:**

```
DBDICT
DBDICT PARAM PROJVERS
```

**Full Format:**

The full format permits the selection of items by name and/or by the WHERE descriptor. The full format also permits the attributes to be printed using the SELECT descriptor. In addition, the print format can be specified with the SORT, FORMAT, and LABEL descriptors. Note that the full format only allows the specification of a single table on a DBDICT statement.

$$\text{DBDICT} \left( \begin{array}{l} \left( \left[ \begin{array}{c} \text{DATBLK} \\ \text{DATBLK(LOCAL)} \end{array} \right] = \left[ \begin{array}{c} * \\ (\text{datblk-list}) \end{array} \right] \right) \\ \left( \left[ \begin{array}{c} \text{PARAM} \\ \text{PARAM(LOCAL)} \end{array} \right] = \left[ \begin{array}{c} * \\ (\text{param-list}) \end{array} \right] \right) \\ \text{PROJVERS} \\ \text{QUALCURR} \\ \text{QUALIFIERS} \end{array} \right) \text{WHERE}(\text{where-expr}),$$

SELECT(colname[- ' col-label']. . . ),

**FORMAT** (FWIDTH = w [.d] DWIDTH = w [.d] AWIDTH = a IWIDTH = i,  
LWIDTH = k COLSPACE = c VALUE = w,  
colname = col-width, . . . ),

SORT ( colname =  $\left[ \begin{array}{c} \text{A} \\ \text{D} \end{array} \right], \dots ),$

LABEL ( 'page - title'  $\left[ \begin{array}{c} \text{RIGHT} \\ \text{CENTER} \\ \text{LEFT} \end{array} \right] )$

**Describers:**

<b>Describer</b>	<b>Meaning</b>
DATBLK	Print the data blocks. datblk-list specifies a list of NDDL-defined data blocks separated by commas. If LOCAL is specified, the non-NDDL-defined data blocks are printed.
PARAM	Print the parameter table. param-list specifies a list of parameters separated by commas. If LOCAL is specified, the non-NDDL-defined parameters are printed.
PROJVERS	Print the project-version table.
QUALIFIERS	Print the qualifier table.

<b>Describer</b>	<b>Meaning</b>
QUALCURR	Print the current values of the qualifiers. SORT is ignored.
where-expr	Logical expression that specifies the desired values of colnames described below. For example, WHERE(VERSION=4 AND SEID < > 2 AND SEID > 0) selects all items under version 4 for all values of SEID greater than 0 except 2. See the beginning of this section for a further description. The default for VERSION is the last version, and PROJECT is the current project. The default for qual is *, which is all qualifier values found on the database. See also Remark 12 .
SELECT	Specifies a list of column names to be printed. The order of the specified colnames will be printed from left to right. If a colname is not specified, then all columns will be printed.
colname	Column name. colname specifies a particular attribute of the database item; such as, data block name (NAME), creation date (CDATE), number of blocks (SIZE), or qualifier name (SEID, SPC, etc.). The allowable colnames are given in the Remarks.
col-label	The label to be printed above the column identified by colname. The default for col-label is the colname. col-label may not be specified for colnames QUALSET, QUALALL, and TRAILER.
FWIDTH=w.d	Specifies the default width for single-precision real numbers in real and complex qualifiers. (Integers: w > 0 and d > 0, Default = 12.5)
DWIDTH=w.d	Specifies the default width for double-precision real numbers in real and complex qualifiers. (Integers: w > 0 and d > 0, Default = 17.10)
AWIDTH=a	Specifies the default width for character string qualifiers. Character strings are printed with enclosing single quotation marks, even if the string is blank. (Integer > 0, Default = 8)
IWIDTH=i	Specifies the default width for integer qualifiers. (Integer > 0.) See Remarks for defaults.
LWIDTH=k	Specifies the default width for logical qualifiers. Logical values are printed as either "T" for TRUE or "F" for FALSE. (Integer > 0, Default = 1)

<b>Describer</b>	<b>Meaning</b>
COLSPACE=c	Specifies the default number of spaces between columns. (Integer > 0) See Remarks for defaults.
VALUE=w	Specifies the default width for parameter values. The values are printed as character strings with left justification. (Integer > 0, Default = 40)
col-width	The print width of the data under colname or qual-name. For real numbers, specify w.d where w is the width of the field and d is the number of digits in the mantissa. For integers and character strings, specify w where w is the width of the field. col-width may not be specified for colnames QUALSET, QUALALL, and TRAILER.
SORT	Specifies how the rows are sorted. The sort is performed in order according to each colname specified in the list. A “D” following the colname causes the sort to be in descending order. An “A” following the colname causes the sort to be in ascending order. Colnames QUALSET, QUALALL, and TRAILER may not be specified under SORT. Each colname specified in SORT must be separated by commas.
page-title	A title to be printed on each page of the directory output.
RIGHT, CENTER, LEFT	Print justification of the page title.

**Remarks:**

1. DBDICT prints seven different tables according to a default or a user-defined format. The tables are:

<b>Table 2-1. DBDICT Tables</b>			
<b>Describer</b>	<b>Description</b>	<b>Default Page-Title</b>	<b>See Remark</b>
DATABLK	Data blocks described by a NDDL DATABLK statement.	NDDL DATABLOCKS	<a href="#">2.</a>
PARAM	Parameters described by a NDDL PARAM statement.	NDDL PARAMETERS	<a href="#">3.</a>
QUALCURR	Current Qualifiers and their values.	CURRENT QUALIFIERS	<a href="#">4.</a>
QUALIFIERS	Qualifiers and their values for each key number.	QUALIFIERS	<a href="#">5.</a>

<b>Table 2-1. DBDICT Tables</b>			
<b>Describer</b>	<b>Description</b>	<b>Default Page-Title</b>	<b>See Remark</b>
DATABLK(LOCAL)	Data blocks not described by a NDDL DATABLK statement.	LOCAL DATABLOCKS	6.
PARAM(LOCAL)	Parameters not described by a NDDL PARAM statement.	LOCAL PARAMETERS	7.
PROJVERS	Project-Version.	PROJECT-VERSION	8.

If DBDICT is specified without any describers then the NDDL Data blocks Table will be printed. See Remark 2 .

DATABLK(LOCAL) and PARAM(LOCAL) produce no output, and QUALCURR produces the default values specified on the NDDL QUAL statement.

The defaults and allowable colnames for SELECT, FORMAT, SORT, and LABEL depend on the table. The defaults are described in the following remarks and tables.

- The default print of the NDDL Data Blocks Table is obtained by:

```
DBDICT
```

or

```
DBDICT DATABLK
```

and is equivalent to:

```
DBDICT DATABLK ,
  SELECT (NAME, DATABASE, DBSET, PROJ, VERS, CDATE, CTIME,
    SIZE, KEY, PURGED=' PU', EQUIVD=' EQ',
    POINTER=' FILE', QUALSET) ,
  FORMAT (NAME=8, DBSET=8, CDATE=6, CTIME=6, SIZE=5,
    KEY=4 , PURGED=4, EQUIVD=4, POINTER=8,
    IWIDTH=5, COLSPACE=1) ,
  SORT (PROJ=A, VERS=A, DBSET=A, NAME=A) ,
  LABEL ('NDDL DATABLOCKS' CENTER)
```

and looks like:


```
**** DICTIONARY PRINT ****
EXECUTION OF DMAP STATEMENT NUMBER 20
MODULE NAME = DBDICT , SUBDMAP SEKRRS , OSCAR RECORD NUMBER 16

      NDDL DATABLOCKS
NAME DATABASE DBSET PROJ VERS CDATE CTIME SIZE KEY PU EQ FILE SEID PEID LOAD SPC MPC METH
-----
AGG  MASTER DBALL 1 1930805 72340 0 326 1 0 132484 0 0
AXIC  MASTER DBALL 1 1930805 72336 0 315 1 0 65764
BGPDTX MASTER DBALL 1 1930805 72338 1 324 0 2 131332 0
BGPDTX MASTER DBALL 1 1930805 72338 1 324 0 1 131332 0
BJJ  MASTER DBALL 1 1930805 72341 0 332 1 0 132612 0
BULK  MASTER DBALL 1 1930805 72336 2 315 0 0 65700
CASECC MASTER DBALL 1 1930805 72336 1 316 0 2 67428
```

**Figure 2-1. DBDICT DATABLK Example**

Table 2-2 gives the allowable colnames along with a description that may be specified in the FORMAT, SELECT, and SORT descriptors.

<b>Table 2-2. DBDICT DATABLK Colnames</b>			
<b>colname</b>	<b>Default col-width</b>	<b>Default col-label</b>	<b>Description</b>
PROJECT	40	PROJECT NAME	Project name defined by PROJECT statement
PROJ	4	PROJ NO	Project number associated with PROJECT
VERS	4	VERSION	Version number
CDATE	6	CDATE	Creation date
CTIME	6	CTIME	Creation time
NAME	8	NAME	Parameter name
DATABASE	8	DATABASE	MASTER DBset name
DBSET	8	DBSET	DBset name
RDATE	6	RDATE	Revision date
RTIME	6	RTIME	Revision time
SIZE	5	SIZE	Number of blocks
qual-name	See Note.	qualifier name	Qualifier name
KEY	4	KEY	Key number
TRLi	8	TRLi	i-th word in the trailer
TRAILER	8	TRLi	All 10 trailer words
EXTNAME	8	EXTNAME	Extended name
EQUIVD	4	EQ	Equivalenced flag
PURGED	4	PU	Purged flag
EQFLAG	4	EF	Scratch equivalenced flag
SCRFLAG	4	SF	Scratch DBSET flag
POINTER	8	POINTER	Directory pointer
DBENTRY	8	DBENTRY	Database entry pointer
FEQCHAIN	8	FEQCHAIN	Forward equivalence chain
BEQCHAIN	8	BEQCHAIN	Backward equivalence chain
DBDIR20	9	DBDIR(20)	Directory word 20
QUALALL	See Note.	qualifier name	All qualifiers
QUALSET	See Note.	qualifier name	Predefined subset of all qualifiers



**Note**

Default widths for qualifiers are DWIDTH=17.10, IWIDTH=5, LWIDTH=1, AWIDTH=8, and FWIDTH=12.5.

- The default print of the NDDL Parameter Table is obtained by:

```
DBDICT PARAM
```

and is equivalent to:

```
DBDICT PARAM,
  SELECT (NAME, DATABASE, DBSET, PROJ, VERS, CDATE, CTIME,
         KEY, VALUE, QUALSET) ,
  FORMAT (NAME=8, DATABASE=8, DBSET=8, CDATE=6, CTIME=6,
         KEY=4, VALUE=40, IWIDTH=5, COLSPACE=1) ,
  SORT (PROJ=A, VERS=A, DBSET=A, NAME=A) ,
  LABEL ('NDDL PARAMETERS' CENTER)
```

and looks like:

```

***** DICTIONARY PRINT *****
EXECUTION OF DMAP STATEMENT NUMBER      21
MODULE NAME = DBDICT  , SUBDMAP SEKRRS  , OSCAR RECORD NUMBER      17

                                NDDL PARAMETERS
NAME  DATABASE  DBSET  PROJ  VERS  CDATE  CTIME  KEY  VALUE          SEID  PEID  LOAD  SPC  MPC  METH
-----
ACOUSTIC MASTER  MASTER  1      1      930805  72338  323  0                0      0
ALTRFD  MASTER  MASTER  1      1      930805  72338  319  NO
BCHNG  MASTER  MASTER  1      1      930805  72337  325  FALSE
DBALLX MASTER  MASTER  1      1      930805  72336  318  DBALL             -1     -1
EPSBIG  MASTER  MASTER  1      1      930805  72339  323  1.0000000E+12    0      0
ERROR  MASTER  MASTER  1      1      930805  72338  319  -1
FIXEDB  MASTER  MASTER  1      1      930805  72338  323  0                0      0

```

**Figure 2-2. DBDICT PARAM Example**

Table 2-3 gives the allowable colnames along with a description that may be specified in the FORMAT, SELECT, and SORT descriptors.

colname	Default col-width	Default col-label	Description
PROJECT	40	PROJECT NAME	Project name defined by PROJECT statement
PROJ	5	PROJ	Project number associated with PROJECT
VERS	4	VERS	Version number
CDATE	6	CDATE	Creation date
CTIME	6	CTIME	Creation time
NAME	8	NAME	Parameter name
DATABASE	8	DATABASE	MASTER DBset name





QUALALL selects all qualifiers to be printed. The qualifiers will be printed in alphabetic order. QUALSET selects the qualifiers SEID, PEID, SPC, MPC, LOAD, and METH to be printed.

Table 2-4 gives the allowable colnames along with a description that may be specified in the FORMAT, SELECT, and SORT descriptors. QUALALL and QUALSET may not be specified in the FORMAT or SORT descriptors. The qualifier names and values are not printed one per row, but rather from left to right as one logical line that is allowed to wrap after 132 columns.

<b>Table 2-4. DBDICT QUALIFIERS Colnames</b>			
<b>colname</b>	<b>Default col-width</b>	<b>Default col-label</b>	<b>Description</b>
KEY	5	KEY	Key number
qual-name	See Note.	qualifier name	Qualifier name
QUALALL	See Note.	qualifier name	All qualifiers
QUALSET	See Note.	qualifier name	Predefined subset of all qualifiers

### Note

Default widths for qualifiers are DWIDTH=17.10, IWIDTH=5, LWIDTH=1, and FWIDTH=12.5. AWIDTH defaults to the length specified on the QUAL statement in the NDDL sequence.

5. The default print of the Current Qualifier Table is obtained by:

```
DBDICT QUALCURR
```

and is equivalent to:

```
DBDICT QUALCURR SELECT (QUALALL),
  FORMAT (AWIDTH=8, IWIDTH=5, LWIDTH=1, COLSPACE=2),
  LABEL=('CURRENT QUALIFIERS' CENTER)
```

and looks like:



```

***** D I C T I O N A R Y   P R I N T   * * * * *
EXECUTION OF DMAP STATEMENT NUMBER      23
MODULE NAME = DBDICT   , SUBDMAP SEKRRS , OSCAR RECORD NUMBER      19
NAME      SUBDMAP      BLOCKS  PU  EQ  LOCAL DATABLOCKS
-----
CASEW    PHASE1DR      1      0  0  131780  201  4  0  308  0  0  0

```

**Figure 2-5. DBDICT DATABLK(LOCAL) Example**

TRL<sub>*i*</sub> specifies the data block trailer word *i* where  $1 \leq i \leq 10$ . TRAILER selects all 10 data block trailer words.

Table 2-6 gives the allowable colnames along with a description that may be specified in the FORMAT, SELECT, and SORT descriptors.

colname	Default col-width	Default col-label	Description
NAME	8	NAME	Parameter name
SUBDMAP	8	SUBDMAP	SubDMAP name
SIZE	8	BLOCKS	Number of blocks
EQUIVD	8	EQ	Equivalenced flag
PURGED	8	PU	Scratch flag
POINTER	8	POINTER	Directory pointer
TRL <sub><i>i</i></sub>	8	TRL <sub><i>i</i></sub>	<i>i</i> -th word in the trailer
TRAILER	8	TRL <sub><i>i</i></sub>	All 10 trailer words
EXTNAME	8	EXTNAME	Extended name

7. The default print of the Local Parameter Table is obtained by:

```
DBDICT PARAM(LOCAL)
```

and is equivalent to:

```

DBDICT PARAM(LOCAL) SELECT (NAME, SUBDMAP, VALUE),
      FORMAT (COLSPACE=4, VALUE=40, AWIDTH=8),
      SORT (NAME=A) LABEL (' LOCAL PARAMETERS' CENTER)

```


and looks like:

```

***** DICTIONARY PRINT *****

EXECUTION OF DMAP STATEMENT NUMBER      24
MODULE NAME = DBDICT      , SUBDMAP SEKRRS      , OSCAR RECORD NUMBER      20
                                           LOCAL PARAMETERS

NAME      SUBDMAP      VALUE
-----
AERO      SESTATIC     FALSE
AERO      PHASE1DR     FALSE
ALTRED    SESTATIC     NO
ALTRED    PHASE1DR     NO
ALTSHAPE  SESTATIC     0
ALWAYS    PHASE1DR     -1
ALWAYS    PHASE1C     -1
ALWAYS    SEKRRS      -1
ALWAYS    SESTATIC     -1
APP       PHASE1DR     STATICS
APP       PHASE1C     STATICS
APP       SESTATIC     STATICS
APRCH     SESTATIC
ASING     PHASE1DR     0
ASING     SEKRRS      0
ASING     PHASE1C     0
ASING     SESTATIC     0
    
```



**Figure 2-6. DBDICT PARAM(LOCAL) Example**

Table 2-7 gives the allowable colnames along with a description that may be specified in the FORMAT, SELECT, and SORT descriptors.

Table 2-7. DBDICT PARAM(LOCAL) Colnames			
colname	Default col-width	Default col-label	Description
NAME	8	NAME	Parameter name
SUBDMAP	8	SUBDMAP	SubDMAP name
VALUE	40	VALUE	Parameter name

8. The default print of Project-Version Table is obtained by:

```
DBDICT PROJVERS
```

and is equivalent to:

```

DBDICT PROJVERS ,
  SELECT (PROJECT=' PROJECT NAME' , PROJ=' PROJ NO.' ,
    VERS=' VERSION' , DELFLG=' DELETED' ,
    CDATE=' CREATION DATE' CTIME=' CREATION
    TIME' ) ,
  FORMAT (PROJECT=40, PROJ=10, VERS=10, DELFLG=7,
    COLSPACE=1 , CDATE=13, CTIME=13) ,
  LABEL (' PROJECT-VERSION' , CENTER) ,
  SORT (PROJ=A, VERS=A)
    
```

and looks like:

## DBDICT

Prints Database Directory Tables:

```

***** D I C T I O N A R Y   P R I N T   * * * * *
EXECUTION OF DMAP STATEMENT NUMBER 19
MODULE NAME = DBDICT , SUBDMAP SEKRRS , OSCAR RECORD NUMBER 15
PROJECT NAME          PROJ NO.    PROJECT-VERSION
-----
'LEFT FENDER          '          1          1          930805          72319

```

**Figure 2-7. DBDICT PROJVERS Example**

Table 2-8 gives the allowable colnames along with a description that may be specified in the FORMAT, SELECT, and SORT descriptors.

colname	Default col-width	Default col-label	Description
PROJECT	40	PROJECT NAME	Project name defined by PROJECT statement
PROJ	10	PROJ NO	Project number associated with PROJECT
VERS	10	VERSION	Version number
DELFLG	7	DELETED	Flag indicating whether this project/version has been deleted by the RESTART NOKEEP or DBCLEAN statements.
CDATE	13	CREATION DATE	Creation date
CTIME	13	CREATION TIME	Creation time

CDATE is printed as YYMMDD where YY, MM, and DD are the year, month, and date, respectively. CTIME is HHMMSS where HH, MM, and SS are the hour, minute, and second, respectively.

9. If a parameter or qualifier value is defined to be character string, then the value will be printed with enclosing single quotation marks. Blank strings will also be printed with single quotation marks.
10. If a given qualifier is not in the path of a given data block or parameter, then blank spaces will be printed.
11. A line will wrap if additional columns need to be printed and not enough space is available on the output. The first column of each additional line is to be indented by the width of the first column printed for the entry.
12. The where-expr has the following rules:
  - If the where-expr specifies a colname that is not assigned to the data block or parameter, then no directory information will be printed for that data block or parameter. For example, given that SPC is not a qualifier for KGG, then the following DBDICT statement will produce no output:

```
DBDICT DATBLK=KGG WHERE (SPC=10)
```

- If the where-expr does not specify a colname that is assigned to the data block (or parameter), then the qualifier is wildcarded. For example, given that SEID is a qualifier for KAA, then the following DBDICT statements are equivalent:

```
DBDICT DATBLK=KAA
DBDICT DATBLK=KAA WHERE (SEID = *)
```

13. A colname specified in the where-expr must be specified in the SELECT clause if the SELECT clause is also specified.

### Examples:

1. Print the Project Version Table with a title.

```
DBDICT PROJVERS SORT (PROJ,VERSION) LABEL ('PROJECT
VERSION TABLE' LEFT)
```

2. Print a directory of all data blocks qualified with PEID=10 or SEID=10. Print columns for the NAME and DBSET, and the qualifiers SPC, MPC, and LOAD.

```
DBDICT DATBLK SELECT (NAME, SPC, MPC, LOAD, DBSET, SIZE,
SEID, PEID) ,
SORT (NAME, SIZE=D) WHERE (SEID=10 OR PEID=10)
```

**DBDIR**      Prints Database Directory Tables

Prints the database directory.

**Format:**

```
DBDIR [VERSION={version-ID,*}] [PROJECT={'project-ID',*}] [
FORMAT={format-no}]
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
version-ID	Version identifier.
project-ID	Project identifier. (See <a href="#">PROJ</a> .)
*	Wildcard. All versions or projects will be printed.
format-no	Specifies the type(s) of directory information to be printed. If several items are desired, then the sum of the following values is required. 63 is the default, which is the sum of the first six values below:
	1    Project Version Table
	2    NDDL Data Blocks
	4    NDDL Parameters
	8    NDDL Empty Data Blocks
	16   NDDL Data Block Trailers
	32   NDDL Path Value Table for NDDL entries
	64   Scratch Data Blocks

**Remarks:**

- Trailers are not printed unless NDDL data blocks, empty data blocks, or local scratch data blocks are also printed.
- The path value table is not printed unless NDDL data blocks, empty data blocks, or parameters are also printed.
- If no version-ID is given, all versions will be printed. If no project-ID is given, the current project will be printed.



4. The directory print includes all items found on the primary database and all databases attached by the DBLOCATE and DBLOAD FMS statements.
5. Only one DBDIR statement is permitted in the FMS Section, and this statement should appear last in the FMS Section.

**Examples:**

DBDIR

The above example would print all versions of the current project-ID in the database.

**DBFIX** Database Directory Error Detection

Detects and optionally corrects errors in the database directory.

**Format:**

$$\text{DBFIX} \left\{ \left\{ \begin{array}{l} \text{LIST} \\ \text{NOLIST} \end{array} \right\} \left\{ \begin{array}{l} \text{CORRECT} \\ \text{NOCORRECT} \end{array} \right\} \right\}$$

**Describers:**

Describer	Meaning
LIST	Requests a debug listing of the database directory pointers.
NOLIST	Suppresses a debug listing of the database directory.
CORRECT	Corrects the database if any errors are found.
NOCORRECT	Suppresses the correction of the database.

**Remarks:**

1. It is recommended that a backup copy of the database be made before this statement is used since corrections of the database are achieved through the deletion of data. Data blocks and parameters are deleted from the database if they have (1) incorrect paths (different from those listed in the NDDL), (2) incorrect names (two or more names that are not equivalenced and reference the same data), or (3) incorrect directory pointers.
2. NOLIST does not suppress the listing of any corrections made to the database.

**Examples:**

```
DBFIX LIST,NOCORRECT
```

The example above requests a printout of the directory pointers and any errors, but not the corrections.

## DBLOAD      Load a Database from a FORTRAN File

Recovers data blocks or parameters from a database created by the DBUNLOAD statement.

### Format:

$$\text{DBLOAD} \left[ \text{DATABLK} = \left[ \begin{array}{c} * \\ \text{(datablk-list)} \end{array} \right] \text{PARAM} = \left[ \begin{array}{c} * \\ \text{(param-list)} \end{array} \right] \text{WHERE}(\text{where-expr}) , \right.$$

$$\left. \text{CONVERT}(\text{convert-expr}) \text{UNIT} = \text{unit} \text{FORMAT} \left\{ \begin{array}{l} \text{BINARY} \\ \text{NEUTRAL} \end{array} \right\} \left\{ \begin{array}{l} \text{OVRWRT} \\ \text{NOOVRWRT} \end{array} \right\} \right]$$

### Examples:

1. Load the database stored in ASCII format on FORTRAN unit 12.

```
DBLOAD          UNIT=12  FORMAT=NEUTRAL
ASSIGN          DBLOCK='physical file name of unloaded database' UNIT=12
                FORMATTED
```

2. Load version 1 of KAA under project FRONT BUMPER and store it on the primary database under version 5 and project BUMPER. Overwrite duplicates found on the primary database.

```
DBLOAD          DATABLK=(KAA) WHERE(PROJECT='FRONT
                BUMPER' AND ,SEID=10 AND VERSION=1) CONVERT(VERSION=5; , PROJECT='BUMPER')
ASSIGN          DBLOCK='physical file name of unloaded
                database'
```

### Describers:

Describer	Meaning
datablk-list	Specifies a list of data blocks separated by commas. The default is * which selects all data blocks. The loaded data block may be renamed in the primary database by specifying a slash after the old name followed by the new name. For example, if KLL is to be renamed to KLL1, then DATABLK=(KLL/KLL1) is specified.
param-list	Specifies a list of parameters separated by commas. The default is *, which selects all parameters. The loaded parameter may be renamed in the primary database by specifying a slash after the old name followed by the new name. For example, if LUSETS is to be renamed to LUSET, then PARAM=(LUSETS/LUSET) is specified.

<b>Describer</b>	<b>Meaning</b>
where-expr	<p>A logical expression that specifies the desired values of qualifiers, PROJECT, VERSION, and DBSET. For example, WHERE(VERSION=4 AND SEID&lt;&gt;2 AND SEID&gt;0) selects all items under version 4 for all values of SEID greater than 0 except 2. See the beginning of this section on WHERE and CONVERT clauses.</p> <p>The default for VERSION is * for all versions; PROJECT is * for all projects; and DBSET is * for all DBsets. The default for qual is *, which is all qualifier values found on the loaded database. See also Remark 8 .</p>
convert-expr	<p>Modifies the values for PROJECT, VERSION, DBSET, and qualifiers selected by the where-expr. The format of convert-expr is:</p> <p>PROJECT=project-expr; VERSION=version-expr;</p> <p>DBSET=DBset-name; quali=qual-expr[;..]</p> <p>For example, CONVERT (SEID=100 + SEID; SPC=102). See the beginning of this section on WHERE and CONVERT clauses.</p> <p>The default action for VERSION and PROJECT is to use the same version IDs and project IDs; i.e., CONVERT(PROJECT=PROJECT; VERSION=VERSION). But if either PROJECT or VERSION is specified in the convert-expr, then both must be specified. The default action for qualifiers and DBSET is to use the same values as long as they are defined in both databases. If not, see Remark 8 .</p>
unit	<p>Specifies the FORTRAN unit number of the database to be loaded. The unit must be specified on an ASSIGN statement that references the physical filename of the loaded database. The default is 51.</p>

<b>Describer</b>	<b>Meaning</b>
OVRWRT NOOVRWRT	By default, if duplicate data blocks or parameters exist on the loaded and primary databases, then a fatal message is issued. A duplicate means that a data block or parameter has not only the same name but also the same qualifier values, PROJECT, VERSION, and DBSET as a data block or parameter on the primary database.
NEUTRAL, BINARY	The database to be loaded may be in BINARY or NEUTRAL format. BINARY indicates the database to be loaded is in binary or FORTRAN unformatted format. NEUTRAL indicates the database to be loaded is in ASCII format. The default is BINARY.

**Remarks:**

1. The DBLOAD statement and its applications are discussed further in “Database Archival and Retrieval” in the *NX Nastran User’s Guide*.
2. If the DATBLK keyword is specified and PARAM is not specified, then only data blocks may be loaded. If the PARAM keyword is specified and DATBLK is not specified, then only parameters may be loaded. If neither DATBLK nor PARAM is specified, then all data blocks and parameters may be loaded.
3. The DB keyword is equivalent to DATBLK, and the PARM keyword is equivalent to PARAM.
4. The database to be loaded is attached as read-only. In other words, items can only be fetched and not stored on this database.
5. If more than one DBLOAD statement is specified, then the statements will be processed in the order in which they appear. If a duplicate data block or parameter is found on two or more different DBLOAD statements, then the last duplicate will be used.
6. If NEUTRAL is specified, then the FORMATTED keyword must be specified on the corresponding ASSIGN statement.
7. If a data block or parameter is being renamed, then the new name must be defined in the NDDL of the primary database.
8. If the database to be loaded and the primary database have different NDDL schemes and CONVERT is not used, then the following is performed:

- If a qualifier in the NDDL of the database to be loaded is not in the NDDL of the primary database, then all of its values are converted to the null value corresponding to its type. For example, if the qualifier is integer, real, double-precision, complex or character, then the value is converted to 0, 0., 0.D0, (0.,0.), or blank, respectively. If this conversion results in a duplicate data block(s) or parameter(s), then a User Warning Message is printed and the duplicates are not loaded.
  - If a DBset-name in the NDDL of the database to be loaded is not in the NDDL of the primary database, then its values will be converted to the PARAM default value in the NDDL of the database to be loaded.
9. Data blocks that are equivalenced on the database to be loaded remain equivalenced as long as they are loaded in the same DBLOAD statement or in consecutive DBLOAD statements with the same unit number. Otherwise, a separate copy is produced for the secondary data block.
  10. It is not possible to restart from a database created by DBLOAD in the same run.
  11. SOL 190 (or DBTRANS) is also required with DBLOAD if:
    - The database to be loaded has a different BUFFSIZE.
    - The database to be loaded is in neutral format or is being transferred between different machine types.

See also “Migrating Databases” in the *NX Nastran User’s Guide*.

**DBLOCATE**     Attaches Secondary Databases

Obtains data blocks or parameters from prior versions of the primary database, or other databases. DBLOCATE may also be used to compress the primary database and to migrate databases created in prior NX Nastran versions.

**Format:**

$$\text{DBLOCATE} \left[ \text{DATABLK} = \left[ \begin{array}{c} * \\ \text{(datablk-list)} \end{array} \right] \text{PARAM} = \left[ \begin{array}{c} * \\ \text{(param-list)} \end{array} \right] \text{WHERE}(\text{where-expr}) , \right.$$

$$\left. \text{CONVERT}(\text{convert-expr}) \text{LOGICAL} = \text{dbname} \left[ \begin{array}{c} \text{OVRWRT} \\ \text{NOOVRWRT} \end{array} \right] \text{COPY} \right]$$

**Example:**

1. Locate in version 4 of MASTER3 all data blocks named KAA for all superelements with IDs greater than 0.

```
DBLOCATE      DATABLK=(KAA) WHERE (PROJECT=' FRONT
              BUMPER' ,AND SEID>0 AND VERSION=4) LOGI=MASTER3
ASSIGN        MASTER3='physical file name of master
              DBset'
```

2. Copy all data blocks and parameters from the last version of MASTER3 to the primary database. For all items with the qualifier SEID, change the SEID to twice the old ID number.

```
DBLOCATE      CONVERT(SEID=2*SEID) COPY LOGI=MASTER3
ASSIGN        MASTER3='physical file name of master
              DBset'
```

3. Compress a database with multiple versions. All versions under the current project-ID (see PROJ statement) will be copied from the database OLDDB to NEWDB.

```
ASSIGN        MASTER3='physical filename of new
              master DBset'
ASSIGN        OLDDB='physical filename of old master
              DBset'
DBLOCATE      LOGI=OLDDB COPY WHERE (VERSION=*) ,
              CONVERT (VERSION=VERSION;PROJECT=PROJECT)
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
datablk-list	Specifies a list of data blocks separated by commas. The default is *, which selects all data blocks. The located data block may be renamed in the primary database by specifying a slash after the old name followed by the new name. For example, if KLL is to be renamed to KLL1, then DATABLK = (KLL/KLL1) is specified.
param-list	Specifies a list of parameters separated by commas. The default is *, which selects all parameters. The located parameter may be renamed in the primary database by specifying a slash after the old name followed by the new name. For example, if LUSETS is to be renamed to LUSET, then PARAM=(LUSETS/LUSET) is specified.
where-expr	<p>A logical expression that specifies the desired values of qualifiers, PROJECT, VERSION, and DBSET. For example, WHERE(VERSION=4 AND SEID &lt; &gt; 2 AND SEID &gt; 0) selects all items under version 4 for all values of SEID greater than 0 except 2. See the beginning of this section on WHERE and CONVERT clauses.</p> <p>The default for VERSION is the last version-ID and PROJECT is the current project-ID. The default for qual is *, which is all qualifier values found on the located database. See also Remark 9 .</p>
convert-expr	<p>Modifies the values for PROJECT, VERSION, DBSET, and qualifiers selected by the where-expr. The format of convert-expr is:</p> <pre>PROJECT=project-expr; VERSION=version-expr; DBSET=DBset-name; quali=qual-expr[;...]</pre> <p>For example, CONVERT (SEID=100+SEID; SPC=102). See the beginning of this section on WHERE and CONVERT clauses.</p> <p>The default action for VERSION and PROJECT is to convert to the current version-ID and current project-ID. But if either PROJECT or VERSION is specified in the convert-expr, then both must be specified. See Example 27-3. The default action for qualifiers and DBSET is to use the same values as long</p>



<b>Describer</b>	<b>Meaning</b>
	as both databases have the same NDDL scheme. If not, see Remark 9 .
dbname	Specifies the logical name of the master directory DBset of the located database. dbname must be specified on an ASSIGN statement, which references the physical file name. By default, the located database is also the primary database. (If dbname is specified for the primary database, then dbname must be MASTER.)
OVRWRT	By default, duplicate data blocks or parameters on the located database will take precedence over those on the primary database. A duplicate means that a data block or parameter has not only the same name but also the same qualifier values, PROJECT, VERSION, and DBSET as the data block or parameter on the primary database. If NOOVRWRT is specified, then a fatal message is issued.
NOOVRWRT	
COPY	Requests that the located data blocks or parameters be copied to the primary database.

**Remarks:**

1. The DBLOCATE statement and its applications are discussed further in “Database Concepts” in the *NX Nastran User’s Guide*.
2. If the DATBLK keyword is specified and PARAM is not specified, then only data blocks may be located. If the PARAM keyword is specified and DATBLK is not specified, then only parameters may be located. If neither DATBLK nor PARAM is specified, then all data blocks and parameters may be located.
3. The DB keyword is equivalent to DATBLK, and the PARM keyword is equivalent to PARAM.
4. If more than one DBLOCATE statement is specified, then the statements will be processed in the order in which they appear. If a duplicate data block or parameter is found on two or more different DBLOCATE statements, then the last duplicate will be used.
5. If the located database is not the primary database, then it is attached for read-only purposes. In other words, items can only be fetched and not stored on the located database.

## 82 DBLOCATE

### Attaches Secondary Databases

# 2

## FMS

6. If the RESTART FMS statement is also specified, then located data blocks and parameters are treated as if they exist in the restart version. In other words, restart equivalences will be made on located items at the beginning of the run and can be subsequently broken as a result of regeneration and/or NDDL dependencies.
7. If a data block or parameter is being renamed, then the new name must be defined in the NDDL of the primary database.
8. If LOGICAL refers to the primary database and one version is to be copied to another, then the items are equivalenced.
9. If the located database and the primary database have different NDDL schemes and CONVERT is not used, then the following is performed:
  - If a qualifier in the NDDL of the located database is not in the NDDL of the primary database, then all of its values are converted to the null value corresponding to its type. For example, if the qualifier is integer, real, double precision, complex or character, then the value is converted to 0, 0., 0.D0, (0.,0.), or blank, respectively. If this conversion results in a duplicate data block(s) or parameter(s), then a User Warning Message is printed and the duplicates are not located.
  - If a dbset-name in the NDDL of the located database is not in the NDDL of the primary database, then its values will be converted to the PARAM default value in the NDDL of the located database.

**DBSETDEL**      Deletes DBsets

Deletes DBsets, all of its members, and associated physical files.

**Format:**

DBSETDEL dbsetnamei

**Describers:**

<b>Describer</b>	<b>Meaning</b>
dbsetnamei	Specifies the name(s) of DBset(s) to be deleted. The DBset names MASTER, OBJSCR, or SCRATCH may not be specified.

**Remarks:**

1. The DBSETDEL statement and its applications are discussed further in “Deleting DBsets” in the *NX Nastran User’s Guide*.
2. If dbsetnamei does not exist, then no action is taken.
3. After a DBset has been deleted with this statement, it may be recreated with the INIT statement in a subsequent run.

**Examples:**

Delete DBset DBUP20 from the database.

```
DBSETDEL DBUP20
```

## DBUNLOAD Unload a Database to a FORTRAN File

Stores data blocks or parameters from the primary database onto a FORTRAN file in a binary or neutral format, for purposes of database compression or database transfer between different computers.

### Format:

$$\text{DBUNLOAD} \left[ \text{DATABLEK} = \left[ \begin{array}{c} * \\ \text{(datablk-list)} \end{array} \right] \text{PARAM} = \left[ \begin{array}{c} * \\ \text{(param-list)} \end{array} \right] \text{WHERE}(\text{where-expr}) \right]$$

$$\text{UNIT} = \text{unit} \text{FORMAT} = \left\{ \begin{array}{l} \text{BINARY} \\ \text{NEUTRAL} \end{array} \right\} \left\{ \begin{array}{l} \text{REWIND} \\ \text{NOREWIND} \end{array} \right\}$$

### Examples:

1. Unload the database in ASCII format onto FORTRAN unit 12.

```
DBUNLOAD      UNIT=12 FORMAT=NEUTRAL
ASSIGN        DBUNLOAD='physical file name of
              FORTRAN unit 12'
              UNIT=12 FORMATTED
```

2. Unload version 1 of KAA under project FRONT BUMPER.

```
DBUNLOAD      DATABLEK=(KAA) WHERE (PROJECT='FRONT
              BUMPER' ,AND SEID=10 AND VERSION=1)
ASSIGN        DBUNLOAD='physical file name of
              FORTRAN unit 50'
```

### Describers:

Describer	Meaning
datablk-list	Specifies a list of data blocks separated by commas. The default is * which selects all data blocks.
param-list	Specifies a list of parameters separated by commas. The default is *, which selects all parameters.

<b>Describer</b>	<b>Meaning</b>
where-expr	<p>Logical expression which specifies the desired values of qualifiers, PROJECT, VERSION, and DBSET. For example, WHERE(VERSION=4 AND SEID&lt;&gt;2 AND SEID&gt;0) selects all items under version 4 for all values of SEID greater than 0 except 2. See the beginning of this section on WHERE and CONVERT Clauses.</p> <p>The default for VERSION is * for all versions; PROJECT is * for all projects; and DBSET is * for all DBsets. The default for qual is *, which is all qualifier values found on the primary database.</p>
unit	<p>Specifies the FORTRAN unit number to unload the database. The unit must be specified on an ASSIGN statement, which references its physical filename. The default is 50.</p>
NEUTRAL BINARY	<p>The database may be unloaded in BINARY or NEUTRAL format. BINARY indicates the database is to be unloaded in binary or FORTRAN unformatted. NEUTRAL indicates the database is to be unloaded in ASCII format. The default is BINARY.</p>
NOREWIND REWIND	<p>By default, if DBUNLOAD is executed more than once for the same unit, then the unit is not rewound. REWIND requests that the unit be rewound prior to unloading.</p>

**Remarks:**

1. The DBUNLOAD statement and its applications are discussed further in “Database Archival and Retrieval” in the *NX Nastran User’s Guide*.
2. If the DATBLK keyword is specified and PARAM is not specified, then only data blocks may be unloaded. If the PARAM keyword is specified and DATBLK is not specified, then only parameters may be unloaded. If neither DATBLK nor PARAM is specified, then all data blocks and parameters may be unloaded.
3. The DB keyword is equivalent to DATBLK, and the PARM keyword is equivalent to PARAM.
4. If more than one DBUNLOAD statement is specified, then the statements will be processed in the order in which they appear.

**DBUNLOAD****Unload a Database to a FORTRAN File**

5. If NEUTRAL is specified, then the FORMATTED keyword must be specified on the corresponding ASSIGN statement.
6. If NEUTRAL is specified, then only data blocks with an NDDL description are unloaded. (See the *NX Nastran DMAP Programmer's Guide* under the DATBLK statement.) An NDDL description is required for TYPE=TABLE and none is required for TYPE=MATRIX. The data block must be unloaded in BINARY if TYPE=UNSTRUCTURED, KDICT, or KELM.
7. Data blocks that are equivalenced on the primary database remain equivalenced as long as they are unloaded in the same DBUNLOAD statement or in consecutive DBUNLOAD statements with the same unit number. Otherwise, a separate copy for the secondary data block is produced.

**DBUPDATE**      Specify Database Directory Update Interval

Specifies the maximum length of CPU time between database directory updates to the MASTER DBset. This statement is intended to be used if the INIT MASTER(RAM=r) option is specified.

**Format:**

DBUPDATE [=] update-time

**Describers:**

<b>Describer</b>	<b>Meaning</b>
update-time	CPU time interval in minutes (real or integer) between database directory updates.

**Remarks:**

1. The difference in CPU time from the last update is checked after the execution of each DMAP instruction. The database directory is updated if this difference is greater than update-time. Update-time and CPU time are accurate to the nearest whole second only.
2. If update-time < 0, then database directory updates are only performed at the end of the run.
3. Defaults for update-time are machine dependent and may be found in the *NX Nastran Installation and Operations Guide*.
4. Periodic updates of the directory tables to MASTER DBset increase the integrity of the database during system crashes (for example, crashes due to insufficient time or space).
5. In addition to those specified by DBUPDATE, directory updates are performed automatically at various points in the execution of the DMAP. An asterisk appears after the word "BEGN" in the Executive Summary Table whenever an update occurs. These updates occur whenever a permanent data block or parameter DMAP equivalence or restart equivalence is broken. Updates also occur upon deletions. Additions to the database do not automatically cause a directory update to take place.
6. This statement is in effect only when INIT MASTER(RAM=r) is being used. INIT MASTER(S) and INIT MASTER(NORAM) disable periodic and automatic updates.
7. Update-time may also be changed with the DMAP instruction PUTSYS(update-time, 128) or the NASTRAN SYSTEM(128)=update-time

## 88 **DBUPDATE** Specify Database Directory Update Interval

statement. (The update-time must be a real, single-precision value specified in minutes.)

### **Examples:**

```
DBUPDATE=5.5
```

The above example would call for a database directory update at the end of a DMAP module execution, after five and one-half minutes of CPU time have elapsed from the last update.



## DEFINE      Parameter Definition

Assigns user defined keywords (or cellnames) to NASTRAN system cells. (See the NASTRAN statement for a description of “cellname”). In addition, the DEFINE statement provides a mechanism to set default values for system cells.

**Format:**

DEFINE keyword [ =expression ] [ LOCATION=SYSTEM(i) ] [ TYPE=type ]

**Describers:**

Describer	Meaning
keyword	User defined name, 1 through 24 characters in length. The first character must be alphabetic. Only the following characters can be used for keywords: A-Z, 0-9, ' , _ , and “. All other characters are invalid.
expression	Expression produces a single value from a set of constant and/or variable parameters separated by operators. The value is assigned to the “keyword” and is also used to set the value for the NASTRAN system cell specified by “LOCATION”. The TYPE determines both the type of the result and the type conversions that will be applied to the constants and variables within the expression—mixed mode expressions are allowed (see Remark 6 ). The parentheses can be used to change the order of precedence. Operations within parentheses are performed first with the usual order of precedence being maintained within the parentheses. The variable parameters within the expression must be keywords previously defined on a DEFINE statement. The following operations are allowed

Parameter Type	Operator	Operation
Integer or Real	+	Addition
	-	Subtraction
	×	Multiplication
	/	Division
Logical	+	Bit-wise OR
Logical	-	Bit clear. For example, the result of $a-b$ is equal to the value of $a$ with the bits associated with $b$ set to 0.

## DEFINE

### Parameter Definition

**2**  
FMS

Describer	Meaning
SYSTEM(I)	Specifies the NASTRAN system cell number to be associated with the keyword.
type	The type of the expression result and the type conversions that will be applied to the constants and variables within the expression. Allowable data types are as follows:

Description	Type
Integer (default)	I
Real	R
Logical	LOGICAL

#### Remarks:

1. If TYPE, LOCATION and EXPRESSION are omitted, the default data type is integer and the default value is zero.
2. If expression is omitted, an internal default will be assigned to the keyword/cellname based on the LOCATION. (See “[NASTRAN](#)” for a list of internal default values).
3. A DEFINE statement that specifies a LOCATION sets the default for a NASTRAN system cell and therefore it is not necessary to set the system cell value on a subsequent NASTRAN statement, unless the user wishes to override the previous DEFINE statement setting. Also, since more than one DEFINE statement may be present for the same “keyword” the last specification takes precedence. “Keywords” referenced on a NASTRAN statement or in an expression on the DEFINE statement are automatically substituted by the last specification of the “keyword” prior to the current statement being processed.
4. DEFINE statements may also be specified in Runtime Configuration (RC) files. See the *NX Nastran Installation and Operations Guide*.
5. System cells may also be set with the NASTRAN statement. In addition, they may be set or values returned with the DMAP PUTSYS and GETSYS functions and the PARAM module. See the *NX Nastran DMAP Programmer’s Guide*
6. Each operand within the expression will be converted to the result type prior to the arithmetic operation. For example: the statement “DEFINE JJ=2.5 + 3.6 TYPE=I” would result in 2.5 and 3.6 being converted to 2 and 3 respectively and the result of 5 would be assigned to JJ.

**Examples:**

1. Change the default value for block size.

```
DEFINE BUFFSIZE=4097 LOCATION=SYSTEM(1)
```

2. Set the sparse matrix selection to forward-backward substitution only.

```
DEFINE SPARSE=16 LOCATION=SYSTEM(126)
```

3. Define the system cell keyword and default value for the maximum output line count and then reset it to another value on a NASTRAN statement. Note: The DEFINE statement would typically be placed in an RC file and the NASTRAN statement would be placed in the File Management Section whenever the user wants to override the DEFINE statement default setting.

```
DEFINE          MAXLINES=999999999 LOCATION=SYSTEM(9)
NASTRAN        MAXLINES=100000
```

4. Define system cells that behave like “toggles”, turning some feature on or off.

```
DEFINE          MESH=2 LOCATION=(31)
DEFINE          NOMESH=0 LOCATION=(31)
```

```
NASTRAN        MESH
```

Note: Since each subsequent DEFINE statement redefines the default value, the second DEFINE of system cell location 31 sets the default value to 0. A NASTRAN statement can then be inserted in the input file to reset the MESH system cell back to a value of 2. This same technique can be used with any system cell where the user wishes to simply refer to the system cell keyword and have the system cell set to a previous DEFINE statement default.

5. Invalid usage of the DEFINE and NASTRAN statement:

```
DEFINE          BUFFSIZE=4097
NASTRAN        BUFFSIZE=2048
```

**Valid usage:**

```
DEFINE          BUFFSIZE=4097 LOCATION=SYSTEM(1)
NASTRAN        BUFFSIZE=2048
```

**92**    **ENDJOB**  
Terminate Job

**ENDJOB**    Terminate Job

Terminates the job at a user-specified location in the FMS Section.

**Format:**

ENDJOB

**Remarks:**

ENDJOB is normally used after a DBDICT or DBDIR statement or after database initialization.

**Examples:**

```
DBDICT  
ENDJOB
```

**EXPAND**      Concatenate New DBset Members

Concatenates additional DBset members on an existing permanent DBset previously defined with an INIT statement.

**Format:**

EXPAND dbset-name LOGICAL=(log-namei [(max-sizei)]...)

**Describers:**

<b>Describer</b>	<b>Meaning</b>
dbset-name	The name of a DBset previously defined with an INIT statement.
log-namei	Specifies the logical name of a DBset member. log-namei may also be referenced on an ASSIGN statement which refers to the physical file name of the DBset member.
max-sizei	Specifies the maximum size, in blocks, of a DBset member. For storage units specified in words or bytes, the size must be followed by one of the unit keywords below

Unit Keyword	Storage Unit
KW	Kilowords (thousand)
KB	Kilobytes (thousand)
MW	Megawords (million)
MB	Megabytes (million)
GW	Gigawords (billion)
GB	Gigabytes (billion)

For example, 100MB is 100 megabytes. The size of a block in words is defined by BUFFSIZE.

**Remarks:**

1. On all computers with dynamic file allocation, the physical filename of a DBset member may be specified on an ASSIGN statement:

```
ASSIGN log-name='physical filename'
```

If an ASSIGN statement is not specified for the member, then a name is automatically assigned. The naming convention is described in "Introduction to Database Concepts" in the *NX Nastran User's Guide*.

## EXPAND Concatenate New DBset Members

### Examples:

```
ASSIGN          DBMEM02='physical file name'  
EXPAND         DBALL LOGICAL=(DBMEM02)
```

This would create and add the DBset member DBMEM02 to the already existing DBset DBALL.

## **INCLUDE**      Insert External File

Inserts an external file into the input file. The INCLUDE statement may appear anywhere within the input data file.

### **Format:**

INCLUDE 'filename'

### **Describers:**

<b>Descriptor</b>	<b>Meaning</b>
filename	Physical filename of the external file to be inserted. The user must supply the name according to installation or machine requirements. It is recommended that the filename be enclosed by single right-hand quotation marks (').

### **Examples:**

The following INCLUDE statement is used to obtain the Bulk Data from another file called MYBULK.DATA:

```
SOL 101  
CEND  
TITLE = STATIC ANALYSIS  
LOAD=100  
BEGIN BULK  
INCLUDE 'MYBULK.DATA'  
ENDDATA
```

### **Remarks:**

1. INCLUDE statements may be nested; that is, INCLUDE statements may appear inside the external file. The nested depth level must not be greater than 10.
2. Each line in an INCLUDE statement is limited to 72 characters. If a line is longer than 72 characters, it must be continued on multiple lines. For example:

```
INCLUDE '/directory_name_1/directory_name_2/directory_name_3/  
file_name.dat'
```

**INIT** Create a DBset

Creates a temporary or permanent DBset. For the SCRATCH and MASTER DBsets, all or some of their space may be allocated to real memory.

**Format 1:**

Initialize any DBset except MASTER and SCRATCH:

```
INIT DBset-name [ LOGICAL=(log-namei(max-sizei),...)
```

```
BUFSIZE=b CLUSTER=c ]
```

**Format 2:**

Initialize the MASTER DBset:

```
INIT MASTER [ ( RAM = r , S ) LOGICAL=(log-name(max-sizei),...)
```

```
BUFSIZE = b CLUSTER = c
```

**Format 3:**

Initialize the SCRATCH DBset:

```
INIT SCRATCH [ ( MEM = m ) LOGICAL = (log-name(max-sizei),...),
```

```
SCRATCH = (log-namei(max-sizei),...) BUFSIZE = b CLUSTER=c ]
```

**Examples:**

1. Modify the default allocation of the DBALL DBset to 50000 blocks.

```
INIT DBALL LOGI=(DBALL(50000))
```

2. Do not allocate any real memory for the MASTER and SCRATCH DBsets.

```
INIT MASTER (NORAM)
```

```
INIT SCRATCH (NOMEM)
```

3. Create a new DBset called DBUP with two members DBUP1 and DBUP2.

```
INIT DBUP LOGI=(DBUP1, DBUP2)
```

```
ASSIGN DBUP1 ='physical filename 1'
```

```
ASSIGN DBUP2='physical filename 2'
```



**Describers:**

**Describer**

**Meaning**

dbset-name  
MASTER  
SCRATCH

The name of a temporary or permanent DBset.

log-name*i*

Specifies the logical name of a DBset member. log-name*i* may also be referenced on an ASSIGN statement, which refers to the physical file name of the DBset member. If no log-name*i* is specified, then the DBset will have one member and the log-name will be the same as the DBset-name. A maximum of twenty log-names may be specified. For the SCRATCH DBset see also Remark 8 . SCR300 is a special keyword that indicates that the log-names are members reserved for DMAP module internal scratch files.

max-size*i*

Specifies the maximum size, in blocks, words, or bytes, of a DBset member. For storage units specified in words or bytes, the size must be followed by one of the unit keywords below.

Unit Keyword	Storage Unit
KW	Kilowords (1024)
KB	Kilobytes (1024)
MW	Megawords (1048576)
MB	Megabytes (1048576)
GB	Gigabytes (1073741824)
GW	Gigawords (1073741824)

For example, 100MB is 100 megabytes. The size of a block in words is defined by BUFFSIZE. The default for DBALL and SCRATCH is 250,000 blocks.

RAM  
NORAM

RAM=*r* requests that *r* words of real memory are to be allocated for the MASTER DBset. The default is RAM or RAM=30000. NORAM or RAM=0 specifies no real memory is to be allocated.

Describer	Meaning
S	If the primary database is being created in the run, this option requests that all DBsets in the primary database will be automatically deleted at the end of the run. INIT MASTER(S) is equivalent to specifying <code>scr = yes</code> on the “nastran” command. See the <a href="#">“nastran Command and NASTRAN Statement”</a> . If the run is a restart, then this option is ignored.
MEM NOMEM	MEM=m specifies that m blocks of real memory are to be allocated for the SCRATCH DBset. The default m is machine dependent and may be found in the <i>NX Nastran Installation and Operations Guide</i> . NOMEM or MEM = 0 requests that no real memory is to be allocated.
BUFSIZE	BUFSIZE = b specifies the number of words per block in the DBset and will override the value specified by the BUFSIZE keyword on the NASTRAN statement. The default for b is obtained from the NASTRAN BUFSIZE statement. See the <i>NX Nastran Installation and Operations Guide</i> .
CLUSTER	CLUSTER = c specifies the number of blocks per cluster in the DBset. The default is 1, and any other value is not recommended.

**Remarks:**

1. The INIT statement and its applications are discussed further in “Introduction to Database Concepts” in the *NX Nastran User’s Guide*.
2. There are four DBsets that are predefined and automatically allocated by the program. Their DBset-names are MASTER, DBALL, SCRATCH, and OBJSCR, and they are described in “Introduction to Database Concepts” in the *NX Nastran User’s Guide*.
3. On all computers with dynamic file allocation, the physical filename of a DBset member may be specified on an ASSIGN statement:

```
ASSIGN log-name='physical filename'
```

If an ASSIGN statement is not specified for the member, then a name is automatically assigned.

4. It is recommended that there be sufficient physical space to hold a DBset member should it reach its maximum size (max-size<sub>i</sub>). The max-size<sub>i</sub> may be converted to words by multiplying by b. A summary of space usage and allocation is printed at the end of the Execution Summary Table.
5. In restart runs, the INIT statement is ignored for preexisting permanent DBsets. The INIT statement is intended to be specified only in the run in which the DBset is being created. If more DBset members need to be added to the DBset, then the EXPAND statement is used.
6. If RAM or RAM = r is specified and the run terminates because the computer operating system detects insufficient space or time or the computer halts due to a power outage or operator interruption, then it may not be possible to restart from the database. See the DBUPDATE FMS statement.
7. BUFFSIZE = b and CLUSTER = c must satisfy the following inequality:

$$b \leq \frac{64000}{c} + 5$$

8. By default, the SCRATCH DBset is divided into two partitions: LOGICAL and SCR300. The LOGICAL partition, log-names after the LOGICAL keyword, are reserved for DMAP scratch data blocks and the SCR300 partition for DMAP module internal scratch files.
  - The maximum total number of log-names for LOGICAL and SCR300 is 20. For example, if LOGICAL has 8 log-names, then SCR300 can have no more than 12 log-names.
  - If NASTRAN SYSTEM(142) = 1 is specified, then the SCR300 partition is not created and internal scratch files, along with DMAP scratch data blocks, will reside on the LOGICAL partition. The default is SYSTEM(142) = 2.
  - If NASTRAN SYSTEM(151)=1 is specified and the LOGICAL partition has reached its maximum size, then the SCR300 partition will be used. The default is SYSTEM(151) = 1.
  - By default, the space specified for the SCR300 partition is released to the operating system after each DMAP module is executed as long as the module used more than 100 blocks for internal scratch files. If 100 blocks is not a desirable threshold, then it may be changed by specifying NASTRAN SYSTEM(150) = t, where t is the number of blocks for the threshold.
9. BUFFSIZE = b is predefined for DBset-names MSCOBJ, OBJSCR, and USROBJ and may not be changed by BUFFSIZE on this statement or the NASTRAN BUFFSIZE bmax statement. The default for b is recommended for all except

## 100 INIT Create a DBset

very large problems. `bmax` must reflect the maximum of `b` specified for all DBsets attached to the run, including the delivery database. See *NX Nastran Installation and Operations Guide* for the defaults of `b` and `bmax`.

10. If `INIT MASTER(RAM = r)` and `INIT SCRATCH(MEM = m)` are specified, then `BUFSIZE` for these DBsets must be the same. If not, a warning message is issued, and the `BUFSIZE` for the `SCRATCH` DBset is reset to that of the `MASTER` DBset.
11. Only one `INIT` statement per dbset-name may be specified in the File Management Section.

**PROJ** Define Database Project-Identifier

Defines the current or default project identifier, project-ID.

**Format:**

PROJ [=] 'project-ID'

**Describers:**

<b>Describer</b>	<b>Meaning</b>
project-ID	Project identifier. Must be enclosed in single quotes. (Character string, maximum of 40 characters; Default = blank)

**Remarks:**

1. There may be only one PROJECT statement in the File Management Section. The PROJECT statement must be specified before all DBCLEAN, DBDIR, DBDICT, RESTART, DBLOCATE, and DBLOAD statements where project-ID is not specified by the user.
2. This statement is optional and specifies that all data blocks and parameters stored on or accessed from the database in the current run shall also be identified by project-ID. Therefore, in subsequent runs that may access this data through other FMS statements such as RESTART, the project-ID must be specified.
3. Project-ID is the default on DBCLEAN, DBDIR, DBDICT, and RESTART FMS statements and in the WHERE and CONVERT clause of the DBLOCATE statement.
4. Leading blanks and trailing blanks enclosed within single quotes are ignored. All other blanks are considered part of the project-ID.
5. Project-ID is saved with only the first 40 characters specified.

**Examples:**

1. PROJ = 'MY JOB'
2. The following project-ID will be truncated to 40 characters:

```
PROJ 'CAR MODEL 1999 BODY FRAME SYM - PROTYP B RUN'
```

and all subsequent restarts must have the statement.

```
PROJ 'CAR MODEL 1999 BODY FRAME SYM - PROTYP B'
```

## 102 RESTART

### Reuse Database From a Previous Run

## RESTART Reuse Database From a Previous Run

Requests that data stored in a previous run be used in the current run.

### Format:

```
RESTART [PROJECT = 'project-ID' VERSION = [version-ID]
        [KEEP] LOGICAL = dbname]
        [NOKEEP]
```

### Describers:

Describer	Meaning
project-ID	Project identifier. See PROJ FMS statement. Must be enclosed in single right-hand quotation marks (?). (Character string, maximum of 40 characters; default is the project-ID specified on the PROJ FMS statement).
version-ID	Version number. (Integer > 0)
LAST	Specifies the last version under project-ID.
KEEP	Data stored under VERSION will remain on the database after the run is completed.
NOKEEP	Data stored under VERSION will be deleted from the database after the run is completed.
dbname	Specifies the logical name of an existing MASTER (master directory) DBset to be used for restart purposes. This MASTER and its associated database will be opened in a read-only mode to perform the restart, any new data will be written to the database for the current run.

### Remarks:

1. There may be only one RESTART statement in the File Management Section.
2. A new version-ID is automatically assigned whenever a restart is performed.
3. If project-ID or version-ID or both are specified and cannot be found, then a fatal message will be issued.
4. The RESTART statement is required to perform restarts in solution sequences 101 through 200.

5. If PROJECT is not specified, then the run will restart from the project-ID specified on the PROJ statement. (See Example 43-2 below.)
6. Databases created in one version cannot be directly restarted into a different version. Restrictions are typically documented in the current release guide; however, a DBLOCATE type restart might work.

**Examples:**

1.

```
RESTART VERSION=7
```

Version number 7 will be retrieved for this run (version 8). At the end of the run, version 7 will be deleted.

2.

```
PROJ='FENDER'  
RESTART
```

The last version under project-ID FENDER will be used in the current run.

3.

```
ASSIGN RUN1='run1.MASTER'  
RESTART LOGICAL=RUN1
```

The run1.MASTER and its associated database will be used (read only) for restart purposes.

**104 RESTART**  
Reuse Database From a Previous Run

**2**

**FMS**



Chapter

# 3 Executive Control Statements

- *Key to Descriptions*
- *Executive Control Statement Descriptions*

### 3.1 Key to Descriptions

**3**  
EXEC

Braces {} indicate that a choice of descriptors is mandatory.

A brief sentence about the function of the statement is given.

Descriptors in uppercase letters are keywords that must be specified as shown.

Default descriptors are shaded.

If the descriptors are stacked vertically, then you can only specify one.

Brackets [] indicate that a choice of descriptors is optional.

Descriptors that are variables are shown in lower case. The descriptor's type (e.g., Integer, Real, or Character), allowable range, and default value are enclosed in parentheses. If no default value is given, the descriptor must be specified by the user.

Each of the descriptors is discussed briefly.

Remarks are arranged in order of importance. For example, they indicate the statement's relationship to other statements, restrictions and recommendations on use, and provide further details about the descriptors.

**LINK**  
Link a Main SubDMAP  
Links a main subDMAP to form a solution sequence.

**Format:**  
LINK { subDMAP-name }<sup>n</sup> SOLO = SOLOUT-DBset

**Descriptors:**  
 INCLUDE-DBset  
 MAP  
 NOMAP  
 SOLO  
 SOLOUT-DBset  
 subDMAP-name  
 solution number of the main subDMAP. See the SOL statement description for the list of valid numbers. (Integer > 0).  
 name of a main subDMAP. See the NX Nastran DMAP Module Dictionary.

**Remarks:**  
 1. All DBsets specified by the INCLUDE key-word must be defined in the current run or obtained from the following order:  
 a. Objects created with the COMPILE statement in the current run.  
 b. Objects residing on the DBset-name specified by the INCLUDE key-word. The default is MSCOBJ.  
 2. Upon successful linking of a subDMAP, the subDMAP may be executed with the SOL statement.

### Executive Control Section

This section describes the Executive Control statements. These statements select a solution sequence and various diagnostics.

Most Executive Control statements are order independent. The exceptions are the COMPILE, COMPILER, ALTER, ENDALTER, and LINK statements. If used, the LINK statement must appear after all COMPILE statements. The COMPILER statement (or equivalent DIAGs) must appear before all COMPILE statements. The COMPILER statement also sets the defaults for subsequent COMPILE statements.

## Executive Control Statement Summary

The Executive Control statements are summarized as follows:

ALTER	Specifies deletion and/or insertion of following DMAP statements.
APP	Specifies an approach in a solution sequence.
CEND	Designates the end of the Executive Control statements.
COMPILE	Requests compilation of specified subDMAPs or the NDDL file.
COMPILER	Specifies DMAP compilation diagnostics.
DIAG	Requests diagnostic output or modifies operational parameters.
DOMAINSOLVER	Selects domain decomposition solution methods.
ECHO	Controls the echo of Executive Control statements.
ENDALTER	Designates the end of a DMAP sequence headed by an ALTER.
GEOMCHECK	Specifies tolerance values and options for optional finite element geometry tests.
ID	Specifies a comment.
LINK	Requests the link of a main subDMAP.
SOL	Requests execution of a solution sequence or DMAP program.
TIME	Sets the maximum allowable execution time.

## 3.2 Executive Control Statement Descriptions

You can abbreviate Executive Control statements down to their first four characters as long as the abbreviation is unique relative to all other statements. Each statement is described as follows:

### Description

A brief sentence about the function of the statement is given.

### Format

Describers in uppercase are keywords that must be specified as shown. In addition, describers in lowercase indicate that the user must provide a value.

Braces { } indicate that a choice of describers is mandatory. If the describers are stacked vertically, then only one may be specified.

Brackets [ ] indicate that a choice of describers is optional. If the describers are stacked vertically, then only one may be specified.

Describers that are shaded indicate the defaults.

If the statement line is longer than 72 columns, then it may be continued to the next line with a comma. For example:

```
    COMPILER SEDRCVR SOUIN=MSCSOU,  
    NOREF     NOLIST
```

### Examples

One or more examples are given.

### Describers

Each of the describers is briefly discussed. The describer's type (e.g., Integer, Real, or Character), its allowable range, and its default value are enclosed in parentheses. The describer must be specified by the user if no default value is given.

### Remarks

The remarks in the Remarks section are generally arranged in order of importance and indicate such things as the Executive Control statement's relationship to other statements, restrictions and recommendations on its use, and further descriptions of the describers.

**\$** Comment

Used to insert comments into the input file. Comment statements may appear anywhere within the input file.

**Format:**

\$ followed by any characters out to column 80.

**Examples:**

```
$ TEST FIXTURE-THIRD MODE
```

**Remarks:**

1. Comments are ignored by the program.
2. Comments will appear only in the unsorted echo of the Bulk Data.

## 110 ALTER Insert and/or Delete DMAP Statements

### ALTER Insert and/or Delete DMAP Statements

Inserts and/or deletes DMAP statements in a subDMAP.

#### Format:

```
ALTER k1 [,k2]
```

or

```
ALTER 'string1' [(occurrence,offset)] , ['string2' [(occurrence,offset)] ]
```

or

```
ALTER k1 , ['string2' [(occurrence,offset)] ]
```

or

```
ALTER 'string1' [(occurrence,offset)] , [k2]
```

#### Describers:

Describer	Meaning
k1	If k2 or 'string2' is not specified, the subsequent DMAP statements will be inserted after either the statement number k1 or the 'string1', [(occurrence,offset)] reference point.
k1, k2	DMAP statements numbered k1 through k2 will be deleted and may be replaced with subsequent DMAP statements.
'string1'	If 'string2' or k2 is not specified, the subsequent DMAP statements will be inserted after the first occurrence of 'string1'.
'string1', 'string2'	DMAP statements beginning with the first occurrence of 'string1' through DMAP statements containing the first occurrence of 'string2' will be deleted and may be replaced with subsequent DMAP statements.
occurrence	This flag indicates which occurrence of the proceeding string is to be used, starting at the beginning of the subDMAP. (Integer > 0; Default = 1)
offset	This flag indicates the offset from the reference DMAP statement. Depending on the sign, the specific DMAP statement may be above (-offset) or below (+offset) the referenced DMAP statement. (Integer; Default = 0)

**Remarks:**

1. The ALTER statement must be used in conjunction with the COMPILE Executive Control statement. Note: ALTER statements cannot be used in conjunction with a MALTER statement, and therefore, should never immediately follow this statement.
2. If a MALTER statement is used in conjunction with the ALTER statement, then the MALTER should be placed above the COMPILE statements. Failure to place the MALTER in this position may cause ALTER statements to be ignored.
3. The ALTERs can reference the DMAP statements in any order within a subDMAP. Two restrictions on ordering are:
  - K2 or 'string2'(occurrence, offset) references must refer to a DMAP statement number that is greater than or equal to the k1 or 'string1'(occurrence,offset) reference within a single ALTER statement.
  - K1 or 'string1' and k2 or 'string2' cannot overlap DMAP line positions with another ALTER that references the same subDMAP.



4. The 'string1' or 'string2' used as a search pattern will apply to one complete DMAP statement-i.e., a multiline DMAP statement will be searched for a pattern match as if each 72 character line of the DMAP statement were concatenated together into one string. All blanks and comments (either embedded or immediately preceding the DMAP statement) will be retained. However, comments are ignored for the following type of alter:

```
alter '^ *gp0'
```

5. Within a SUBDMAP, both 'string1' and 'string2' will be used to search for a pattern match starting at the beginning of the subDMAP-not at the current position of the last string match.
6. The special characters (meta characters) used for string searching are described in Remark 9. The characters <, >, and \$, which are common DMAP characters, are also special meta characters. If they are to be used in the search string as regular characters, then they must be preceded by a backward slash (\). For example, to find the string

```
IF (DDRMM >=-1)
```

the command is

```
ALTER 'IF (DDRMM \>=-1)' $
```

7. The ALTER statement must not exceed 72 characters (no continuations are allowed).

## 112 ALTER Insert and/or Delete DMAP Statements

8. 'string2' (r2,02) can be defaulted to 'string1' (r1,01) by using a null string ("). For example, the alter statement

```
ALTER 'string1' (r1,01), ''
```

is equivalent to

```
ALTER 'string1' (r1,01), 'string1' (r1,01)
```

The defaults for (r2,02) using the null string can be overridden by specifying (r2,02).

As another example, the alter statement

```
ALTER 'string1' (r1,01), '' (r2,02)
```

is equivalent to

```
ALTER 'string1' (r1,01), 'string1' (r2,02)
```

9. Meta characters:

- . Matches any *single* character except *newline*.
- \* Matches any number (including zero) of the single character (including a character specified by a regular expression) that immediately precedes it. For example, since "." (dot) means any character, ".\*" means "match any number of characters".
- [...] Matches any *one* of the characters enclosed between the brackets.  
or < > For example, "[AB]" matches either "A" or "B". A range of consecutive characters can be specified by separating the first and last characters in the range with a hyphen. For example "[A-Z]" will match any uppercase letter from A to Z and "[0-9]" will match any digit from 0 to 9. Some meta characters lose special meaning inside brackets. A circumflex (^) as the first character in the bracket tries to match any one character *not* in the list.
- ^ or ! Requires that the following regular expression be found at the beginning of the line. Note, that these meta characters may lead to UFM 802 if the preceding line is a comment.  
or -|
- \$ Requires that the preceding regular expression be found at the end of the line.
- \ Treats the following special character as an ordinary character. For example "\ ." stands for a period and "\\*" for an asterisk. Also, to search for a tic ('), the search string must be single quotes.
- ' Marks the beginning and end of a pattern to be matched.



Note: Nonportable characters such as ^ and [ ] should be replaced (e.g., ^ @ ! and [] @ <>) if portability is required. However, all the above characters are recognized by NX Nastran.

10. If a string-based alter uses the “!” in the expression (find occurrence at the beginning of line), it is possible NX Nastran will fail with USER FATAL MESSAGE 802.

**Examples:**

1. The following alter will insert a MATPRN DMAP statement after the first occurrence of the string 'SDR2' in subDMAP DSASTAT.

```
SOL 101
COMPILE DSASTAT $
ALTER 'SDR2' $
MATPRN OESDS1//$
CEND
```

2. The following alter will delete the second occurrence of the OUTPUT4 DMAP statement in subDMAP DSASTAT and replace it with a MATPRN DMAP statement.

```
SOL 101
COMPILE DSASTAT $
ALTER 'OUTPUT4' (2), 'OUTPUT4' (2) $
$ OR
$ ALTER 'OUTPUT4' (2), '' $
MATPRN OESDS1//$
CEND
```

## 114 APP Specify Solution Sequence Approach

### APP Specify Solution Sequence Approach

Selects heat transfer analysis in the linear static SOL 101 or a coupled analysis combining heat transfer and structural analysis in SOL 153.

#### Format:

APP approach.

#### Describers:

Descriptor	Meaning
approach	Specifies one of the following:
HEAT	Indicates that heat transfer is to be performed in SOL 101.
COUPLED	Indicates a coupled analysis combining heat transfer and structural analysis in SOL 153.

#### Remarks:

1. The APP statement is optional.
2. The APP HEAT statement applies only to linear static SOL 101. The APP HEAT statement is not required in SOLs 153 and 159, or in SOL 101 if PARAM,HEATSTAT,YES is specified.
3. The NASTRAN HEAT=101 statement is an alternate specification of APP HEAT. See [“nastran Command and NASTRAN Statement”](#).

#### Examples:

The following requests a heat transfer rather than a structural analysis in Solution Sequence 101.

```
SOL 101  
APP HEAT
```

**CEND** End of Executive Control Delimiter

Designates the end of the Executive Control Section.

**Format:**

CEND

**Remarks:**

CEND is required unless an ENDJOB statement appears in the File Management Section.

**COMPILE** Compile DMAP Statements

Requests the compilation of a subDMAP, subDMAP alter, or NDDL sequence.

**Format 1:**

Compiles a subDMAP or subDMAP alter sequence

```
COMPILE SUBDMAP  
DMAP subDMAP-name [SOUIN = souin-DBset SOUOUT = souout-DBset
```

```
OBJOUT = objout-DBset LIST REF DECK  
NOLIST NOREF NODECK ] ] ]
```

**Format 2:**

Compiles an NDDL sequence

```
COMPILE NDDL = nddl-name { { SOUIN = souin-dbset } { LIST } { REF } { DECK }  
{ SOUOUT = souout-dbset } { NOLIST } { NOREF } { NODECK } }
```

**Examples:**

1. The following compiles an alter in subDMAP PHASEIDR.

```
COMPILE PHASEIDR  
ALTER 'CALL PHASE1A'  
CEND
```

2. The following compiles a subDMAP called MYDMAP. (SUBDMAP and END are DMAP statements; see *NX Nastran DMAP Programmer's Guide*.)

```
COMPILE MYDMAP LIST REF  
SUBDMAP MYDMAP $  
.  
.  
END $  
CEND
```

3. The following obtains a listing of the NDDL.

```
ACQUIRE NDDL  
COMPILE NDDL=NDDL LIST  
CEND
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
subDMAP-name	The name of a subDMAP sequence. SubDMAP-name must be 1 to 8 alphanumeric characters in length and the first character must be alphabetic. The keywords DMAP and SUBDMAP are optional and do not have to be specified.
nddl-name	The name of an NDDL sequence. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.) The keyword NDDL must be specified.
souin-DBset	The name of a DBset from which the subDMAP or NDDL source statements will be retrieved. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.) The default is MSCSOU if the next statement is not a subDMAP statement.
souout-DBset	The name of a DBset on which the subDMAP or NDDL source statements will be stored. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.) The default is the SCRATCH DBset.
objout-DBset	The name of a DBset on which the subDMAP object code will be stored. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.) The default is the OBJSCR DBset.
LIST, NOLIST	LIST requests a compiled listing of the subDMAP or NDDL sequence. NOLIST suppresses the listing. NOLIST is the default.
REF, NOREF	REF requests a compiled cross reference of the subDMAP or NDDL sequence. NOREF suppresses the cross reference. NOREF is the default.
DECK, NODECK	DECK requests the subDMAP or NDDL source statements to be written to the PUNCH file. NODECK suppresses the writing to the PUNCH file. NODECK is the default.

**Remarks:**

1. SubDMAP names for NX Nastran solution sequences are given in the SOL statement description. The “COMPILER LIST REF” statement may be used to determine the appropriate subDMAP-name.
2. If a subDMAP is being compiled and SOUIN=souin-DBset is specified, then an ALTER Executive Control statement or an INCLUDE statement which contains an ALTER statement as the first non comment line, must appear immediately after these. If not, then the SUBDMAP DMAP statement must appear immediately after these statements. See the *NX Nastran DMAP Programmer's Guide*.
3. DBsets USRSOU and USROBJ are no longer automatically created. They must be initialized by the INIT FMS statement and then may be specified for souin-dbset (or souout-dbset) and objout-dbset, respectively. They may be used to store the subDMAP source statements and object code on the primary database for re-execution in a subsequent run. For example:

In the first run, the following COMPILE statement compiles and stores a subDMAP called MYDMAP.

```
COMPILE MYDMAP SOUOUT=USRSOU OBJOUT=USROBJ
SUBDMAP MYDMAP $
.
.
END $
CEND
```

In the second run, the SOL statement is used to execute the MYDMAP stored in the previous run. The LINK statement is required to retrieve the object code from the USROBJ DBset.

```
SOL MYDMAP
LINK MYDMAP INCL=USROBJ
CEND
```

In the third run, the COMPILE statement is used to alter MYDMAP and execute.

```
SOL MYDMAP
COMPILE MYDMAP SOUIN=USRSOU
ALTER...
.
.
.
CEND
```

4. If SOUOUT or OBJOUT is specified and a subDMAP with the same name as the subDMAP-name already exists on the database, then its source statements or object code will be replaced.

5. A COMPILE statement is required for each subDMAP to be compiled. If two or more COMPILE statements reference the same subDMAP name, then only the last is used in the linking of the object code. If the COMPILE statement is being used only to alter a subDMAP and two or more COMPILE statements reference the same subDMAP name, then the multiple alters are assembled and the subDMAP is compiled only once.
6. Only one COMPILE statement for an NDDL sequence may be specified in the input file.
  - SOUIN=souin-DBset requests only a compilation of the NDDL sequence stored on souin-DBset for purposes of obtaining a listing or a cross reference, and it cannot be modified with the ALTER statement. See Remark 3 . COMPILE NDDL=NDDL SOUIN=MSCSOU LIST requests a listing of the NX Nastran NDDL sequence. The ACQUIRE FMS statement or the SOL statement must be specified in order to attach the corresponding Delivery Database.
  - To alter the NX Nastran NDDL sequences, the entire modified NDDL sequence is included after the COMPILE statement and SOUIN=souin-DBset is not specified.
  - SOUOUT=souout-DBset requests the storage of the NDDL source statements on the souout-DBset and may not be specified with SOUIN=souin-DBset.
7. The COMPILER statement may be used to override the defaults of NOLIST, NOREF, and NODECK. In other words, if LIST or NOLIST, REF or NOREF, or DECK or NODECK is not specified, then the corresponding option on the COMPILER statement will be used. In the following example, REF on the COMPILER statement will override the default of NOREF on the COMPILE statement.

```
COMPILER REF
COMPILE MYDMAP
```

8. MSCSOU and MSCOBJ, specified with SOUOUT and OBJOUT, are special DBsets similar to USRSOU and USROBJ except that they are used in the creation or modification of a delivery database. For an example application, see the *NX Nastran Installation and Operations Guide*.

**COMPILER**      DMAP Compiler Output Options

Requests compilation of a DMAP sequence and/or overrides defaults on the COMPILE statement.

**Format:**

COMPILER[=] [ LIST ] [ DECK ] [ REF ] [ GO ] [ SORT ]  
                   [ NOLIST ] [ NODECK ] [ NOREF ] [ NOGO ] [ NOSORT ]

**Describers:**

Describer	Meaning
LIST, NOLIST	LIST requests the compilation listing of the solution sequence. NOLIST suppresses the listing.
DECK, NODECK	DECK requests that the DMAP source statements of the solution sequence be written to the PUNCH file. NODECK suppresses the DECK option.
REF, NOREF	REF requests a compilation cross reference. NOREF suppresses a compilation cross reference.
GO, NOGO	GO requests the execution of the solution sequence following compilation. NOGO requests termination following compilation.
SORT, NOSORT	SORT compiles subDMAPs in alphabetical order. NOSORT compiles subDMAPs in calling sequence order.

**Remarks:**

1. REF is equivalent to DIAG 4. LIST is equivalent to DIAG 14. DECK is equivalent to DIAG 17.
2. NOGO is an alternative to NOEXE on the SOL statement.
3. This statement provides the user a means of obtaining a compilation or source listing, or both, of a complete solution sequence, including all the component subDMAPs.
4. See the COMPILE statement to compile a single subDMAP.
5. This statement also requests the automatic link of the solution sequence. Therefore, all objects must be created in the current run or obtained from the





DBset such as USROBJ. See the COMPILE statement for how to create and store objects.

6. The COMPILER statement may be used to override the defaults of NOLIST, NOREF, NODECK on the COMPILE entry when they are not explicitly specified. However, COMPILER LIST produces a list of the entire solution sequence. If a listing of only specific subdmaps are desired, then COMPILER LIST should not be specified and the LIST request should be made on the COMPILE entry.

```
COMPILER REF  
COMPILE MYDMAP
```

**Examples:**

```
COMPILER=LIST
```

## 122 **DIAG** Request Diagnostic Output

### **DIAG** Request Diagnostic Output

Requests diagnostic output or special options.

#### **Format:**

DIAG [=] k1[k2, ..., kn]

#### **Describers:**

<b>Describer</b>	<b>Meaning</b>
ki	A list separated by commas and/or spaces of desired diagnostics.

#### **Remarks:**

1. The DIAG statement is optional.
2. Multiple DIAG statements are allowed.
3. The following table lists the possible values for ki and their corresponding actions:

k=1	Dumps memory when a nonpreface fatal message is generated.
k=2	Prints database directory information before and after each DMAP statement. Prints bufferpooling information.
k=3	Prints "DATABASE USAGE STATISTICS" after execution of each functional module. This message is the same as the output that appears after the run terminates.
k=4	Prints cross-reference tables for compiled sequences. Equivalent to the COMPILER REF statement.
k=5	Prints the BEGIN time on the operator's console for each functional module.
k=6	Prints the END time for each functional module in the log file or day file and on the operator's console. Modules that consume less time than the threshold set by SYSTEM(20) do not create a message.
k=7	Prints eigenvalue extraction diagnostics for the Complex Determinate method.
k=8	Prints matrix trailers as the matrices are generated in the Execution Summary Table.
k=9	Not used.

- k=10 Uses alternate nonlinear loading in linear transient analysis. Replaces  $N_{n+1}$  with  $(N_{n+1} + N_n + N_{n-1})/3$ .
- k=11 DBLOAD, DBUNLOAD, and DBLOCATE diagnostics.
- k=12 Prints eigenvalue extraction diagnostics for complex Inverse Power, complex Lanczos and ISRR methods.
- k=13 Prints the open core length (the value of REAL on VAX computers).
- k=14 Prints the solution sequence. Equivalent to the COMPILER LIST statement.
- k=15 Prints table trailers.
- k=16 Traces real inverse power eigenvalue extraction operations.
- k=17 Punches solution sequences. Equivalent to the COMPILER DECK statement.
- k=18 In aeroelastic analysis, prints internal grid points specified on SET2 Bulk Data entries.
- k=19 Prints data for MPYAD and FBS method selection in the Execution Summary Table.
- k=20 Similar to DIAG 2 except the output appears in the Execution Summary Table and has a briefer and more user-friendly format. However, the .f04 file will be quite large if DIAG 20 is specified with an NX Nastran solution sequence. A DMAP Alter with DIAGON(20) and DIAGOFF(20) is recommended. DIAG 20 also prints DBMGR, DBFETCH, and DBSTORE subDMAP diagnostics. See the *NX Nastran DMAP Programmer's Guide*.
- k=21 Prints diagnostics of DBDIR and DBENTRY table.
- k=22 Outputs EQUIV and EQUIVX module diagnostics.
- k=23 Not used.
- k=24 Prints files that are left open at the end of a module execution. Also prints DBVIEW diagnostics.
- k=25 Outputs internal plot diagnostics.
- k=26 Outputs dynamic file allocation diagnostics on IBM/MVS computers.
- k=27 Prints Input File Processor (IFP) table. See section 4.3 of the *NX Nastran Programmer's Guide* for more information on IFP.

## 124 DIAG

### Request Diagnostic Output

- k=28 Punches the link specification table (XBSBD). The Bulk Data and Case Control Sections are ignored, and no analysis is performed.
- k=29 Process link specification table update. The Bulk Data and Case Control Sections are ignored, and no analysis is performed.
- k=30 In link 1, punches the XSEMii data (i.e., set ii via DIAG 1 through 15). The Bulk Data and Case Control Sections are ignored, and no analysis is performed. After link 1, this turns on BUG output. Used also by MATPRN module. See also Remark 5 on the “TSTEP” Bulk Data entry.
- k=31 Prints the link specification table and module properties list (MPL) data. The Bulk Data and Case Control Sections are ignored, and no analysis is performed.
- k=32 Prints diagnostics for XSTORE and PVA expansion.
- k=33 Not used.
- k=34 Turns off plot line optimization.
- k=35 Prints diagnostics for 3-D slideline contact analysis in SOLs 106 and 129.
- k=36 Prints extensive tables generated by the GP0 module in p-version analysis.
- k=37 Disables the superelement congruence test option and ignores User Fatal Messages 4277 and 4278. A better alternative is available with PARAMeter CONFAC. See “Parameters” .
- k=38 Prints material angles for CQUAD4, CQUAD8, CTRIA3, and CTRIA6 elements. The angle is printed only for elements that specify MCID in field 8 of the connection entry.
- k=39 Traces module FA1 operations and aerodynamic splining in SOLs 145 and 146.
- k=40 Prints constraint override/average information for edges and faces in p-adaptive analysis.
- k=41 Traces GINO OPEN/CLOSE operations.
- k=42 Not used.
- k=43 Not used.
- k=44 Prints a mini-dump for fatal errors and suppresses user message exit.

- k=45     Prints the same database directory information as DIAG 2 except that it prints only after each DMAP statement.
- k=46     Used by Siemens development for GINO printout.
- k=47     Prints DBMGR, DBFETCH, and DBSTORE subDMAP diagnostics.
- k=48     Used by Siemens development for GINO printout.
- k=49     Prints the DMAP execution time summary table.
- k=50     Traces the nonlinear solution in SOLs 106, 129, 153, and 159. Prints subcase status; echoes NLPARM, NLPCI, and TSTEPNL entry fields; and prints initial arc-length. Prints iteration summary only in SOLs 129, and 159.  
  
           In static aeroelastic analysis (SOL 144), prints transformation information associated with the generation of the DJX matrix in the ADG module and intermediate solutions information in the ASG module.
- k=51     Prints intermediate displacement, load error vectors, and additional iteration information helpful to debugging in SOLs 106, 129, 153, and 159.
- k=52     Disables the printing of errors at each time step in SOLs 129 and 159.
- k=53     Prints the MESSAGE module output in the execution summary table.
- k=54     Print linker debug diagnostics.
- k=55     Output performance timing.
- k=56     Prints all DMAP statements and RESTART deletions. (Extended print of Execution Summary table).
- k=57     Outputs executive table (XDIRLD) performance timing and last-time-used (LTU) diagnostics.
- k=58     Outputs data block deletion debug and timing constants echo.
- k=59     Prints buffpool debug.
- k=60     Prints diagnostics for data block cleanup at the end of each module execution in subroutines DBCLN, DBEADD, and DBERPL.
- k=61     GINO block allocator diagnostics.
- k=62     GINO block manager diagnostics.

## 126 **DIAG** Request Diagnostic Output

- k=63 Prints each item checked by the RESTART module and its NDDL description.
- k=64 Requests upward compatibility DMAP conversion from MSC.Nastran Version 65 only. Ignored in MSC.Nastran Version 70.5 and later systems.

### **Examples:**

DIAG 8,53

or

DIAG 8  
DIAG 53

See the “NX Nastran Output Files” in the *NX Nastran User’s Guide*.

**3**

**EXEC**

## DOMAINSOLVER Domain Decomposition Solution Method

Selects domain decomposition solution methods.

**Format:**

```
DOMAINSOLVER [
GDSTAT (NUMDOM=int)
GDMODES (NUMDOM=int)
FDMODES (NUMDOM=int)
FDFREQR (NUMDOM=int)
ACMS (NUMDOM=int UPFACT=real TREE=[MULTI | SINGLE])
]
```

**Describers:**

Describer	Meaning
GDSTAT	Geometric Domain Decomposition—Linear Statics
GDMODES	Geometric Domain Decomposition—Normal Modes
FDMODES	Frequency Domain—Normal Modes
FDFREQR	Frequency Domain—Frequency Response
ACMS	Automatic Component Modal Synthesis

A description of the parameters follows

NUMDOM	Selects the number of domains or frequency segments as described below. It is different for each method.
ACMS	If NUMDOM = 0 or 1, then the model will not be split. Default depends on the model size as follows: NGRID ≤ 2,000; NUMDOM=4 2,000 ≤ NGRIDS < 10,000; NUMDOM=16 10,000 ≤ NGRIDS < 50,000; NUMDOM=32 50,000 ≤ NGRIDS < 100,000; NUMDOM=64 100,000 ≤ NGRIDS < 300,000; NUMDOM=128 300,000 ≤ NGRIDS; NUMDOM=256 The model will be split into NUMDOM domains.

## 128 DOMAINSOLVER

### Domain Decomposition Solution Method

GDSTAT	Default = dmp; if NUMDOM has any other value, it will automatically be set to dmp (=# of processors used for the run). The model will be split into NUMDOM domains.
GDMODES	Default = dmp; if NUMDOM has any other value, it will automatically be set to dmp (=# of processors used for the run). The model will be split into NUMDOM domains.
FDMODES	Default = dmp; if NUMDOM has any other value, it will automatically be set to dmp (=# of processors used for the run). The model will NOT be split into domains; instead, the frequency range will be split inside the READ module into NUMDOM segments that are solved independently.
FDFREQR	Default = dmp; if NUMDOM has any other value, it will automatically be set to dmp (which is the number of processors used for the run). The model will NOT be split into domains; instead, the forcing frequencies will be split inside the FRLGEN or FRRD1 module into NUMDOM segments that are solved independently.
UPFACT (ACMS)	The EIGR/L specification must include a frequency range. By default, the frequency range used for upstream component modes is two times larger than the selected range. To modify this factor, specify the keyword UPFACT.
TREE (ACMS)	Specifies the type of tree to use: TREE = MULTI > multi-level superelements tree (default). TREE = SINGLE ≥ single-level superelement tree.

#### Remarks:

1. A multi-level tree requires the number of tip superelements (i.e., NUMDOM) to be evenly divisible by the number of processors specified for the run; otherwise the program will switch to a single-level tree automatically.
2. The DOMAINSOLVER command isn't required to run the FDMODES or GDMODES options.
  - FDMODES can be run using the submittal keyword dmp and the NASTRAN keyword NUMSEG.
  - GDMODES can be run using the submittal keyword dmp.



See “Parallel Options” in the *NX Nastran Numerical Methods User’s Guide* for more information on running FDMODES and GDMODES using submittal keywords.

3. In case the user defines frequency domain options in multiple places, (i.e. NUMSEG can be defined as a NASTRAN keyword, on the DOMAINSOLVER executive control command, and on the EIGRL bulk data card), the following rules apply:
  - EIGRL takes precedence over the DOMAINSOLVER options.
  - DOMAINSOLVER options take precedence over the NASTRAN keyword NUMSEG.
4. The hierarchic domain parallel (hdmp) method is a simultaneous application of the geometry and frequency domain normal modes methods. Since the DOMAINSOLVER statement can be used to set only one of either FDMODES or GDMODES, and not both at the same time, DOMAINSOLVER cannot be used with the hdmp method. Instead, keyword submittal is required. In the hdmp method, the number of frequency segments is defined by the NCLUST submittal keyword. The number of geometry partitions is equal to DMP/NCLUST, where DMP is a submittal keyword specifying the number of processors allocated to the task. See “Hierarchic DMP (HDMP)” in the *NX Nastran Numerical Methods User’s Guide* for more information on this method.

**130 ECHO**  
**Control Printed Echo**

**ECHO**      Control Printed Echo

Controls the echo (printout) of the Executive Control Section.

**Formats:**

ECHOOFF  
ECHOON

**Remarks:**

1. The ECHO statement is optional.
2. ECHOOFF suppresses the echo of subsequent Executive Control statements. ECHOON reactivates the echo after an ECHOOFF statement.

**ENDALTER** End of DMAP Alter

Designates the end of an alter.

**Format:**

ENDALTER

**Remarks:**

The ENDALTER statement is required when using an alter unless the alter package ends with the CEND, COMPILE, or LINK statement.

## 132 GEOMCHECK

Specifies Geometry Check Options

### GEOMCHECK Specifies Geometry Check Options

Specifies tolerance values for (optional) finite element geometry tests.

#### Format:

```
GEOMCHECK test_keyword [= tol_value], [MSGLIMIT = n], [MSGTYPE = FATAL  
INFORM  
WARN]  
  
[SUMMARY], [NONE]
```

#### Describers:

Describer	Meaning
test_keyword	A keyword associated with the particular element geometry test. See Remark 2 . for a list of acceptable selections.
tol_value	Tolerance value to be used for the specified test. See Remark 2 . for default values of the test tolerances.
n	The maximum number of messages that will be produced. The default is 100 messages for each element type. See Remark 3 .
FATAL	Geometry tests that exceed tolerance values produce fatal messages. See Remark 4 .
INFORM	Geometry tests that exceed tolerance values produce informative messages. See Remark 4 .
WARN	Geometry tests that exceed tolerance values produce warning messages. See Remark 4 .
SUMMARY	A summary table of the geometry tests performed is produced. No individual element information messages are output.
NONE	None of the optional element geometry tests will be performed.

#### Remarks:

1. The GEOMCHECK directive controls the number and severity of certain informational and warning messages produced by element matrix generation geometry checking operations. Controls are currently available for the CQUAD4, CQUADR, CTRIA3, CTRIAR, CHEXA, CPENTA, CPYRAM, CTETRA, CBAR,

CBEAM, CTRAX3, CTRAX6, CQUADX4, and CQUADX8 elements only. Multiple GEOMCHECK directives may be present. Continuations are acceptable.

2. The following table and associated remarks summarize the acceptable specifications for test\_keyword. See the second table and associated remarks for CTRAX3, CTRAX6, CQUADX4, and CQUADX8 specifications.

Name	Value Type	Default	Comment
Q4_SKEW	Real $\geq$ 0.0	30.0	Skew angle in degrees
Q4_TAPER	Real $\geq$ 0.0	0.50	Taper ratio
Q4_WARP	Real $\geq$ 0.0	0.05	Surface warping factor
Q4_IAMIN	Real $\geq$ 0.0	30.0	Minimum Interior Angle in degrees
Q4_IAMAX	Real $\geq$ 0.0	150.0	Maximum Interior Angle in degrees
T3_SKEW	Real $\geq$ 0.0	10.0	Skew angle in degrees
T3_IAMAX	Real $\geq$ 0.0	160.0	Maximum Interior Angle in degrees
TET_AR	Real $\geq$ 0.0	100.0	Longest edge to shortest height aspect ratio
TET_EPLR	Real $\geq$ 0.0	0.50	Edge point length ratio
TET_DETJ	Real	0.0	J   minimum value
TET_DETG	Real	0.0	J   minimum value at vertex point
HEX_AR	Real $\geq$ 0.0	100.0	Longest edge to shortest edge aspect ratio
HEX_EPLR	Real $\geq$ 0.0	0.50	Edge point length ratio
HEX_DETJ	Real	0.0	J   minimum value
HEX_WARP	Real $\geq$ 0.0	0.707	Face warp coefficient
PYR_AR	Real $\geq$ 0.0	100.0	Longest edge to shortest edge aspect ratio
PYR_EPLR	Real $\geq$ 0.0	0.50	Edge point length ratio
PYR_DETJ	Real	0.0	J   minimum value
PYR_WARP	Real $\geq$ 0.0	0.707	Face warp coefficient
PEN_AR	Real $\geq$ 0.0	100.0	Longest edge to shortest edge aspect ratio
PEN_EPLR	Real $\geq$ 0.0	0.50	Edge point length ratio
PEN_DETJ	Real	0.0	J   minimum value
PEN_WARP	Real $\geq$ 0.0	0.707	Quadrilateral face warp coefficient
BEAM_OFF	Real $\geq$ 0.0	0.15	CBEAM element offset length ratio
BAR_OFF	Real $\geq$ 0.0	0.15	CBAR element offset length ratio

where:

- Test\_keyword names starting with the characters Q4 are applicable to CQUAD4 and CQUADR elements. Test\_keyword names starting with

## 134 GEOMCHECK

### Specifies Geometry Check Options

the characters T3 are applicable to CTRIA3 and CTRIAR elements.

Test\_keyword names starting with the characters TET\_ are applicable to CTETRA elements. Test\_keyword names starting with the characters HEX\_ are applicable to CHEXA elements. Test\_keyword names starting with the characters PYR\_ are applicable to CPYRAM elements. Test\_keyword names starting with the characters PEN\_ are applicable to CPENTA elements.

- Skew angle for the quadrilateral element is defined to be the angle between the lines that join midpoints of the opposite sides of the quadrilateral. Skew angle for the triangular element is defined to be the smallest angle at any of the three vertices.
- Interior angles are defined to be the angles formed by the edges that meet at the corner node of an element. There are four for quadrilateral shapes and three for triangular shapes.
- Taper ratio for the quadrilateral element is defined to be  $(A_i - .5 * A_{total}) / .5 * A_{total}$ , where  $A_i$  is the area of the triangle formed at each corner grid point. The largest of the four ratios is compared against the tolerance value. It may be noted that as the ratio approaches 1.0, the shape approaches a triangle.
- Surface warping factor for a quadrilateral is defined to be the distance of the corner points of the element to the mean plane of the grid points divided by the average of the element's diagonal lengths. For flat elements (all of the grid points lie in a plane), this factor is zero.
- The edge point length ratio test is only performed for solid elements when edge node points exist. The test evaluates the relative position of the edge node point along a straight line connecting the two vertex nodes of that edge. Ideally, the edge point should be located on this line at a point midway between the two end points. The default tolerance allows the edge node to be positioned anywhere between the two quarter points on this line. In addition, the angles between the lines joining the edge node and the end points are determined. If the angle is greater than 30°, then the edge point length ratio test is considered violated and a diagnostic message will be generated if appropriate.
- The face warp coefficient test tolerance is the cosine of the angle formed between the normal vectors located at diagonally opposite corner points on each face surface. This value is 1.0 for a face where all 4 corners lie in a plane. The default tolerance allows angles of up to 45° before a message is generated.

3

EXEC

- The longest edge to shortest edge aspect ratio test evaluates the ratio of the longest length to the shortest length encountered in the element. If the ratio exceeds the tolerance, an informational message is produced.
- For TET\_AR, the shortest edge is computed by taking 6 times the volume and dividing it by the largest height value. The largest height value is the minimum distance between a corner node and the opposite plane.

The following table and associated remarks summarize the acceptable test\_keyword specifications for elements CTRAX3, CTRAX6, CQUADX4, and CQUADX8.

Name	Value Type	Default	Comment
TRX_IAMN	Real $\geq$ 0.0	30.0	Minimum Interior Angle in degrees
TRX_IAMX	Real $\geq$ 0.0	100.0	Maximum Interior Angle in degrees
TRX_AR	Real $\geq$ 0.0	100.0	Longest edge to shortest edge aspect ratio
TRX_EPLR	Real $\geq$ 0.0	0.5	Edge point length ratio
QDX_IAMN	Real $\geq$ 0.0	30.0	Minimum Interior Angle in degrees
QDX_IAMX	Real $\geq$ 0.0	150.0	Maximum Interior Angle in degrees
QDX_AR	Real $\geq$ 0.0	100.0	Longest edge to shortest edge aspect ratio
QDX_SKEW	Real $\geq$ 0.0	30.0	Skew angle in degrees
QDX_TAPR	Real $\geq$ 0.0	0.5	Taper ratio
QDX_EPLR	Real $\geq$ 0.0	0.5	Edge point length ratio

where:

- Test\_keyword names starting with the characters QDX are applicable to CQUADX4 and CQUADX8 elements except QDX\_EPLR only applies to CQUADX8. Test\_keyword names starting with the characters TRX are applicable to CTRAX3 and CTRAX6 elements except TRX\_EPLR only applies to CTRAX6.
- Skew angle for the quadrilateral elements is defined to be the angle between the lines that join midpoints of the opposite sides of the quadrilateral.
- Interior (min and max) angles are defined to be the angles formed by the edges that meet at the corner node of an element. There are four for quadrilateral shapes and three for triangular shapes.
- Taper ratio for the quadrilateral elements is defined to be the ratio of the area of the triangle formed at each corner grid point to one half of the area of the quadrilateral. The largest of the four ratios is compared against the

## 136 GEOMCHECK

### Specifies Geometry Check Options

tolerance value. It may be noted that as the ratio approaches 1.0, the shape approaches a triangle.

- The edge point length ratio test is only performed for elements when edge node points exist. The test evaluates the relative position of the edge node point along a straight line connecting the two vertex nodes of that edge. Ideally, the edge point should be located on this line at a point midway between the two end points. The default tolerance allows the edge node to be positioned anywhere between the two quarter points on this line.
  - The aspect ratio test evaluates the ratio of the longest length edge to the shortest edge encountered in the element.
3. A single line summarizing the results of all tests for an element will be output if any of the geometry tests exceeds the test tolerance. Only the first n of these messages will be produced. A summary of the test results indicating the number of tolerances exceeded as well as the element producing the worst violation is also output. If the SUMMARY keyword has been specified, only the summary table is produced and none of the single line element messages will be output.

Solutions which fail with numerical problems, i.e. negative jacobian, report differently based on the sign of MSGLIMIT. When troubleshooting a failed analysis, you may find it useful to switch between the following two strategies:

Value of MSGLIMIT	Meaning when numerical fatal errors occur
> 0 (positive)	<p>If numerical problems are found, a FATAL ERROR message is generated without the offending element ID, the analysis terminates, but the GEOMCHECK criteria <i>is</i> processed and output for all elements.</p> <p>This strategy works when only a few elements fail the GEOMCHECK. However, if there are hundreds or thousands of failures, diagnosing the critical elements could become difficult. In addition, the offending element ID may or may not have failed the GEOMCHECK criteria depending on the criteria you entered.</p>
< 0 (negative)	<p>If numerical problems are found, a FATAL ERROR message is generated which includes the offending element ID, the analysis terminates, yet GEOMCHECK <i>is not</i> processed for all elements. The downside of using a negative MSGLIMIT is if the model contains multiple offending elements, the procedure of fixing/rerunning needs to be repeated until all offending elements have been corrected.</p>



4. When SUMMARY is not specified, each geometry test that exceeds the tolerance will be identified in the single line output summary by an indicator based on the specification for MSGTYPE. For the FATAL option, the indicator is “FAIL”; for the INFORM option, it is “xxxx”; for the WARN option, it is “WARN”. If the FATAL option is specified and any test fails, the run is terminated.
5. There are two categories of element checks in an NX Nastran solution:
  - The system controlled checks will always occur whether GEOMCHECK is defined or not. As the name implies, there is no user control to these checks. The system controlled checks will always produce a fatal error if an element is found which prevents the formulation of the finite element matrix.
  - GEOMCHECK is the optional, user controlled check, and can optionally generate a fatal error if it finds an element which fails the user defined criteria. By default, GEOMCHECK does not produce fatal errors.

The system controlled and user controlled checks are similar for elements like shells, but different for elements like solids. Be aware that when MSGTYPE=inform, GEOMCHECK may flag a poor quality element with an informational message, the element may pass the system check, and the solve may complete. MSGTYPE should be set appropriately if you expect fatal errors in these cases.

Fatal errors can also be forced by assigning a negative value to MSGLIMIT, for example, MSGLIMIT=-100. This is also useful since a specific “FAIL” message will be reported for each element failing the GEOMCHECK criteria.

**Examples:**

1. Set the tolerance for the CQUAD4 element skew angle test to 15.0 degrees and limit messages to 50.

```
GEOMCHECK Q4_SKEW=15.0,MSGLIMIT=50
```

2. Limit messages to 500 for each element type.

```
GEOMCHECK MSGLIMIT=500
```

3. Set the message type to fatal for CQUAD4 element taper tests.

```
GEOMCHECK Q4_TAPER,MSGTYPE=FATAL
```

4. Request summary table output only using default tolerance values.

```
GEOMCHECK SUMMARY
```

**138 ID**  
**Comment**

**ID**      Comment

Specifies a comment.

**Format:**

ID [=] i1, i2

**Describers:**

<b>Describer</b>	<b>Meaning</b>
i1, i2	Character strings (1 to 8 characters in length and the first character must be alphabetic).

**Remarks:**

The ID statement is optional and not used by the program.

**3**

**EXEC**

## **INCLUDE**      Insert External File

Inserts an external file into the input file. The INCLUDE statement may appear anywhere within the input data file.

### **Format:**

INCLUDE 'filename'

### **Describers:**

<b>Descriptor</b>	<b>Meaning</b>
filename	Physical filename of the external file to be inserted. The user must supply the name according to installation or machine requirements. It is recommended that the filename be enclosed within single right-hand quotation marks (').

**3**  
**EXEC**

### **Examples:**

The following INCLUDE statement is used to obtain the Bulk Data from another file called MYBULK.DATA.

```
SOL 101
INCLUDE 'MYEXEC.DATA'
CEND
TITLE = STATIC ANALYSIS
LOAD=100
BEGIN BULK
ENDDATA
```

### **Remarks:**

1. INCLUDE statements may be nested; that is, INCLUDE statements may appear inside the external file. The nested depth level must not be greater than 10.
2. The INCLUDE statement does not allow continuations. The total length of the statement must be 72 characters or less.

140 **LINK**  
Link a Main SubDMAP

**LINK** Link a Main SubDMAP


Links a main subDMAP to form a solution sequence.

**Format:**

$$\text{LINK} \left\{ \begin{array}{c} n \\ \text{subDMAP-name} \end{array} \right\} [\text{SOLOUT} = \text{solout-DBset} \quad \text{EXECOUT} = \text{exeout-DBset} \\ \text{INCLUDE} = \text{incl-DBset} \quad \left[ \begin{array}{c} \text{MAP} \\ \text{NOMAP} \end{array} \right] \text{SOLNAME} = \text{newname} ]$$

**Describers:**

Describer	Meaning
n	The solution number of the main subDMAP. See “SOL” for the list of valid numbers. (Integer>0)
subDMAP-name	The name of a main subDMAP. See the <i>NX Nastran DMAP Programmer’s Guide</i> . (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.)
solout-DBset	The name of a DBset where the solution sequence executable and the link table of the solution sequence may be stored. See Remark 6. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.)
exeout-DBset	The name of an alternate DBset different than solout-DBset where only the solution sequence executable may be stored. See Remark 6. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.)
incl-DBset	The name of a DBset where other subDMAP objects are obtained. See Remark 2. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.)
newname	A new name which is referenced by the SOL statement. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic; default is subDMAP-name.)



<b>Describer</b>	<b>Meaning</b>
MAP	Prints the link map. A link map will give the name of all the subDMAPs that make up the solution sequence.
NOMAP	Suppresses printing of the link map.

**Remarks:**

1. All DBsets specified on this statement must have the same BUFFSIZE. See [“INIT”](#) .
2. SubDMAP objects are created with the COMPILE statement either in the current run or obtained from previous runs. The LINK statement collects objects in the following order:
  - Objects created with the COMPILE statement in the current run.
  - Objects residing on the DBset-name specified by the INCLUDE keyword. The default is MSCOBJ.
3. Upon successful linking of a subDMAP, the subDMAP may be executed with the SOL statement.
4. The LINK statement must appear after all the COMPILE packages, if any. A compile package begins with the COMPILE statement and is delimited by the ENDALTER, CEND, LINK, or another COMPILE statement.
5. The link table is necessary for COMPILER (or DIAG 4, 14, 17) Executive statement requests and the automatic link process.
6. EXEOUT is useful in building delivery databases where executables are not to be saved. EXEOUT defaults to the same DBset as specified by SOLOUT.



**Examples:**

1.

```
LINK STATICS
```

Links the STATICS main subDMAP. The program links any subDMAPs compiled in this run, with any other subDMAP objects called in STATICS and stored on the MSCOBJ DBset.

2.

```
LINK MYDMAP, SOLNAM=STATICS, SOLOUT=USROBJ,  
NOMAP, INCLUDE=USROBJ
```

## 142 LINK

### Link a Main SubDMAP

Links MYDMAP and renames the solution sequence executable to STATICS. The executable will be saved on the USROBJ DBset. The order of search for subDMAP objects is:

- Compiled subDMAP in this run.
- USROBJ DBset.

Insert and/or Delete DMAP Statements in Solution Sequences

**MALTER** Insert and/or Delete DMAP Statements in Solution Sequences

Inserts or deletes DMAP statements by allowing a global “string” search across all subDMAPs within the current solution sequence.

**Format:**

```
MALTER 'string1' [(occurrence,offset)] , ['string2' [(occurrence,offset)] ]
```

or

```
MALTER 'string1' [(occurrence,offset)] , [k2]
```

**Describers:**

Describer	Meaning
'string1'	If 'string2' or k2 is not specified, the subsequent DMAP statements will be inserted after the first occurrence of 'string1'.
'string1', 'string2'	DMAP statements beginning with the first occurrence of 'string1' through DMAP statements containing the first occurrence of 'string2' will be deleted and may be replaced with subsequent DMAP statements.
k2	If k2 is specified, it is applied to the subDMAP in which 'string1' was found. (Integer > 0)
occurrence	This flag indicates which occurrence of the preceding string is to be used, starting at the beginning of the subDMAP. (Integer > 0, Default = 1)
offset	This flag indicates the offset from the referenced DMAP statement. Depending on the sign, the specific DMAP statement may be above (-offset) or below (+offset) the referenced DMAP statement. (Integer, Default = 0)

**Remarks:**

1. If a MALTER statement is used in conjunction with the ALTER statement, then the MALTER should be placed above the COMPILE statements. Failure to place the MALTER in this position may cause ALTER statements to be ignored.
2. The MALTER statement can reference the DMAP statements in any order within a subDMAP. Two restrictions on ordering are:

## 144 MALTER

### Insert and/or Delete DMAP Statements in Solution Sequences

- k2 or 'string2'(occurrence,offset) references must refer to a DMAP line number that is greater than or equal to the k1 or 'string1'(occurrence,offset) reference within a single MALTER statement.
  - 'string1' and k2 or 'string2' cannot overlap DMAP line positions with another MALTER that references the same subDMAP.
3. The 'string1' or 'string2' used as a search pattern will apply to one complete DMAP statement-i.e., a multiline DMAP statement will be searched for a pattern match as if each 72 character line of the DMAP statement were concatenated together into one string. All blanks and comments (either embedded or immediately preceding the DMAP statement) will be retained.

4. The special characters used for string searching are described in Remark 9 . The characters <, >, and \$, which are common DMAP characters, are also special meta characters. If they are to be used in the search string as regular characters, then they must be preceded by a backward slash (\). For example, to find the string

```
IF (DDRMM >=-1)
```

the command is

```
ALTER 'IF (DDRMM \>=-1)' $
```

5. 'string2' (r2,02) can be defaulted to 'string1' (r1,01) by using a null string ("). For example, the alter statement

```
MALTER 'string1' (r1,01), ''
```

is equivalent to

```
MALTER 'string1' (r1,01), 'string1' (r1,01)
```

The defaults for (r2,02) using the null string can be overridden by specifying (r2,02).

As another example, the alter statement

```
MALTER 'string1' (r1,01), '' (r2,02)
```

is equivalent to

```
MALTER 'string1' (r1,01), 'string1' (r2,02)
```

6. The existing COMPILE statement options, such as LIST, XREF, SOUIN, etc., cannot be directly specified on the new MALTER statement. They are obtained as follows:
  - If a COMPILE statement exists for the subDMAP referenced by the MALTER, then options from this COMPILE statement will be used.



## Insert and/or Delete DMAP Statements in Solution Sequences

- Else, they will be taken from the COMPILER statement, provided the LIST, and SORT option is always on.
7. The MALTER string search order is as follows:
- All COMPILE statement references that are part of the existing solution sequence (i.e., SOL=) are searched first.
  - Then, all remaining subDMAPs in the solution sequence are searched in ascending alphabetical order.
  - Within a subDMAP, both 'string1' and 'string2' will be used to search for a pattern match starting at the beginning of the subDMAP, not at the current position of the last string match.
8. The MALTER statement must not exceed 72 characters (no continuations are allowed).
9. Meta characters:

.	Matches any <i>single</i> character except <i>newline</i> .
*	Matches any number (including zero) of the single character (including a character specified by a regular expression) that immediately precedes it. For example, since “.” (dot) means any character, “.*” means “match any number of characters.”
[...] or < >	Matches any <i>one</i> of the characters enclosed between the brackets. For example, “[AB]” matches either “A” or “B”. A range of consecutive characters can be specified by separating the first and last characters in the range with a hyphen. For example “[A-Z]” will match any uppercase letter from A to Z and “[0-9]” will match any digit from 0 to 9. Some meta characters lose special meaning inside brackets. A circumflex (^) as the first character in the bracket tries to match any one character <i>not</i> in the list.
^ or ! or -	Requires that the following regular expression be found at the beginning of the line.
\$	Requires that the preceding regular expression be found at the end of the line.
\	Treats the following special character as an ordinary character. For example “\.” stands for a period and “\*” for an asterisk. Also, to search for a tic (’), the search string must be “\’”.
’	Marks the beginning and end of a pattern to be matched.

# 146 MALTER

## Insert and/or Delete DMAP Statements in Solution Sequences

### Note

Nonportable characters such as ^ and [ ] should be replaced (e.g., ^ ® ! and [] ® <>) if portability is required. However, all the above characters are recognized by NX Nastran.

- Labels for use with the MALTER have been included in the solution sequences. See [Table 3-1](#). These labels will be maintained in future versions and it is strongly suggested that alters which use the MALTER command take advantage of the unique MALTER labels. Use of the MALTER labels will significantly reduce the time required to convert alters between versions.



DMAP MALTER Labels
\$MALTER:AFTER PREFACE MODULES
\$MALTER:TOP OF PHASE 1 SUPERELEMENT LOOP, AFTER PARAMETERS AND QUALIFIERS SET
\$MALTER:AFTER SUPERELEMENT STIFFNESS, VISCOUS DAMPING, MASS, AND ELEMENT STRUCTURAL DAMPING GENERATION (KJJZ, BJJZ, MJJZ, K4JJ)
\$MALTER:AFTER X2GG MATRICES READ (K2JJ, M2JJ, B2JJ)
\$MALTER:AFTER TOTAL SUPERELEMENT STIFFNESS, VISCOUS DAMPING, AND MASS FORMULATED, STRUCTURAL + DIRECT INPUT
\$MALTER:AFTER SUPERELEMENT LOAD GENERATION (PJ)
\$MALTER:AFTER UPSTREAM SUPERELEMENT MATRIX AND LOAD ASSEMBLY (KGG, BGG, MGG, K4GG, PG)
\$MALTER:AFTER SUPERELEMENT MATRIX AND LOAD REDUCTION TO A-SET, STATIC AND DYNAMIC (KAA, KLAA, MAA, MLAA, BAA, K4AA, PA)
\$MALTER:BOTTOM OF PHASE 1 SUPERELEMENT LOOP
\$MALTER:AFTER X2PP MATRICES READ (K2PP, M2PP, B2PP)
\$MALTER:AFTER SUPERELEMENT DISPLACEMENT RECOVERY (UG)
\$MALTER:AFTER ELEMENT STRESS, STRAIN, ETC. DATA RECOVERY, SORT1 (OUGV1, OES1, OEF1, ETC.)
\$MALTER:AFTER ELEMENT STRESS, STRAIN, ETC. DATA RECOVERY, SORT2 (OUGV2, OES2, OEF2, ETC.)
\$MALTER:BOTTOM OF SUPERELEMENT DATA RECOVERY LOOP
\$MALTER:USERDMAP - AFTER CALL PREFACE

### Examples:

- The following MALTER will insert a MATPRN DMAP statement to print the KJJ matrix for each superelement.

```
SOL 101
MALTER 'MALTER:AFTER SUPERELEMENT STIFFNESS .* GENERATION'
MESSAGE //'SEID=' /SEID $
MATPRN KJJZ / $
```

2. The following MALTER will add a user DMAP after the PREFACE modules in SOL 100 (USERDMAP).

```
SOL 101
MALTER 'AFTER CALL PREFACE'
.
.
.
```

## 148 SOL Execute a Solution Sequence

### SOL      Execute a Solution Sequence

Specifies the solution sequence or main subDMAP to be executed.

#### Format:

$$\text{SOL} \left\{ \begin{array}{c} n \\ \text{subDMAP-name} \end{array} \right\} [\text{SOLIN} = \text{obj-DBset} \quad \text{NOEXE}]$$

#### Describers:

Describer	Meaning
n	Solution number. See Remark 6 . for the list of valid numbers. (Integer > 0)
subDMAP-name	The name of a main subDMAP. See the <i>NX Nastran DMAP Programmer's Guide</i> . (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.)
obj-DBset	The character name of a DBset where the OSCAR is stored. See Remarks 1 and 2. (Character; 1 to 8 alphanumeric characters in length and the first character must be alphabetic.)
NOEXE	Suppresses execution after compilation and/or linkage of the solution is complete. Also, the Bulk Data and Case Control Sections are not read or processed.

#### Remarks:

1. If a SOLIN keyword is not given and if there are no LINK statements within the input data, the program will perform an automatic link. The program will first collect the objects created in the current run by the COMPILE statement and the remaining objects stored in the MSCOBJ DBset. The program will then perform an automatic link of the collected objects.
2. If the SOLIN keyword is not given but a LINK statement is provided, the SOLIN default will be obtained from the SOLOUT keyword on the LINK statement.
3. The OSCAR (Operation Sequence Control ARray) defines the problem solution sequence. The OSCAR consists of a sequence of entries with each entry containing all of the information needed to execute one step of the problem

3

EXEC

solution. The OSCAR is generated from information supplied by the user's entries in the Executive Control Section.

4. The SOLIN keyword will skip the automatic link and execute the OSCAR on the specified DBset.
5. The DOMAINSOLVER may be used in conjunction with Solution Sequences 101, 103, 108, and 111 to select domain decomposition solution methods.
6. The following Solution Sequences are currently available in NX Nastran:

**Table 3-2. Structured Solution Sequences**

SOL Number	SOL Name	Description
101	SESTATIC	Statics with Options:  Linear Steady State Heat Transfer  Alternate Reduction (See "Superelement Alternate Statics Solution" of the <i>NX Nastran User's Guide</i> .)  Inertia Relief  Design Sensitivity - Statics
103	SEMODES	Normal Modes with Option:  Design Sensitivity - Modes
105	SEBUCKL	Buckling with options:  Static Analysis  Alternate Reduction  Inertia Relief  Design Sensitivity - Buckling
106	NLSTATIC	Nonlinear or Linear Statics
107	SEDCEIG	Direct Complex Eigenvalues
108	SEDFREQ	Direct Frequency Response
109	SEDTRAN	Direct Transient Response
110	SEMCEIG	Modal Complex Eigenvalues
111	SEMFREQ	Modal Frequency Response
112	SEMTRAN	Modal Transient Response
114	CYCSTATX	Cyclic Statics with Option:  Alternate Reduction

## 150 SOL Execute a Solution Sequence



<b>Table 3-2. Structured Solution Sequences</b>		
<b>SOL Number</b>	<b>SOL Name</b>	<b>Description</b>
115	CYCMODE	Cyclic Normal Modes
116	CYCBUCKL	Cyclic Buckling
118	CYCFREQ	Cyclic Direct Frequency Response
129	NLTRAN	Nonlinear or Linear Transient Response
144	AESTAT	Static Aeroelastic Response
145	SEFLUTTR	Aerodynamic Flutter
146	SEAERO	Aeroelastic Response
153	NLSCSH	Static Structural and/or Steady State Heat Transfer Analysis with Options:  Linear or Nonlinear Analysis
159	NLTCSH	Transient Structural and/or Transient Heat Transfer Analysis with Options:  Linear or Nonlinear Analysis
187	RESDDAM	DDAM analysis.
190	DBTRANS	Database Transfer.
200	DESOPT	Design Optimization

### Examples:

1. In the following example, SOL 103 is executed from MSCOBJ.

```
SOL 103
```

2. In the following example, the PHASE0 subDMAP is altered, SOL 103 is relinked onto the OBJSCR DBset (which is the default for SOLOUT), and SOL 103 is executed.

```
SOL 103
  COMPIL PHASE1
  ALTER 'DTIIN'
  TABPT SETREE,,,,, // $
  .
  .
  .
  ENDALTER $
```

3. In the following example, the solution sequence called DYNAMICS is executed from the USROBJ DBset.

```
SOL DYNAMICS SOLIN = USROBJ
```

## SOL 601,N or SOL 701

Executes a NX Nastran Advanced Implicit (SOL 601,N) or Explicit (SOL 701) Nonlinear Solution

### Format:

SOL 601,N

SOL 701

### Examples:

SOL 601,106

SOL 701

### Remarks:

1. There must be no space in 601,N.
2. You must place the following statement at the beginning of each SOL 601 and 701 Nastran input file:

```
ASSIGN OUTPUT2='advnlin'.op2,UNIT=21
```

The file name 'advnlin.op2' is reserved. If there is an existing file with this name in the directory that the job is running, it will be overwritten.


3. Only one running job is allowed in a directory at any time. A SOL 601 (or 701) job may be terminated gracefully at any equilibrium iteration (or time step) by creating a run time option file "tmpadvnlin.rto" in the current working directory with a line "STOP=1" in the file. The following parameters relating to SOL 601 solution convergence may also be modified in the rto file: MAXITE, DTOL, ETOL, RCTOL, RTOL, STOL, RCONSM, RNORM, RMNORM, DNORM, and DMNORM. See NXSTRAT entry for description of these parameters. Only one parameter should be specified on each line in the rto file. For example,
 

```
MAXITE=30
ETOL=1.0E-6
```
4. When an analysis is completed, a restart file dbs.res is created where dbs is set by the "dbs" keyword (as for dbs.MASTER and dbs.DBALL files). This file should be preserved to run a restart analysis. To run a restart analysis, dbs.res must exist and the parameter MODEX in NXSTRAT bulk data entry must be set to 1. The IDs of grids, elements, properties, materials, contact sets, contact pairs and contact regions should be the same in both the original and the restart model.

Note that the default for dbs is the current working directory with the prefix of the current job name.

Note that keyword scratch=no must be used when running a restart analysis.

5. In the nastran command, keyword parallel may be used to specify the number of processors to use for the solution.
6. The SOL 601 and 701 solution uses the **memory** keyword ( $\geq 128$  MB) by default to specify the maximum memory that can be used. The SOL 601 and 701 input data processing default is 128MB for Windows 32-bit and 256MB for all other platforms. You can optionally use the environment variable NXNA\_MEMORY to specify the memory used for both the solution and the input data processing. Note that if memory < 128 MB is specified, it will be ignored.



Environment Variable	Description
NXNA_MEMORY	Specifies memory in MB for the both input processing and solution.

**Note**

When defining NXNA\_MEMORY, include the numerical value in MB, but do not include the "MB" text descriptor.

For example, this is a valid definition:

NXNA\_MEMORY=4000

This is an invalid definition:

NXNA\_MEMORY=4000MB

7. N represent s a valid analysis type. The available types are:

N	SOL 601 Analysis Types
106	Static (Default)
129	Transient
153	Static with steady-state thermal coupling
159	Transient with thermal coupling; see TRANOPT parameter in TMCPARA bulk entry for options

8. You can use the following Case Control commands with SOL 601 and SOL 701. See Remark 12 below for exceptions):

ACCELERATION	FLUX	SPCFORCES
ANALYSIS	MPC	STRESS
BCRESULTS	GKRESULTS	SUBCASE
BCSET	GPFORCE	TEMPERATURE
BGSET	IC	THERMAL
BOLTLD	LOAD	TITLE



DISPLACEMENT	SET	TSTEP
DLOAD	SHELLTHK	VELOCITY
EBDSET	SPC	

- SOL 601,153 output is in SORT1 format by default. To get SORT2 format, specify all output requests in SORT2 for both the thermal and structural subcases.

SOL 601,159 output is in SORT2 format by default. To get SORT1 format, specify all output requests in SORT1 for both the thermal and structural subcases.

- Only one subcase is used for SOL 601,106; SOL 601,129; and SOL 701. If multiple subcases exist, the first subcase is used. Two subcases (first two subcases) are required for SOL 601,153 and SOL 601,159.
- Both LOAD and DLOAD can be specified for either static or transient analysis. LOAD selects constant loads while DLOAD selects time-dependent loads. See the *Advanced Nonlinear Theory and Modeling Guide* on defining time-dependent loads.
- ANALYSIS, BGSET, BOLTLT, GKRESULTS, GPFORCE, FLUX and THERMAL are not supported in SOL 701.
- DISPLACEMENT, VELOCITY, and ACCELERATION should all reference the same set of grid points. If different sets are referenced, the sets are combined and results will be output for the combined set.
- For shell nodes which have 5 degrees of freedom, rotation results are not output for displacements, velocities, and accelerations.
- You can use the following Bulk Data Entries with SOL 601 (all) and SOL 701 (except those marked as “not 701”):

BCPROP	CPLSTN4 (not 701)	MAT8	PLOADX1 (not 701)
BCPROPS	CPLSTN6 (not 701)	MAT9	PLPLANE (not 701)
BCRPARA	CPLSTN8 (not 701)	MATG (not 701)	PLSOLID
BCTPARA	CPLSTS3 (not 701)	MATHE	PMASS
BCTADD	CPLSTS4 (not 701)	MATHP	PPLANE (not 701)
BCTSET	CPLSTS6 (not 701)	MATS1	PROD
BDYOR (not 701)	CPLSTS8 (not 701)	MATSMA (not 701)	PSHELL
BGSET (not 701)	CPYRAM	MATT1	PSOLID
BLSEG (not 701)	CQUAD (not 701)	MATT2	QHBDY (not 701)
BOLT (not 701)	CQUAD4	MATT3 (not 701)	QBDY1 (not 701)

BOLTFOR (not 701)	CQUAD8 (not 701)	MATT4 (not 701)	QBDY2 (not 701)
BSURF	CQUADR (not 701)	MATT5 (not 701)	QBDY3 (not 701)
BSURFS	CQUADX (not 701)	MATT8	QVOL (not 701)
CBAR	CQUADX4 (not 701)	MATT9	RADBC (not 701)
CBEAM	CQUADX8 (not 701)	MATTC (not 701)	RADM (not 701)
CBUSH1D	CREEP (not 701)	MOMENT	RADMT (not 701)
CDAMP1	CROD	MOMENT1	RBAR
CDAMP2	CTETRA	MOMENT2	RBE2
CELAS1	CTRAX3 (not 701)	MPC	RBE3
CELAS2	CTRAX6 (not 701)	MPCADD	RFORCE
CHBDYE (not 701)	CTRIA3	NXSTRAT	SPC
CHBDYG (not 701)	CTRIA6 (not 701)	PARAM	SPC1
CGAP	CTRIAR (not 701)	PBAR	SPCADD
CHEXA	CTRIAX (not 701)	PBARL	SPCD
CMASS1	DLOAD	PBCOMP	TABLED1
CMASS2	EBDSET	PBEAM	TABLED2
CONM1	EBDADD	PBEAML	TABLEM1
CONM2	FORCE	PBUSH1D	TABLES1
CONROD	FORCE1	PCOMP (not 701)	TABLEST
CONV (not 701)	FORCE2	PCONV (not 701)	TEMP
CORD1C	GRAV	PDAMP	TEMPBC (not 701)
CORD1R	GRID	PELAS	TEMPD
CORD1S	LOAD	PELAST	TIC
CORD2C	MAT1	PGAP	TLOAD1
CORD2R	MAT2	PLOAD	TMCPARA (not 701)
CORD2S	MAT3 (not 701)	PLOAD1	TSTEP
CPENTA	MAT4 (not 701)	PLOAD2	
CPLSTN3 (not 701)	MAT5 (not 701)	PLOAD4	

16. BCTPARA, EBDSET, EBDADD, MATHE and NXSTRAT are supported only by SOLs 601 and 701. MATSMA, MATTC, MATG and TMCPARA are supported only by SOL 601.

17. Not all parameters in each bulk data entry are used. Restrictions are given in the description for the entry. Some restrictions are highlighted in Remark 19.

18. For PARAM entry, parameters POST, LGDISP, LGSTRN and ALPHA1 are supported by SOLs 601 and 701. In addition parameters ALPHA2, TABS and SIGMA are supported by SOL 601.
19. PARAM,POST,-2 must be specified to generate both geometry and results data blocks in the op2 file. PARAM,POST,-1 must be specified to generate only results data blocks. Otherwise, no op2 file is generated.
20. Some important restrictions in SOL 601 and 701 are highlighted below:
  - When there is element birth/death (either through EBDSET or automatic element rupture) or preload bolt, SORT2 output is not supported.
  - Structural damping is not supported for individual elements. Hence, GE field in the supported Bulk Data entries is not used. Rayleigh damping is supported and specified with PARAM ALPHA1 and ALPHA2. Only ALPHA1 is supported for SOL 701.
  - Nonstructural mass is not supported.
  - CROD and CONROD are simulated by rod elements with no torsional stiffness.
  - Several restrictions apply to beam elements, e.g. beam offsets, tapered beams, shear center. Please see remarks in the CBAR, CBEAM, PBAR, PBARL, PBEAM, PBEAML, and PBCOMP entries.
  - Only relevant fields in the MAT2 and MAT9 entries are used to define orthotropic materials instead of anisotropic materials.
  - In the PSHELL entry, only MID1 is used to define material properties of shell elements.
  - Restrictions apply to the use of follower force/moment in FORCE1, FORCE2, MOMENT1, and MOMENT2 entries.
  - Transverse properties for gap elements (PGAP entry) are not supported.
  - Only diagonal terms in the mass matrix defined by CONM1 and CONM2 are used.
  - Several restrictions apply to MATHP, CREEP, and PLOAD1 entries. Other restrictions are mentioned in the remarks for the entry.
21. For more information on SOL 601 and 701, please refer to the *Advanced Nonlinear Theory and Modeling Guide*.

**TIME**

Sets the maximum CPU and I/O time.

**Format:**

TIME[=]t1[,t2]

**Describers:**

Describer	Meaning
t1	Maximum allowable execution time in CPU minutes. (Real or Integer; $0 < t1 < 3.15E7$ minutes; Default = $3.15E7$ minutes). Values entered with an exponent are interpreted as Real and must include a decimal (for example, 1.E2).
t2	Maximum allowable I/O limit in minutes. (Real or Integer $> 0$ ; Default is infinity, which is machine dependent.)

**Remarks:**

1. The TIME statement is optional.
2. If t2 is specified then t1 must be specified.

**Examples:**

1. The following example designates a runtime of 8 hours:

```
TIME 480
```

2. The following example designates 90 seconds:

```
TIME 1.5
```

## Chapter

# 4 Case Control Commands

- *Key to Descriptions*
- *Format of Case Control Command Descriptions*
- *Case Control Command Summary*
- *Case Control Command Descriptions*
- *Case Control Applicability Tables*

## 4.1 Key to Descriptions

**Applied Load Output Request**

Requests the form and type of applied load vector output.

**Format:**

OLOAD  $\left[ \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right] \right] \left[ \begin{array}{l} \text{PRINT, PUNCH, [REAL or IMAG]} \\ \text{PHASE} \end{array} \right] = \left\{ \begin{array}{l} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$

**Examples:**

OLOAD=ALL  
 OLOAD(SORT1,PHASE)=5

**Describers Meaning**

Describers	Meaning
SORT1	Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.
SORT2	Output will be presented as a tabular listing of frequency or time for each grid point.
PRINT	The printer will be
PHASE	requests polar format (Phase output is in degrees)
ALL	Applied loads for all points
NONE	Applied load for no points will be output.
n	Set identification of a previously appearing SET command. Only loads on points whose identification numbers appear on this SET command will be output. (Integer > 0).

**Remarks:**

- Both PRINT and PUNCH
- See the *NX Nastran User's* SORT2 formats and their
- In a statics problem, a request

Brackets [ ] indicate that a choice of describers is optional.

If the describers are stacked vertically, then only one may be specified.

A brief description of the command is given.

Describers in uppercase letters are keywords that must be specified as shown.

Describers in lower case are variables.

The default describers are shaded.

A typical example is given.

Braces { } indicate that a choice of describers is mandatory.

Each of the describers is discussed briefly. Further details may be discussed under Remarks.

Parentheses are required if items inside the parentheses are specified.

If the describer is in lower case, then it is a variable and the describer's type (e.g., Integer, Real, or Character), allowable range, and default value are enclosed in parentheses. If no default value is given, the describer must be specified by the user.

The remarks are generally arranged in order of importance and indicate such things as which Bulk Data entries are selected by the Case Control command, the command's relationship to other commands, restrictions and recommendations on its use, and further details regarding the describers.



## The Case Control Section

The Case Control Section has several basic functions; specifically, it:

- Selects loads and constraints.
- Requests printing, plotting, and/or punching of input and output data (see “Plotting” in the *NX Nastran User’s Guide*.)
- Defines the subcase structure for the analysis.

[Table 4-1](#) through [Table 4-6](#) at the end of this section indicate the applicability of each command in all solution sequences.

## 4.2 Format of Case Control Command Descriptions

Case Control commands may be abbreviated down to the first four characters as long as the abbreviation is unique relative to all other commands. Each command is described as follows:

### Description

A brief sentence about the function of the command is stated.

### Format

Describers in uppercase are keywords that must be specified as shown. In addition, describers in lowercase indicate that the user must provide a value.

Braces { } indicate that a choice of describers is mandatory. If the describers are stacked vertically, then only one may be specified.

Brackets [ ] indicate that a choice of describers is optional. If the describers are stacked vertically, then only one may be specified.

Describers that are shaded indicate the defaults.

If the command line is longer than 72 columns, then it may be continued to the next line with a comma. For example:

```
SET 1=5, 6, 7, 8, 9,  
    10 THRU 55
```

### Examples

One or more examples are given.

### Describers

Each of the describers is briefly discussed. The describer's type (e.g., Integer, Real, or Character), allowable range, and default value are enclosed in parentheses. The describer must be specified by the user if no default value is given.

### Remarks

The Remarks are generally arranged in order of importance and indicate such things as which Bulk Data entries are selected by the Case Control command; the command's relationship to other commands, restrictions and recommendations on its use; and further descriptions of the describers.



## 4.3 Case Control Command Summary

This section contains a summary of all Case Control commands under the following headings:

### Subcase Definition

#### 1. Output Request Delimiters

OUTPUT	Delimits the various types of commands for the structure plotter, curve plotter, grid point stress, and MSGSTRESS.
OUTPUT(PLOT)	Beginning of structure plotter output request.
OUTPUT(POST) or SETS DEFINITION }	Beginning of grid point stress output requests and/or p-element data recovery set definition.
OUTPUT(XYOUT) or OUTPUT(XYPLOT) }	Beginning of curve plotter output request.
OUTPUT(CARDS)	Suppresses processing of Bulk Data entries (MSGMESH).
ENDCARDS	Reactivates processing of Bulk Data entries (MSGMESH).

#### 2. Subcase Delimiters

SUBCASE	Delimits and identifies a subcase.
SUBCOM	Delimits and identifies a combination subcase.
SYM	Delimits and identifies a symmetry subcase.
SYMCOM	Delimits and identifies a symmetry combination subcase.
REPCASE	Delimits and identifies a repeated output request subcase.

#### 3. Subcase Control

SUBSEQ	Gives the coefficients for forming a linear combination of the previous subcases.
--------	---

## 162 Case Control Command Summary

SYMSEQ	Gives the coefficients for combining the symmetry subcases into the total structure.
MODES	Repeats a subcase.
MASTER	Allows the redefinition of a MASTER subcase.

### Data Selection

#### 1. Static Load Selection

LOAD	Selects an external static loading set.
DEFORM	Selects the element deformation set.
CLOAD	Requests a CLOAD Bulk Data entry that defines a list of superelement loads and their scale factors in nonlinear static analysis only.

#### 2. Dynamic Load Selection

DLOAD	Selects a dynamic load or an acoustic source to be applied in a transient or frequency response problem.
LOADSET	Selects a sequence of static load sets to be applied to the structural model. The load sets may be referenced by dynamic load commands.
NONLINEAR	Selects nonlinear dynamic load set for transient problems.

#### 3. Constraint Selection

SPC	Selects a single-point constraint set to be applied.
MPC	Selects a multipoint constraint set.
SUPPORT1	Selects the fictitious support set (SUPPORT1 entries only) to be applied to the model.
AXISYMMETRIC	Selects boundary conditions for an axisymmetric shell problem or specifies the existence of fluid harmonics for hydroelastic problems.

DSYM	Provides for either one or two planes of overall symmetry in DIH-type cyclic symmetry problems.
BC	Identifies multiple boundary conditions for normal modes, buckling, and flutter analysis in SOLs 103, 105, 145, and 200.
STATSUB	Selects the static solution to use in forming the differential stiffness for buckling analysis, normal modes, complex eigenvalue, frequency response and transient response analysis.

4. Thermal Field Selection

TEMPERATURE	Selects the temperature set to be used in either material property calculations or thermal loading in heat transfer and structural analysis.
TEMPERATURE (LOAD)	Selects temperature set for static thermal load.
TEMPERATURE (MATERIAL)	Selects temperature set for temperature-dependent material properties.
TEMPERATURE (INITIAL)	Selects initial temperature distribution for temperature dependent material properties and heat transfer problems.
TSTRU	Defines a temperature set ID for a structures run based on a heat transfer subcase.

5. Static Solution Conditions

SMETHOD	Selects iterative solver parameters.
---------	--------------------------------------

6. Dynamic Solution Conditions

RSMETHOD	Selects the real eigenvalue extraction parameters in the component mode reduction of the residual structure for direct and modal solutions.
METHOD	Selects the real eigenvalue extraction parameters.
CMETHOD	Selects complex eigenvalue extraction parameters.

## 164 Case Control Command Summary

SDAMPING	Requests modal damping as a function of natural frequency in modal solutions or viscoelastic materials as a function of frequency in direct frequency response analysis.
FREQUENCY	Selects the set of forcing frequencies to be solved in frequency response problems.
RANDOM	Selects the RANDPS and RANDT1 Bulk Data entries to be used in random analysis.
IC	Selects the initial conditions for direct transient analysis (SOLs 109, 129, and 159).
SMETHOD	Selects iterative solver override options in frequency response analysis.
TSTEP	Selects integration and output time steps for linear or nonlinear transient analysis.

### 4 CASE

#### 7. Direct Input Matrix Selection

B2GG	Selects direct input damping matrices.
B2PP	Selects direct input damping matrices.
K2GG	Selects direct input stiffness matrices.
K2PP	Selects direct input stiffness matrices, which are not included in normal modes.
M2GG	Selects direct input mass matrices.
M2PP	Selects direct input mass matrices, which are not included in normal modes.
TFL	Selects the transfer function set(s) to be added to the direct input matrices.
P2G	Selects direct input load matrices.
MFLUID	Selects the MFLUID Bulk Data entries to be used to specify the fluid-structure interface.

#### 8. Nonlinear Analysis

NLPARM	Selects the parameters used for nonlinear static analysis.
SMETHOD	Selects iterative solver override parameters in nonlinear static analysis.
TSTEP	Selects integration and output time steps for linear or nonlinear transient analysis.
TSTEPNL	Transient time step set Selection for nonlinear analysis.

9. Aerodynamic Analysis

AECONFIG	Assigns the aerodynamic configuration parameter used to locate the associated datablocks on the aerodynamic and aeroelastic databases.
AESYMX	Aerodynamic XY plane of symmetry flag.
AESYMXZ	Aerodynamic XZ plane of symmetry flag.
AEUXREF	Defines the Reference Aerodynamic Extra Point (Controller) Vector.
CSSCHD	Aerodynamic Control Surface Schedule.
GUST	Selects the gust field in an aerodynamic response problem.
TRIM	Selects trim variable constraints in static aeroelastic response.
FMETHOD	Selects the parameters to be used by the aerodynamic flutter analysis.
DIVERG	Selects the divergence parameters in a static aeroelastic divergence problem.

10. Design Optimization and Sensitivity (SOL 200)

ANALYSIS	Specifies the type of analysis being performed for the current subcase.
AUXCASE	Delimits Case Control commands for an auxiliary model in SOL 200.

## 166 Case Control Command Summary

AUXMODEL	References an auxiliary model for generation of boundary shapes in shape optimization.
BEGIN BULK	Designates the end of the Case Control Section and/or the beginning of a Bulk Data Section.
DESGLB	Selects the design constraints to be applied at the global level in a design optimization task.
DESOBJ	Selects the DRESP1, DRESP2, or DRESP3 entry to be used as the design objective.
DESSUB	Selects the design constraints to be used in a design optimization task for the current subcase.
DSAPRT	Specifies design sensitivity output parameters.
MODTRAK	Selects mode tracking options in design optimization (SOL 200).

### 4 CASE

#### 11. Original Design Sensitivity Analysis (DSA) (SOLs 101, 103, and 105)

SENSITY	Requests generation of the combined constraint/design sensitivity matrix for original design sensitivity analysis (DSA).
---------	--

#### 12. p-element and Adaptivity Analysis

ADACT	Specifies whether or not the subcase is to participate in the adaptivity process.
ADAPT	Specifies adaptivity control parameters.
DATAREC	Requests form and type of output for p-version elements.
OUTRCV	Selects the output options for p-elements defined on an OUTRCV Bulk Data entry.
SET	Defines a set of element identification numbers only for the SURFACE and VOLUME commands (grid point stress) or the OUTRCV Bulk Data entry (p-element data recovery). This form of the SET command must and can only be specified after the SETS DEFINITION or OUTPUT(POST) command delimiter.

SETS DEFINITION	Delimits the various type of commands under grid point stress and/or p-version element set definitions. This command is synonymous with OUTPUT(POST).
VUGRID	Requests output of view grid and view element entries used in p-version element data recovery.

## Output Selection

### 1. Output Control

TITLE	Defines a character string that will appear on the first heading line of each page of the NX Nastran printer output.
SUBTITLE	Defines a subtitle that will appear on the second heading line of each page of the printer output.
LABEL	Defines a character string that will appear on the third heading line of each page of the printer output.
LINE	Defines the maximum number of output lines per printed page.
MAXLINES	Sets the maximum number of output lines.
ECHO	Controls echo (i.e., printout) of the Bulk Data.
ECHOOFF	Suppresses echo of Case Control.
ECHOON	Reactivates echo of Case Control.
PAGE	Causes a page eject in the echo of the Case Control Section.
PLOTID	Defines a character string that will appear on the first frame of any plotter output.
SKIP	Activates or deactivates the execution of subsequent commands in the Case Control (including plot commands).
SKIPON	Defines commands in Case Control that are not to be processed.
SKIPOFF	Resumes processing of commands in Case Control.

### 2. Set Definition

SET	Defines a set of element or grid point numbers to be plotted.
SET2	Lists paired set numbers for design sensitivity. These sets refer to constraint and design variable set identification numbers.
MAXMIN	Specifies options for max/min surveys of certain output data associated with grid points.
OFREQUENCY	Selects a set of frequencies for output requests.
OMODES	Selects a set of modes for output requests.
OTIME	Selects a set of times for output requests.
PARTN	Specifies a list of grid point identification numbers that will be partitioned with the DMAP module MATMOD (Option 17). In SOLs 111 and 200, the PARTN command specifies the points at which modal participation factors are to be computed.
SURFACE	Defines a surface for the calculation of grid point stresses, strains, or mesh stress discontinuities.
VOLUME	Defines a volume for the calculation of grid point stresses, strains, or mesh stress discontinuities.

3. Physical Set Output Requests

DISPLACEMENT, VECTOR, or PRESSURE	Requests the form and type of displacement or pressure vector output. Note: PRESSURE and VECTOR are equivalent commands.
SVECTOR	Requests the form and type of solution set eigenvector output.
VELOCITY	Requests the form and type of velocity vector output.
ACCELERATION	Requests the form and type of acceleration vector output.
FORCE orELFORCE	Requests the form and type of element force output or particle velocity output in coupled fluid-structural analysis. Note: ELFORCE is an equivalent command.



STRESS or ELSTRESS	Requests the form and type of element stress output. Note: ELSTRESS is an equivalent command.
GPSTRESS	Requests grid point stresses for printing only.
ELSDCON	Requests mesh stress discontinuities based on element stresses (see STRESS).
GPSDCON	Requests mesh stress discontinuities based on grid point stresses (see GPSTRESS).
STRFIELD	Requests the computation of grid point stresses for graphical postprocessing and mesh stress discontinuities.
STRAIN	Requests the form and type of strain output.
GPFORCE	Requests grid point force balance at selected grid points.
ESE	Requests the output of the strain energy in selected elements.
FLUX	Requests the form and type of gradient and flux output in heat transfer analysis.
ENTHALPY	Requests form of enthalpy vector output in transient heat transfer analysis (SOL 159).
HDOT	Requests form of rate of change of enthalpy vector output in transient heat transfer analysis (SOL 159).
MPCFORCE	Requests the form and type of multipoint force of constraint vector output.
SPCFORCES	Requests the form and type of single-point force of constraint vector output.
OLOAD	Requests the form and type of applied load vector output.
THERMAL	Requests the form and type of temperature output.
NOUTPUT	Requests physical output in cyclic symmetry problems.
BOUTPUT	Selects contact regions for output.

## 170 Case Control Command Summary

EDE	Requests the output of the energy loss per cycle in selected elements.
EKE	Requests the output of the kinetic energy in selected elements.
GPKE	Requests the output of the kinetic energy at selected grid points in normal modes analysis only.
GPSTRAIN	Requests grid points strains for printing only.
MEFFMASS	Requests the output of the modal effective mass, participation factors, and modal effective mass fractions in normal modes analysis.
NLSTRESS	Requests the form and type of nonlinear element stress output in SOL 106.

### 4 CASE

#### 4. Solution Set Output Requests

HARMONICS	Controls the number of harmonics output in axisymmetric shell or axisymmetric fluid problems; controls the number of harmonics to be used for analysis in cyclic symmetry problems.
HOUTPUT	Requests harmonic output in cyclic symmetry problems.
SDISPLACEMENT	Requests the form and type of solution set displacement output.
SVELOCITY	Requests the form and type of solution set velocity output.
SACCELERATION	Requests the form and type of solution set acceleration output.
NLOAD	Requests the form and type of nonlinear load output for transient problems.
MPRES	Requests the pressure for selected surface elements in fluid-structure interaction problems.
AEROF	Requests the aerodynamic loads on aerodynamic control points.

APRESSURE Requests the aerodynamic pressures in static aeroelastic response.

5. Model Checkout

ELSUM Requests a summary of element properties for output.

GROUNDCHECK Performs grounding check analysis on stiffness matrix to expose unintentional constraints by moving the model rigidly.

WEIGHTCHECK At each stage of the mass matrix reduction, computes rigid body mass and compares it with the rigid body mass of the g-set.

**Superelement Control**

SUPER Assigns a subcase(s) to a superelement or set of superelements.

SEMGENERATE Specifies the superelement identification numbers for which stiffness, mass, and damping matrices will be generated.

SELGENERATE Specifies the superelement identification numbers for which static loads will be generated.

SEALL Specifies the superelement identification numbers of Phase 1 processing in which all matrices and loads are generated and assembled. Controls execution of the solution sequence.

SEKREDUCE Specifies the superelement identification numbers for which stiffness matrices are assembled and reduced.

SEMREDUCE Specifies the superelement identification numbers for which the mass and damping matrices will be assembled and reduced. In buckling analysis, the differential stiffness matrices are assembled and reduced.

SELREDUCE Specifies the superelement identification numbers for which the static load matrices will be assembled and reduced.



## 172 Case Control Command Summary

SEFINAL	Specifies the superelement identification number of the final superelement to be assembled.
SEEXCLUDE	Specifies the superelement identification numbers for which all matrices and loads will not be assembled into the downstream superelement.
SEDR	Specifies the superelement identification numbers for which data recovery will be performed.
SEDV	Specifies the superelement identification numbers for which the design variables will be processed.
SERESP	Specifies the superelement identification numbers for which the design sensitivity matrices will be generated.

### Miscellaneous

\$	Used to insert comments into the input file. Comment statements may appear anywhere within the input file.
INCLUDE	Inserts an external file into the input file. The INCLUDE statement may appear anywhere within the input data file.
OUTPUT	Delimits the various types of commands for the structure plotter, curve plotter, grid point stress, and MSGSTRESS.
PARAM	Specifies values for parameters.

4

CASE

## 4.4 Case Control Command Descriptions

## 174 \$ Comment

\$ Comment

Used to insert comments into the input file. Comment statements may appear anywhere within the input file.

### **Format:**

\$ followed by any characters out to column 80.

### **Examples:**

```
$ TEST FIXTURE-THIRD MODE
```

### **Remarks:**

1. Comments are ignored by the program.
2. Comments will appear only in the unsorted echo of the Bulk Data.

**A2GG** Direct Input Acoustic/Fluid-Structure Matrix Selection

Selects direct input acoustic/fluid-structure coupling matrix or matrices.

**Format:**

A2GG=name

**Examples:**

```
A2GG=ADMIG
A2GG=ADMIG1, ADMIG2, ADMIG3
A2GG=1.25*ADMIG1, 1.0*ADMIG2, 0.75*ADMIG3
SET 100=A1, A2
A2GG=100
```

**Describers:**

Describer	Meaning
name	Name of direct input acoustic/fluid-structure coupling matrix [ $A_{gg}^2$ ] defined using DMIG bulk entries. (Character) Scale factors may be included (see Remarks 4 and 5).



**Remarks:**

1. DMIG matrices are not used unless selected using A2GG.
2. If PARAM,ASCOUP,YES, the direct input acoustic/fluid-structure coupling matrix selected using A2GG is added to the computed acoustic/fluid-structure coupling matrix. If PARAM,ASCOUP,NO, the direct input acoustic/fluid-structure coupling matrix selected using A2GG replaces the computed acoustic/fluid-structure coupling matrix.
3. The matrix must be square and field 4 of the DMIG bulk entry must contain the integer 1. When filling out the DMIG bulk entries, the GJ column index corresponds to fluid points, CJ is zero, the Gi row index corresponds to structural points, Ci corresponds to DOF, and Ai are the area values.
4. The associated DMIG matrices can be scaled using either in-line scale factors entered on A2GG (for example, A2GG=1.25\*ADMIG1), or the parameter CA2 (for example, PARAM,CA2,1.25), or both. For information regarding the CA2 parameter, see ["Parameter Descriptions"](#).
5. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. 1.0 should be entered for matrices in the list that are

## 176 A2GG

### Direct Input Acoustic/Fluid-Structure Matrix Selection

not scaled. For example, if  $A2GG=1.25*ADMIG1,1.0*ADMIG2,0.75*ADMIG3$  is specified, the result is  $A2GG=1.25*ADMIG1 + ADMIG2 + 0.75*ADMIG3$ .

Specifying the CA2 parameter scales all the A2GG. For example, if both  $PARAM,CA2,1.30$  and  $A2GG=1.25*ADMIG1,1.0*ADMIG2,0.75*ADMIG3$  are specified, the result is  $A2GG=1.30(1.25*ADMIG1 + ADMIG2 + 0.75*ADMIG3)$ .

6. A2GG is supported in dynamic solutions with acoustic/fluid-structure coupling.
7. Only one A2GG case control command should be used in an input file and it should appear above any subcases.



## ACCELERATION    Acceleration Output Request

Requests form and type of acceleration vector output.

**Format:**

$$\text{ACCELERATION} \left[ \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right], \left[ \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right], \right. \\
 \left. \left[ \begin{array}{l} \text{[ABS]} \\ \text{[REL]} \end{array} \right], \left[ \begin{array}{l} \text{PSDF} \\ \text{ATOC} \\ \text{CRMS} \\ \text{RALL} \end{array} \right], \left[ \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right], \left[ \text{[RPUNCH]} \right] \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```

ACCELERATION=5
ACCELERATION(SORT2, PHASE)=ALL
ACCELERATION(SORT1, PRINT, PUNCH, PHASE)=17
    
```

**Describers:**

Describer	Meaning
SORT1	Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.
SORT2	Output will be presented as a tabular listing of frequency or time for each grid point.
PRINT	The printer will be the output medium.
PUNCH	The punch file will be the output medium.
PLOT	Computes, but does not print or punch, acceleration output.
REAL or IMAG	Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.
PHASE	Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.

## 178 ACCELERATION

### Acceleration Output Request

Describer	Meaning
ABS	For enforced motion dynamic analysis, acceleration results will be output as absolute acceleration.
REL	For enforced motion dynamic analysis, acceleration results will be output relative to the enforced motion input.
PSDF	Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 7.
ATOC	Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 7.
CRMS	Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 7.
RALL	Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 7.
RPRINT	Writes random analysis results to the print file. (Default) See remark 7.
NORPRINT	Disables the writing of random analysis results to the print file. See remark 7.
RPUNCH	Writes random analysis results to the punch file. See remark 7.
ALL	Accelerations at all points will be output.
NONE	Accelerations at no points will be output.
n	Set identification of a previously appearing SET command. Only accelerations of points with identification numbers that appear on this SET command will be output. (Integer>0)

**Remarks:**

1. Both PRINT and PUNCH may be requested.
2. Acceleration output is only available for transient and frequency response problems.
3. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
4. ACCELERATION = NONE allows overriding an overall output request.
5. The PLOT option is used when curve plots are desired in the magnitude/phase representation and no printer request is present for magnitude/phase representation.
6. Acceleration results are output in the global coordinate system (see field CD on the GRID Bulk Data entry).
7. The following applies to SOL 111 PSD solutions:
  - Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT describers control the frequency response output. The RPRINT,NORPRINT,RPUNCH describers control the random output.
  - The SORT1 and SORT2 describers only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.
  - Any combination of the PSDF, ATOC, and CRMS describers can be selected. The RALL describer selects all three.

## 180 ACCELERATION

### Acceleration Output Request

- When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.
8. When doing enforced motion dynamic analysis and relative output is requested (using the REL descriptor), the output will be relative to the input as described by the equation:

$$u_f = y_f - K_{ff}^{-1} K_{fs} u_s$$

where  $u_f$  = absolute displacement

$y_f$  = relative displacement

$u_s$  = enforced motion.

The REL descriptor does not apply to PSDF, ATOC, CRMS, or RALL.

#### Remarks related to SOLs 601 and 701:

1. Output is restricted to REAL format. IMAG, PHASE, PSDF, ATOC and RALL are ignored.
2. Displacements, velocities and accelerations must be output for the same set of grid points if requested. Output requested for set n in this command will be combined with the sets requested in the VELOCITY and DISPLACEMENT commands, and accelerations will be output at the grid points of the combined set.
3. SOLs 601 and 701 do not support PUNCH requests.

**ADACT**    Adaptivity Subcase Selection

Specifies whether or not the subcase is to participate in the adaptivity process.

**Format:**

$$\text{ADACT} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

ADACT=NONE  
ADACT=10

**Describers:**

Describer	Meaning
ALL	All subcases will participate in the error analysis.
n	The first n modes in a normal modes analysis will participate in the error analysis. (Integer>0)
NONE	The current subcase will not participate in the error analysis.

**Remarks:**

1.    ADACT is processed only when an adaptive analysis is requested.
2.    In a static analysis, ADACT=n is equivalent to ADACT = ALL and ALL means that the results of all subcases will be included in the error analysis. When ADACT = NONE in any subcase, the results of that subcase are excluded from the error analysis and adaptivity.
3.    In an eigenvalue analysis, ALL means that the results of all the modes will be included in the error analysis.
4.    Only one ADACT command may be specified per SUBCASE.
5.    An ADAPT Case Control command must be present in order to have an adaptive analysis.

**182 ADAMSMNF**  
**Generates ADAMS Interface Modal Neutral File**

**ADAMSMNF** Generates ADAMS Interface Modal Neutral File

Generates ADAMS Interface Modal Neutral File (MNF) during SOL 103.

**Format:**

$$\text{ADAMSMNF} \left[ \text{FLEXBODY} = \begin{Bmatrix} \text{NO} \\ \text{YES} \end{Bmatrix} \right], \left[ \text{FLEXONLY} = \begin{Bmatrix} \text{YES} \\ \text{NO} \end{Bmatrix} \right],$$

$$\left[ \text{OUTGSTRS} = \begin{Bmatrix} \text{NO} \\ \text{YES} \end{Bmatrix} \right], \left[ \text{OUTGSTRN} = \begin{Bmatrix} \text{NO} \\ \text{YES} \end{Bmatrix} \right],$$

$$\left[ \text{MINVAR} = \begin{Bmatrix} \text{PARTIAL} \\ \text{CONSTANT} \\ \text{FULL} \\ \text{NONE} \end{Bmatrix} \right], \left[ \text{PSETID} = \begin{Bmatrix} \text{NONE} \\ \text{setid} \\ \text{ALL} \\ \text{sktunit} \end{Bmatrix} \right],$$

$$\left[ \text{ADMOUT} = \begin{Bmatrix} \text{NO} \\ \text{YES} \end{Bmatrix} \right], \left[ \text{CHECK} = \begin{Bmatrix} \text{NO} \\ \text{YES} \end{Bmatrix} \right]$$

**Examples:**

ADAMSMNF FLEXBODY=YES

**Describers:**

Describer	Meaning
FLEXBODY	Requests the generation of MNF.
NO	Standard NX Nastran solution without MNF creation (default).
YES	MNF generation requested.
FLEXONLY	Determines if standard DMAP solution runs or not after MNF creation is complete.
YES	Only MNF creation occurs (default).



<b>Describer</b>	<b>Meaning</b>
	NO    MNF file creation occurs along with standard DMAP solution.
<b>OUTGSTRS</b>	Determines if grid point stress is written to MNF.
	NO    Do not write grid point stress to MNF (default).
	YES    Write grid point stress to MNF.
<b>OUTGSTRN</b>	Determines if grid point strain is written to MNF.
	NO    Do not write grid point strain to MNF (default).
	YES    Write grid point strain to MNF.
<b>MINVAR</b>	Determines how mass invariants are computed.
	PARTIAL    Mass invariants 5 and 9 are not computed.
	CONSTANT    Mass invariants 1,2,6 and 7 are computed.
	FULL    All nine mass invariants are computed.
	NONE    No mass invariants are computed.
<b>PSETID</b>	Selects a set of elements defined in the OUTPUT(PLOT) section (including PLOTEL) or on a sketch file whose connectivity is exported to face geometry to be used in ADAMS. (See Remark 15)
	NONE    All grids, geometry and associated modal data is written to MNF (default).
	setid    The connectivity of a specific element set is used to export face geometry.
	ALL    The connectivity of all element sets are used to export face geometry.
<b>sktunit</b>	The connectivity of element faces defined on a sketch file is used to export face geometry. Note that the value must be a negative number to distinguish it from a setid value.

## 184 ADAMSMNF

### Generates ADAMS Interface Modal Neutral File

Describer	Meaning
ADMOUT	Requests that the FLEXBODY run output an NX Nastran OP2 file for use in post processing of ADAMS/Flex results.
NO	OP2 file will not be generated (default).
YES	OP2 file will be generated.
CHECK	Requests debug output be written to the f06 file when ADMOUT=YES (See Remark 19).
NO	No debug output will be written (default).
YES	Debug output will be written.

#### Remarks:

1. The creation of the Adams MNF, which is applicable in a non-restart SOL 103 analysis only, is initiated by ADAMSMNF FLEXBODY=YES (other describers are optional) along with the inclusion of the bulk data entry DTI,UNITS. The MNF file naming convention is as follows: 'jid\_seid.mnf', where seid is the integer number of the superelement (0 for residual-only run). The location of these files is the same directory as the jid.f06 file.
2. The Data Table Input Bulk Data entry DTI,UNITS, which is required for an ADAMSMNF FLEXBODY=YES run, is used to specify the system of units for the data stored in the MNF (unlike NX Nastran, ADAMS is not a unitless code). Once identified, the units will apply to all superelements in the model. The complete format is:

```
DTI    UNITS    1      MASS    FORCE    LENGTH  TIME
```

All entries are required. Acceptable character strings are listed below.

Mass:

KG - kilogram

LBM – pound-mass (0.45359237 kg)

SLUG – slug (14.5939029372 kg)

GRAM – gram (1E-3 kg)

OZM – ounce-mass (0.02834952 kg)

KLBM – kilo pound-mass (1000 lbm) (453.59237 kg)

MGG – megagram (1E3 kg)



MG – milligram (1E-6 kg)  
MCG – microgram (1E-9 kg)  
NG – nanogram (1E-12 kg)  
UTON – U.S. ton (907.18474 kg)  
SLI – slinch (175.1268352 kg)

Force:

N – Newton  
LBF – pound-force (4.44822161526 N)  
KGF – kilograms-force (9.80665 N)  
OZF – ounce-force (0.2780139 N)  
DYNE – dyne (1E-5 N)  
KN – kilonewton (1E3 N)  
KLBF – kilo pound-force (1000 lbf) (4448.22161526 N)  
MN – millinewton (1E-3 N)  
MCN – micronewton (1E-6 N)  
NN – nanonewton (1E-9 N)

Length:

M – meter  
KM – kilometer (1E3 m)  
CM – centimeter (1E-2 m)  
MM – millimeter (1E-3 m)  
MI – mile (1609.344 m)  
FT – foot (0.3048 m)  
IN – inch (25.4E-3 m)  
MCM – micrometer (1E-6 m)  
NM – nanometer (1E-9 m)  
A – Angstrom (1E-10 m)  
YD – yard (0.9144 m)  
ML – mil (25.4E-6 m)

MCI – microinch (25.4E-9 m)

Time:

S – second

H – hour (3600.0 sec)

MIN-minute (60.0 sec)

MS – millisecond (1E-3 sec)

MCS – microsecond (1E-6 sec)

NS – nanosecond (1E-9 sec)

D – day (86.4E3 sec)

**4**  
**CASE**

3. Since DTI,UNITS determines all units for the MNF, the units defined in WTMASS, which are important for units consistency in NX Nastran, are ignored in the output to the MNF. For example, if the model mass is kilograms, force in Newtons, length in meters, and time in seconds, then WTMASS would equal 1 ensuring that NX Nastran works with the consistent set of kg, N, and m. The units written to the MNF would be: “DTI,UNITS,1,KG,N,M,S”.
4. You can create flexible body attachment points by defining the component as a superelement or part superelement, in which case the physical external (a-set) grids become the attachment points; or for a residual-only type model, you can use standard NX Nastran ASET Bulk Data entries to define the attachment points.
5. The nine mass variants are:

$$\begin{matrix} 1 \\ 1 \times 1 \end{matrix} I = \sum_{p=1}^N m_p$$

$$\begin{matrix} 2 \\ 3 \times 1 \end{matrix} I = \sum_{p=1}^N m_p s_p$$

$$\begin{matrix} 3 \\ 3 \times M \end{matrix} I_j = \sum_{p=1}^N m_p \Phi_p \quad j = 1, \dots, M$$

$${}^4_I = \sum_{p=1}^N m_p s_p \bar{\Phi}_p + I_p \Phi_p^*$$

$3 \times M$

$${}^5_{I_j} = \sum_{p=1}^N m_p \check{\Phi}_{pj} \Phi_p \quad j = 1, \dots, M$$

$3 \times M$

$${}^6_I = \sum_{p=1}^N m_p \Phi_p^T \Phi_p + \Phi_p^{*T} I_p \Phi_p^*$$

$M \times M$

$${}^7_I = \sum_{p=1}^N m_p s_p^{\sim T} s_p + I_p$$

$3 \times 3$

$${}^8_{I_j} = \sum_{p=1}^N m_p s_p \check{\Phi}_{pj} \quad j = 1, \dots, M$$

$3 \times 3$

$${}^9_{I_{jk}} = \sum_{p=1}^N m_p \check{\Phi}_{pj} \Phi_{pk} \quad j, k = 1, \dots, M$$

$3 \times 3$

$s_p = [xyz]^T$  are the coordinates of grid point  $p$  in the basic coordinate system.

$$s_p = \begin{bmatrix} 0 & -z & y \\ z & 0 & -x \\ -y & x & 0 \end{bmatrix} = \text{skew symmetric vector cross product}$$

operator.

$f_p$ =partitioned orthogonal modal matrix that corresponds to the translational degrees of freedom of grid  $p$ .

$I_p$ =inertia tensor  $p$ .

$f_p^*$ =partitioned orthogonal modal matrix that corresponds to the rotational degrees of freedom of grid  $p$ .

188 **ADAMSMNF**  
Generates ADAMS Interface Modal Neutral File

$\Phi_{pf}$  =skew-symmetric matrix formed for each grid translational degree of freedom for each mode.

M=number of modes.

N=number of grids.

6. To accurately capture the mode shapes when supplying SPOINT/QSET combinations, the number of SPOINTS (ns) should be at least  $ns=n+(6+p)$ , assuming that residual flexibility is on. In the above equation for ns, the number of modes (n) is specified on the EIGR (METHOD=LAN) or EIGRL Bulk Data entries; the number of load cases is p. In general, you can't have too many SPOINTS, as excess ones will simply be truncated with no performance penalty.
7. For FLEXBODY=YES runs, residual vectors for the component should always be calculated as they result in a more accurate representation of the component shapes at little additional cost.
8. OMIT or OMIT1 Bulk Data entries are not supported.
9. Lumped mass formulation (default) is required. Either leave PARAM,COUPMASS out of the input file or supply PARAM,COUPMASS,-1 (default) to ensure lumped mass.
10. P-elements are not allowed because they always use a coupled mass formulation. Likewise, the MFLUID fluid structure interface is not allowed because the virtual mass matrix it generates is not diagonal.
11. PARAM,WTMASS,value with a value other than 1.0 may be used with an NX Nastran run generating an MNF. It must have consistent units with regard to the DTI,UNITS Bulk Data entry. Before generating the MNF, NX Nastran will appropriately scale the WTMASS from the physical mass matrix and mode shapes.
12. There is a distinction between how an ADAMSMNF FLEXBODY=YES run handles element-specific loads (such as a PLOAD4 entry) versus those that are grid-specific (such as a FORCE entry), especially when superelements are used. The superelement sees the total element-specific applied load. For grid-specific loads, the loads attached to an external grid will move downstream with the grid. That is to say, it is part of the boundary and not part of the superelement. This distinction applies to a superelement run and not to a residual-only or parts superelement run.
13. The loads specified in NX Nastran generally fall into two categories: non-follower or fixed direction loads (non-circulatory) and follower loads (circulatory). The follower loads are nonconservative in nature. Examples of fixed direction loads

4

CASE

are the FORCE entry or a PLOAD4 entry when its direction is specified via direction cosines. Examples of follower loads are the FORCE1 entry or the PLOAD4 entry when used to apply a normal pressure. By default in NX Nastran, the follower loads are always active in SOL 103 and will result in follower stiffness being added to the differential stiffness and elastic stiffness of the structure. In a run with ADAMSMNF FLEXBODY=YES and superelements, if the follower force is associated with a grid description (such as a FORCE1) and the grid is external to the superelement, the follower load will move downstream with the grid. Thus, the downstream follower contribution to the component's stiffness will be lost, which could yield poor results. This caution only applies to a superelement run and not to a residual-only or a part superelement run.

14. OUTGSTRS and OUTGSTRN entries require the use of standard NX Nastran STRESS= or STRAIN= used in conjunction with GPSTRESS= or GPSTRAIN= commands to produce grid point stress or strain. GPSTRESS(PLOT)= or GPSTRAIN(PLOT)= will suppress grid stress or strain print to the NX Nastran .f06 file.
15. To reduce the FE mesh detail for dynamic simulations, PSETID (on the ADAMSMNF Case Control command) defined with a SET entry (i.e. setid) is used to define a set of PLOTTELs or other elements used to select grids to display the components in ADAMS. This option can significantly reduce the size of the MNF without compromising accuracy in the ADAMS simulation providing that the mass invariant computation is requested. With superelement analysis, for any of these elements that lie entirely on the superelement boundary (all of the elements' grids attached only to a-set or exterior grids), a SEELT Bulk Data entry must be specified to keep that display element with the superelement component. This can also be accomplished using PARAM, AUTOSEEL,YES. The SEELT entry is not required with parts superelements, as boundary elements stay with their component.

If the SET entry points to an existing set from the OUTPUT(PLOT) section, this single set is used explicitly to define elements used to select grids to display the component in ADAMS. If PSETID does not find the set ID in OUTPUT(PLOT), it will search sets in the case control for a matching set ID. This matching set ID list then represents a list of OUTPUT(PLOT) defined elements' sets, the union of which will be used to define a set of PLOTTELs or other elements used to select grids to display the component in ADAMS. If the user wishes to select all of the sets in the OUTPUT(PLOT) section, then use PSETID=ALL.

The following element types are not supported for writing to an MNF, nor are they supported as a 'type' entry in a set definition in OUTPUT(PLOT): CAABSF, CAEROi, CDUMi, CHACAB, CHACBR, CHBDYx, CDAMP3, CDAMP4, CELAS3, CELAS4, CFLUIDi, CMASS3, CMASS4, CRAC2D, CRAC3D, CTRMEM, CTWIST, CWEDGE, CWELD, and GENEL.

## 190 ADAMSMNF Generates ADAMS Interface Modal Neutral File

PSETID can also point to a sketch file using PSETID=-sktunit, where sktunit references an ASSIGN statement of the form

```
ASSIGN SKT='sketch_file.dat',UNIT=sktunit.
```

The grids defined for the elements' faces in the sketch file, along with *all* external (i.e. boundary) grids for the superelements, will be the only grids (and their associated data) written to the MNF.

The format of the sketch file, which describes the mesh as a collection of faces, must be as follows:

```
face_count
face_1_node_count face_1_nodeid_1 face_1_nodeid_2 ...
face_2_node_count face_2_nodeid_1 face_2_nodeid_2 ...

<etc>
```

Faces must have a node count of at least two. For example, a mesh comprised of a single brick element might be described as follows:

```
6
4 1000 1001 1002 1003
4 1007 1006 1005 1004
4 1000 1004 1005 1001
4 1001 1005 1006 1002
4 1002 1006 1007 1003
4 1003 1007 1004 1000
```

Alternatively, the mesh might be described as a stick figure using a collection of lines (two node faces), as shown below:

```
8
2 101 102
2 102 103
2 103 104
2 104 105
2 105 106
2 106 107
2 107 108
2 108 109
```

16. Typical NX Nastran data entry requirements are described below.

Typical Parameters:

- PARAM,RESVEC,character\_value – controls calculation of residual flexibility (including inertia relief) modes. In SOL 103, residual flexibility is on by default for only component modes (o-set).
- PARAM,GRDPNT, value - mass invariants  $1I$ ,  $2I$ , and  $7I$  will be computed using results of NX Nastran grid point weight generator execution in the basic coordinate system.

Typical Case Control:

- ADAMSMNF FLEXBODY=YES is required for MNF generation.
- METHOD=n is required before or in the first subcase for modal solutions.
- SUPORT1=seid is necessary to select a static support set for a residual only linear preload run.
- SUPER=n,SEALL=n is useful with multiple superelement models to select an individual superelement as a flexible body. Cannot be used with a linear STATSUB(PRELOAD) run.

OUTPUT(PLOT) is necessary to define elements used to select grids to display the component in ADAMS when PSETID=ALL or setid.

SET n=list of elements (including PLOTELS) is used to select grids to display the component.

- OUTPUT(POST) is necessary to define volume and surface for grid stress or strain shapes.

SET n=list is a list of elements for surface definition for grid stress or strain shapes.

Stress and strain data in the MNF is limited to the six components (i.e. 3 normal and 3 shear) for a grid point for a given mode.

SURFACE n SET n NORMAL z3 is used to define a surface for writing stress and strain data. Only one FIBER selection is allowed for each SURFACE, thus the use of the FIBRE ALL keyword on the SURFACE case control command will write stresses to the MNF at the Z1 fiber location only.

Since the FIBRE keyword only applies to stresses, strain data will always be written to the MNF at the MID location.

Stress and strain data at grid points can only be written to the MNF for surface and volume type elements (e.g. CQUAD and CHEXA).

VOLUME n SET n is a volume definition.

The default SYSTEM BASIC is required with SURFACE or VOLUME.

- STRESS(PLOT) is necessary for stress shapes.
- STRAIN(PLOT) is necessary for strain shapes.
- GPSTRESS(PLOT) is necessary for grid point stress shapes to be included in the MNF.

## 192 ADAMSMNF

### Generates ADAMS Interface Modal Neutral File

- GPSTRAIN(PLOT) is necessary for grid point strain shapes to be included in the MNF.

Typical Bulk Data:

- DTI,UNITS,1,MASS,FORCE,LENGTH,TIME is required for MNF generation. For input files containing superelements, this command must reside in the main bulk data section.
- SPOINT,id\_list defines and displays modal amplitude.SESET,SEID,grid\_list defines a superelement (see GRID and BEGIN BULK SUPER=). The exterior grids will represent the attachment points along with the q-set.
- SEELT,SEID,element\_list reassigns superelement boundary elements to an upstream superelement.
- RELEASE,SEID,C,Gi is an optional entry that removes DOFs from an attachment grid for which no constraint mode is desired. For example, this allows the removal of rotational degrees of freedom from an analysis where only translational degrees of freedom are required.
- SEQSET,SEID,spoint\_list defines modal amplitudes of a superelement (see SEQSET1).
- SENQSET,SEID,N defines modal amplitudes of a part superelement. It must reside in the main Bulk Data Section.
- ASET,IDI,Ci defines attachment points for a residual-only run (see ASET1).
- QSET1,C,IDI defines modal amplitudes for the residual structure or modal amplitudes for a part superelement (see QSET).
- SUPORT1,SID,IDI,Ci defines the static support for a preload condition with a residual-only run. This entry is case control selectable. Do not use SUPORT.
- PLOTEL,EID,Gi can be used, along with existing model elements, to define elements used to select grids to display the components in ADAMS.
- EIGR,SID,METHOD,... obtains real eigenvalue extraction (see EIGRL).

17. ADAMSMNF and MBDEXPORT case control entries cannot be used in the same analysis run. In other words, an ADAMS MNF file or a RecurDyn RFI file can be generated during a particular NX Nastran execution, but not both files at the same time. Attempting to generate both files in the same analysis will cause an error to be issued and the execution to be terminated.



18. The ADMOUT=YES option is used when you would like results recovery (using the ADMRECVR case control entry) from an ADAMS/Flex analysis. This option requires the following assignment command:

```
ASSIGN OUTPUT2='name.out' STATUS=UNKNOWN UNIT=20
FORM=UNFORM
```

inserted into the file management section of the NX Nastran input file. It will cause an OP2 file with a .out extension to be generated, which then can be used as input into an NX Nastran SOL 103 run using the ADMRECVR case control capability to perform results recovery from an ADAMS/Flex analysis. FLEXBODY=YES is required with its use.

The data blocks output are:

```
MGGEW - physical mass external sort with weight mass removed
MAAEW - modal mass
KAAE - modal stiffness
CMODEXT - component modes.
```

This capability is limited to no more than one superelement per NX Nastran model. Residual-only analyses are supported.

19. Setting CHECK=YES (which is only available when ADMOUT=YES) is *not* recommended for models of realistic size due to the amount of data that will be written to the f06.
20. The ADAMSMNF data routines use the environment variable TMPDIR for temporary storage during the processing of mode shape data. As a result, TMPDIR must be defined when using ADAMSMNF. TMPDIR should equate to a directory string for temporary disk storage, preferably one with a large amount of free space.
21. If any damping is defined in the model, an equivalent modal viscous damping will be determined for each mode and written to the MNF. This equivalent modal viscous damping is defined as:

$$\begin{bmatrix} \mathbf{d} \end{bmatrix} = \mathbf{y}^T \mathbf{B}_e \mathbf{y}$$

where  $\mathbf{d}$  = equivalent modal viscous damping  
 $\mathbf{y}$  = mode shapes  
 $\mathbf{B}_e$  = equivalent viscous damping defined by:

**194 ADAMSMNF**  
**Generates ADAMS Interface Modal Neutral File**

$$B_{\epsilon} = B_{AA}^1 + B_{AA}^2 + \frac{G}{W3} K_{AA}^1 + \frac{1}{W4} K_{AA}^4$$

G, W3, and W4 are parameters described in the “Parameter Descriptions” section of this guide.

**ADAPT**    Adaptivity Control Selection

Specifies adaptivity control parameters.

**Format:**

ADAPT=n

**Examples:**

ADAPT=12

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification for either an ADAPT or PSET Bulk Data entry. (Integer>0)

**Remarks:**

1. ADAPT is required only when an analysis with p-elements is requested.
2. A multiple p-level analysis with error analysis is performed whenever the ADAPT command references an ADAPT Bulk Data entry.
3. A single p-level analysis without error analysis is performed whenever the ADAPT command references a PSET Bulk Data entry.
4. Only one ADAPT may appear in the Case Control Section and should appear above all SUBCASE commands.
5. The subcases that will not participate in the error analysis/adaptivity must contain the ADAPT = NONE command.

**196 ADMRECVR**  
**ADAMS stress recovery.**

**ADMRECVR** ADAMS stress recovery.

Recovers stress results from an ADAMS/Flex analysis.

**Format:**

$$\text{ADMRECVR} \left[ \text{ADMFORM} = \begin{Bmatrix} \text{BINARY} \\ \text{ASCII} \end{Bmatrix} \right],$$

$$\left[ \text{MSRMODE} = \begin{Bmatrix} 0 \\ 1 \\ 2 \end{Bmatrix} \right], \left[ \text{RGBODY} = \begin{Bmatrix} \text{NO} \\ \text{YES} \\ \text{BOTH} \end{Bmatrix} \right],$$

$$\left[ \text{MSGLVL} = \begin{Bmatrix} 0 \\ 1-4 \end{Bmatrix} \right], \left[ \text{ADMCHK} = \begin{Bmatrix} \text{NO} \\ \text{YES} \end{Bmatrix} \right]$$

**Examples:**

```
ASSIGN INPUT2='adams_results.mdf' UNIT=13
...
CEND
```

```
STRESS (PLOT)=100
ADMRECVR
```

**Describers:**

Describer	Meaning
ADMFORM	Specifies the format of the ADAMS/Flex modal deformations file (see remarks 1 and 2)
BINARY	OUTPUT2 file (default)
ASCII	PUNCH file.
MSRMODE	Specifies stress recovery type (see remarks 6 and 7).
0	Component modal definitions are stored in an OUTPUT2 file (specifically, a *.out file was created by using ADMOUT=YES on the ADAMSMNF case control in a pre-ADAMS/Flex NX Nastran run). The OUTPUT2 files used in this case do not contain data blocks used for MNF creation (default).



<b>Describer</b>	<b>Meaning</b>
1	Same as option 0, except that the OUTPUT2 file will contain 10 additional data blocks used for MNF creation by an ADAMS pre-processor (specifically, a *.out file created through use of the mnfx.alt DMAP alter capability).
2	No file reference (specifically, component modal definitions will be recomputed)
RGBODY	Requests the addition of rigid body motion with modal deformations (see remark 5).
NO	Do not include rigid body motion (default).
YES	Include rigid body motion.
BOTH	Generate two output data blocks; one containing rigid body motion and the other without.
MSGLVL	Level of diagnostic output from Lanczos eigensolver when component modal definitions are determined (applies only when MSRMODE=2).
0	No output (default).
1	Warning and fatal messages.
2	Summary output.
3	Detailed output on cost and convergence.
4	Detailed output on orthogonalization.
ADMCHK	Requests debug output be written to the f06 file (See Remark 9).
NO	No debug output will be written (default).
YES	Debug output will be written.

**Remarks:**

1. When modal deformations to be read are in binary (OUTPUT2) format (specifically, ADMFORM=BINARY), the following statement needs to be specified near the top of the NX Nastran input file in the file management section:

## 198 ADMRECVR ADAMS stress recovery.

ASSIGN INPUTT2='<MDFilename>' UNIT=13

where <MDFilename> is the name of the modal deformations file from ADAMS.

2. To input the modal deformations file from ADAMS in ASCII (Punch) format (specifically, ADMFORM=ASCII), the following statement needs to be included in the bulk data section:

INCLUDE '<MDFilename>' where '<MDFilename>' is the name of the modal deformations file.

3. Dynamic stress/strain output can either be in .f06, PUNCH, and/or OUTPUT2 according to standard NX Nastran functionality. However, stress recovery in NX Nastran from ADAMS/Flex results does not support XYPLOT output.
4. If displacements, stresses, and/or strains are to be available for post processing, one or more of the following statements must appear in the case control section of the NX Nastran input file:

DISP(PLOT) = <set id>

STRAIN(FIBER,PLOT) = <set id>

STRESS(PLOT) = <set id>

5. Rigid body motions from an ADAMS simulation are included in the modal deformation file, but they are not applied unless the RGBODY keyword is set to YES or BOTH and the SORT1 option is included in the DISP(PLOT) command in case control. Including rigid body motion affects the display and animation of the flexible component, but it has no effect on dynamic stresses. For RGBODY=YES, the displacements output data block OUGV1 will contain a '0' in word 3 of each header record. For RGBODY=NO, OUGV1 will contain a '1' in word 3 of each header record. For RGBODY=BOTH, two OUGV1 data blocks will be generated; one for RGBODY=YES and one for RGBODY=NO.
6. For MSRMODE=0 or 1, stress recovery references the OUTPUT2 file obtained from the initial CMS analysis (specifically, ADMOUT=YES on the ADAMSMNF case control entry or use of the mnfx.alt DMAP alter capability). No other files are required. The geometric data needs to be included in the bulk data of the NX Nastran input file because geometry is missing from the OUTPUT2 file. This mode of stress recovery is faster than the MSRMODE=2 mode. To reference this OUTPUT2 file the following line needs to be included in the file specification section of the NX Nastran input file:

ASSIGN INPUTT2='<OUTPUT2\_filename>' UNIT=20

7. For MSRMODE=2, no files are referenced for stress recovery. Instead, a full CMS reanalysis is performed to build the reference data for the stress recovery analysis. Obviously, the analysis time is significantly far greater compared to

the MSRMODE=0 or 1 method, but this method frees up disk space. There is also risk in using this method. If the reanalysis generates slightly different component eigenvalues or eigenvectors than were generated during the creation of the ADAMS MNF in the initial NX Nastran run, then the ADAMS results in the ADAMS MDF (modal deformation file) will be inconsistent and incorrect results will be recovered. Something as simple as a sign change for one eigenvector will cause incorrect results to be recovered. It is, therefore, *highly recommended* that MSRMODE=0 or 1 *always* be used.

8. This capability must be performed in SOL 103 and is limited to no more than one superelement per NX Nastran model. Residual-only analyses are supported.
9. Setting ADMCHK=YES is *not* recommended for models of realistic size due to the amount of data that will be written to the f06.

**200 AECONFIG**  
**Aeroelastic Configuration Name**

**AECONFIG** Aeroelastic Configuration Name

Assigns the aerodynamic configuration parameter used to locate the associated datablocks on the aerodynamic and aeroelastic databases. The configuration name is the Aerodynamic Supergroup identified as part of the aeroelastic model in the Aeroelasticity module prior to analysis submission. The standard location of the AECONFIG entry will be above the SUBCASE entries. An AECONFIG located within a SUBCASE entry will override the global AECONFIG; this requires attachment to an existing aerodynamic database. If the AECONFIG is not found, new qualified datablocks will be created from the data in the Bulk Data Section.

**Format:**

Assigns a DBset member name

AECONFIG =config-name.

**Examples:**

Assigns a MASTER file for the aerodynamic and aeroelastic DBsets.

AECONFIG =CONFIG\_A

**Describers:**

<b>Describer</b>	<b>Meaning</b>
config-name	The configuration name. This is the Aerodynamic SuperGroup name identified as part of the aeroelastic model.



**AEROF**    Aerodynamic Force Output Request

Requests the aerodynamic loads on aerodynamic control points.

**Format:**

AEROF=n

**Examples:**

AEROF=ALL  
AEROF=5

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification of a previously appearing SET command. (Integer>0)
ALL	Output forces at all points.

**Remarks:**

1. The SET command references box or body element identification numbers.
2. Output is in the units of force or moment.
3. Only aerodynamic forces on points specified on the SET command will be output.

## 202 AESYMXY Aerodynamic Flow Symmetry About XY Plane

### AESYMXY Aerodynamic Flow Symmetry About XY Plane

Aerodynamic XY plane of symmetry flag. This is used to indicate whether the aerodynamic model has symmetry with respect to the ground. This selection is typically done within each subcase, but a case control default can be defined by placing an entry above the subcase.

#### Format:

$$\text{AESYMXY} = \left\{ \begin{array}{l} \text{SYMMETRIC} \\ \text{ANTISYMMETRIC} \\ \text{ASYMMETRIC} \end{array} \right\}$$

#### Example 1:

AESYMXY=ASYMMETRIC

#### Describers:

Describer	Meaning
SYMMETRIC	Indicates that the aerodynamic model is moving in a symmetric manner with respect to the XY plane.
ANTISYMMETRIC	Indicates that the aerodynamic model is moving in an antisymmetric manner with respect to the XY plane.
ASYMMTRIC	Indicates that the aerodynamic model has no reflection about the XY plane.

#### Remarks:

1. If the AESYMXY and AESYMXZ commands are not present for a particular subcase, aerodynamic XY symmetry will be determined from the SYMXY field of the AEROS Bulk Data entry for static aeroelastic analysis and from the SYMXY field of the AERO Bulk Data entry for flutter and dynamic aeroelastic analysis.
2. Symmetric implies ground effect while asymmetric implies free air analysis.

**AESYMXZ**    Aerodynamic Flow XZ Symmetry About XZ Plane

Aerodynamic XZ plane of symmetry flag. This is used to support symmetric models about the centerline. Default is ASYMMETRIC (no symmetry). (Subcase level inheritance from AESYMXY applies.)

**Format:**

$$\text{AESYMXY} = \left\{ \begin{array}{l} \text{SYMMETRIC} \\ \text{ANTISYMMETRIC} \\ \text{ASYMMETRIC} \end{array} \right\}$$

**Example 1:**

AESYMXZ=SYMMETRIC

**Describers:**

<b>Describer</b>	<b>Meaning</b>
SYMMETRIC	Indicates that a half span aerodynamic model is moving in a symmetric manner with respect to the XZ plane.
ANTISYMMETRIC	Indicates that a half span aerodynamic model is moving in an antisymmetric manner with respect to the XZ plane.
ASYMMETRIC	Indicates that a full aerodynamic model is provided. (Default.)

**Remarks:**

If the AESYMXZ and AESYMXY commands are not present, aerodynamic XZ symmetry is determined from the SYMXZ field of the AEROS Bulk Data entry for static aeroelastic analysis and from the SYMXZ field of the AERO Bulk Data entry for flutter and dynamic aeroelastic analysis.



## 204 AEUXREF Define the Reference Aerodynamic Extra Point (Controller) Vector

### AEUXREF Define the Reference Aerodynamic Extra Point (Controller) Vector

Reference UXVEC selector for the aeroelastic trim analysis. This is used to indicate an aerodynamic extra point vector about which the stability derivatives are to be computed and printed. The stability derivatives are the change in force due to a unit perturbation of each parameter in the aerodynamic extra point set. Due to the nonlinear nature of the aeroelastic loads, the stability derivatives can be (but are not required to be) a function of the point about which the slope is computed. This input defines which point is to be used in computing the stability derivatives for printing (local slopes will be computed as needed in the trim solver). This selection is typically done within each subcase, but a case control default can be defined by placing an entry above the subcase level.

#### Format:

$$\text{AEUXREF} = \left\{ \begin{array}{c} n \\ \text{TRIM} \end{array} \right\}$$

#### Examples:

AEUXREF=100

AEUXREF=TRIM

#### Describers:

Describer	Meaning
n	The identification number of a UXVEC Bulk Data entry that defines the point about which stability derivatives will be computed in TRIM cases.
TRIM	Indicates that the stability derivatives should be computed about the trimmed state.

#### Remarks:

1. If, for a particular subcase, AEUXREF is not defined, the “free stream” state will be used (that is, the stability derivatives will be computed about zero values for all parameters). This results in upward compatibility with the linear database paradigm.
2. Only one of TRIM or a UXVEC id may be specified on any given subcase. To see stability derivatives about additional points, you must define additional trim subcases.

**ANALYSIS**      Analysis Discipline Subcase Assignment

Specifies the type of analysis being performed for the current subcase.

**Format:**

ANALYSIS=type

**Examples:**

ANALYSIS=STATICS  
 ANALYSIS=MODES

**Describers:**

Descriptor	Meaning	
type	Analysis type. Allowable values and applicable solution sequences (Character):	
	STATICS	Statics
	MODES	Normal Modes also in SOL 110, 111, 112
	BUCK	Buckling
	DFREQ	Direct Frequency
	MFREQ	Modal Frequency
	MTRAN	Modal Transient
	DCEIG	Direct Complex Eigenvalue Analysis
	MCEIG	Modal Complex Eigenvalue Analysis
	SAERO	Static Aeroelasticity
	DIVERGE	Static Aeroelastic Divergence
	FLUTTER	Flutter
	HEAT	Heat Transfer Analysis
	STRUCTURE	Structural Analysis

SOL 200 only

SOLs 153 and 159 only

## 206 ANALYSIS

### Analysis Discipline Subcase Assignment

#### Remarks:

1. ANALYSIS = STRUC is the default in SOLs 153 and 159.
2. In SOL 200, all subcases, including superelement subcases, must be assigned by an ANALYSIS command either in the subcase or above all subcases. Also, all subcases assigned by ANALYSIS=MODES must contain a DESSUB request. If a SOL 200 job contains both ANALYSIS=STATICS and ANALYSIS=BUCK subcases, the STATICS subcases should come before ANALYSIS=BUCK. A SOL 200 job may not contain both DFREQ and MFREQ subcases at the same time.
3. ANALYSIS=DIVERG is only available for analysis in SOL 200. Sensitivity and optimization are not supported for this analysis type.
4. In order to obtain normal modes data recovery in SOLs 110, 111, and 112, ANALYSIS = MODES must be specified under one or more separate subcase(s) which contains requests for data recovery intended for normal modes only. For example, in SOL 111:

```
METH=40
SPC=1
SUBCASE 1 $ Normal Modes
  ANALYSIS=MODES
  DISP=ALL
SUBCASE 2 $ Frequency response
  STRESS=ALL
  DLOAD=12
  FREQ=4
```

All commands which control the boundary conditions (SPC, MPC, and SUPORT) and METHOD selection should be copied inside the ANALYSIS=MODES subcase or specified above the subcase level.

#### Remarks related to SOL 601:

1. ANALYSIS=STRUC and ANALYSIS=HEAT are supported for SOL 601,153 and SOL 601,159.
2. For SOL 601,153 and SOL 601,159, two subcases are required. The first two subcases must be one with ANALYSIS=STRUC (default) and one with ANALYSIS=HEAT. The parameter COUP in TMCPARA bulk entry is used to specify the type of coupling between the structural and heat transfer analysis.

4

CASE

**APRESSURE**    Aerodynamic Pressure Output Request

Requests the aerodynamic pressures in static aeroelastic response.

**Format:**

$$\text{APRES} = \left\{ \begin{array}{c} n \\ \text{ALL} \end{array} \right\}$$

**Examples:**

APRES=ALL

APRES=6

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification number of a previously appearing SET command. Only aerodynamic pressures on the referenced aerodynamic boxes will be output. (Integer>0)
ALL	Pressures at all points will be output.

**208 AUXCASE**  
Auxiliary Model Case Control Delimiter

**AUXCASE** Auxiliary Model Case Control Delimiter

Delimits Case Control commands for an auxiliary model in SOL 200.

**Format:**

AUXCASE

**Examples:**

AUXCAS

AUXC

**Remarks:**

1. AUXCASE indicates the beginning of Case Control commands for an auxiliary model. AUXCASE commands must follow the primary model Case Control commands.
2. All Case Control commands following this entry are applicable until the next AUXCASE or BEGIN BULK command. Commands from preceding Case Control Sections are ignored.
3. Each auxiliary model Case Control must be delimited with the AUXCASE command.
4. The AUXMODEL command is used to associate the auxiliary model Case Control with a particular auxiliary model.



**AUXMODEL**    Auxiliary Model Identification Number

References an auxiliary model for generation of boundary shapes in shape optimization.

**Format:**

AUXMODEL=n

**Examples:**

AUXMODEL=4  
AUXM=4

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Auxiliary model identification number. (Integer>0)

**Remarks:**

1. AUXMODEL references a particular auxiliary model for analysis and may only be specified in the auxiliary model Case Control Section.
2. See the BEGIN BULK command for the Bulk Data definition of an auxiliary model.

## 210 AXISYMMETRIC Conical Shell Boundary Conditions

### AXISYMMETRIC Conical Shell Boundary Conditions

Selects boundary conditions for an axisymmetric shell problem or specifies the existence of fluid harmonics for hydroelastic problems.

#### Format:

$$\text{AXISYMMETRIC} = \left\{ \begin{array}{l} \text{SINE} \\ \text{COSINE} \\ \text{FLUID} \end{array} \right\}$$

#### Examples:

AXISYMMETRIC=COSINE

#### Describers:

Describer	Meaning
SINE	Sine boundary conditions will be used.
COSINE	Cosine boundary conditions will be used.
FLUID	Existence of fluid harmonics.

#### Remarks:

1. This command is required for conical shell problems.
2. If this command is used for hydroelastic problems, at least one harmonic must be specified on the AXIF command.
3. See “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library* for a discussion of the conical shell problem.
4. See “Axisymmetric Fluids in Tanks” in the *NX Nastran Advanced Dynamic Analysis User’s Guide* for a discussion of the hydroelastic formulation.
5. The sine boundary condition will constrain components 1, 3, and 5 at every ring for the zero harmonic.
6. The cosine boundary condition will constrain components 2, 4, and 6 at every ring for the zero harmonic.
7. SPC and MPC Case Control commands may also be used to specify additional constraints.

**B2GG**    Direct Input Damping Matrix Selection

Selects direct input damping matrices.

**Format:**

B2GG=name

**Examples:**

```
B2GG=BDMIG
B2GG=BDMIG1, BDMIG2, BDMIG3
B2GG=1.25*BDMIG1, 1.0*BDMIG2, 0.75*BDMIG3
SET 100=B1, B2
B2GG=100
```

**Describers:**

Describer	Meaning
name	Name of $[B_{gg}^2]$ matrix that is input on the DMIG Bulk Data entry. Scale factors may be included (see remarks 4 and 5). See “Matrix Assembly Operations in SubDMAP SEMG” in the <i>NX Nastran User’s Guide</i> . (Character)



**Remarks:**

1. DMIG matrices will not be used unless selected.
2. Terms are added to the damping matrix before any constraints are applied.
3. The matrix must be symmetric and field 4 on the DMIG,name entry must contain the integer 6.
4. The associated DMIG matrices can be scaled using either in-line scale factors on B2GG (for example, B2GG=1.25\*BDMIG1), using the parameter CB2 (for example, PARAM,CB2,1.25), or both. See “Parameter Descriptions”.
5. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

```
B2GG=1.25*BDMIG1, 1.0*BDMIG2, 0.75*BDMIG3
```

The parameter CB2 when defined will scale all B2GG. For example, if PARAM,CB2,1.30 is defined with the B2GG example above, the result would be B2GG=1.30(1.25\*BDMIG1 + 1.0\*BDMIG2 + 0.75\*BDMIG3).

## 212 B2PP Direct Input Damping Matrix Selection

### B2PP Direct Input Damping Matrix Selection

Selects direct input damping matrices.

#### Format:

B2PP=name

#### Examples:

```
B2PP=BDMIG
B2PP=BDMIG1, BDMIG2, BDMIG3
B2PP=1.25*BDMIG1, 1.0*BDMIG2, 0.75*BDMIG3
B2PP=(1.25,0.5)*BDMIG1, (1.0,0.0)*BDMIG2, (0.75,-2.2)*BDMIG3
SET 100=B1, B2
B2PP=100
```

#### Describers:

Describer	Meaning
name	Name of [ $B_{pp}^2$ ] matrix that is input on the DMIG or DMIAX Bulk Data entry. Scale factors may be included (see remarks 7 and 8). See “Formulation of Dynamic Equations in SubDMAP GMA” in the <i>NX Nastran User’s Guide</i> . (Character)

#### Remarks:

1. DMIG entries will not be used unless selected.
2. B2PP is used only in dynamics problems.
3. DMIAX entries will not be used unless selected by the B2PP command.
4. The matrix must be square or symmetric and field 4 on the DMIG,name entry must contain a 1 or 6.
5. It is recommended that PARAM,AUTOSPC,NO be specified. See “Constraint and Mechanism Problem Identification in SubDMAP SEKR” in the *NX Nastran User’s Guide*.
6. The B2PP command is supported across subcases. A B2PP command selecting a different DMIG or DMIAX matrix can be defined for each subcase.
7. The associated DMIG matrices can be scaled using in-line scale factors on B2PP (for example, B2PP=1.25\*BDMIG1).

8. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

```
B2PP=1.25*BDMIG1,1.0*BDMIG2,0.75*BDMIG3
```

**214 BC**  
**Boundary Condition Identification**

**BC**      Boundary Condition Identification

Identifies multiple boundary conditions for normal modes, buckling, and flutter analysis in SOLs 103, 105, 145, and 200.

**Format:**

BC=n

**Examples:**

BC=23

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Identification number. (Integer>0)

**Remarks:**

1. In SOLs 103, 105, 145, and 200 BC is required in each subcase if multiple boundary conditions are specified for normal modes, buckling, and flutter analysis.
2. If only one boundary condition is specified, then BC does not have to be specified and n defaults to zero.

**4**

**CASE**

Contact Result Output Request (SOLs 101, 103, 111, 112, 601, and 701)

**BCRESULTS** Contact Result Output Request (SOLs 101, 103, 111, 112, 601, and 701)

**Format:**

$$\text{BCRESULTS} \left( \text{TRACTION}, \text{FORCE}, \text{SEPDIS}, \begin{bmatrix} \text{PRINT} \\ \text{PLOT} \\ \text{PUNCH} \end{bmatrix} \right) = \begin{bmatrix} \text{ALL} \\ n \\ \text{NONE} \end{bmatrix}$$

**Examples:**

```
BCRESULTS=ALL
BCRESULTS (FORCE, PLOT)=ALL
BCRESULTS (TRACTION, FORCE, PLOT)=ALL
```

**Describers:**

Describer	Meaning
TRACTION	Contact pressure (scalar) and in-plane contact tractions (vector in basic coordinate system) are output for each contact grid point.
FORCE	Contact force vector is output for each contact grid point.
SEPDIS	The separation distance between elements in source and target regions is output at the element grid points. See SOLs 601 and 701 remarks.
PRINT	The printer will be the output medium.
PLOT	Computes and puts contact results in OP2 file only.
PUNCH	The punch file is the output media.
ALL	Contact results at all contact grid points will be output.
NONE	Contact results will not be output.
n	Set identification of a previously appearing SET command. Only contact grid points with identification numbers that appear on this SET command will be output. (Integer>0)



**Remarks :**

1. The separation distance output is a scalar quantity representing the source side normal distance to the target. During the solution, the separation distance is

**216 BCRESULTS**  
**Contact Result Output Request (SOLs 101, 103, 111, 112, 601, and 701)**

known at the element integration points, but is written to the grids when output. The result at each source grid is the value of separation distance at the closest contact element. If there are two or more contact elements equidistant from the grid, then the minimum value of separation distance is used at the grids rather than the average, since the average gives unexpected results for coarse meshes.

**Remarks related to SOLs 601 and 701:**

1. SOLs 601 and 701 do not support SEPDIS or PUNCH requests.



**BCSET** Contact Set Selection (SOLs 101, 103, 111, 112, 601 and 701)

Selects the contact set for SOLs 101, 103, 111, 112, 601 and 701.

**Format:**

BCSET=n

**Examples:**

BCSET=5

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Contact set identification of a BCTSET, BCTADD or BCTPARAM Bulk Data entry. (Integer>0)

**Remarks:**

1. BCSET references a BCTSET Bulk Data entry if there is only one contact set. When multiple contact sets are used, BCSET must reference a BCTADD bulk data entry.
2. A converged SOL 101 contact condition can be included in a consecutive normal mode solution (SOL 103). The normal mode solution results, which included the SOL 101 contact conditions, can then be used in an optional dynamic response calculation (SOLs 111 and 112). See the chapter on contact in the *NX Nastran User's Guide* for more information.
3. When a BCSET case control command exists, CGAP elements are treated as linear contact elements if the system cell (412) OLDGAPS is set to 0 (default). You can use CGAP elements this way with surface-to-surface contact defined (BCTSET bulk entries exist), or without (no BCTSET bulk entries exist). In the case where no surface-to-surface contact is defined, "n" can point to a BCTPARAM bulk entry which optionally defines PENN, PENT or PENTYP for the CGAP/linear contact elements, or to nothing if a BCTPARAM bulk entry does not exist (an integer value for "n" is still required in this case). See the chapter on surface contact in the *NX Nastran User's Guide* for more information.
4. If the contact solution is having problems converging, the fields on the BCTPARAM bulk data entry can be modified from their defaults. See the BCTPARAM bulk data entry, and the chapter on surface contact in the *NX Nastran User's Guide* for more information.

**218 BCSET**  
**Contact Set Selection (SOLs 101, 103, 111, 112, 601 and 701)**

5. Solution 101 (including consecutive solutions 103, 111, 112) contact conditions cannot be included when using the DMP solution methods.
6. Inertia relief using the parameter definition INREL -1 or -2 is not supported in models which include contact.
7. When defining contact regions and pairs on geometry which is not tangent continuous, creating single contact regions which cross corner transitions can result in non-uniform stress results around the corners. It is recommended to break these areas into multiple regions and pairs. See the chapter on contact in the *NX Nastran User's Guide* for more information.
8. If multiple eigenvalue subcases (solutions 103 or 105) include STATSUB commands to select linear static subcases, and the linear static subcases include glue and/or linear contact definitions, the BCSET and/or BGSET case control commands must be specified in the global case. Failure to do this can result in erroneous results.

**BEGIN BULK**    Case Control and Bulk Data Delimiter

Designates the end of the Case Control Section and/or the beginning of a Bulk Data Section.

**Format:**

$$\text{BEGIN [BULK] } \left[ \begin{array}{l} \text{AUXMODEL = auxmid} \\ \text{SUPER = seid} \end{array} \right]$$

**Examples:**

```
BEGIN BULK
BEGIN AUXMODEL=22
```

**Describers:**

Describer	Meaning
AUXMODEL	Indicates the beginning of an auxiliary model Bulk Data Section.
auxmid	Auxiliary model identification number. (Integer>0)
SUPER	Indicates the beginning of partitioned superelement Bulk Data Section.
seid	Superelement identification number. (Integer ≥ 0)



**Remarks:**

1. BEGIN BULK is not required if there are no Bulk Data entries and there is no ENDDATA entry. The BEGIN SUPER or BEGIN AUXMODEL Bulk Data must lie between BEGIN BULK and ENDDATA entries.
2. For an auxiliary model, AUXMID is referenced by the AUXMODEL Case Control command.
3. Partitioned Bulk Data Sections defined by BEGIN SUPER are used to define only one superelement each. Bulk Data commands which define superelements are ignored in partitioned Bulk Data Sections.

Superelements specified by a BEGIN SUPER entry can be automatically attached to other superelements based on relative location of grid points. For connection to the downstream superelement, the global coordinate directions of the attachment grid points of the upstream superelement will be internally transformed to the global coordinate directions of the grid points of the

**220 BEGIN BULK**  
**Case Control and Bulk Data Delimiter**

downstream superelement. For displacement data recovery, the output will be in the original global coordinate directions.

**BGSET**    Glue Contact Set Selection

Selects the glue contact set.

**Format:**

BGSET=n

**Examples:**

BGSET=5

**Describers:**

Describer	Meaning
n	Glue contact set identification of a BGSET Bulk Data entry. (Integer>0)

**Remarks:**

1. The default search distance defined on the BGSET bulk entry will glue all overlapping sections of the source and target regions. This value can be used in special cases to control what subregions are to be glued.
2. Glue definitions are supported in all solution sequences except for solutions 144 -146, and 701. In solutions 153 and 159 heat transfer analysis, they are treated as constant conductivity connections. See the BGPARM bulk entry for details. Edge-to-surface glue is not supported in solutions 153 and 159.
3. When defining glue regions and pairs on geometry which is not tangent continuous, creating single glue regions which cross corner transitions can result in non-uniform stress results around the corners. It is recommended to break these areas into multiple regions and pairs. See the chapter on constraints in the *NX Nastran User's Guide* for more information on glue definitions.
4. Inertia relief (PARAM,INREL) and glue conditions can be included together when using the sparse solver (default), but not the element iterative solver.
5. Shell offsets are not accounted for in edge-to-surface gluing. The gluing occurs at the grid locations and not at the offset location.
6. If multiple eigenvalue subcases (solutions 103 or 105) include STATSUB commands to select linear static subcases, and the linear static subcases include glue and/or linear contact definitions, the BCSET and/or BGSET case control commands must be specified in the global case. Failure to do this can result in erroneous results.



**222 BGSET**  
**Glue Contact Set Selection**

7. Glue conditions cannot be defined between different superelements. They must be defined within a superelement or within the residual.

**BOLTLD (case control)** Bolt Preload Set Selection

Selects either a BOLTLD bulk entry or BOLTFOR bulk entries for bolt preload processing.

**Format:**

BOLTLD=n

**Examples:**

BOLTLD=5

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification number (SID) of a BOLTLD bulk entry or BOLTFOR bulk entries. See Remark 2. (Integer>0)

**Remarks:**

1. Bolt preload is supported in SOLs 101, 103, 105, 107 through 112, and 601.
2. If the SID referenced by a BOLTLD case control command exists on both a BOLTLD bulk entry and BOLTFOR bulk entries, the BOLTLD bulk entry is selected.
3. Subcases without BOLTLD case control commands should be placed at either the beginning or end of the subcases.
4. For the special case where the sparse solver is used, the model does not contain contact, and the keyword scratch = yes, BOLTLD case control commands in the subcases must be ordered. For example, if a model contains three subcases with BOLTLD = 1 used twice and BOLTLD = 2 used once, the BOLTLD case control commands should be ordered with:
  - The first and second subcases containing BOLTLD = 1 and the third subcase containing BOLTLD = 2.
  - The first subcase containing BOLTLD = 2 and the second and third subcases containing BOLTLD = 1.

If the iterative solver is used or contact is used or the keyword scratch = no, ordering the subcases in this way is not necessary, but is recommended. Doing so minimizes the number of matrix decompositions required during the solution.

**224 BOLTLD (case control)**  
**Bolt Preload Set Selection**

5. Superelements with preloaded bolts are allowed. However, the elements used to define the bolts along with the bolt preload forces must be in the residual.
6. For dynamic solution sequences, a static subcase containing the BOLTLD case control command must be referenced by a STATSUB case control command.



## **BOUTPUT**    Contact Output Requests

Selects contact regions for output.

**Format:**

$$\text{BOUTPUT} \left[ \left( \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right] \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
BOUTPUT=ALL
BOUTPUT=5
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
SORT1	Output is presented as a tabular listing of slave nodes for each load or time depending on the solution sequence.
SORT2	Output is presented as a tabular listing of load or time for each slave node.
PRINT	The print file is the output media.
PUNCH	The punch file is the output media.
PLOT	Generate output histories for slave nodes, but do not print.
ALL	Histories of all the slave nodes listed in all the BOUTPUT Bulk Data entries are output. If no BOUTPUT Bulk Data entries are specified, histories of all the slave nodes in all the contact regions are output.
n	Set identification of previously appearing SET command. Only contact regions with identification numbers that appear on the SET command are selected for output. If there is a BOUTPUT Bulk Data entry for a contact region selected via the set command, histories for slave nodes listed in the Bulk Data entry are output. If there is no BOUTPUT Bulk Data entry for a contact region selected via the set command, histories for all the slave nodes in that contact region are output.
NONE	Result histories for slave nodes are not calculated or output.



## 226 BOUTPUT

### Contact Output Requests

#### Remarks:

1. BOUTPUT is processed in SOLs 106, 129, 153, and 159 only.
2. SORT1 is the default in SOLs 106 and 153. SORT2 is the default in SOLs 129 and 159.

**CLOAD**    Static Load Request for Upstream Superelement Loads

Requests a CLOAD Bulk Data entry that defines a list of superelement loads and their scale factors in nonlinear static analysis only.

**Format:**

CLOAD=n

**Examples:**

CLOAD=15

**Describers:**

Describer	Meaning
n	Identification number of a unique CLOAD Bulk Data entry. (Integer>0)

**Remarks:**

1. This command may only appear in the residual structure subcases (see “SUPER”) and if used it must be specified in all of them.
2. The CLOAD Bulk Data entry must reference previously processed LSEQ (load sequence) Bulk Data that was requested by LOADSET Case Control commands on the upstream (SUPER ≠ 0) subcases.
3. The resulting load is added to those produced by LOAD and TEMP(LOAD) Case Control commands in the residual structure subcases.

## 228 CMETHOD Complex Eigenvalue Extraction Method Selection

### CMETHOD      Complex Eigenvalue Extraction Method Selection

Selects complex eigenvalue extraction parameters.

#### Format:

CMETHOD=n

#### Examples:

CMETHOD=77

#### Describers:

Describer	Meaning
n	Set identification of EIGC (and EIGP) Bulk Data entry. (Integer>0)

#### Remarks:

1. The CMETHOD command must be specified in order to compute complex eigenvalues.
2. See the description for the parameter, UNSYMF, to perform complex eigenvalue analysis in Solution 106.

**CSSCHD**    Aerodynamic Control Surface Schedule

Selects control system schedule information.

**Format:**

CSSCHD=n

**Examples:**

CSSCHD=10

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification of a control system schedule that appears on a CSSCHD Bulk Data entry.

**Remarks:**

One or more CSSCHD entries can be invoked by this entry.

## 230 DATAREC

### Data Recovery Output for p-Version Elements

## DATAREC

### Data Recovery Output for p-Version Elements

Requests form and type of output for p-version elements.

**Format:**

$$\text{DATAREC} \left[ \left( \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right) \right] = n$$

**Examples:**

DATAREC=12

**Describers:**

Describer	Meaning
SORT1	Output will be presented as a tabular listing of grid point results per load case.
SORT2	Output will be presented as a tabular listing of load case per grid point.
n	SID of OUTPUT Bulk Data entry to be used. Only displacements, stresses, and strains of p-version elements with identification numbers that appear on the OUTPUT Bulk Data entry with SID = n will be output. (Integer>0)

**Remarks:**

1. DATAREC is processed only when an adaptive analysis is requested.
2. Only one command per subcase is allowed.
3. This information is used only for output control and does not in anyway affect the analysis.
4. Displacements, stresses, and strains will be calculated and printed only for p-version elements in OUTPUT entry. Those elements listed that are not p-version elements will be ignored.
5. The coordinates of the view points (points at which the displacements are calculated and printed) can be printed by using the VUGRID command.

**DEFORM**    Element Deformation Static Load

Selects the element deformation set.

**Format:**

DEFORM=n

**Examples:**

DEFORM=27

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification number of DEFORM Bulk Data entries. (Integer>0)

**Remarks:**

1. DEFORM Bulk Data entries will not be used unless selected by the DEFORM command in the Case Control Section.
2. DEFORM is only applicable in linear statics, inertia relief, differential stiffness, and buckling problems (SOLs 101, 105, 114, and 200), and will produce a fatal message in other solution sequences.
3. The total load applied will be the sum of external (LOAD), thermal (TEMP(LOAD)), element deformation (DEFORM) and constrained displacement loads (SPC, SPCD).
4. Static, thermal, and element deformation loads should have unique identification numbers.
5. In the superelement solution sequences, if this command is used in a cold start, it must also be specified in the restart.

## 232 DESGLB Request Design Constraints at the Global Level

### DESGLB Request Design Constraints at the Global Level

Selects the design constraints to be applied at the global level in a design optimization task.

#### Format:

DESGLB=n

#### Examples:

```
DESGLB=10  
DESG=25
```

#### Describers:

Describer	Meaning
n	Set identification of a set of DCONSTR or a DCONADD Bulk Data entry identification number. (Integer>0)

#### Remarks:

1. If used, this command must occur before the first SUBCASE.
2. A DESGLB command is optional. It should be used to invoke either constraints on responses that are independent of a particular subcase (such as WEIGHT or VOLUME), or constraints that involve a combination of responses from various subcases (see also DRSPAN Case Control command).
3. DESGLB constraints on DRESP2 or DRESP3 responses that are independent of DRESP1 responses are also acceptable.
4. When DESGLB constraints refer to second level responses (DRESP2 and/or DRESP3) that are based on combinations of DRESP1 responses from more than one subcase, each such DRESP1 must have been assigned to a particular subcase by way of the DRSPAN Case Control command. Such DESGLB constraints are output for the last analyzed subcase associated with the second level response in question.



**DESOBJ** Design Objective

Selects the DRESP1, DRESP2, or DRESP3 entry to be used as the design objective.

**Format:**

$$\text{DESOBJ} \left[ \left( \begin{array}{c} \text{MAX} \\ \text{MIN} \end{array} \right) \right] = n$$

**Examples:**

```
DESOBJ=10
DES0=25
```

**Describers:**

Describer	Meaning
MIN	Specifies that the objective is to be minimized.
MAX	Specifies that the objective is to be maximized.
n	Set identification of a DRESP1, DRESP2, or DRESP3 Bulk Data entry. (Integer>0)



**Remarks:**

1. A DESOBJ command is required for a design optimization task and is optional for a sensitivity task. No more than one DESOBJ may appear in Case Control.
2. If the DESOBJ command is specified within a SUBCASE, the identified DRESPi Bulk Data entry uses a response only from that subcase. If DESOBJ appears above all SUBCASE commands and there are multiple subcases, it uses a global response (See also Remarks 5 and 6).
3. A DRESPi (i=1, 2, 3) entry referenced as an objective cannot represent multiple responses. For example, DRESP1 responses which include multiple grids in the ATTi field or multiple frequencies in the ATTB field cannot be referenced.
4. The minimization or maximization is on the algebraic value of the objective function.
5. A global response, as mentioned in Remark 2, may be either a subcase independent response or one which includes a combination of DRESP1 responses from more than one subcase (see also DRSPAN Case Control command, and the Remarks for DESGLB).

**234 DESOBJ**  
**Design Objective**

6. When the global response includes a combination of DRESP1 responses from more than one subcase, each such DRESP1 response must have been assigned to a particular subcase by way of the DRSPAN Case Control command. A DESOBJ referencing such a global response is output for the last analyzed subcase associated with the second level response in question.
7. The design objective is minimized or maximized (as prescribed) in the algebraic direction. Thus, care must be exercised if negative values are expected. For example, to minimize the absolute value of a displacement component, absolute value will need to be specified by way of a DRESP2 response that references the DRESP1 for that particular displacement component.
8. When the design is infeasible due to violated constraints, the objective function may move in the direction opposite to that desired in an attempt to reach the feasible region.
9. The best design found is not necessarily the one in the last design cycle or the one with the lowest value of the objective function. If there are one or more feasible designs (very small positive within specified or default tolerance, or negative maximum normalized constraint values), then the best design is the feasible design with the lowest value of the objective function. If there are no feasible designs (all positive non-trivial values of the maximum normalized constraint), then the best infeasible design found is that with the smallest value of the maximum normalized constraint, without regard for the value of the objective function.

**DESSUB**      Design Constraints Request at the Subcase Level

Selects the design constraints to be used in a design optimization task for the current subcase.

**Format:**

DESSUB=n

**Examples:**

```
DESSUB=10  
DESS=25
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification of a set of DCONSTR and/or a DCONADD Bulk Data entry identification number. (Integer $\geq 0$ )

**Remarks:**

1. A DESSUB command is required for every subcase for which constraints are to be applied. An exception to this is 'global constraints', which are selected by the DESGLB command.
2. All DCONSTR and DCONADD Bulk Data entries with the selected set ID will be used.
3. A DESSUB command appearing before all subcases is applicable for all subcases except for those subcases where a different DESSUB command appears.

## 236 DISPLACEMENT

### Displacement Output Request

## DISPLACEMENT Displacement Output Request

Requests the form and type of displacement or pressure vector output. Note: PRESSURE and VECTOR are equivalent commands.

**Format:**

$$\text{DISPLACEMENT} \left[ \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right], \left[ \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right], \right. \\ \left. \left[ \begin{array}{l} \text{[ABS]} \\ \text{[REL]} \end{array} \right], \left[ \begin{array}{l} \text{[PSDF]} \\ \text{[ATOC]} \\ \text{[CRMS]} \\ \text{[RALL]} \end{array} \right], \left[ \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right], \left[ \text{[RPUNCH]} \right] \right] = \left\{ \begin{array}{l} \text{ALL} \\ \text{n} \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
DISPLACEMENT=5
DISPLACEMENT (REAL)=ALL
DISPLACEMENT (SORT2, PUNCH, REAL)=ALL
```

**Describers:**

Describer	Meaning
SORT1	Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.
SORT2	Output will be presented as a tabular listing of load, frequency or time for each grid point.
PRINT	The printer will be the output medium.
PUNCH	The punch file will be the output medium.
PLOT	Generates, but does not print, displacement data.
REAL or IMAG	Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.
PHASE	Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.

<b>Describer</b>	<b>Meaning</b>
ABS	For enforced motion dynamic analysis, displacement results will be output as absolute displacement.
REL	For enforced motion dynamic analysis, displacement results will be output relative to the enforced motion input.
PSDF	Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 8.
ATOC	Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 8.
CRMS	Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 8.
RALL	Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 8.
RPRINT	Writes random analysis results to the print file. (Default) See remark 8.
NORPRINT	Disables the writing of random analysis results to the print file. See remark 8.
RPUNCH	Writes random analysis results to the punch file. See remark 8.
ALL	Displacements for all points will be output.
NONE	Displacement for no points will be output.
n	Set identification of a previously appearing SET command. Only displacements of points with identification numbers that appear on this SET command will be output. (Integer>0)

## 238 DISPLACEMENT

### Displacement Output Request

#### Remarks:

1. Both PRINT and PUNCH may be requested.
2. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
3. VECTOR and PRESSURE are alternate forms and are entirely equivalent to DISPLACEMENT.
4. DISPLACEMENT = NONE overrides an overall output request.
5. The PLOT option is used when curve plots are desired in the magnitude/phase representation and no printer output request is present for magnitude/phase representation.
6. The units of translation are the same as the units of length of the model. Rotations are in units of radians.
7. Displacement results are output in the global coordinate system (see field CD on the GRID Bulk Data entry).
8. The following applies to SOL 111 PSD solutions:
  - Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT descriptors control the frequency response output. The RPRINT,NORPRINT,RPUNCH descriptors control the random output.
  - The SORT1 and SORT2 descriptors only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.

4

CASE

- Any combination of the PSDF, ATOC, and CRMS describers can be selected. The RALL describer selects all three.
  - When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.
9. When doing enforced motion dynamic analysis and relative output is requested (using the REL describer), the output will be relative to the input as described by the equation:

$$u_f = y_f - K_{ff}^{-1} K_{fs} u_s$$

where  $u_f$  = absolute displacement

$y_f$  = relative displacement

$u_s$  = enforced motion.

The REL describer does not apply to PSDF, ATOC, CRMS, or RALL.

**Remarks related to SOLs 601 and 701:**

1. Output is restricted to REAL format. IMAG, PHASE, PSDF, ATOC and RALL are ignored.
2. Displacements, velocities and accelerations must be output for the same set of grid points if requested. Output requested for set n in this command will be combined with the sets requested in the VELOCITY and ACCELERATION commands, and displacements will be output at the grid points of the combined set.
3. SOLs 601 and 701 do not support PUNCH requests.

**240 DIVERG**  
**Static Aeroelastic Divergence Request**

**DIVERG**      Static Aeroelastic Divergence Request

Selects the divergence parameters in a static aeroelastic divergence problem.

**Format:**

DIVERG=n

**Examples:**

DIVERG=70

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification of a DIVERG Bulk Data entry. (Integer>0)

**Remarks:**

Static aeroelastic divergence analysis can be performed in SOLs 144 and 200.

**4**

**CASE**



**DLOAD**    Dynamic Load Set Selection

Selects a dynamic load or an acoustic source to be applied in a transient or frequency response problem.

**For SOLs 601 and 701 :** Selects a time-dependent load for advanced nonlinear analysis.

**Format:**

DLOAD=n

**Examples:**

DLOAD=73

**Describers:**

Describer	Meaning
n	Set identification of a DLOAD, RLOAD1, RLOAD2, TLOAD1, TLOAD2, or ACSRCE Bulk Data entry. (Integer>0)
n (SOL 601/701)	Set identification of a DLOAD or TLOAD1 Bulk Data entry. (Integer>0)



**Remarks related to transient and frequency response:**

1. RLOAD1 and RLOAD2 may only be selected in a frequency response problem.
2. TLOAD1 and TLOAD2 may be selected in a transient or frequency response problem.
3. Either a RLOADi or TLOADi entry (but not both) must be selected in an aeroelastic response problem. If RLOADi is selected, a frequency response is calculated. If TLOADi is selected, then transient response is computed by Fourier transform. When there are only gust loads (GUST entry), the DLOAD selects a TLOADi or RLOADi entry with zero load along with field 3 of the GUST command.
4. The DLOAD command will be ignored if specified for upstream superelements in dynamic analysis. To apply loads to upstream superelements, please see the **"LOADSET"** .

**Remarks related to SOLs 601 and 701:**

1. In SOLs 601 and 701, DLOAD may be used in a static or transient analysis.

## 242 DLOAD

### Dynamic Load Set Selection

2. Both the DLOAD and LOAD case control commands can be specified in a SOLs 601 and 701 analysis. DLOAD is used to select time-dependent loads and LOAD is used to select constant loads.
3. See Section 5.1 in the *Advanced Nonlinear Theory and Modeling Guide* on defining time-dependent loads.

## To assign a set of DRESP1 responses to a specific subcase

**DRSPAN** To assign a set of DRESP1 responses to a specific subcase

Assigns a set of DRESP1 responses to a specific subcase, by referencing an existing SET. This set should then contain the list of the DRESP1 to be assigned to the subcase for which the DRSPAN data references the set.

**Format:**

DRSPAN = SETID

**Example:**

DRSPAN=375

**Describers:**

Describer	Meaning
SETID	The ID number of a previously defined SET containing the list of DRESP1 responses that should be assigned to the subcase within which this DRSPAN data resides.

**Remarks:**

1. A DRESP1 response assigned to a particular subcase may not be assigned to another subcase.
2. A DRSPAN referenced SET may not be referenced by another DRSPAN command.
3. A DRSPAN referenced SET may not refer to ALL.
4. A DRESP2 or DRESP3 response that references DRSPAN based DRESP1 responses, may not contain non-DRSPAN based DRESP1.
5. A DRESP2 or DRESP3 response that references DRSPAN based DRESP1 responses may not be nested within another DRESP2 or DRESP3, or have nested DRESP2. If nesting is done with DRSPAN, the job may produce unreliable results if it does not fail. See Remark 6 below for an exception.
6. One exception to Remark 5 above is the case of referenced (nested) DRESP2, which are actually DRESP1 that are mathematical functions (integrated responses) defined in Remark 20 for DRESP1. In accordance with Remark 20 of DRESP1, these responses should be referred to as DRESP2 from a referencing DRESP2 (should not be referenced from a DRESP3). Such responses actually being DRESP1, however, may therefore be specified in DRSPAN sets.

## 244 DRSPAN

To assign a set of DRESP1 responses to a specific subcase

7. An objective function referencing a DRSPAN related second level response (DRESP2 or DRESP3) should be above the subcase level.
8. A constraint referencing a DRSPAN related second level response (DRESP2 or DRESP3) should be referenced by a DESGLB command, and therefore should be above the subcase level.
9. The DRSPAN command can be used with superelements, as long as all DRESP1 responses in a DRSPAN related DRESP2 or DRESP3 are from the same superelement.

4

CASE

**DSAPRT**    Design Sensitivity Output Parameters

Specifies design sensitivity output parameters.

**Format:**

$$DSAPRT \left[ \left[ \begin{array}{c} \text{FORMATTED} \\ \text{UNFORMATTED} \\ \text{NOPRINT} \end{array} \right], \left[ \begin{array}{c} \text{NOEXPORT} \\ \text{EXPORT} \end{array} \right], [\text{START} = i], [\text{BY} = y], [\text{END} = k] \right] = \left[ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right]$$

**Examples:**

```
DSAPRT (FORMATTED, EXPORT)
DSAPRT (FORMATTED, START=FIRST, BY=3, END=LAST) =101
DSAPRT (UNFORMATTED, START=FIRST)
DSAPRT (UNFORMATTED, EXPORT)
DSAPRT (FORMATTED, END=4) =ALL
DSAPRT (UNFORMATTED, END=SENS) =ALL
DSAPRT (NOPRINT, EXPORT)
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
FORMATTED	Output will be presented with headings and labels.
UNFORMATTED	Output will be printed as a matrix print (see the description for the MATPRN module in the <i>NX Nastran DMAP Programmer's Guide</i> ).
NOPRINT	No output will be printed.
EXPORT	Output will be exported to an external binary file specified by PARAM,IUNIT.
NOEXPORT	Output will not be exported to an external binary file.
START=i	Specifies the first design cycle for output. (Integer>0 or Character: "FIRST" or "LAST"; Default = 1 or "FIRST")
BY=j	Specifies the design cycle interval for output. (Integer ≥ 1, or >0; Default = 0) See Remark 2 .
END=k	Specifies the last design cycle for output. (Integer>0 or Character: "FIRST", "LAST", or "SENS"; Default = "LAST")
ALL	All design responses (defined in DRESP1, DRESP2, and DRESP3 entries) will be output.



**246 DSAPRT**  
**Design Sensitivity Output Parameters**

<b>Describer</b>	<b>Meaning</b>
n	Set identification of a previously appearing SET command. Only sensitivities of responses with identification numbers that appear on this SET command will be output. (Integer>0)

**Remarks:**

1. Only one DSAPRT may appear in the Case Control Section and should appear above all SUBCASE commands.
2. Sensitivity data will be output at design cycles i, i+j, i+2j, ..., k. Note that the BY=0 default implies no sensitivity analysis at the intermediate design cycles.
3. END = SENS requests design sensitivity analysis, and no optimization will be performed.
4. If both DSAPRT and PARAM,OPTEXIT, 4, -4, or 7 are specified then DSAPRT overrides PARAM,OPTEXIT, 4, -4, or 7. PARAM,OPTEXIT values and the equivalent DSAPRT commands are as follows:

<b>OPTEXIT</b>	<b>Equivalent DSAPRT Command</b>
4	DSAPRT(UNFORMATTED, END=SENS)
-4	DSAPRT(NOPRINT, EXPORT, END=SENS)
7	DSAPRT(UNFORMATTED, START=LAST)

5. Formatted sensitivity output is not supported for aeroelastic response types (DRESP1 RTYPE=TRIM, STABDER or FLUTTER). Unformatted output must be requested.



**DSYM**    Dihedral Symmetry Option in Cyclic Symmetry

Provides for either one or two planes of overall symmetry in DIH-type cyclic symmetry problems.

**Format:**

$$\text{DSYM} = \left\{ \begin{array}{c} \text{S} \\ \text{A} \\ \text{SS} \\ \text{SA} \\ \text{AS} \\ \text{AA} \end{array} \right\}$$

**Examples:**

DSYM=AS

**Describers:**

<b>Describer</b>	<b>Meaning</b>
S, A	The problem is assumed to be symmetrical (S) or antisymmetrical (A) with respect to the plane containing Side 1 of segment 1.
SS, SA, AS, AA	The problem is assumed to be symmetrical (or antisymmetrical) with respect to the plane containing Side 1 of segment 1 (denoted by the first symbol), and also with respect to a plane perpendicular to Side 1 (denoted by the second symbol).

**248 EBDSET**  
**Element Birth/Death Set Selection**

**EBDSET**      Element Birth/Death Set Selection

Selects the element birth/death set (SOLs 601 and 701)

**Format:**

EBDSET=n

**Examples:**

EBDSET=5

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Element birth/death set identification of an EBDSET or EBDADD Bulk Data entry. (Integer>0)

**4**

**CASE**



## ECHO    Bulk Data Echo Request

Controls echo (i.e., printout) of the Bulk Data.

### Format:

$$\text{ECHO} = \left\{ \left[ \begin{array}{l} \text{UNSORT} \left[ \begin{array}{l} \text{SORT} [ ([\text{EXCEPT}] \text{cdni}, \dots) ] \\ \text{NOSORT} \\ \text{BOTH} \\ \text{NONE} \end{array} \right] \\ \text{PUNCH} \left[ \begin{array}{l} \text{BSTBULK} \\ \text{NEWBULK} \end{array} \right] \end{array} \right\}$$

### Examples:

```
ECHO=NOSORT
ECHO=BOTH
ECHO=PUNCH, SORT (MAT1, PARAM)
ECHO=SORT (EXCEPT DMI, DMIG)
ECHO=PUNCH (BSTBULK)
ECHO=PUNCH (NEWBULK)
ECHO=SORT, PUNCH (BSTBULK)
```

**4**  
**CASE**

### Describers:

Describer	Meaning
UNSORT	The unsorted Bulk Data will be printed. If SORT is also not specified then the sorted Bulk Data will not be printed.
SORT	The sorted (arranged in alphanumeric order) Bulk Data will be printed.
NOSORT	The sorted Bulk Data will not be printed. If UNSORT is also not specified then the unsorted Bulk Data will not be printed.
cdni,...	Bulk Data entry names to be included or excluded by EXCEPT, in the sorted echo printout. The PUNCH file is not affected by cdni.
EXCEPT	Exclude cdni Bulk Data entries from sorted echo printout. See Remark 6.
BOTH	Both sorted and unsorted Bulk Data will be printed. This is equivalent to ECHO=SORT, UNSORT.
NONE	Neither sorted nor unsorted Bulk Data will be printed.

## 250 ECHO Bulk Data Echo Request

Describer	Meaning
PUNCH	The entire Bulk Data will be written to the punch file in sorted form.
BSTBULK	For SOL 200 design optimization runs, an unsorted updated bulk data file will be written to the punch file, using the updated design variables and properties as well as any mode-tracked eigenvalue DRESP1 (i.e. the updated design data) for the BEST design cycle obtained and indicated in the SOL 200 run. See Remark 7.
NEWBULK	For SOL 200 design optimization runs, an unsorted updated bulk data file will be written to the punch file, using the updated design variables and properties as well as any mode-tracked eigenvalue DRESP1 (i.e. the updated design data) for the LAST design cycle obtained and indicated in the SOL 200 run. See Remark 7.

### 4 CASE

#### Remarks:

1. If no ECHO command appears, a sorted Bulk Data will be printed.
2. Comments will appear at the front of the sorted file if ECHO=PUNCH.
3. Portions of the unsorted Bulk Data can be selectively echoed by including the commands ECHOON and ECHOOFF at various places within the Bulk Data. ECHOOFF stops the unsorted echo until an ECHOON command is encountered. Many such pairs of commands may be used. The ECHOON and ECHOOFF commands may be used in the Executive and Case Control Sections; however, ECHOOF should not be the first entry as continuation entries will not be handled correctly.
4. If the SORT (cdni,...) is specified in a restart in SOLs 101 through 200, then the continuation entries will not be printed.
5. If the SORT (cdni,...) describer is used, then it must appear as the last describer, as in the example above.
6. If EXCEPT is specified then it must be specified before all cdni. All Bulk Data entry types will be listed except those given for cdn1, cdn2, etc. If EXCEPT is not specified, then only those Bulk Data entry types listed under cdn1, cdn2, etc. will be listed.

7. For SOL 200, often the last design cycle and the best design cycle coincide. However, BSTBULK is useful for cases where the best design cycle is actually an earlier cycle. In contrast, NEWBULK may be useful when the user knows that the job will be continued later starting from the last design cycle.

## 252 EDE Element Energy Loss Per Cycle Output Request

**EDE** Element Energy Loss Per Cycle Output Request

Requests the output of the energy loss per cycle in selected elements.

**Format:**

$$\text{EDE} \left[ \left[ \begin{array}{c} (\text{PRINT, PUNCH}) \\ \text{PLOT} \end{array} \right] \left[ \begin{array}{c} \text{AVERAGE} \\ \text{AMPLITUDE} \\ \text{PEAK} \\ \text{AVGAMP} \end{array} \right] \left[ \begin{array}{c} \text{RMAG} \\ \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right. \\
 \left. \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right] \left[ \text{THRESH} = p \right] \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

```
EDE=ALL
EDE (PUNCH, THRESH=.0001)=19
```

**Describers:**

Describer	Meaning
PRINT	Write energies to the print file (default).
PUNCH	Write energies to the punch file.
PLOT	Do not write energies to either the punch file or the print file.
AVERAGE	Requests average energy in frequency response analysis only.
AMPLITUDE	Requests amplitude of energy in frequency response analysis only.
PEAK	Requests peak energy for frequency response analysis only. PEAK is the sum of AVERAGE and AMPLITUDE.
AVGAMP	Requests both the average and amplitude energy in frequency response analysis only.
RMAG	Outputs the energy magnitude in real data format.

4

CASE

Describer	Meaning
REAL or IMAG	Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.
PHASE	Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.
SORT1	Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.
SORT2	Output will be presented as a tabular listing of frequency or time for each grid point.
THRESH	Suppresses energies for elements having an energy value of less than p% in all output files. THRESH overrides the value of TINY described in Remark 1. (Default=0.001)
ALL	Computes energy for all elements.
n	Set identification number. Energy for all elements specified on the SET n command will be computed. The SET n command must be specified in the same subcase as the EDE command or above all subcases. (Integer>0)
NONE	Element energy will not be output.

**Remarks:**

1. If THRESH = p is not specified, then p defaults to the values specified by user parameter TINY.
2. The energy calculations include the contribution of initial thermal strain.
3. Energy density (element energy divided by element volume) is also computed in some solution sequences. It can be suppressed by use of PARAM,EST,-1.
4. The equations used to calculate elemental damping energy components are given below.

Average Damping Energy:

$$E_{avg} = \Pi \omega \left[ \{u_r\}^T [B_e] \{u_r\} + \{u_i\}^T [B_e] \{u_i\} \right]$$

where:

## 254 EDE Element Energy Loss Per Cycle Output Request

$E$	=	elemental energy
$\{u_r\}$	=	displacement - real part
$\{u_i\}$	=	displacement - imaginary part
$[B_e]$	=	elemental damping

Real Part of Damping Energy Amplitude:

$$E_{amp\_real} = \Pi\omega \left[ \{u\}^T [B_e] \{u_r\} - \{u_i\}^T [B_e] \{u_i\} \right]$$

Imaginary Part of Damping Energy Amplitude:

$$E_{amp\_imag} = -2\Pi\omega \{u_r\}^T [B_e] \{u_i\}$$

Magnitude of Damping Energy Amplitude:

$$E_{amp\_mag} = \sqrt{E_{amp\_real}^2 + E_{amp\_imag}^2}$$

Phase of Damping Energy Amplitude:

$$\theta_{amp} = \arctan \left( \frac{E_{amp\_imag}}{E_{amp\_real}} \right)$$

Peak Damping Energy:

$$E_{peak} = E_{avg} + E_{amp\_mag}$$

5. In SOL 111, EDE can only be requested if PARAM,DDRMM,-1 is used.
6. Only damping from the viscous dampers (e.g., CVISC, CDAMPi, etc.) are included. Structural damping is not included in the calculation.

**EKE**    Element Kinetic Energy Output Request

Requests the output of the kinetic energy in selected elements.

**Format:**

$$\text{EKE} \left[ \left[ \begin{array}{c} \text{(PRINT, PUNCH)} \\ \text{PLOT} \end{array} \right] \left[ \begin{array}{c} \text{AVERAGE} \\ \text{AMPLITUDE} \\ \text{PEAK} \\ \text{AVGAMP} \end{array} \right] \left[ \begin{array}{c} \text{RMAG} \\ \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right. \\
 \left. \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right] \left[ \text{THRESH} = p \right] \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

```
EKE=ALL
EKE(PUNCH, THRESH=.0001)=19
```

**Describers:**

<b>Describer</b>	<b>Meaning</b>
PRINT	Write energies to the print file (default).
PUNCH	Write energies to the punch file.
PLOT	Do not write energies to either the punch file or the print file.
AVERAGE	Requests average energy in frequency response analysis only.
AMPLITUDE	Requests amplitude of energy in frequency response analysis only.
PEAK	Requests peak energy for frequency response analysis only. PEAK is the sum of AVERAGE and AMPLITUDE.
AVGAMP	Requests both the average and amplitude energy in frequency response analysis only.
RMAG	Outputs the energy magnitude in real data format.

**256 EKE**  
**Element Kinetic Energy Output Request**

**4**  
**CASE**

<b>Describer</b>	<b>Meaning</b>
REAL or IMAG	Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.
PHASE	Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.
SORT1	Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.
SORT2	Output will be presented as a tabular listing of frequency or time for each grid point.
THRESH	Suppresses energies for elements having an energy value of less than p% in all output files. THRESH overrides the value of TINY described in Remark 1. (Default=0.001)
ALL	Computes energy for all elements.
n	Set identification number. Energy for all elements specified on the SET n command will be computed. The SET n command must be specified in the same subcase as the EKE command or above all subcases. (Integer>0)
NONE	Element energy will not be output.

**Remarks:**

1. If THRESH = p is not specified, then p defaults to the values specified by user parameter TINY.
2. The energy calculations include the contribution of initial thermal strain.
3. Energy density (element energy divided by element volume) is also computed in some solution sequences. It can be suppressed by use of PARAM,EST,-1.
4. The equations used to calculate elemental kinetic energy components are given below.

Average Kinetic Energy:

$$E_{avg} = \frac{1}{4} \left[ \{v_r\}^T [M_e] \{v_r\} + \{v_i\}^T [M_e] \{v_i\} \right]$$

where:



- E = elemental energy
- $\{v_r\}$  = velocity - real part
- $\{v_i\}$  = velocity - imaginary part
- $[M_e]$  = elemental mass

Real Part of Kinetic Energy Amplitude:

$$E_{amp\_real} = \frac{1}{4} \left[ \{v_r\}^T [M_e] \{v_r\} - \{v_i\}^T [M_e] \{v_i\} \right]$$

Imaginary Part of Kinetic Energy Amplitude:

$$E_{amp\_imag} = -\frac{1}{2} \{v_r\}^T [M_e] \{v_i\}$$

Magnitude of Kinetic Energy Amplitude:

$$E_{amp\_mag} = \sqrt{E_{amp\_real}^2 + E_{amp\_imag}^2}$$

Phase of Kinetic Energy Amplitude:

$$\theta_{amp} = \arctan \left( \frac{E_{amp\_imag}}{E_{amp\_real}} \right)$$

Peak Kinetic Energy:

$$E_{peak} = E_{avg} + E_{amp\_mag}$$

5. In SOL 111, EKE can only be requested if PARAM,DDRMM,-1 is used.

## 258 ELSDCON Element Stress Discontinuity Output Request

### ELSDCON Element Stress Discontinuity Output Request

Requests mesh stress discontinuities based on element stresses.

**Format:**

$$\text{ELSDCON} \begin{bmatrix} \text{PRINT} \\ \text{PLOT} \end{bmatrix} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
ELSDCON=ALL  
ELSDCON=19
```

**Describers:**

Describer	Meaning
ALL	Stress discontinuity requests for all SURFACE and VOLUME commands defined in the OUTPUT(POST) section will be output.
n	Set identification number of a previously appearing SET command. Only surfaces and volumes with identification numbers that appear on this SET command will be included in the stress discontinuity output request. (Integer>0)
NONE	No element stress discontinuity output.

**Remarks:**

1. This output is available in linear static analysis in SOLs 101 and 144 only. Output will be presented for each surface or volume as a tabular listing of stress discontinuities for each subcase.
2. Only elements used to define the surface or volume are output. See the descriptions of “SURFACE” and “VOLUME” .
3. Element stress output (STRESS) must be requested for elements referenced on SURFACE and VOLUME commands. Also, the GPSTRESS command must be present for printed output and the STRFIELD command for postprocessing output using the .xdb file (PARAM,POST,0) for the same surfaces and volumes.

4

CASE

**ELSTRAIN** Element Strain Output Request

Requests the form and type of strain output.

ELSTRAIN has an equivalent format to STRAIN. See [STRAIN](#) command for description.

**260 ELSTRESS**  
**Element Stress Output Request**

**ELSTRESS**    Element Stress Output Request

Requests the form and type of stress output.

ELSTRESS has an equivalent format to STRESS. See [STRESS](#) command for description.

**ELSUM**    ELSUM Element Summary Requests

Requests a summary of element properties for output.

**Format:**

$$\text{ELSUM} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

ELSUM = ALL  
 ELSUM = 9

**Describers:**

Describer	Meaning
ALL	Element summary output for all elements.
n	Set identification of a previously appearing SET command. Only produces output for elements whose identification numbers appear on this SET command. (Integer>0).
NONE	No element summary output.



**Remarks:**

1. The ELSUM Case Control command produces a summary of properties for elements. The properties include element-id, material-id, (length or thickness), area, volume, structural mass, non-structural mass, total mass, and the product total mass \* WTMASS. Total mass is the sum of structural and non-structural mass. The SUBTOTAL values (representing the total properties for each element type) and the TOTAL values (representing the total properties for all elements) are output for all elements and are not controlled by the Set identification number n. The SUBTOTAL values will only be output for elements types that are part of the Set specification.
2. Certain element types produce only partial data. For these element types, output will contain element-id, length or thickness, volume, and area without mass data. Totals will thus not include those elements for which mass data was not generated.

**262 ELSUM**  
**ELSUM Element Summary Requests**

3. Mass data will be computed for the following elements: CBAR, CBEAM, CBEND, CHEXA, CONROD, CPENTA, CQUAD4, CQUAD8, CQUADR, CROD, CSHEAR, CTETRA, TRIAR, TRIA3, TRIA6, TRIAX6, CTUBE.

**ENTHALPY**    Heat Transfer Enthalpy Output Request

Requests form of enthalpy vector output in transient heat transfer analysis (SOL 159).

**Format:**

$$\text{ENTHALPY} \left[ \left( \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right] \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

ENTHALPY=5

**Describers:**

Describer	Meaning
SORT1	Output will be presented as a tabular listing of grid points for each time.
SORT2	Output will be presented as a tabular listing of time for each grid point.
PRINT	The printer will be the output medium.
PUNCH	The punch file will be the output medium.
PLOT	Generates but does not print enthalpies.
ALL	Enthalpy for all points will be output.
NONE	Enthalpy for no points will be output.
n	Set identification of previously appearing SET command. Only enthalpies of points with identification numbers that appear on this SET command will be output. (Integer>0)

**Remarks:**

ENTHALPY=NONE is used to override a previous ENTHALPY=n or ENTHALPY=ALL command.

## 264 ESE Element Strain Energy Output Request

### ESE Element Strain Energy Output Request

Requests the output of the strain energy in selected elements.

#### Format:

$$\text{ESE} \left[ \left[ \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right] \left[ \begin{array}{c} \text{AVERAGE} \\ \text{AMPLITUDE} \\ \text{PEAK} \\ \text{AVGAMP} \end{array} \right] \left[ \begin{array}{c} \text{RMAG} \\ \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right. \\
 \left. \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right] \left[ \text{THRESH} = p \right] \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

#### Examples:

```
ESE=ALL
ESE (PUNCH, THRESH=.0001)=19
```

#### Describers:

Describer	Meaning
PRINT	Write energies to the print file (default).
PUNCH	Write energies to the punch file.
PLOT	Do not write energies to either the punch file or the print file.
AVERAGE	Requests average energy in frequency response analysis only.
AMPLITUDE	Requests amplitude of energy in frequency response analysis only.
PEAK	Requests peak energy for frequency response analysis only. PEAK is the sum of AVERAGE and AMPLITUDE.
AVGAMP	Requests both the average and amplitude energy in frequency response analysis only.
RMAG	Outputs the energy magnitude in real data format.



<b>Describer</b>	<b>Meaning</b>
REAL or IMAG	Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.
PHASE	Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.
SORT1	Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.
SORT2	Output will be presented as a tabular listing of frequency or time for each grid point.
THRESH	Suppresses energies for elements having an energy value of less than p% in all output files. THRESH overrides the value of TINY described in Remark 1. (Default=0.001)
ALL	Computes energy for all elements.
n	Set identification number. Energy for all elements specified on the SET n command will be computed. The SET n command must be specified in the same subcase as the ESE command or above all subcases. (Integer>0)
NONE	Element strain energy will not be output.

**Remarks:**

1. If THRESH = p is not specified then p defaults to the values specified by user parameter TINY.
2. The energy calculations include the contribution of initial thermal strain.
3. Energy density (element strain energy divided by element volume) is also computed in some solution sequences. It can be suppressed by use of PARAM,EST,-1.
4. The equations used to calculate elemental strain energy components are given below.

Average Strain Energy:

$$E_{avg} = \frac{1}{4} \left[ \{u_r\}^T [K_e] \{u_r\} + \{u_i\}^T [K_e] \{u_i\} \right]$$

## 266 ESE Element Strain Energy Output Request

where:

$E$	=	elemental energy
		displacement - real part
$\{u_r\}$	=	
		displacement - imaginary part
$\{u_i\}$	=	
$[K_e]$	=	elemental stiffness

Real Part of Strain Energy Amplitude:

$$E_{amp\_real} = \frac{1}{4} \left[ \{u_r\}^T [K_e] \{u_r\} - \{u_i\}^T [K_e] \{u_i\} \right]$$

Imaginary Part of Strain Energy Amplitude:

$$E_{amp\_imag} = -\frac{1}{2} \{u_r\}^T [K_e] \{u_i\}$$

Magnitude of Strain Energy Amplitude:

$$E_{amp\_mag} = \sqrt{E_{amp\_real}^2 + E_{amp\_imag}^2}$$

Phase of Strain Energy Amplitude:

$$\theta_{amp} = \arctan \left( \frac{E_{amp\_imag}}{E_{amp\_real}} \right)$$

Peak Strain Energy:

$$E_{peak} = E_{avg} + E_{amp\_mag}$$

5. In SOL 111, ESE can only be requested if PARAM,DDRMM,-1 is used.
6. Element data recovery for thermal loads is not currently implemented in dynamics.
7. Element strain energy is available for nonlinear static analysis (SOL 106), but the INTOUT entry on the NLPARM bulk entry must be set to "YES" since the strain energy at the intermediate steps is required to correctly integrate the strain energy over all load steps. All other nonlinear solution sequences do not support element strain energy output.

8. The strain energy for nonlinear elements is calculated by integrating the specific energy rate, which is the inner product of strain rate and stress, over element volume and time.

$$E = \int_0^t \int_V \dot{\varepsilon}^T \sigma dV dt$$

**Equation 4-1.**

where:

- $\sigma$  = stress tensor  
 $\dot{\varepsilon}$  = tensor of the strain rate  
 $V$  = element volume  
 $t$  = actual time in the load history

Loads from temperature changes are included in [Equation 4-1](#). If we assume a linear variation of temperatures from subcase to subcase, then the strain energy in [Equation 4-1](#)—for the special case of linear material and geometry—becomes

$$E = \frac{1}{2} u^T K_e u - \frac{1}{2} u^T P_{et}$$

**Equation 4-2.**

where  $P_{et}$  is the element load vector for temperature differences.

For linear elements, the default definition of element strain energy is

$$E = \frac{1}{2} u^T K_e u - u^T P_{et}$$

**Equation 4-3.**

where  $P_{et}$  is the element load vector for temperature differences and element deformation.

In [Equation 4-3](#), the temperatures are assumed to be constant within a subcase. The default definition of the strain energy for linear elements differs from the definition for nonlinear elements by a factor of 1/2 in the temperature loads.

## 268 ESE Element Strain Energy Output Request

To request the strain energy for linear elements using [Equation 4-2](#), set the parameter XFLAG to 2; the default value for XFLAG is 0, which uses [Equation 4-3](#) for the strain energy of linear elements.

## EXTSEOUT    External Superelement Creation Specification

Specify the various requirements for the creation of an external superelement.

**Format:**

$$\text{EXTSEOUT} \left[ \left[ \text{STIFFNESS, MASS, DAMPING, K4DAMP, LOADS, ASMBULK, EXTBULK,} \right. \right.$$

$$\left. \left. \text{EXTID = seid, DMIGSFIX = } \left\{ \begin{array}{l} \text{cccccc} \\ \text{EXTID} \end{array} \right\} \left[ \begin{array}{l} \text{MATDB(orMATRIXDB)} \\ \text{DMIGDB} \\ \text{DMIGOP2=unit} \\ \text{DMIGPCH} \\ \text{MATOP4(orMATRIXOP4)=unit} \end{array} \right] \right] \right]$$

**Examples:**

```

EXTSEOUT
EXTSEOUT (ASMBULK,EXTID=100)
EXTSEOUT (ASMBULK,EXTBULK,EXTID=200)
EXTSEOUT (EXTBULK,EXTID=300)
EXTSEOUT (DMIGDB)
EXTSEOUT (ASMBULK,EXTID=400,DMIGOP2=21)
EXTSEOUT (EXTID=500,DMIGPCH)
EXTSEOUT (ASMBULK,EXTBULK,EXTID=500,DMIGSFIX=XSE500,DMIGPCH)
EXTSEOUT (ASMBULK,EXTBULK,EXTID=500,DMIGSFIX=EXTID,DMIGPCH)
EXTSEOUT (STIF,MASS,DAMP,EXTID=600,ASMBULK,EXTBULK,MATDB)

```

See Remarks 10, 11, and 12.

**Describers:**

Descriptor	Meaning
STIFFNESS	Store the boundary stiffness matrix. See Remarks 1 and 2.
MASS	Store the boundary mass matrix. See Remark 1.
DAMPING	Store the boundary viscous damping matrix. See Remarks 1 and 2.
K4DAMP	Store the boundary structural damping matrix. See Remarks 1 and 2.
LOADS	Store the boundary static loads matrix. See Remarks 1 and 2.



## 270 EXTSEOUT External Superelement Creation Specification

Describer	Meaning
ASMBULK	Generate bulk data entries related to the subsequent superelement assembly process and store them on the assembly punch file (.asm). This data is to be included in the main bulk data portion of the subsequent assembly solution. See Remarks 4 and 13.
EXTBULK	Generate and store bulk data entries for the external superelement on the standard punch file (.pch) when used in combination with one of either MATDB, DMIGDB, or DMIGOP2. This data is used in the BEGIN SUPER portion of the bulk data of the subsequent assembly solution. EXTBULK is ignored if either DMIGPCH or MATOP4 is specified. If EXTBULK is not specified, the subsequent assembly solution retrieves the required data for the external superelement from the medium on which the boundary matrices are stored. See Remarks 5 and 6.
EXTID = <i>seid</i>	<i>seid</i> (integer>0) is the superelement ID to be used in the SEBULK and SECONCT bulk data entries stored on the assembly punch file (.asm) if ASMBULK is specified and in the BEGIN SUPER bulk data entry stored on the standard punch file (.pch) if DMIGPCH or MATOP4 is specified. See Remarks 3, 4, 5, and 7.
DMIGSFIX = <i>cccccc</i>	<i>cccccc</i> is the suffix (up to six characters and must not = any EXTSEOUT keyword) that is to be employed in the names of the DMIG matrices stored on the standard punch file (.pch) if the DMIGPCH keyword is specified. See Remarks 8 – 11.
DMIGSFIX = EXTID	The <i>seid</i> defined by the EXTID keyword is the suffix that is to be employed in the names of the DMIG matrices stored on the standard punch file (.pch) if the DMIGPCH keyword is specified. See Remarks 8 – 11.
MATDB (or MATRIXDB)	Store the boundary matrices and other information on the database (default).
DMIGDB	Similar to MATDB (or MATRIXDB) except that the boundary matrices are stored as DMIG bulk data entries on the database.
DMIGOP2= <i>unit</i>	Store the boundary matrices as DMIG bulk data entries on an OUTPUT2 file whose Fortran unit number if given by <i>unit</i> (integer>0). See Remark 14.

4

CASE

<b>Describer</b>	<b>Meaning</b>
DMIGPCH	Store the boundary matrices as DMIG bulk data entries on the standard punch file (.pch). See Remarks 6 – 13.
MATOP4 = <i>unit</i> (or MATRIXOP4 = <i>unit</i> )	Store the boundary matrices on an OP4 file whose Fortran unit number is given by <i>unit</i> (Integer>0). See Remarks 3, 5, 6, 8, and 10.

**Remarks:**

1. If none of the describers STIFFNESS, MASS, DAMPING, K4DAMP, and LOADS are specified, then all matrices are stored.
2. STIFFNESS, DAMPING, K4DAMP, and LOADS may be abbreviated to STIF, DAMP, K4DA, and LOAD, respectively.
3. EXTID and an *seid* value must be specified if one or more of ASMBULK, EXTBULK, DMIGPCH, or MATOP4 are specified. If the DMIGSFIX=EXTID form is employed along with the DMIGPCH keyword, the value *seid* may not exceed 999999, since this value becomes part of the names given to the DMIG matrices generated on the standard punch file (.pch). See Remark 11.
4. If ASMBULK is specified, the following bulk data entries are generated and stored on the assembly punch file (.asm):
  - SEBULK *seid* ...
  - SECONCT *seid* ...
  - GRID entries for the boundary points
  - CORD2x entries associated with the above GRID entries
5. If DMIGPCH is not specified, but MATOP4 or EXTBULK (in combination with MATDB, DMIGDB, or DMIGOP2) is specified, the following bulk data entries are generated and stored on the standard punch file (.pch):
  - BEGIN SUPER *seid*
  - GRID entries for the boundary points
  - GRID entries for the interior points referenced by PLOTTEL entries
  - CORD2x entries associated with the above GRID entries



## 272 EXTSEOUT

### External Superelement Creation Specification

EXTRN

ASET/ASET1

QSET/QSET1

SPOINT

PLOTEL

6. If DMIGPCH or MATOP4 is specified, then EXTBULK is ignored even if it is specified.
7. If DMIGPCH is specified, the following bulk data entries are generated and stored on the standard punch file (.pch):
  - BEGIN SUPER seid
  - GRID entries for the boundary points
  - CORD2x entries associated with the above GRID entries
  - ASET/ASET1
  - SPOINT
  - DMIG entries for the requested boundary matrices
8. The DMIGSFIX keyword is ignored if DMIGPCH is not specified.
9. If DMIGPCH is specified without the DMIGSFIX keyword, then the boundary DMIG matrices generated and stored on the standard punch file (.pch) will have names of the following form:
  - KAAX (boundary stiffness matrix)
  - MAAX (boundary mass matrix)
  - BAAX (boundary viscous damping matrix)
  - K4AAX (boundary structural damping matrix)
  - PAX (boundary load matrix)
10. If the DMIGSFIX = *cccccc* form is employed along with the DMIGPCH keyword, then the boundary DMIG matrices generated and stored on the standard punch file (.pch) will have names of the following form:
  - K*cccccc* (boundary stiffness matrix)



*Mcccccc* (boundary mass matrix)

*Bcccccc* (boundary viscous damping matrix)

*K4cccccc* (boundary structural damping matrix)

*Pcccccc* (boundary load matrix)

11. If the DMIGSFIX = EXTID form is employed along with the DMIGPCH keyword, then the boundary DMIG matrices generated and stored on the standard punch file (.pch) will have names of the following form:

*Kseid* (boundary stiffness matrix)

*Mseid* (boundary mass matrix)

*Bseid* (boundary viscous damping matrix)

*K4seid* (boundary structural damping matrix)

*Pseid* (boundary load matrix)

12. If the DMIGPCH option is specified, the boundary DMIG matrices generated and stored on the standard punch file (.pch) may not be as accurate as the boundary matrices resulting from other options (MATDB/MATRIXDB or DMIGOP2 or MATOP4/MATRIXOP4). Accordingly, this may result in decreased accuracy from the subsequent assembly job utilizing these DMIG matrices.

13. The punch output resulting from EXTSEOUT usage is determined by ASMBULK, EXTBULK, DMIGPCH, and MATOP4 as follows:

- No ASMBULK, EXTBULK, DMIGPCH, or MATOP4 results in no punch output.
- ASMBULK, but no DMIGPCH, MATOP4, or EXTBULK (in combination with MATDB, DMIGDB, or DMIGOP2) results in punch output being generated and stored on the assembly punch file (.asm). See Remark 4.
- No ASMBULK, but DMIGPCH, MATOP4, or EXTBULK (in combination with MATDB, DMIGDB, or DMIGOP2) results in punch output being generated and stored on the standard punch file (.pch). See Remarks 5 or 7, as appropriate.
- ASMBULK and DMIGPCH, MATOP4, or EXTBULK (in combination with MATDB, DMIGDB, or DMIGOP2) results in punch output consisting of two distinct and separate parts. One part is generated and stored on the assembly punch file (.asm) as indicated in Remark 4. The other part is

## 274 EXTSEOUT

### External Superelement Creation Specification

generated and stored on the standard punch file (.pch) as indicated in Remark 5 or 7, as appropriate.

14. If DMIGOP2=*unit* or MATOP4=*unit* is specified, an appropriate ASSIGN OUTPUT2 or ASSIGN OUTPUT4 statement must be present in the File Management Section (FMS) for the *unit*.
15. The creation of an external superelement using EXTSEOUT involves running a non-superelement NX Nastran job, with the following additional data:
  - The data for the creation of the external superelement is specified by the EXTSEOUT case control entry.
  - The boundary points of the external superelement are specified by ASET/ASET1 bulk data entries.
  - If the creation involves component mode reduction, the required generalized coordinates are specified using QSET/QSET1 bulk data entries. The boundary data for the component mode reduction may be specified using the BNDFIX/BNDFIX1 and BNDFREE/BNDFREE1 bulk data entries (or their equivalent BSET/BSET1 and CSET/CSET1 bulk data entries). (The default scenario assumes that all boundary points are fixed for the component mode reduction.)
  - The output for the external superelement is generated in the assembly job. This output consists of displacements, velocities, accelerations, SPC forces, MPC forces, grid point force balances, stresses, strains, and element forces. However, in order for this output to be generated in the assembly job, the output requests must be specified in the external superelement creation run. Normally, the only output requests for the external superelement that are honored in the assembly job are those that are specified in the creation run. There is, however, one important exception to this: the displacement, velocity, acceleration, SPC forces, and MPC forces output for the boundary grid points as well as for all grid points associated with PLOTTEL entries can be obtained in the assembly job *even if there is no output request specified for these points in the creation run*.
  - If the assembly job involves the use of PARAM Bulk Data entries, then the following points should be noted:
    - PARAM entries specified in the Main Bulk Data portion of the input data apply *only to the residual and not to the external superelement*.
    - PARAM entries specified in the BEGIN SUPER portion of the Bulk Data for an external superelement apply *only to the superelement*.

4

CASE

- The most convenient way of ensuring that PARAM entries apply not only to the residual but also to all external superelements is to specify such PARAM entries in Case Control, not in the Main Bulk Data. This is particularly relevant for such PARAMs as POST.
16. Output transformation matrices (OTMs) are generated for the following outputs requested in the in external superelement run with EXTSEOUT:
- DISPLACEMENT
  - VELOCITY
  - ACCELERATION
  - SPCFORCE
  - MPCFORCES
  - GPFORCE
  - STRESS
  - STRAIN
  - FORCE

Only these external superelement results can be output in the system analysis run. PARAM,OMID,YES is not applicable to the OTMs.

17. If a PARAM,EXTOUT or PARAM,EXTUNIT also exist, they will be ignored. The existence of the EXTSEOUT case control entry takes precedence over PARAM,EXTOUT and PARAM,EXTUNIT.
18. This capability is enabled in SOLs 101, 103, 105, 107-112, 114, 115, 118, 129, 144-146, 159, 187, and 200. This capability is not enabled for thermal analyses. Superelement results can be recovered in the second step (i.e. superelement assembly, analysis, and data recovery) for SOLs 101, 103, 105-112, 129, 144-146, 153, and 159.
19. The run creating the external superelement using this capability is not a superelement run. No superelement designations are allowed (i.e. SUPER, SEALL, SESET, BEGIN SUPER, etc.).

276 **FLSFSEL**  
Fluid-Structure Frequency Selection

**FLSFSEL** Fluid-Structure Frequency Selection

Frequency selection for controlling the fluid-structure interaction.

**Format:**

$$\begin{aligned} & \text{FLSFSEL} \left[ \text{LFREQFL} = \begin{Bmatrix} 0.0 \\ f_1 \end{Bmatrix} \right], \left[ \text{HFREQFL} = \begin{Bmatrix} 1.0\text{E} + 30 \\ f_1 \end{Bmatrix} \right], \\ & \left[ \text{LFREQF} = \begin{Bmatrix} 0.0 \\ f_1 \end{Bmatrix} \right], \left[ \text{HFREQF} = \begin{Bmatrix} 1.0\text{E} + 30 \\ f_1 \end{Bmatrix} \right], \\ & \left[ \text{LMODESFL} = \begin{Bmatrix} 0 \\ m_1 \end{Bmatrix} \right], \left[ \text{LMODES} = \begin{Bmatrix} 0 \\ m_1 \end{Bmatrix} \right], \\ & \left[ \text{FLUIDSE} = \begin{Bmatrix} 0 \\ \text{seid} \end{Bmatrix} \right] \end{aligned}$$

**Examples:**

FLSFSEL LFREQFL=1.0 HFREQFL=2.0

**Describers:**

Describer	Meaning
LFREQFL	The lower bound modal frequency for fluid modes in hertz. Default is 0.0 unless $f_1$ is specified.
HFREQFL	The upper bound modal frequency for fluid modes in hertz. Default is 1.0E+30 unless $f_1$ is specified.
LFREQ	The lower bound modal frequency for structural modes in hertz. Default is 0.0 unless $f_1$ is specified.
HFREQF	The upper bound modal frequency for structural modes in hertz. Default is 1.0E+30 unless $f_1$ is specified.
LMODESFL	The number of lowest fluid modes to be used. If 0, then LFREQFL and HFREQFL will be used to determine number of modes. Default is 0 unless $m_1$ is specified.

<b>Describer</b>	<b>Meaning</b>
LMODES	The number of lowest structural modes to be used. If 0, then LFREQFL and HFREQFL will be used to determined number of modes. Default is 0 unless $m_1$ is specified.
FLUIDSE	Defines a superelement for fluids only. Default is 0, unless <i>seid</i> is specified.

**Remarks:**

All the entries specified in this case control statements are available as PARAMETER statements.

278 **FLSPOUT**  
Fluid-Structure Modal Participation Output

**FLSPOUT** Fluid-Structure Modal Participation Output

Modal participation output control for the fluid-structure interaction.

**Format:**

$$\begin{aligned}
 & \text{FLSPOUT} \left[ \text{FLUIDMP} = \begin{Bmatrix} \text{ALL} \\ n \\ \text{NONE} \end{Bmatrix} \right], \left[ \text{STRUCTMP} = \begin{Bmatrix} \text{ALL} \\ n \\ \text{NONE} \end{Bmatrix} \right], \\
 & \left[ \text{GRIDFMP} = \begin{Bmatrix} \text{ALL} \\ \text{setf} \end{Bmatrix} \right], \left[ \text{GRIDMP} = \begin{Bmatrix} \text{ALL} \\ \text{setg} \\ \text{NONE} \end{Bmatrix} \right], \\
 & \left[ \text{OUTFMP} = \begin{Bmatrix} \text{ALL} \\ p \\ \text{NONE} \end{Bmatrix} \right], \left[ \text{OUTSMP} = \begin{Bmatrix} \text{ALL} \\ p \\ \text{NONE} \end{Bmatrix} \right], \\
 & \left[ \text{PANELMP} = \begin{Bmatrix} \text{ALL} \\ \text{setp} \\ \text{NONE} \end{Bmatrix} \right], \left[ \text{FEPS} = \begin{Bmatrix} 1.0\text{E} - 11 \\ \text{eps} \end{Bmatrix} \right], \\
 & \left[ \text{SEPS} = \begin{Bmatrix} 1.0\text{E} - 11 \\ \text{eps} \end{Bmatrix} \right], \left[ \text{ARF} = \begin{Bmatrix} 0.95 \\ a \end{Bmatrix} \right], \left[ \text{ARS} = \begin{Bmatrix} 0.95 \\ a \end{Bmatrix} \right], \\
 & \left[ \text{PSORT} = \begin{Bmatrix} \text{ABSOLUTE} \\ \text{REAL} \\ \text{IMAGINARY} \end{Bmatrix} \right], \left[ \begin{Bmatrix} \text{DESCENDING} \\ \text{ASCENDING} \end{Bmatrix} \right]
 \end{aligned}$$

**Examples:**

FLSPOUT FLUIDMP=ALL PANELMP=ALL STRUCTMP=ALL

**Describers:**

Descriptor	Meaning
FLUIDMP	First “n” fluid modes to be used for modal participation requests. See FLUIDMP parameter. Default=NONE.



<b>Describer</b>	<b>Meaning</b>
STRUCTMP	First “n” structural modes to be used for modal participation requests. See FLUIDMP parameter. Default=NONE.
GRIDFMP	Fluid grid set for modal participation output. Default is ALL unless setf is specified in which case the modal participation factors will be output for all fluid grids in setf.
GRIDMP	Structure grid set for modal participation output. Default is NONE unless setg is specified in which case the modal participation factors will be output for all structural grids.
OUTFMP	Request “p” highest fluid mode participation factors be output. Default=NONE.
OUTSMP	Request “p” highest structural mode participation factors be output. Default=NONE.
PANELMP	Include panel id’s which are included in a “setp” case control set for modal participation calculations. Default=NONE.
FEPS	Threshold for filtering fluid modal participation factors from being printed. Default=1.0E-11.
SEPS	Threshold for filtering structure modal participation factors from being printed. Default=1.0E-11.
ARF	Determines which fluid participation factors are printed. The default is ARF=0.95, which means only values above 95% of the highest value for each mode are printed.
ARS	Determines which structural participation factors are printed. The default is ARS=0.95, which means only values above 95% of the highest value for each mode are printed.
PSORT	Requests how the modal participation output is sorted. The request must occur in pairs. For example, PSORT= (REAL,ASCENDING).



**Remarks:**

All the entries specified in this case control statements are available as PARAMETER statements.

**280 FLSTCNT**  
Control parameters for fluid-structure interaction.

**FLSTCNT** Control parameters for fluid-structure interaction.

Miscellaneous control parameters for fluid-structure interaction.

**Format:**

$$\text{FLSTCNT} \left[ \text{ACSYM} = \begin{Bmatrix} \text{YES} \\ \text{NO} \end{Bmatrix} \right], \left[ \text{ACOUT} = \begin{Bmatrix} \text{PEAK} \\ \text{RMS} \end{Bmatrix} \right], \left[ \text{ASCOUP} = \begin{Bmatrix} \text{YES} \\ \text{NO} \end{Bmatrix} \right], \\ \left[ \text{PREFDB} = \begin{Bmatrix} 1.0 \\ P \end{Bmatrix} \right], \left[ \text{SKINOUT} = \begin{Bmatrix} \text{NONE} \\ \text{PUNCH} \\ \text{FREEFACE} \\ \text{STOP} \end{Bmatrix} \right]$$

**Examples:**

FLSTCNT ACOUT=RMS PREFDB=1.0E-06

**Describers:**

Describer	Meaning
ACSYM	Symmetric (YES) or non-symmetric (NO) solution request for fluid-structure analysis. Default=YES.
ACOUT	PEAK or RMS output with the FORCE Case Control request. Default=PEAK.
ASCOUP	Requests a fluid-structure coupled solution when YES (default). When NO, the fluid and the structure are decoupled.
PREFDB	Specifies the reference pressure. Default=1.0.
SKINOUT	Specifies if a debug file with the pairing information is output. Default=NONE. If SKINOUT=PUNCH, a debug data deck is written out along with a debug punch file. SKINOUT=STOP works like the PUNCH option, but will stop immediately after the debug files are created. If SKINOUT=FREEFACE, a debug data deck is written out. See Remark 2.
NONE	No debug deck or pairing information is generated.



## Control parameters for fluid-structure interaction.

Describer	Meaning
PUNCH	Debug pairing information file is created. The name of the files will be the base name of the deck appended with “_acdbg.dat” and “_acdbg.pch”.
FREEFACE	All free faces are written into a debug file.
STOP	The run is terminated as soon as the debug file with pairing information is created.

**Remarks:**

1. All the entries specified in this case control statements are available as PARAMETER statements.
2. When SKINOUT=PUNCH, both a punch file and a debug data deck are created. The punch file (\*.pch) contains a list of the original structural and fluid element ID's which participated in the coupling. The debug data deck (\*.dat) contains
  - dummy shell elements representing the *coupled* structural free faces, and are assigned to a dummy pshell with id=1.
  - dummy shell elements representing the *coupled* fluid free faces, and are assigned to a dummy pshell with id=2.

When SKINOUT=FREEFACE, a debug data deck is created (no punch file) containing

- dummy shell elements representing the *coupled* structural free faces, and are assigned to a dummy pshell property with id=1.
- dummy shell elements representing the *coupled* fluid free faces, and are assigned to a dummy pshell property with id=2.
- dummy shell elements representing the *uncoupled* structural free faces, and are assigned to a dummy pshell property with id=3.
- dummy shell elements representing the *uncoupled* fluid free faces, and are assigned to a dummy pshell property with id=4.

## 282 FLUX

### Heat Transfer Gradient and Flux Output, or Acoustics Particle Velocity Output Request

**FLUX** Heat Transfer Gradient and Flux Output, or Acoustics Particle Velocity Output Request

Requests the form and type of gradient and flux output in heat transfer analysis. Also can be used for particle velocity output in coupled fluid-structural analysis.

#### Format:

$$\text{FLUX}[(\text{PRINT}, \text{PLOT}, \text{PUNCH})] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

#### Examples:

```
FLUX=ALL  
FLUX (PUNCH, PRINT) =17  
FLUX=25
```

#### Describers:

Describer	Meaning
PRINT	The printer will be the output medium.
PUNCH	The punch file will be the output medium.
PLOT	The output will be sent to the plot file.
ALL	Flux for all elements will be output.
NONE	Flux for no elements will be output.
n	Set identification of a previously appearing SET command. Only fluxes of elements with identification numbers that appear on this SET command will be output. (Integer>0)

#### Remarks:

1. FLUX=ALL in SOL 159 may produce excessive output.
2. FLUX=NONE overrides an overall request.

#### Remarks related to SOL 601:

1. FLUX output request is supported for heat transfer analysis in SOL 601,153 and SOL 601,159.

**Heat Transfer Gradient and Flux Output, or Acoustics Particle Velocity Output Request**

2. Output for CHBDY type elements is not supported.

**284 FMETHOD**  
**Flutter Analysis Method Parameter Selection**

**FMETHOD** Flutter Analysis Method Parameter Selection

Selects the parameters to be used by the aerodynamic flutter analysis.

**Format:**

FMETHOD=n

**Examples:**

FMETHOD=72

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Set identification number of a FLUTTER Bulk Data entry. (Integer>0)

**Remarks:**

1. An FMETHOD command is required for flutter analysis.
2. A CMETHOD command is also required for the K-method of flutter analysis.
3. If this entry is being used in SOL 200 in conjunction with flutter design conditions, the METHOD selected on the FLUTTER Bulk Data entry must be "PK" or "PKNL".

**FORCE** Element Force Output or Particle Velocity Request

Requests the form and type of element force output or particle velocity output in coupled fluid-structural analysis. Note: ELFORCE is an equivalent command.

**Format:**

$$\text{FORCE} \left[ \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right], \left[ \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right], \left[ \begin{array}{l} \text{CENTER} \\ \text{CORNER or BILIN} \\ \text{SGAGE} \\ \text{CUBIC} \end{array} \right], \left[ \begin{array}{l} \text{[PSDF]} \\ \text{[ATOC]} \\ \text{[CRMS]} \\ \text{[RALL]} \end{array} \right], \left[ \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right], \left[ \text{[RPUNCH]} \right] \right] = \left\{ \begin{array}{l} \text{ALL} \\ \text{n} \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```

FORCE=ALL
FORCE (REAL, PUNCH, PRINT)=17
FORCE=25
    
```

**Describers:**

Describer	Meaning
SORT1	Output will be presented as a tabular listing of elements for each load, frequency, eigenvalue, or time, depending on the solution sequence.
SORT2	Output will be presented as a tabular listing of frequency or time for each element type.
PLOT	Generates force output for requested set but no printed output.
PRINT	The printer will be the output medium.
PUNCH	The punch file will be the output medium.
REAL or IMAG	Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.
PHASE	Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.

**286 FORCE**  
**Element Force Output or Particle Velocity Request**

<b>Describer</b>	<b>Meaning</b>
PSDF	Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the case control. See Remark 8.
ATOC	Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the case control. See Remark 8.
CRMS	Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the case control. See Remark 8.
RALL	Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the case control. See Remark 8.
RPRINT	Writes random analysis results to the print file. (Default) See Remark 8.
NORPRINT	Disables the writing of random analysis results to the print file. See Remark 8.
RPUNCH	Writes random analysis results to the punch file. See Remark 8.
CENTER	Output CQUAD4, CQUADR, CTRIAR element forces at the center only.
CORNER or BILIN	Output CQUAD4, CQUADR, CTRIAR element forces at the center and grid points using strain gage approach with bilinear extrapolation.
SGAGE	Output CQUAD4 element forces at center and grid points using strain gage approach.
CUBIC	Output CQUAD4 element forces at center and grid points using cubic bending correction.
ALL	Forces for all elements will be output.

**4**

**CASE**

Describer	Meaning
n	Set identification of a previously appearing SET command. Only forces of elements with identification numbers that appear on this SET command will be output. (Integer>0)
NONE	Forces for no elements will be output.

**Remarks:**

1. ALL should not be used in a transient problem.
2. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
3. ELFORCE is an alternate form and is entirely equivalent to FORCE.
4. FORCE=NONE overrides an overall request.
5. For composite stress and/or failure index output, a FORCE request is required for the desired elements.
6. In nonlinear transient analysis, this request is ignored for nonlinear elements.
7. The options CENTER, CORNER, CUBIC, SGAGE, and BILIN are recognized only in the first subcase and determine the option to be used in all subsequent subcases with the STRESS, STRAIN, and FORCE commands. Consequently, options specified in subcases other than the first subcase will be ignored.

## 288 **FORCE** Element Force Output or Particle Velocity Request

- If the STRESS command is specified in the first subcase then the option on the STRESS command is used in all subcases with STRESS, STRAIN, and FORCE commands.
  - If the STRAIN command and no STRESS command is specified in the first subcase, then the option on the STRAIN command is used in all subcases containing STRESS, STRAIN, and FORCE commands.
  - If the FORCE command and no STRESS or STRAIN command is specified in the first subcase, then the option on the FORCE command is used in all subcases containing STRESS, STRAIN, and FORCE commands.
  - If STRESS, STRAIN, and FORCE commands are not specified in the first subcase, then the CENTER option is used in all subcases containing STRESS, STRAIN, and FORCE commands.
8. The following applies to SOL 111 PSD solutions:
- Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT describers control the frequency response output. The RPRINT,NORPRINT,RPUNCH describers control the random output.
  - The SORT1 and SORT2 describers only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.
  - Any combination of the PSDF, ATOC, and CRMS describers can be selected. The RALL describer selects all three.
  - When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.



**FREQUENCY**    Frequency Set Selection

Selects the set of forcing frequencies to be solved in frequency response problems.

**Format:**

FREQUENCY=n

**Examples:**

FREQUENCY=17

**Describers:**

Describer	Meaning
n	Set identification number of FREQ, FREQ1, FREQ2, FREQ3, FREQ4, and FREQ5 Bulk Data entries. (Integer>0)

**Remarks:**

1. A frequency set selection is required for a frequency response problem.
2. A frequency set selection is required for transient response by Fourier methods (SOL 146).
3. All FREQ, FREQ1, FREQ2, FREQ3, FREQ4, and FREQ5 entries with the same frequency set identification numbers will be used. Duplicate frequencies will be ignored.  $f_N$  and  $f_{N-1}$  are considered duplicated if
  - $|f_N - f_{N-1}| < 10^{-5} |f_{MAX} - f_{MIN}|$



**290 GKRESULTS**  
Gasket Result Output Request (SOL 601 only)

**GKRESULTS** Gasket Result Output Request (SOL 601 only)

Requests the form and type of gasket result output in SOL 601.

**Format:**

$$\text{GKRESULTS} \left( \begin{array}{c} \text{PRINT} \\ \text{PLOT} \end{array} \right) = \text{ALL or NONE}$$

**Examples:**

GKRESULTS=ALL  
GKRESULTS (PLOT)=ALL

**Describers:**

Describer	Meaning
PRINT	The printer will be the output medium.
PLOT	Computes and puts gasket results in OP2 file only.
ALL	Gasket results will be output for all gasket elements.
NONE	Gasket results will not be output.

**Remarks:**

- Gasket results consist of gasket pressure, gasket closure, plastic gasket closure, gasket yield stress and gasket status.
- Gasket status is defined as follows:

Status	Definition	Integer in .OP2 (OGK datablock)
Open	The gasket pressure is less than the leakage pressure.	1
Closed	The gasket pressure is higher than the leakage pressure but has not yet caused plasticity.	2
Sealed	There has been plastic gasket deformation and the current pressure is above the gasket leakage pressure.	3
Leaked	After plastic deformation, the gasket pressure has dropped below gasket leakage pressure.	4
Crushed	Gasket closure strain has exceeded the rupture value.	5

**GPFORCE**    Grid Point Force Output Request

Requests grid point force balance at selected grid points.

**Format:**

$$\text{GPFORCE} \left[ \left[ \begin{array}{l} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{l} \text{PRINT} \\ \text{NOPRINT} \end{array} \right], \text{PUNCH}, \left[ \begin{array}{l} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right] = \left\{ \begin{array}{l} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

```
GPFORCE=ALL
GPFORCE=17
GPFORCE (SORT2, PRINT, PUNCH, PHASE) = 123
```

**Describers:**

Describer	Meaning
SORT1	Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time depending on solution sequence. (Default)
SORT2	Output will be presented as a tabular listing of load, frequency, eigenvalue, or time for each grid point.
PRINT	The printer will be the output medium. (Default)
PUNCH	The punch file will be the output medium.
NOPRINT	Generates, but does not print, grid point force balance results.
REAL or IMAG	Requests rectangular format (real and imaginary) of complex output. Use of REAL or IMAG yields the same output. (Default)
PHASE	Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.
ALL	Grid point force balance for all grid points will be output.
n	Set identification number of a previously appearing SET command. Only grid points with identification numbers that appear on this SET command will be included in the grid point force balance output. (Integer>0)



## 292 GPFORCE

### Grid Point Force Output Request

#### Remarks:

1. Both PRINT and PUNCH may be requested.
2. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
3. PARAM,DDRRMM,-1 is required in the modal solution sequences 111, 112, 146, and 200.
4. The printing of the grid point forces will be suppressed if PARAM,NOGPF,-1 appears in the Bulk Data.
5. The Bulk Data entry PARAM,NOELOF,+1 will cause the output of the grid point forces to be aligned with the edges of the two-dimensional elements. The default value of -1 will suppress this output.
6. The Bulk Data entry PARAM,NOELOP,+1 will cause the output of the sum of the forces parallel to the edges of adjacent elements. The default value of -1 will suppress this output.
7. The output of grid point forces aligned with the edges of elements is available for the following elements:

```
CBAR  
CROD  
CBEAM  
CSHEAR  
CONROD  
CTRIA3
```

The positive direction for grid point forces aligned with the edges of elements is from the reference point to the load point as indicated on the printed output.

8. Grid point force balance is computed from linear and nonlinear elements, the sum of applied and thermal loads, and MPC and SPC forces. Effects not accounted for include those from mass elements in dynamic analysis (inertia loads), general elements, DMIG entries, and boundary loads from upstream superelements. These effects may lead to an apparent lack of equilibrium at the grid point level. The following table summarizes those effects that are considered and those effects that are ignored in the calculation of grid point forces in the global coordinate system:

Contributions Included	Contributions Ignored
Applied Loads	GENEL Forces
SPC Forces	DMIG and DMI Forces
Element Elastic Forces	Boundary Loads from Upstream Superelements
Thermal Loads	
MPC and Element Forces	

9. Only the element elastic forces are included when the grid point forces are aligned with the edges of elements.
10. In inertia relief analysis, the GPFORCE output related to SPCFORCES and applied loads is interpreted differently for SOLs 101 and 200:
- In SOLs 101 and 200, the SPCFORCE and applied load output includes both the effect of inertial loads and applied loads.
11. Grid point force output is available for nonlinear static analysis (SOLs 106 and 601). All other nonlinear solution sequences do not support grid point force output. PARAM,NOELOF and PARAM,NOELOP are not supported in nonlinear static analysis; therefore, Remarks 3,4,5 and 7 do not apply to SOL 106.

## 294 GPKE Grid Point Kinetic Energy Output Request

### GPKE Grid Point Kinetic Energy Output Request

Requests the output of the kinetic energy at selected grid points in normal modes analysis only.

#### Format:

$$\text{GPKE} \left[ \begin{array}{c} \text{PRINT} \\ \text{NOPRINT} \end{array} \right], (\text{PUNCH}, \text{THRESH} = e) = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

#### Examples:

```
GPKE=ALL  
GPKE (PRINT, PUNCH)=19
```

#### Describers:

Describer	Meaning
PRINT	The printer will be the output medium.
NOPRINT	Generates, but does not print, grid point kinetic energy output.
PUNCH	The punch file will be the output medium.
e	Minimum energy threshold. Only energies above this value will be printed and/or punched.
ALL	Grid point kinetic energy for all grid points will be output.
n	Set identification number of a previously appearing SET command. Only grid points with identification numbers that appear on this SET command will be included in the output. (Integer>0)
NONE	Grid point kinetic energy for no points will be output.

#### Remarks:

1. Grid point kinetic energy is only available for normal modes analysis.
2. Both PRINT and PUNCH may be requested.
3. GPKE=NONE overrides an overall output request.

4. For models using the lumped mass formulation, the grid point kinetic energy can be used to examine the distribution of kinetic energy among the grid points. It is computed as:

$$E_{k_g} = \Phi_g^{mass} \otimes [M_{gg} \Phi_g^{mass}]$$

where  $f_g^{mass}$  is the mass-normalized eigenvector so that the total grid point kinetic energy is scaled to be unity. Note that the operator shown in the previous equation indicates term-wise matrix multiplication.

5. The grid point kinetic energy output has limited meaning for a coupled mass formulation. Since this mass formulation produces a coupling of mass across grid points, the sharing of kinetic energy among grid points can occur. In general, this obscures the meaning of the computation as a means of identifying important model parameters to control modal behavior.

## 296 GPRSORT Composites Ply Results Sorted Output

### GPRSORT Composites Ply Results Sorted Output

Requests that the output of composites ply results (stress, strain and failure indices) on elements referencing a PCOMPG be sorted by global ply ID, then by element ID, versus by element ID, then by global ply ID.

#### Formats:

$$\text{GPRSORT} = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

#### Examples:

```
GPRSORT = ALL  
GPRSORT = 16
```

#### Describers:

Describer	Meaning
n	Set identification number of a previously appearing SET command.
ALL	All composite elements referencing a PCOMPG property entry type. See Remarks.

#### Remarks:

1. Composite element output will be sorted by global ply ID, and by element ID. This sorted output is only available for composite elements referencing a PCOMPG property entry, which includes global ply IDs.
2. Composite elements referencing the PCOMP property entry will be excluded from the sorted output.



**GPSDCON**    Grid Point Stress Discontinuity Output Request

Requests mesh stress discontinuities based on grid point stresses.

**Format:**

$$\text{GPSDCON} \begin{bmatrix} \text{PRINT} \\ \text{PLOT} \end{bmatrix} = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

```
GPSDCON=ALL
GPSDCON=19
```

**Describers:**

Describer	Meaning
ALL	Stress discontinuity requests for all SURFACE and VOLUME commands defined in the OUTPUT(POST) section will be output.
n	Set identification number of a previously appearing SET command. Only surfaces and volumes with identification numbers that appear on this SET command will be included in the stress discontinuity output request. (Integer>0)
NONE	No grid point stress discontinuity output.



**Remarks:**

1. This output is available in linear static analysis SOLs 101 and 144 only. Output will be presented for each surface or volume as a tabular listing of stress discontinuities for each subcase.
2. Only elements used to define the surface or volume are output. See the description for the SURFACE or VOLUME commands.
3. Element stress output (STRESS) must be requested for elements referenced on SURFACE and VOLUME commands. Also, the GPSTRESS command must be present for printed output and the STRFIELD command for postprocessing output using the .xdb file (PARAM,POST,0) for the same surfaces and volumes.

## 298 GPSTRAIN Grid Point Strain Output Request for Printing Only

### GPSTRAIN      Grid Point Strain Output Request for Printing Only

Requests grid point strains for printing only.

**Format:**

$$\text{GPSTRAIN} \begin{bmatrix} \text{PRINT} \\ \text{PLOT} \end{bmatrix} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
GPSTRAIN=ALL  
GPSTRAIN=19
```

**Describers:**

Describer	Meaning
ALL	Grid point strain requests for all SURFACE and VOLUME commands defined in the OUTPUT(POST) section will be output.
n	Set identification number of a previously appearing SET command. Only surfaces and volumes with identification numbers that appear on this SET command will be included in the grid point strain output request. (Integer>0)
NONE	No grid point strain output.

**Remarks:**

1. For statics, normal modes and transient analysis output will be presented for each surface or volume as a tabular listing of grid point strains for each load, eigenvalue, and time step. (See “DISPLACEMENT” for a discussion of SORT1 and SORT2.)
2. Only grid points connected to elements used to define the surface or volume are output. See the description for “SURFACE” and “VOLUME” .
3. Element strain output (STRAIN) must be requested for elements referenced on SURFACE and VOLUME commands.
4. In nonlinear transient analysis, grid point strains are computed only if parameter LGDISP is -1, which is the default, and for elements with linear material properties only.

5. For the graphical display of grid point strains in the computation of mesh strain discontinuities, the STRFIELD command must be specified.

## 300 GPSTRESS

### Grid Point Stress Output Request

## GPSTRESS

### Grid Point Stress Output Request

Requests grid point stresses.

**Format:**

$$\text{GPSTRESS} \begin{bmatrix} \text{PRINT} \\ \text{PLOT} \end{bmatrix} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
GPSTRESS=ALL  
GPSTRESS=19
```

**Describers:**

Describer	Meaning
ALL	Grid point stress requests for all SURFACE and VOLUME commands defined in the OUTPUT(POST) section will be output.
n	Set identification number of a previously appearing SET command. Only surfaces and volumes with identification numbers that appear on this SET command will be included in the grid point stress output request. (Integer>0)
NONE	No grid point stress output.

**Remarks:**

1. For statics, normal modes and transient analysis output will be presented for each surface or volume as a tabular listing of grid point stresses for each load, eigenvalue, and time step. (See “DISPLACEMENT” for a discussion of SORT1 and SORT2.)
2. Only grid points connected to elements used to define the surface or volume are output. See the description for “SURFACE” and “VOLUME” .
3. Element stress output (STRESS) must be requested for elements referenced on SURFACE and VOLUME commands.
4. In nonlinear transient analysis, grid point stresses are computed only if parameter LGDISP is -1, which is the default, and for elements with linear material properties only. Grid point stresses are not computed for the hyperelastic elements.

5. For the graphical display of grid point stresses in the computation of mesh stress discontinuities, the STRFIELD command must be specified.
6. Grid point stress is not output for midside nodes.

## 302 GROUNDCHECK Rigid Body Motion Grounding Check

### GROUNDCHECK Rigid Body Motion Grounding Check

Perform grounding check analysis on stiffness matrix to expose unintentional constraints by moving the model rigidly.

#### Format:

$$\text{GROUNDCHECK} \left[ \left( \begin{array}{l} \text{PRINT} \\ \text{NOPRINT} \end{array} \right), \text{PUNCH, SET} = \left( \left\{ \begin{array}{l} \text{G, N, N + AUTOSPC, F, A} \\ \text{ALL} \end{array} \right\} \right) \right] = \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

$$\left[ \text{GRID} = \text{gid, THRESH} = \text{e, DATAREC} = \left( \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right), (\text{RTHRESH} = \text{r}) \right]$$

#### Examples:

GROUNDCHECK=YES  
GROUNDCHECK (GRID=12, SET=(G, N, A), THRESH=1.E-5, DATAREC)=YES

#### Describers:

Describer	Meaning
PRINT	Writes output to the print file. (Default)
NOPRINT	Does not write output to the print file.
PUNCH	Writes output to the punch file.
SET	Selects degree-of-freedom set(s). (Default: SET=G).
gid	Reference grid point for the calculation of the rigid body motion.
e	Maximum strain energy which passes the check. The default value is computed by dividing the largest term in the stiffness matrix by 1.E10.
DATAREC	Requests data recovery of grounding forces. (Default: DATAREC=NO)
r	Grounding forces which are larger than r percent of the largest grounding force will be printed if DATAREC=YES. (Default=10%)

#### Remarks:

1. GROUNDCHECK must be specified above the subcase level.

2. SET=N+AUTOSPC uses the stiffness matrix for the n-set with the rows corresponding to degrees-of-freedom constrained by the PARAM,AUTOSPC operation zeroed out. If AUTOSPC was not performed, then this check is redundant with respect to SET=N.

## 304 GUST Aerodynamic Gust Load Requests

### **GUST** Aerodynamic Gust Load Requests

Selects the gust field in an aeroelastic response problem.

#### **Format:**

GUST=*n*

#### **Examples:**

GUST=73

#### **Describers:**

<b>Describer</b>	<b>Meaning</b>
<i>n</i>	Set identification of a GUST Bulk Data entry. (Integer>0)

#### **Remarks:**

The choice of transient or frequency response GUST depends upon the type of TLOAD or RLOAD referenced on the selected GUST entry.



**HARMONICS**    Harmonic Analysis or Printout Control

Controls the number of harmonics output in axisymmetric shell or axisymmetric fluid problems; controls the number of harmonics to be used for analysis in cyclic symmetry problems.

**Format for Axisymmetric Problems:**

$$\text{HARMONICS} = \left\{ \begin{array}{c} \text{ALL} \\ \text{NONE} \\ h \end{array} \right\}$$

**Format for Cyclic Symmetric Problems:**

$$\text{HARMONICS} = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

HARMONICS=ALL  
HARMONICS=32

**Describers:**

Describer	Meaning
ALL	All harmonics will be output in the case of axisymmetric shell or axisymmetric fluid problems. All harmonics will be used for analysis in cyclic symmetry problems.
NONE	No harmonics will be output. This option is not available for use in cyclic symmetry problems.
h	Available harmonics up to and including harmonic h will be output in the case of axisymmetric shell or axisymmetric fluid problems. (Integer ≥ 0)
n	Harmonics specified in SET n will be used for analysis in cyclic symmetry problems. (Integer>0)

**Remarks:**

1. If no HARMONICS command is present in the Case Control Section for axisymmetric shell or fluid problems, printed output is prepared only for the zero harmonic.



## 306 HARMONICS

### Harmonic Analysis or Printout Control

2. This command must be present in cyclic symmetry problems with HARMONICS=ALL or n; otherwise, the program will abort without performing any analysis.
3. In cyclic symmetry analysis, n must be defined as a set of integers on a SET command.

**HDOT** Heat Transfer Rate of Change of Enthalpy Output Request

Requests form of rate of change of enthalpy vector output in transient heat transfer analysis (SOL 159).

**Format:**

$$\text{HDOT} \left( \left( \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right] \right) \right) = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

HDOT=5

**Describers:**

Describer	Meaning
SORT1	Output will be presented as a tabular listing of grid points for each time.
SORT2	Output will be presented as a tabular listing of time for each grid point.
PRINT	The printer will be the output medium.
PUNCH	The punch file will be the output medium.
PLOT	Generates but does not print rate of change of enthalpy.
ALL	Rate of change of enthalpy for all points will be output.
NONE	Rate of change of enthalpy for no points will be output.
n	Set identification of previously appearing SET command. Only rates of change of enthalpy for points with identification numbers that appear on this SET command will be output. (Integer>0)

**Remarks:**

HDOT=NONE is used to override a previous HDOT=n or HDOT=ALL command.

## 308 HOUTPUT Harmonic Output Request in Cyclic Symmetry Problems

### HOUTPUT Harmonic Output Request in Cyclic Symmetry Problems

Requests harmonic output in cyclic symmetry problems.

**Format:**

$$\text{HOUTPUT}[(C, S, C^*, S^*)] = \left\{ \begin{array}{c} \text{ALL} \\ K \end{array} \right\}$$

**Examples:**

```
HOUTPUT=ALL  
HOUTPUT (C, S) =5
```

**Describers:**

Describer	Meaning
C, S, C*, S*	Harmonic coefficients. See Remark 4 .
ALL	All harmonics will be output.
k	Set identification number of harmonics for output. (Integer>0)

**Remarks:**

1. Set k must be defined on a SET command and output will be computed for all available harmonics in SET k.
2. HOUTPUT=ALL requests output for all harmonics specified on the HARMONICS command.
3. Either the HOUTPUT or NOUTPUT command is required to obtain data recovery in cyclic symmetry analysis.
4. C and S correspond to the cosine and sine coefficients when the STYPE field is ROT or AXI on the CYSYM Bulk Data entry.

C, S, C\*, and S\* correspond to the cosine symmetric, sine symmetric, cosine antisymmetric, and sine antisymmetric coefficients respectively, when the STYPE field is DIH on the CYSYM Bulk Data entry.

**IC** Transient Initial Condition Set Selection

Selects the initial conditions for transient analyses (SOLs 109, 112, 129, 159, 601, and 701).

**Format:**

$$\text{IC} \begin{bmatrix} \text{PHYSICAL} \\ \text{MODAL} \\ \text{STATSUB[,DIFFK]} \end{bmatrix} = n$$

**Examples:**

```
IC = 17
IC (PHYSICAL) = 10
IC (MODAL) = 20
IC (STATSUB) = 30
IC (STATSUB,DIFFK) = 1030
```

**Describers:**

Describer	Meaning
PHYSICAL	The TIC bulk entries selected by set <i>n</i> define initial conditions for coordinates involving grid and scalar points (default). See Remark 6.
MODAL	The TIC bulk entries selected by set <i>n</i> define initial conditions for modal coordinates. See Remarks 3 and 6.
STATSUB	Use the solution of the static analysis subcase <i>n</i> as the initial conditions. See Remark 4.
DIFFK	Include the effects of differential stiffness in the solution. See Remarks 4 and 5.
<i>n</i>	For the PHYSICAL option, <i>n</i> is the set identification number of TIC bulk entries for structural analysis (SOLs 109, 112, 129, 601, and 701) or TEMP and TEMPD bulk entries for heat transfer analysis (SOL 159). For the MODAL option, <i>n</i> is the set identification number of TIC bulk entries for modal transient analysis (SOL 112). For the STATSUB option, <i>n</i> is the ID of a static analysis subcase (SOL 109 and 112). (Integer>0)

## 310 IC Transient Initial Condition Set Selection

### Remarks:

1. For structural analysis, TIC bulk entries will not be used (therefore, no initial conditions) unless selected in the case control section.
2. Only the PHYSICAL option (the default) may be specified in direct transient analysis (SOL 109), nonlinear or linear transient analysis (SOL 129), heat transfer analysis (SOL 159), advanced implicit nonlinear analysis (SOL 601,N), and advanced explicit nonlinear analysis (SOL 701).
3. IC(MODAL) may be specified only in modal transient analysis (SOL 112).
4. IC(STATSUB) and IC(STATSUB,DIFFK) may not both be specified in the same execution. They are only applicable to direct transient (SOL 109) and modal transient (SOL 112), but not in a DMP solution.
5. The DIFFK keyword is meaningful only when used in conjunction with the STATSUB keyword.
6. Initial condition definitions on extra points are not supported and will be ignored.
7. The IC case control command is not supported in multiple subcases.

4

CASE

## **INCLUDE**    Insert External File

Inserts an external file into the input file. The INCLUDE statement may appear anywhere within the input data file.

### **Format:**

INCLUDE 'filename'

### **Describers:**

<b>Describer</b>	<b>Meaning</b>
filename	Physical filename of the external file to be inserted. The user must supply the name according to installation or machine requirements. It is recommended that the filename be enclosed within single right-hand quotation marks (').

### **Examples:**

The following INCLUDE statement is used to obtain the Bulk Data from another file called MYBULK.DATA:

```
SOL 101  
CEND  
TITLE=STATIC ANALYSIS  
LOAD=100  
INCLUDE 'MYCASE.DATA'  
BEGIN BULK  
ENDDATA
```

### **Remarks:**

1. INCLUDE statements may be nested; that is, INCLUDE statements may appear inside the external file. The nested depth level must not be greater than 10.
2. The INCLUDE statement does not allow continuations. The total length of the statement must be 72 characters or less.

## 312 K2GG Direct Input Stiffness Matrix Selection

### K2GG Direct Input Stiffness Matrix Selection

Selects direct input stiffness matrices.

#### Format:

K2GG=name

#### Examples:

```
K2GG=KDMIG
K2GG=KDMIG1, KDMIG2, KDMIG3
K2GG=1.25*KDMIG1, 1.0*KDMIG2, 0.75*KDMIG3
SET 100=K1, K2
K2GG=100
```

#### Describers:

Describer	Meaning
name	Name of a [ $k_{gg}^2$ ] matrix that is input on the DMIG Bulk Data entry. (Character) Scale factors may be included (see remarks 4 and 5). See “Matrix Assembly Operations in SubDMAP SEMG” in the <i>NX Nastran User’s Guide</i> .

#### Remarks:

1. DMIG matrices will not be used unless selected.
2. Terms are added to the stiffness matrix before any constraints are applied.
3. The matrix must be symmetric and field 4 on the DMIG,name entry must contain the integer 6.
4. The associated DMIG matrices can be scaled using either in-line scale factors on K2GG (for example, K2GG=1.25\*KDMIG1), using the parameter CK2 (for example, PARAM,CK2,1.25), or both. See “[Parameter Descriptions](#)”.
5. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

```
K2GG=1.25*KDMIG1,1.0*KDMIG2,0.75*KDMIG3
```

The parameter CK2 when defined will scale all K2GG. For example, if PARAM,CK2,1.30 is defined with the K2GG example above, the result would be K2GG=1.30(1.25\*KDMIG1 + 1.0\*KDMIG2 + 0.75\*KDMIG3).



**K2PP**    Direct Input Stiffness Matrix Selection

Selects direct input stiffness matrices, which are not included in normal modes.

**Format:**

K2PP=name

**Examples:**

```
K2PP=KDMIG
K2PP=KDMIG1, KDMIG2, KDMIG3
K2PP=1.25*KDMIG1, 1.0*KDMIG2, 0.75*KDMIG3
K2PP=(1.25,0.5)*KDMIG1, (1.0,0.0)*KDMIG2, (0.75,-2.2)*KDMIG3
SET 100=K1, K2
K2PP=100
```

**Describers:**

Describer	Meaning
name	Name of a $[k_{pp}^2]$ matrix that is input on the DMIG or DMIAX Bulk Data entry. (Character) Scale factors may be included (see remarks 6 and 7). See “Formulations of Dynamic Equations in SubDMAP GMA” in the <i>NX Nastran User’s Guide</i> .



**Remarks:**

1. DMIG and DMIAX entries will not be used unless selected by the K2PP command.
2. The matrix must be square or symmetric and field 4 on the DMIG,name entry must contain a 1 or 6.
3. It is recommended that PARAM,AUTOSPC,NO be specified. See “Constraint and Mechanism Problem Identification in SubDMAP SEKR” in the *NX Nastran User’s Guide*.
4. K2PP matrices are used only in dynamic response problems. They are not used in normal modes.
5. The K2PP command is supported across subcases. A K2PP command selecting a different DMIG or DMIAX matrix can be defined for each subcase.
6. The associated DMIG matrices can be scaled using in-line scale factors on K2PP (for example, K2PP=1.25\*KDMIG1).

## 314 **K2PP** Direct Input Stiffness Matrix Selection

7. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

```
K2PP=1.25*KDMIG1,1.0*KDMIG2,0.75*KDMIG3
```

**4**

**CASE**

**K42GG**    Direct Input Structural Damping Matrix Selection

Selects direct input structural damping matrices.

**Format:**

K42GG=name

**Examples:**

```
K42GG=KDMIG
K42GG=KDMIG1, KDMIG2, KDMIG3
K42GG=1.25*KDMIG1, 1.0*KDMIG2, 0.75*KDMIG3
SET 100=K1, K2
K42GG=100
```

**Describers:**

Describer	Meaning
name	Name of a $[k^{4,2}_{gg}]$ matrix that is input on the DMIG Bulk Data entry. (Character) Scale factors may be included (see remarks 4 and 5). See “Matrix Assembly Operations in SubDMAP SEMG” in the <i>NX Nastran User’s Guide</i> .



**Remarks:**

1. DMIG matrices will not be used unless selected.
2. Terms are added to the structural damping matrix before any constraints are applied.
3. The matrix must be symmetric and field 4 on the DMIG,name entry must contain the integer 6.
4. The associated DMIG matrices can be scaled using either in-line scale factors on K42GG (for example, K42GG=1.25\*KDMIG1), using the parameter CK42 (for example, PARAM,CK42,1.25), or both. See “[Parameter Descriptions](#)”.
5. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

```
K42GG=1.25*KDMIG1,1.0*KDMIG2,0.75*KDMIG3
```

The parameter CK42 when defined will scale all K42GG. For example, if PARAM,CK42,1.30 is defined with the K42GG example above, the result would be K42GG=1.30(1.25\*KDMIG1 + 1.0\*KDMIG2 + 0.75\*KDMIG3).

## 316 LABEL Output Label

### LABEL Output Label

Defines a character string that will appear on the third heading line of each page of printer output.

#### Format:

LABEL=label

#### Examples:

```
LABEL=DEMONSTRATION PROBLEM
```

#### Describers:

Describer	Meaning
label	Any character string.

#### Remarks:

1. LABEL appearing at the subcase level will label output for that subcase only.
2. LABEL appearing before all subcases will label any outputs that are not subcase dependent.
3. If no LABEL command is supplied, the label line will be blank.
4. LABEL information is also placed on plotter output as applicable. Only the first 65 characters will appear.

**LINE**    Maximum Lines Per Printed Page

Defines the maximum number of output lines per printed page.

**Format:**

LINE=n

**Examples:**

LINE=35

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Maximum number of output lines per page. (Integer>0; Default = 50)

**Remarks:**

1. For 11 inch paper, 50 lines per page is recommended; for 8-1/2 inch paper, 35 lines per page is recommended.
2. The NASTRAN statement keyword NLINES may also be used to set this value. See the [“nastran Command and NASTRAN Statement”](#) .

## 318 LOAD External Static Load Set Selection

### LOAD External Static Load Set Selection

Selects an external static load set.

**For SOLs 601 and 701:** Selects a constant load for advanced nonlinear analysis.

#### Format:

LOAD=n

#### Examples:

LOAD=15

#### Describers:

Describer	Meaning
n	Set identification of at least one external load Bulk Data entry. The set identification must appear on at least one DAREA, FORCE, FORCE1, FORCE2, FORCEAX, GRAV, MOMAX, MOMENT, MOMENT1, MOMENT2, LOAD, PLOAD, PLOAD1, PLOAD2, PLOAD4, PLOADX, QVOL, QVECT, QHBDY, QBDY1, QBDY2, QBDY3, PRESAX, RFORCE, SPCD, or SLOAD entry. (Integer>0)
n (For SOLs 601 and 701)	Set identification of at least one external load Bulk Data entry. The set identification must appear on at least one FORCE, FORCE1, FORCE2, GRAV, MOMENT, MOMENT1, MOMENT2, LOAD, PLOAD, PLOAD1, PLOAD2, PLOAD4, PLOADX1 (SOL 601), RFORCE or SPCD entry. (Integer>0)

#### Remarks:

1. A GRAV entry cannot have the same set identification number as any of the other loading entry types. If it is desired to apply a gravity load along with other static loads, a LOAD Bulk Data entry must be used.
2. LOAD is only applicable in linear and nonlinear statics, inertia relief, differential stiffness, buckling, and heat transfer problems.
3. The total load applied will be the sum of external (LOAD), thermal (TEMP(LOAD)), element deformation (DEFORM), and constrained displacement (SPC) loads.
4. Static, thermal, and element deformation loads should have unique set identification numbers.

**Remarks related to SOLs 601 and 701:**

1. In SOL 601, LOAD may be used in a static or transient analysis.
2. Both DLOAD and LOAD case control commands can be specified in a SOL 601 or 701 analysis. DLOAD is used to select time-dependent loads and LOAD is used to select constant loads.

## 320 LOADSET

### Static Load Set Selection

## LOADSET

### Static Load Set Selection

Selects a sequence of static load sets to be applied to the structural model. The load sets may be referenced by dynamic load commands.

#### Format:

LOADSET=n

#### Examples:

```
LOADSET=100
```

#### Describers:

Describer	Meaning
n	Set identification number of at least one LSEQ Bulk Data entry. (Integer>0)

#### Remarks:

1. When used in superelement analysis, this command must be used for all superelements. The number of static load vectors created for each superelement depends upon the type of analysis. In static analysis, the number of vectors created is equal to the number of unique EXCITEID IDs on all LSEQ entries in the Bulk Data; in dynamic analysis, the number of vectors created is equal to the number of unique DAREA IDs on all RLOAD1, RLOAD2, TLOAD1, TLOAD2 and ACSRCE entries in the Bulk Data.
2. When the LOADSET command is used in superelement statics, the residual structure should have as many loading conditions as the number of unique EXCITEID sets defined on all LSEQ entries. The subcases after the first should contain only SUBTITLE and LABEL information and residual structure output requests. SUBTITLE and LABEL information for all superelements will be obtained from the residual structure.
3. In SOL 101, the design sensitivity output will identify all expanded subcases by a sequence of unique integers beginning with n.
4. In the nonlinear static solution sequences (SOLs 106 and 153) the LOADSET must appear above all subcases and only one LOADSET may be specified.
5. Only one LOADSET command is allowed per superelement.
6. It is no longer necessary to employ LOADSET/LSEQ data to specify static loading data for use in dynamic analysis. In the absence of LOADSET request in



Case Control, all static loads whose load set IDs match the EXCITEID IDs on all RLOAD1, RLOAD2, TLOAD1, TLOAD2 and ACSRCE entries in the Bulk Data are automatically processed.

## 322 M2GG Direct Input Mass Matrix Selection

### M2GG Direct Input Mass Matrix Selection

Selects direct input mass matrices.

#### Format:

M2GG=name

#### Examples:

```
M2GG=MDMIG
M2GG=MDMIG1, MDMIG2, MDMIG3
M2GG=1.25*MDMIG1, 1.0*MDMIG2, 0.75*MDMIG3
SET 100=M1, M2
M2GG=100
```

#### Describers:

Describer	Meaning
name	Name of a $[M_{gg}^2]$ matrix that is input on the DMIG Bulk Data entry. Scale factors may be included (see remarks 4 and 5). See “Matrix Assembly Operations in SubDMAP SEMG” in the <i>NX Nastran User’s Guide</i> . (Character)

#### Remarks:

1. DMIG matrices will not be used unless selected.
2. Terms are added to the mass matrix before any constraints are applied.
3. The matrix must be symmetric and field 4 on the DMIG, name entry must contain a 6.
4. The associated DMIG matrices can be scaled using either in-line scale factors on M2GG (for example, M2GG=1.25\*MDMIG1), using the parameter CM2 (for example, PARAM,CM2,1.25), or both. See “[Parameter Descriptions](#)”.
5. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

```
M2GG=1.25*MDMIG1,1.0*MDMIG2,0.75*MDMIG3
```

The parameter CM2 when defined will scale all M2GG. For example, if PARAM,CM2,1.30 is defined with the M2GG example above, the result would be M2GG=1.30(1.25\*MDMIG1 + 1.0\*MDMIG2 + 0.75\*MDMIG3).

6. M2GG input is not affected by PARAM,WTMASS. M2GG input must either be in consistent mass units or PARAM,CM2 may be used.

## 324 M2PP Direct Input Mass Matrix Selection

### M2PP Direct Input Mass Matrix Selection

Selects direct input mass matrices, which are not included in normal modes.

#### Format:

M2PP=name

#### Examples:

```
M2PP=MDMIG
M2PP=MDMIG1, MDMIG2, MDMIG3
M2PP=1.25*MDMIG1, 1.0*MDMIG2, 0.75*MDMIG3
M2PP=(1.25,0.5)*MDMIG1, (1.0,0.0)*MDMIG2, (0.75,-2.2)*MDMIG3
SET 100=M1, M2
M2PP=100
```

#### Describers:

Describer	Meaning
name	Name of a $[M_{pp}^2]$ matrix that is input on the DMIG or DMIAX Bulk Data entry. Scale factors may be included (see remarks 7 and 8). See “Dynamic Reduction and Component Mode Synthesis in SubDMAP SEMR3” in the <i>NX Nastran User’s Guide</i> . (Character)

#### Remarks:

1. DMIG and DMIAX entries will not be used unless selected by the M2PP input.
2. M2PP input is not affected by PARAM,WTMASS. M2PP input must be in consistent mass units.
3. The matrix must be square or symmetric and field 4 on the DMIG, name entry must contain a 1 or 6.
4. It is recommended that PARAM,AUTOSPC,NO be specified. See “Constraint and Mechanism Problem Identification in SubDMAP SEKR” in the *NX Nastran User’s Guide*.
5. M2PP matrices are used only in dynamic response problems. They are not used in normal modes.
6. The M2PP command is supported across subcases. A M2PP command selecting a different DMIG or DMIAX matrix can be defined for each subcase.

7. The associated DMIG matrices can be scaled using in-line scale factors on M2PP (for example,  $M2PP=1.25*MDMIG1$ ).
8. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

$M2PP=1.25*MDMIG1, 1.0*MDMIG2, 0.75*MDMIG3$

## 326 MASTER

### Redefine the MASTER Subcase

## MASTER

Redefine the MASTER Subcase

Allows the redefinition of a MASTER subcase.

### Format:

SUBCASE n

MASTER

### Examples:

```
SUBCASE 10
MASTER
```

### Remarks:

1. All commands in a MASTER subcase apply to the following subcases until a new MASTER subcase is defined.
2. Suppose that superelement 10 has SPC set 10, MPC set 10, and LOAD sets 101 and 102. Suppose also that superelement 20 has SPC set 20, MPC set 20, and LOAD sets 201 and 202.

The following setup specifies the required subcase structure:

```
TITLE=MY MODEL
DISP=ALL
SEALL=ALL
SUBCASE 101
  MASTER
  SPC=10
  MPC=10
  SUPER=10, 1
  LOAD=101
  LABEL=SUPER 10
  ESE=ALL
SUBCASE 102
  LOAD=102
  SUPER=10, 2
SUBCASE 201
  MASTER
  SPC=20
  MPC=20
  SUPER=20, 1
  LOAD=201
  LABEL=SUPER 20
SUBCASE 202
  LOAD=202
  SUPER=20, 2
```

3. MASTER may also be used to advantage with multiple boundary condition Case Control setups. Suppose that constraint sets 10 and 20 are to be solved with

three loading conditions each: 1, 2, and 3 and 4, 5, and 6, respectively. The following Case Control Section may be used

```
TITLE=MULTIPLE BOUNDARY CONDITIONS
DISP=ALL
SYM 1
MASTER
  SPC=10
  LOAD=1
SYM 2
  LOAD=2
SYM 3
  LOAD=3
SYM 4
  MASTER
  SPC=20
  LOAD=4
SYM 5
  LOAD=5
SYM 6
  LOAD=6
SYMCOM 10
  SYMSEQ=1., 1., 1., -1., -1., -1.
SYMCOM 20
  SYMSEQ=-1., -1., -1., 1., 1., 1.
```

4. The **MASTER** command must appear immediately after a **SUBCASE** or **SYM** command.

**328 MAXLINES**  
Maximum Number of Output Lines

**MAXLINES**      Maximum Number of Output Lines

Sets the maximum number of output lines.

**Format:**

MAXLINES=n

**Examples:**

MAXLINES=150000

**Describers:**

<b>Describer</b>	<b>Meaning</b>
n	Maximum number of output lines allowed. (Integer>0; Default=999999999)

**Remarks:**

1. Any time MAXLINES is exceeded, the program will terminate.
2. MAXLINES does not override any system parameters such as those on Job Control Language commands.
3. MAXLINES may also be specified on the NASTRAN statement with SYSTEM(14). See the [“nastran Command and NASTRAN Statement”](#)..
4. The code actually counts the number of pages and assumes that the number of lines output is the number of lines allowed per page, specified by the “LINES” command, times the number of pages.



**MAXMIN**    MAXMIN Survey Output Request

Specifies options for max/min surveys of certain output data associated with grid points.

**Format:**

$$\text{MAXMIN} \left( \left[ \left\{ \begin{array}{c} \text{MAX} \\ \text{BOTH} \\ \text{MIN} \\ \text{VMAG} \end{array} \right\} [= \text{num}] \right], \left[ \text{CID} = \left\{ \begin{array}{c} \text{GLOBAL} \\ \text{BASIC} \\ \text{cid} \end{array} \right\} \right], \text{oplist}, [\text{COMP} = \text{list}] \right) = \left\{ \begin{array}{c} \text{ALL} \\ \text{n} \\ \text{NONE} \end{array} \right\}$$

**Examples:**

MAXMIN (BOTH=10,CID=1000,DISP,COMP=T1/T3)=501

**Describers:**

Describer	Meaning
MAX	Specifies only maximum values are to be output. See Remark 1 .
MIN	Specifies only minimum values are to be output. See Remark 1 .
BOTH	Specifies both maximum and minimum values are to be output. See Remark 1 .
VMAG	Specifies vector magnitude resultants are to be output. See Remark 2 .
num	The maximum number of values that will be output. See Remark 3 . (Integer>0 , default=5)
CID	Specifies the coordinate system frame of reference in which the max/min values will be output. See Remarks 1 and 3.
GLOBAL	Requests output in the global coordinate system frame of reference.
BASIC	Requests output in the basic coordinate system frame of reference.
cid	Requests output in the local coordinate system defined by cid. (Integer>0)



## 330 MAXMIN MAXMIN Survey Output Request

Describer	Meaning
oplist	Specifies a list of one or more standard Case Control output requests for which max/min results are to be produced. The list may include any of DISP, SPCDF, OLOAD, MPCF, VELO, ACCE or ALL. See Remark 6 . (Character, no default)
list	Specifies a list of grid point degree of freedom (DOF) component directions that will be included in the max/min survey output. The components are separated by slashes and are selected from T1, T2, T3, R1, R2, R3. See Remarks 4 and 5. (Character, default=/T1 /T2 /T3 /R1 /R2 /R3)
ALL	MAXMIN survey results for all points will be output.
NONE	MAXMIN survey results for no points will be output.
n	Set identification of a previously appearing SET command. The max/min results survey will be output only for the points specified in SET n. (Integer>0)

### 4 CASE

#### Remarks:

1. The MAXMIN command produces an algebraically ascending sorted list of the output quantities specified for all of the points in the selected set. MAX refers to the largest magnitude positive values, while MIN refers to the largest magnitude negative values. The output format is similar to that of displacement output. All components will be output for a grid point and the order of the grid points will be in sort on the particular component that was surveyed. The output title contains the identification number of the SET of points participating in the max/min output, the coordinate system frame of reference, the number of MAX and MIN values output and the component that was surveyed. When the output being surveyed is in the global output coordinate system reference frame and BASIC or a local output coordinate system is specified as cid, both the sorted system output and the original reference system output are displayed for the grid point if these systems are different.
2. Vector magnitude results are computed for both translations and rotations and displayed under the T1 and R1 column headings. The presence of the COMP keyword is ignored.
3. The default value of 5 generates a minimum of 10 output lines for the BOTH option. There will be 5 maximum values and 5 minimum values produced. In addition, if coordinate system are involved, both surveyed and original data

will be output. This could result in as many as 10 more lines of output for each surveyed component.

4. Multiple MAXMIN commands may be specified for a subcase. This permits different output quantities to have different MAXMIN specification within a subcase. For example,

```
SET 501=1,3,5,7 THRU 99, 1001,2001
MAXMIN (DISP, COMP=T3)=501
MAXMIN (SPCF, COMP=T1/R3)=ALL
```

specifies different components and output sets for displacements and forces of single point constraint. When multiple component searches are specified using the COMP keyword, separate output tables are produced that contain the results of the max/min survey for each of the components in the list. For example, COMP=T1/R3 produces two surveys, one with the T1 component surveyed and the other with the R3 component surveyed.

5. Scalar point output is included only if component T1 is included in the list.
6. MAXMIN output will only be generated for items in the oplist when there is an associated case control command present. For example, a DISP Case Control command must be present in order for the MAXMIN (DISP)=ALL command to produce output. Use of the ALL keywords for the oplist requests MAXMIN output for all of the output commands acceptable to MAXMIN that are present in case control.

## 332 MBDEXPORT Multi-Body Dynamics Export

### MBDEXPORT Multi-Body Dynamics Export

Generates interface file for third-party multi-body dynamics and control system software during a normal mode solution (SOL 103).

#### Format:

$$\begin{aligned}
 & \text{MBDEXPORT} \left[ \begin{array}{l} \text{RECURDYN} \\ \text{ADAMS} \\ \text{OP4} = \text{urit} \\ \text{MATLAB} \end{array} \right] \left[ \begin{array}{l} \text{STANDARD} \\ \text{STATESPACE} \end{array} \right] \left[ \text{FLEXBODY} = \left\{ \begin{array}{l} \text{NO} \\ \text{YES} \end{array} \right\} \right] \left[ \text{FLEXONLY} = \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\} \right] \\
 & \left[ \text{MINVAR} = \left\{ \begin{array}{l} \text{PARTIAL} \\ \text{CONSTANT} \\ \text{FULL} \\ \text{NONE} \end{array} \right\} \right] \left[ \text{PSETID} = \left\{ \begin{array}{l} \text{NONE} \\ \text{setid} \\ \text{ALL} \\ \text{skturit} \end{array} \right\} \right] \\
 & \left[ \text{OUTGSTRS} = \left\{ \begin{array}{l} \text{NO} \\ \text{YES} \end{array} \right\} \right] \left[ \text{OUTGSTRN} = \left\{ \begin{array}{l} \text{NO} \\ \text{YES} \end{array} \right\} \right] \\
 & \left[ \text{RECVROP2} = \left\{ \begin{array}{l} \text{NO} \\ \text{YES} \end{array} \right\} \right] \left[ \text{CHECK} = \left\{ \begin{array}{l} \text{NO} \\ \text{YES} \end{array} \right\} \right]
 \end{aligned}$$

The general examples, descriptors, and remarks are an overview for all interface types. Below this are specific examples, descriptors, and remarks sections for each interface type.

#### General Examples:

```

MBDEXPORT ADAMS STANDARD FLEXBODY=YES FLEXONLY=NO
MBDEXPORT FLEXBODY=YES MINVAR=FULL
MBDEXPORT OP4=22 STANDARD FLEXBODY=YES
MBDEXPORT OP4=22 STATESPACE FLEXBODY=YES
MBDEXPORT MATLAB STANDARD FLEXBODY=YES
MBDEXPORT MATLAB STATESPACE FLEXBODY=YES

```

#### General Descriptors:

Descriptor	Meaning
ADAMS	Generate ADAMS Interface Modal Neutral File (MNF).
RECURDYN	Generate RecurDyn Flex Input (RFI) file. (default)

<b>Describer</b>	<b>Meaning</b>
OP4	Generate OP4 file.
MATLAB	Generate MATLAB script file.
STANDARD	Matrices are based on standard second order differential equations of motion. (default)
STATESPACE	Matrices are based on first order differential equations that represent the equations of motion, and are suitable for use with control system software.

**General Remarks:**

1. Only one choice of ADAMS, RECURDYN, OP4, or MATLAB is allowed and must immediately follow the MBDEXPORT command.
2. The describers can be truncated to the first 4 characters.
3. STATESPACE is not valid for ADAMS or RECURDYN.

The information from this point on is specific to each interface type.

**RECURDYN STANDARD Describers:**

<b>Describer</b>	<b>Meaning</b>
FLEXBODY	Requests the generation of RFI (required).
NO	Standard NX Nastran solution without RFI creation. (default)
YES	RFI generation requested.
FLEXONLY	Determines if DMAP solution and data recovery runs or not after RFI creation is complete.
YES	Only RFI creation occurs. (default)
NO	RFI file creation occurs along with standard DMAP solution and data recovery.
MINVAR	Determines how mass invariants are computed.

**334 MBDEXPORT**  
Multi-Body Dynamics Export

<b>Describer</b>	<b>Meaning</b>
PARTIAL	Mass invariants 6 and 8 are not computed. (default)
CONSTANT	Mass invariants 1,2,3 and 9 are computed.
FULL	All nine mass invariants are computed.
NONE	No mass invariants are computed.
PSETID	Selects a set of elements defined in the OUTPUT(PLOT) (including PLOTEL) whose connectivity is exported into the RFI. (See Remark 16)
NONE	No specific sets are selected, thus all grids, geometry and associated modal data are written to RFI. (default)
setid	The connectivity of a specific element set is used to export face geometry.
ALL	The connectivity of all element sets are used to export face geometry.
OUTGSTRS	Determines if grid point stress is written to RFI.
NO	Do not write grid point stress to RFI. (default)
YES	Write grid point stress to RFI.
OUTGSTRN	Determines if grid point strain is written to RFI.
NO	Do not write grid point strain to RFI. (default)
YES	Write grid point strain to RFI.
RECVROP2	Requests that the FLEXBODY run output an NX Nastran OP2 file for use in post processing of RecurDyn/Flex results.
NO	OP2 file will not be generated. (default)
YES	OP2 file will be generated.

**4**

**CASE**

**Describer      Meaning**

- CHECK      Requests debug output be written to the f06 file when RECVROP2=YES. (See Remark 20)
- NO      No debug output will be written. (default)
- YES      Debug output will be written.

**RECURDYN STANDARD Remarks:**

1. The creation of the RecurDyn Flex Input file is applicable in a non-restart SOL 103 analysis only. RFI files are named 'jid\_seid.rfi', where seid is the integer number of the superelement (0 for residual-only run). These files are located in the same directory as the jid.f06 file.
2. The creation of the RecurDyn Flex Input file is initiated by MBDEXPORT RECURDYN FLEXBODY=YES (other describers are optional) and the inclusion of the bulk data entry DTI,UNITS.
3. The Data Table Input Bulk Data entry DTI,UNITS, which is required for an MBDEXPORT RECURDYN FLEXBODY=YES run, is used to specify the system of units for the data stored in the RFI (unlike NX Nastran, RecurDyn is not a unitless code). Once identified, the units will apply to all superelements in the model. The complete format is:

```
DTI      UNITS    1            MASS      FORCE      LENGTH    TIME
```

All entries are required. Acceptable character strings are listed below.

**Mass:**

- KG - kilogram
- LBM – pound-mass (0.45359237 kg)
- SLUG – slug (14.5939029372 kg)
- GRAM – gram (1E-3 kg)
- OZM – ounce-mass (0.02834952 kg)
- KLBM – kilo pound-mass (1000 lbm) (453.59237 kg)
- MGG – megagram (1E3 kg)
- MG – milligram (1E-6 kg)



**336 MBDEXPORT**  
**Multi-Body Dynamics Export**

MCG – microgram (1E-9 kg)

NG – nanogram (1E-12 kg)

UTON – U.S. ton (907.18474 kg)

SLI – slinch (175.1268352 kg)

Force:

N – Newton

LBF – pound-force (4.44822161526 N)

KGF – kilograms-force (9.80665 N)

OZF – ounce-force (0.2780139 N)

DYNE – dyne (1E-5 N)

KN – kilonewton (1E3 N)

KLBF – kilo pound-force (1000 lbf) (4448.22161526 N)

MN – millinewton (1E-3 N)

MCN – micronewton (1E-6 N)

NN – nanonewton (1E-9 N)

CN – centinewton (1E-2 N)

P – poundal (0.138254954 N)

Length:

M – meter

KM – kilometer (1E3 m)

CM – centimeter (1E-2 m)

MM – millimeter (1E-3 m)

MI – mile (1609.344 m)

FT – foot (0.3048 m)

IN – inch (25.4E-3 m)

MCM – micrometer (1E-6 m)

NM – nanometer (1E-9 m)

A – Angstrom (1E-10 m)

YD – yard (0.9144 m)



ML – mil (25.4E-6 m)

MCI – microinch (25.4E-9 m)

Time:

S – second

H – hour (3600.0 sec)

MIN-minute (60.0 sec)

MS – millisecond (1E-3 sec)

MCS – microsecond (1E-6 sec)

NS – nanosecond (1E-9 sec)

D – day (86.4E3 sec)

4. Because DTI,UNITS determines all units for the RFI, the units defined in WTMASS, which are important for units consistency in NX Nastran, are ignored in the output to the RFI. For example, if the model mass is in kilograms, force in Newtons, length in meters, and time in seconds, then WTMASS would equal 1 ensuring that NX Nastran works with the consistent set of kg, N, and m. The units written to the RFI would be: “DTI,UNITS,1,KG,N,M,S”.
5. You can create flexible body attachment points by defining the component as a superelement or part superelement, in which case the physical external (a-set) grids become the attachment points; or for a residual-only type model, you can use NX Nastran ASET Bulk Data entries to define the attachment points.
6. The eight mass variants are:

$${}^1 I_{1 \times 1} = \sum_{p=1}^N m_p$$

$${}^2 I_{3 \times 1} = \sum_{p=1}^N m_p s_p$$

$${}^3 I_{3 \times 3} = \sum_{p=1}^N (m_p \tilde{s}_p \tilde{s}_p - I_p)$$

$${}^4 I_j_{3 \times M} = \sum_{p=1}^N m_p \Phi_p \quad j = 1, \dots, M$$

$${}^5 I_j = \sum_{p=1}^N m_p \tilde{s}_p \tilde{\phi}_{pj} \quad j = 1, \dots, M$$

3x3

$${}^6 I_{jk} = \sum_{p=1}^N m_p \tilde{\phi}_{pj} \phi_{pk} \quad j, k = 1, \dots, M$$

3x3

$${}^7 I = \sum_{p=1}^N m_p \tilde{s}_p \Phi_p + \sum_{p=1}^N I_p \Phi_p^*$$

3xM

$${}^8 I_j = \sum_{p=1}^N m_p \tilde{\phi}_{pj} \Phi_p \quad j = 1, \dots, M$$

3xM

$s_p = [xyz]^T$  are the coordinates of grid point  $p$  in the basic coordinate system.

$$s_p = \begin{bmatrix} 0 & -z & y \\ z & 0 & -x \\ -y & x & 0 \end{bmatrix} = \text{skew symmetric vector cross product}$$

operator.

$f_p$  = partitioned orthogonal modal matrix that corresponds to the translational degrees of freedom of grid  $p$ .

$I_p$  = inertia tensor  $p$ .

$f_p^*$  = partitioned orthogonal modal matrix that corresponds to the rotational degrees of freedom of grid  $p$ .

$\tilde{\phi}_{pf}$  = skew-symmetric matrix formed for each grid translational degree of freedom for each mode.

$M$  = number of modes.

$N$  = number of grids.

7. To accurately capture the mode shapes when supplying SPOINT/QSET combinations, the number of SPOINTS (ns) should be at least  $ns=n+(6+p)$ , assuming that residual flexibility is on. In the above equation for ns, the number of modes (n) is specified on the EIGR (METHOD=LAN) or EIGRL Bulk Data entries; the number of load cases is p. In general, you cannot have too many SPOINTS, as excess ones will be truncated with no performance penalty.
8. For FLEXBODY=YES runs, residual vectors for the component should always be calculated as they result in a more accurate representation of the component shapes with little additional computational effort.



9. OMIT or OMIT1 Bulk Data entries are not supported.
10. Lumped mass formulation (default) is required. Either leave PARAM,COUPMASS out of the input file or supply PARAM,COUPMASS,-1 (default) to ensure lumped mass.
11. P-elements are not allowed because they always use a coupled mass formulation. Likewise, the MFLUID fluid structure interface is not allowed because the virtual mass matrix it generates is not diagonal.
12. PARAM,WTMASS,value with a value other than 1.0 may be used with an NX Nastran run generating an RFI. It must have consistent units with regard to the DTI,UNITS Bulk Data entry. Before generating the RFI, NX Nastran will appropriately scale the WTMASS from the physical mass matrix and mode shapes.
13. There is a distinction between how an MBDEXPORT RECURDYN FLEXBODY=YES run handles element-specific loads (such as a PLOAD4 entry) versus those that are grid-specific (such as a FORCE entry), especially when superelements are used. The superelement sees the total element-specific applied load. For grid-specific loads, the loads attached to an external grid will move downstream with the grid. That is to say, it is part of the boundary and not part of the superelement. This distinction applies to a superelement run and not to a residual-only or parts superelement run.
14. The loads specified in NX Nastran generally fall into two categories: non-follower or fixed direction loads (non-circulatory) and follower loads (circulatory). The follower loads are nonconservative in nature. Examples of fixed direction loads are the FORCE entry or a PLOAD4 entry when its direction is specified via direction cosines. Examples of follower loads are the FORCE1 entry or the PLOAD4 entry when used to apply a normal pressure. By default in NX Nastran, the follower loads are always active in SOL 103 and will result in follower stiffness being added to the differential stiffness and elastic stiffness of the structure. In a run with MBDEXPORT RECURDYN FLEXBODY=YES and superelements, if the follower force is associated with a grid description (such as a FORCE1) and the grid is external to the superelement, the follower load will move downstream with the grid. Thus, the downstream follower contribution to the component's stiffness will be lost, which could yield poor results. This caution only applies to a superelement run and not to a residual-only or a part superelement run.
15. OUTGSTRS and OUTGSTRN entries require the use of standard NX Nastran STRESS= or STRAIN= used in conjunction with GPSTRESS= or GPSTRAIN= commands to produce grid point stress or strain. GPSTRESS(PLOT)= or GPSTRAIN(PLOT)= will suppress grid stress or strain print to the NX Nastran .f06 file.

16. To reduce the FE mesh detail for dynamic simulations, PSETID can include the ID of a SET entry. The SET entry lists PLOTTEL or element IDs, whose connectivity is exported into the RFI to display the components in RecurDyn. This option can significantly reduce the size of the RFI without compromising accuracy in the FunctionBay simulation providing that the mass invariant computation is requested. With superelement analysis, for any of these elements that lie entirely on the superelement boundary (all of the elements' grids are attached only to a-set or exterior grids), a SEELT Bulk Data entry must be specified to keep that display element with the superelement component. This can also be accomplished using PARAM, AUTOSEEL,YES. The SEELT entry is not required with parts superelements, as boundary elements stay with their component.

If the SET entry points to an existing set from the OUTPUT(PLOT) section, this single set is used explicitly to define elements that are used to select grids to display the component in RecurDyn. If PSETID does not find the set ID in OUTPUT(PLOT), it will search sets in the case control for a matching set ID. This matching set ID then represents a list of OUTPUT(PLOT) defined elements' sets. The union of which will be used to define a set of PLOTTELS or other elements used to select grids to display the component in RecurDyn. If you wish to select all of the sets in the OUTPUT(PLOT) section, then use PSETID=ALL.

The following element types are not supported for writing to an RFI, nor are they supported as a 'type' entry in a set definition in OUTPUT(PLOT): CAABSF, CAEROi, CDUMi, CHACAB, CHACBR, CHBDYx, CDAMP3, CDAMP4, CELAS3, CELAS4, CFLUIDi, CMASS3, CMASS4, CRAC2D, CRAC3D, CTRMEM, CTWIST, CWEDGE, CWELD, and GENEL.

17. Typical NX Nastran data entry requirements are described below.

Typical Parameters:

- PARAM,RESVEC,character\_value – controls calculation of residual vector modes.
- PARAM,GRDPNT,value - mass invariants  $^1I$ ,  $^2I$ , and  $^3I$  will be computed using results of NX Nastran grid point weight generator execution in the basic coordinate system.

Typical Case Control:

- MBDEXPORT RECURDYN FLEXBODY=YES is required for RFI generation.
- METHOD=n is required before or in the first subcase for modal solutions.
- SUPORT1=seid is necessary to select a static support set for a residual only linear preload run.

- SUPER=*n*,SEALL=*n* is useful with multiple superelement models to select an individual superelement as a flexible body. Cannot be used with a linear STATSUB(PRELOAD) run.

- OUTPUT(PLOT) is necessary to define elements used to select grids to display the component in RecurDyn when PSETID=ALL or setid.

SET *n*=list of elements (including PLOTELS) is used to select grids to display the component.

- OUTPUT(POST) is necessary to define volume and surface for grid stress or strain shapes.

SET *n*=list is a list of elements for surface definition for grid stress or strain shapes.

Stress and strain data in the RFI is limited to the six components (that is, 3 normal and 3 shear) for a grid point for a given mode.

SURFACE *n* SET *n* NORMAL *z3* is used to define a surface for writing stress and strain data. Only one FIBER selection is allowed for each SURFACE, thus the use of the FIBER ALL keyword on the SURFACE case control command will write stresses to the RFI at the Z1 fiber location only.

Since the FIBER keyword only applies to stresses, strain data will always be written to the RFI at the MID location.

Stress and strain data at grid points can only be written to the RFI for surface and volume type elements (for example, CQUAD and CHEXA).

VOLUME *n* SET *n* is a volume definition.

The default SYSTEM BASIC is required with SURFACE or VOLUME.

- STRESS(PLOT) is necessary for stress shapes.
- STRAIN(PLOT) is necessary for strain shapes.
- GPSTRESS(PLOT) is necessary for grid point stress shapes to be included in the RFI.
- GPSTRAIN(PLOT) is necessary for grid point strain shapes to be included in the RFI.

Typical Bulk Data:

- DTI,UNITS,1,MASS,FORCE,LENGTH,TIME is required for RFI generation. For input files containing superelements, this command must reside in the main bulk data section.

- SPOINT,id\_list defines and displays modal amplitude.
  - SESET,SEID,grid\_list defines a superelement (see GRID and BEGIN BULK SUPER=). The exterior grids will represent the attachment points along with the q-set.
  - SEELT,SEID,element\_list reassigns superelement boundary elements to an upstream superelement.
  - RELEASE,SEID,C,Gi is an optional entry that removes DOFs from an attachment grid for which no constraint mode is desired. For example, this allows the removal of rotational degrees of freedom from an analysis where only translational degrees of freedom are required.
  - SEQSET,SEID,spoint\_list defines modal amplitudes of a superelement (see SEQSET1).
  - SENQSET,SEID,N defines modal amplitudes of a part superelement. It must reside in the main Bulk Data Section.
  - ASET,IDI,Ci defines attachment points for a residual-only run (see ASET1).
  - QSET1,C,IDI defines modal amplitudes for the residual structure or modal amplitudes for a part superelement (see QSET).
  - SUPORT1,SID,IDI,Ci defines the static support for a preload condition with a residual-only run. This entry is case control selectable. Do not use SUPORT.
  - PLOTEL,EID,Gi can be used, along with existing model elements, to define elements used to select grids to display the components in RecurDyn.
  - EIGR,SID,METHOD,... obtains real eigenvalue extraction (see EIGRL).
18. MBDEXPORT and ADAMSMNF case control entries cannot be used in the same analysis run. In other words, a RecurDyn RFI file or an ADAMS MNF file can be generated during a particular NX Nastran execution, but not both files at the same time. Attempting to generate both files in the same analysis will cause an error to be issued and the execution to be terminated.
19. The RECVROP2=YES option is used when you would like results recovery (using the MBDRECVR case control entry) from an RecurDyn/Flex analysis. This option requires the following assignment command:
- ```
ASSIGN OUTPUT2='name.out' STATUS=UNKNOWN UNIT=20  
FORM=UNFORM
```

be inserted into the file management section of the NX Nastran input file. It will cause an OP2 file with a .out extension to be generated, which then can be used as input into an NX Nastran SOL 103 run using the MBDRECVR case control capability to perform results recovery from an RecurDyn/Flex analysis. FLEXBODY=YES is required with its use.

The data blocks output are:

MGGEW - physical mass external sort with weight mass removed  
 MAAEW - modal mass  
 KAAE - modal stiffness  
 CMODEXT - component modes.

This capability is limited to no more than one superelement per NX Nastran model. Residual-only analyses are supported.

20. Setting CHECK=YES (which is only available when RECVROP2=YES) is *not* recommended for models of realistic size due to the amount of data that will be written to the f06.
21. The MBDEXPORT data routines use the environment variable TMPDIR for temporary storage during the processing of mode shape data. As a result, TMPDIR must be defined when using MBDEXPORT. TMPDIR should equate to a directory string for temporary disk storage, preferably one with a large amount of free space.

**ADAMS STANDARD Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                          |
|------------------|-------------------------------------------------------------------------|
| FLEXBODY         | Requests the generation of MNF.                                         |
| NO               | Standard NX Nastran solution without MNF creation. (default)            |
| YES              | MNF generation requested.                                               |
| FLEXONLY         | Determines if DMAP solution runs or not after MNF creation is complete. |
| YES              | Only MNF creation occurs. (default)                                     |
| NO               | MNF file creation occurs along with standard DMAP solution.             |
| MINVAR           | Determines how mass invariants are computed.                            |
| PARTIAL          | Mass invariants 5 and 9 are not computed. (default)                     |

## 344 MBDEXPORT Multi-Body Dynamics Export

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                            |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CONSTANT         | Mass invariants 1,2,6 and 7 are computed.                                                                                                                                                 |
| FULL             | All nine mass invariants are computed.                                                                                                                                                    |
| NONE             | No mass invariants are computed.                                                                                                                                                          |
| PSETID           | Selects a set of elements defined in the OUTPUT(PLOT) section (including PLOTEL) or on a sketch file whose connectivity is exported to face geometry to be used in ADAMS. (See Remark 15) |
| NONE             | All grids, geometry and associated modal data is written to MNF. (default)                                                                                                                |
| setid            | The connectivity of a specific element set is used to export face geometry.                                                                                                               |
| ALL              | The connectivity of all element sets are used to export face geometry.                                                                                                                    |
| sktunit          | The connectivity of element faces defined on a sketch file is used to export face geometry. Note that the value must be a negative number to distinguish it from a setid value.           |
| OUTGSTRS         | Determines if grid point stress is written to MNF.                                                                                                                                        |
| NO               | Do not write grid point stress to MNF. (default)                                                                                                                                          |
| YES              | Write grid point stress to MNF.                                                                                                                                                           |
| OUTGSTRN         | Determines if grid point strain is written to MNF.                                                                                                                                        |
| NO               | Do not write grid point strain to MNF. (default)                                                                                                                                          |
| YES              | Write grid point strain to MNF.                                                                                                                                                           |
| RECVROP2         | Requests that the FLEXBODY run output an NX Nastran OP2 file for use in post processing of ADAMS/Flex results.                                                                            |
| NO               | OP2 file will not be generated. (default)                                                                                                                                                 |
| YES              | OP2 file will be generated.                                                                                                                                                               |



| <b>Describer</b> | <b>Meaning</b>                                                                      |
|------------------|-------------------------------------------------------------------------------------|
| CHECK            | Requests debug output be written to the f06 file when RECVROP2=YES. (See Remark 18) |
| NO               | No debug output will be written. (default)                                          |
| YES              | Debug output will be written.                                                       |

**ADAMS STANDARD Remarks:**

1. The creation of the Adams MNF, which is applicable in a non-restart SOL 103 analysis only, is initiated by MBDEXPORT ADAMS FLEXBODY=YES (other describers are optional) and the inclusion of the bulk data entry DTI,UNITS. MNF files are named 'jid\_seid.mnf', where seid is the integer number of the superelement (0 for residual-only run). The location of these files is the same directory as the jid.f06 file.
2. The Data Table Input Bulk Data entry DTI,UNITS, which is required for an MBDEXPORT ADAMS FLEXBODY=YES run, is used to specify the system of units for the data stored in the MNF. Unlike NX Nastran, ADAMS is not a unitless code. Once identified, the units will apply to all superelements in the model. The complete format is:

```
DTI      UNITS    1      MASS      FORCE      LENGTH  TIME
```

All entries are required. Acceptable character strings are listed below.

Mass:

- KG - kilogram
- LBM – pound-mass (0.45359237 kg)
- SLUG – slug (14.5939029372 kg)
- GRAM – gram (1E-3 kg)
- OZM – ounce-mass (0.02834952 kg)
- KLBM – kilo pound-mass (1000 lbm) (453.59237 kg)
- MGG – megagram (1E3 kg)
- MG – milligram (1E-6 kg)
- MCG – microgram (1E-9 kg)
- NG – nanogram (1E-12 kg)
- UTON – U.S. ton (907.18474 kg)

**346 MBDEXPORT**  
**Multi-Body Dynamics Export**

SLI – slinch (175.1268352 kg)

Force:

N – Newton

LBF – pound-force (4.44822161526 N)

KGF – kilograms-force (9.80665 N)

OZF – ounce-force (0.2780139 N)

DYNE – dyne (1E-5 N)

KN – kilonewton (1E3 N)

KLBF – kilo pound-force (1000 lbf) (4448.22161526 N)

MN – millinewton (1E-3 N)

MCN – micronewton (1E-6 N)

NN – nanonewton (1E-9 N)

Length:

M – meter

KM – kilometer (1E3 m)

CM – centimeter (1E-2 m)

MM – millimeter (1E-3 m)

MI – mile (1609.344 m)

FT – foot (0.3048 m)

IN – inch (25.4E-3 m)

MCM – micrometer (1E-6 m)

NM – nanometer (1E-9 m)

A – Angstrom (1E-10 m)

YD – yard (0.9144 m)

ML – mil (25.4E-6 m)

MCI – microinch (25.4E-9 m)

Time:

S – second

H – hour (3600.0 sec)

**4**

**CASE**

- MIN-minute (60.0 sec)
- MS – millisecond (1E-3 sec)
- MCS – microsecond (1E-6 sec)
- NS – nanosecond (1E-9 sec)
- D – day (86.4E3 sec)

3. Since DTI,UNITS determines all units for the MNF, the units defined in WTMASS, which are important for units consistency in NX Nastran, are ignored in the output to the MNF. For example, if the model mass is in kilograms, force in Newtons, length in meters, and time in seconds, then WTMASS would equal 1, ensuring that NX Nastran works with the consistent set of kg, N, and m. The units written to the MNF would be: “DTI,UNITS,1,KG,N,M,S”.
4. You can create flexible body attachment points by defining the component as a superelement or part superelement, in which case the physical external (a-set) grids become the attachment points. For a residual-only type model, you can use standard NX Nastran ASET Bulk Data entries to define the attachment points.
5. The nine mass variants are:

$${}^1_I \begin{matrix} N \\ 1 \times 1 \end{matrix} = \sum_{p=1}^N m_p$$

$${}^2_I \begin{matrix} N \\ 3 \times 1 \end{matrix} = \sum_{p=1}^N m_p s_p$$

$${}^3_{I_j} \begin{matrix} N \\ 3 \times M \end{matrix} = \sum_{p=1}^N m_p \Phi_p \quad j = 1, \dots, M$$

$${}^4_I \begin{matrix} N \\ 3 \times M \end{matrix} = \sum_{p=1}^N m_p s_p \bar{\Phi}_{-p} + I_p \Phi_p^*$$

$${}^5_{I_j} \begin{matrix} N \\ 3 \times M \end{matrix} = \sum_{p=1}^N m_p \check{\Phi}_{pj} \Phi_p \quad j = 1, \dots, M$$

$${}^6_I \quad M \times M = \sum_{p=1}^N m_p \Phi_p^T \Phi_p + \Phi_p^{*T} I_p \Phi_p^*$$

$${}^7_I \quad 3 \times 3 = \sum_{p=1}^N m_p s_p^{\sim T} s_p + I_p$$

$${}^8_{I_j} \quad 3 \times 3 = \sum_{p=1}^N m_p s_p \check{\Phi}_{pj} \quad j = 1, \dots, M$$

$${}^9_{I_{jk}} \quad 3 \times 3 = \sum_{p=1}^N m_p \check{\Phi}_{pj} \phi_{pk} \quad j, k = 1, \dots, M$$

$s_p = [xyz]^T$  are the coordinates of grid point  $p$  in the basic coordinate system.

$$s_p = \begin{bmatrix} 0 & -z & y \\ z & 0 & -x \\ -y & x & 0 \end{bmatrix} = \text{skew symmetric vector cross product}$$

operator.

$f_p$  = partitioned orthogonal modal matrix that corresponds to the translational degrees of freedom of grid  $p$ .

$I_p$  = inertia tensor  $p$ .

$f_p^*$  = partitioned orthogonal modal matrix that corresponds to the rotational degrees of freedom of grid  $p$ .

$\check{\Phi}_{pf}$  = skew-symmetric matrix formed for each grid translational degree of freedom for each mode.

$M$  = number of modes.

$N$  = number of grids.

- To accurately capture the mode shapes when supplying SPOINT/QSET combinations, the number of SPOINTS (ns) should be at least  $ns=n+(6+p)$ , assuming that residual flexibility is on. In the above equation for ns, the number

of modes (n) is specified on the EIGR (METHOD=LAN) or EIGRL Bulk Data entries; the number of load cases is p. In general, you cannot have too many SPOINTS, as excess ones are truncated with no performance penalty.

7. For FLEXBODY=YES runs, residual vectors for the component should always be calculated as they result in a more accurate representation of the component shapes at little additional cost.
8. OMIT or OMIT1 Bulk Data entries are not supported.
9. Lumped mass formulation (default) is required. Either leave PARAM,COUPMASS out of the input file or supply PARAM,COUPMASS,-1 (default) to ensure lumped mass.
10. P-elements are not allowed because they always use a coupled mass formulation. Likewise, the MFLUID fluid structure interface is not allowed because the virtual mass matrix it generates is not diagonal.
11. PARAM,WTMASS,value with a value other than 1.0 may be used with an NX Nastran run generating an MNF. It must have consistent units with regard to the DTI,UNITS Bulk Data entry. Before generating the MNF, NX Nastran will appropriately scale the WTMASS from the physical mass matrix and mode shapes.
12. There is a distinction between how an MBDEXPORT ADAMS FLEXBODY=YES run handles element-specific loads (such as a PLOAD4 entry) versus those that are grid-specific (such as a FORCE entry), especially when superelements are used. The superelement sees the total element-specific applied load. For grid-specific loads, the loads attached to an external grid will move downstream with the grid. That is to say, it is part of the boundary and not part of the superelement. This distinction applies to a superelement run and not to a residual-only or parts superelement run.
13. The loads specified in NX Nastran generally fall into two categories: non-follower or fixed direction loads (non-circulatory) and follower loads (circulatory). The follower loads are nonconservative in nature. Examples of fixed direction loads are the FORCE entry or a PLOAD4 entry when its direction is specified via direction cosines. Examples of follower loads are the FORCE1 entry or the PLOAD4 entry when used to apply a normal pressure. By default in NX Nastran, the follower loads are always active in SOL 103 and will result in follower stiffness being added to the differential stiffness and elastic stiffness of the structure. In a run with MBDEXPORT ADAMS FLEXBODY=YES and superelements, if the follower force is associated with a grid description (such as a FORCE1) and the grid is external to the superelement, the follower load will move downstream with the grid. Thus, the downstream follower contribution to the component's stiffness will be lost, which could yield poor results. This

caution only applies to a superelement run and not to a residual-only or a part superelement run.

14. OUTGSTRS and OUTGSTRN entries require the use of standard NX Nastran STRESS= or STRAIN= used in conjunction with GPSTRESS= or GPSTRAIN= commands to produce grid point stress or strain. GPSTRESS(PLOT)= or GPSTRAIN(PLOT)= will suppress grid stress or strain print to the NX Nastran .f06 file.
15. To reduce the FE mesh detail for dynamic simulations, PSETID (on the MBDEXPORT Case Control command) defined with a SET entry (i.e. setid) is used to define a set of PLOTTELs or other elements used to select grids to display the components in ADAMS. This option can significantly reduce the size of the MNF without compromising accuracy in the ADAMS simulation providing that the mass invariant computation is requested. With superelement analysis, for any of these elements that lie entirely on the superelement boundary (all of the elements' grids attached only to a-set or exterior grids), a SEELT Bulk Data entry must be specified to keep that display element with the superelement component. This can also be accomplished using PARAM, AUTOSEEL,YES. The SEELT entry is not required with parts superelements, as boundary elements stay with their component.

**4**  
CASE

If the SET entry points to an existing set from the OUTPUT(PLOT) section, this single set is used explicitly to define elements used to select grids to display the component in ADAMS. If PSETID does not find the set ID in OUTPUT(PLOT), it will search sets in the case control for a matching set ID. This matching set ID list then represents a list of OUTPUT(PLOT) defined elements' sets, the union of which will be used to define a set of PLOTTELs or other elements used to select grids to display the component in ADAMS. If the user wishes to select all of the sets in the OUTPUT(PLOT) section, then use PSETID=ALL.

The following element types are not supported for writing to an MNF, nor are they supported as a 'type' entry in a set definition in OUTPUT(PLOT): CAABSF, CAEROi, CDUMi, CHACAB, CHACBR, CHBDYx, CDAMP3, CDAMP4, CELAS3, CELAS4, CFLUIDi, CMASS3, CMASS4, CRAC2D, CRAC3D, CTRMEM, CTWIST, CWEDGE, CWELD, and GENEL.

PSETID can also point to a sketch file using PSETID= – sktunit, where sktunit references an ASSIGN statement of the form:

```
ASSIGN SKT='sketch_file.dat',UNIT=sktunit.
```

The grids defined for the elements' faces in the sketch file, along with *all* external (i.e. boundary) grids for the superelements, will be the only grids (and their associated data) written to the MNF.

The format of the sketch file, which describes the mesh as a collection of faces, must be as follows:

```

face_count
face_1_node_count face_1_nodeid_1 face_1_nodeid_2 ...
face_2_node_count face_2_nodeid_1 face_2_nodeid_2 ...

<etc>

```

Faces must have a node count of at least two. For example, a mesh comprised of a single brick element might be described as follows:

```

6
4 1000 1001 1002 1003
4 1007 1006 1005 1004
4 1000 1004 1005 1001
4 1001 1005 1006 1002
4 1002 1006 1007 1003
4 1003 1007 1004 1000

```

Alternatively, the mesh might be described as a stick figure using a collection of lines (two node faces), as shown below:

```

8
2 101 102
2 102 103
2 103 104
2 104 105
2 105 106
2 106 107
2 107 108
2 108 109

```

16. Typical NX Nastran data entry requirements are described below.

Typical Parameters:

- PARAM,RESVEC,character\_value – controls calculation of residual vector modes.
- PARAM,GRDPNT, value - mass invariants  $^1I$ ,  $^2I$ , and  $^7I$  will be computed using results of NX Nastran grid point weight generator execution in the basic coordinate system.

Typical Case Control:

- MBDEXPORT ADAMS FLEXBODY=YES is required for MNF generation.
- METHOD=n is required before or in the first subcase for modal solutions.
- SUPORT1=seid is necessary to select a static support set for a residual only linear preload run.



## 352 MBDEXPORT Multi-Body Dynamics Export

- SUPER=n,SEALL=n is useful with multiple superelement models to select an individual superelement as a flexible body. Cannot be used with a linear STATSUB(PRELOAD) run.

- OUTPUT(PLOT) is necessary to define elements used to select grids to display the component in ADAMS when PSETID=ALL or setid.

SET n=list of elements (including PLOTELS) is used to select grids to display the component.

- OUTPUT(POST) is necessary to define volume and surface for grid stress or strain shapes.

SET n=list is a list of elements for surface definition for grid stress or strain shapes.

Stress and strain data in the MNF is limited to the six components (i.e. 3 normal and 3 shear) for a grid point for a given mode.

SURFACE n SET n NORMAL z3 is used to define a surface for writing stress and strain data. Only one FIBER selection is allowed for each SURFACE, thus the use of the FIBRE ALL keyword on the SURFACE case control command will write stresses to the MNF at the Z1 fiber location only.

Since the FIBRE keyword only applies to stresses, strain data will always be written to the MNF at the MID location.

Stress and strain data at grid points can only be written to the MNF for surface and volume type elements (e.g. CQUAD and CHEXA).

VOLUME n SET n is a volume definition.

The default SYSTEM BASIC is required with SURFACE or VOLUME.

- STRESS(PLOT) is necessary for stress shapes.
- STRAIN(PLOT) is necessary for strain shapes.
- GPSTRESS(PLOT) is necessary for grid point stress shapes to be included in the MNF.
- GPSTRAIN(PLOT) is necessary for grid point strain shapes to be included in the MNF.

Typical Bulk Data:

- DTI,UNITS,1,MASS,FORCE,LENGTH,TIME is required for MNF generation. For input files containing superelements, this command must reside in the main bulk data section.



- SPOINT,id\_list defines and displays modal amplitude. SESET,SEID,grid\_list defines a superelement (see GRID and BEGIN BULK SUPER=). The exterior grids will represent the attachment points along with the q-set.
  - SEELT,SEID,element\_list reassigns superelement boundary elements to an upstream superelement.
  - RELEASE,SEID,C,Gi is an optional entry that removes DOFs from an attachment grid for which no constraint mode is desired. For example, this allows the removal of rotational degrees of freedom from an analysis where only translational degrees of freedom are required.
  - SEQSET,SEID,spoint\_list defines modal amplitudes of a superelement (see SEQSET1).
  - SENQSET,SEID,N defines modal amplitudes of a part superelement. It must reside in the main Bulk Data Section.
  - ASET,IDI,Ci defines attachment points for a residual-only run (see ASET1).
  - QSET1,C,IDI defines modal amplitudes for the residual structure or modal amplitudes for a part superelement (see QSET).
  - SUPORT1,SID,IDI,Ci defines the static support for a preload condition with a residual-only run. This entry is case control selectable. Do not use SUPORT.
  - PLOTEL,EID,Gi can be used, along with existing model elements, to define elements used to select grids to display the components in ADAMS.
  - EIGR,SID,METHOD,... obtains real eigenvalue extraction (see EIGRL).
17. The RECVROP2=YES option is used when you would like results recovery (using the MBDRECVR case control entry) from an ADAMS/Flex analysis. This option requires the following assignment command:

```
ASSIGN OUTPUT2='name.out' STATUS=UNKNOWN UNIT=20
FORM=UNFORM
```

be inserted into the file management section of the NX Nastran input file. It will cause an OP2 file with a .out extension to be generated, which then can be used as input into an NX Nastran SOL 103 run using the MBDRECVR case control capability to perform results recovery from an ADAMS/Flex analysis. FLEXBODY=YES is required with its use.

The data blocks output are:

## 354 MBDEXPORT

### Multi-Body Dynamics Export

MGGEW - physical mass external sort with weight mass removed

MAAEW - modal mass

KAAE - modal stiffness

CMODEXT - component modes.

This capability is limited to no more than one superelement per NX Nastran model. Residual-only analyses are supported.

18. Setting CHECK=YES (which is only available when RECVROP2=YES) is *not* recommended for models of realistic size due to the amount of data that will be written to the f06 file.
19. The MBDEXPORT data routines use the environment variable TMPDIR for temporary storage during the processing of mode shape data. As a result, TMPDIR must be defined when using MBDEXPORT. TMPDIR should equate to a directory string for temporary disk storage, preferably one with a large amount of free space.
20. If any damping is defined in the model, an equivalent modal viscous damping will be determined for each mode and written to the MNF. This equivalent modal viscous damping is defined as:

$$\begin{bmatrix} d \end{bmatrix} = y^T B_e y$$

where  $d$  = equivalent modal viscous damping

$y$  = mode shapes

$B_e$  = equivalent viscous damping defined by:

$$B_e = B_{AA}^1 + B_{AA}^2 + \frac{G}{W3} K_{AA}^1 + \frac{1}{W4} K_{AA}^4$$

$G$ ,  $W3$ , and  $W4$  are parameters described in the “Parameter Descriptions” section of this guide.

#### OP4 Describers:

| Describer   | Meaning                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <i>unit</i> | The OP4 file is written to the specified logical unit number. The logical unit number must match the unit number on an ASSIGN statement. |

4

CASE

| <b>Describer</b> | <b>Meaning</b>                                                                                                              |
|------------------|-----------------------------------------------------------------------------------------------------------------------------|
| FLEXBODY         | Requests the generation and writing of standard or state-space matrices to an OP4 file.                                     |
| NO               | NX Nastran solution without standard or state-space matrix generation. (default)                                            |
| YES              | Standard or state-space matrix generation requested.                                                                        |
| FLEXONLY         | Determines if DMAP solution runs or not after standard or state-space matrix generation is complete.                        |
| YES              | Only standard or state-space matrix generation occurs. (default)                                                            |
| NO               | Standard or state-space matrix generation occurs along with the standard DMAP solution.                                     |
| RECVROP2         | Requests that the FLEXBODY run output an NX Nastran OP2 file for use in post-processing of controls results. (See Remark 5) |
| NO               | OP2 file will not be generated. (default)                                                                                   |
| YES              | OP2 file will be generated.                                                                                                 |
| CHECK            | Requests debug output be written to the f06 file when RECVROP2=YES. (See Remark 6).                                         |
| NO               | No debug output will be written. (default)                                                                                  |
| YES              | Debug output will be written.                                                                                               |



**OP4 Remarks:**

- The generation of standard or state-space matrices and the writing of them to an OP4 file via OUTPUT4, which is applicable in a non-restart SOL 103 analysis only, is initiated by MBDEXPORT OP4=unit STANDARD FLEXBODY=YES, or MBDEXPORT OP4=unit STATESPACE FLEXBODY=YES (other describers are optional) and the inclusion of the ASSIGN file management statement. This ASSIGN statement must be of the form:

ASSIGN OUTPUT4='filename',UNIT=n,etc.

where 'n' matches the value for unit on the MBDEXPORT OP4=unit case control command.

## 356 MBDEXPORT

### Multi-Body Dynamics Export

2. The parameters LFREQ/HFREQ or LMODES can be used to control which modes are used to derive the standard or state-space matrices.
3. For state-space matrices, user-defined set U7 is used for input DOF. User-defined set U8 is used for output DOF. Refer to the USET and USET1 bulk data entries.
4. For standard matrices, user-defined set U8 is used for output DOF. The mode shape output will be reduced to the DOF defined in DOF set U8. If DOF set U8 is not defined, the mode shape data for all DOF will be written. Refer to the USET and USET1 bulk data entries.
5. The RECVROP2=YES option is used when you would like results recovery (using the MBDRECVR case control entry) from a system analysis. This option requires the following assignment command:

```
ASSIGN OUTPUT2='name.out' STATUS=UNKNOWN UNIT=20  
FORM=UNFORM
```

be inserted into the file management section of the NX Nastran input file. It will cause an OP2 file with a .out extension to be generated, which can then be used as an input into an NX Nastran SOL 103 run using the MBDRECVR case control command. FLEXBODY=YES is required when specifying RECVROP2=YES.

The data blocks output are:

MGGEW – physical mass external sort with weight mass removed

MAAEW – modal mass

KAAE – modal stiffness

CMODEXT – component modes

This capability is limited to one superelement per NX Nastran model. Residual-only analyses are supported.

6. Setting CHECK=YES (which is only available when RECVROP2=YES) is *not* recommended for models of realistic size due to the amount of data that will be written to the f06 file.

#### MATLAB Describers:

| Describer | Meaning                                                                                          |
|-----------|--------------------------------------------------------------------------------------------------|
| FLEXBODY  | Requests the generation and writing of standard or state-space matrices to a MATLAB script file. |

| <b>Describer</b> | <b>Meaning</b>                                                                                                              |
|------------------|-----------------------------------------------------------------------------------------------------------------------------|
|                  | NO NX Nastran solution without standard or state-space matrix generation. (default)                                         |
|                  | YES Standard or state-space matrix generation requested.                                                                    |
| FLEXONLY         | Determines if DMAP solution runs or not after standard or state-space matrix generation is complete.                        |
|                  | YES Only standard or state-space matrix generation occurs. (default)                                                        |
|                  | NO Standard or state-space matrix generation occurs along with the standard DMAP solution.                                  |
| RECVROP2         | Requests that the FLEXBODY run output an NX Nastran OP2 file for use in post-processing of controls results. (See Remark 7) |
|                  | NO OP2 file will not be generated. (default)                                                                                |
|                  | YES OP2 file will be generated.                                                                                             |
| CHECK            | Requests debug output be written to the f06 file when RECVROP2=YES. (See Remark 8).                                         |
|                  | NO No debug output will be written. (default)                                                                               |
|                  | YES Debug output will be written.                                                                                           |

**MATLAB Remarks:**

1. The generation of standard or state-space matrices and the writing of them to a MATLAB script file, which is applicable in a non-restart SOL 103 analysis only, is initiated by MBDEXPORT MATLAB STANDARD FLEXBODY=YES, or MBDEXPORT MATLAB STATESPACE FLEXBODY=YES (other describers are optional). The MATLAB script files are named jid\_seid.m where seid is the integer number of the superelement (0 for residual-only run). The location of the MATLAB script files is the same directory as the jid.f06 file.
2. The parameters LFREQ/HFREQ or LMODES can be used to control which modes are used to derive the standard or state-space matrices.
3. For state-space matrices, user-defined set U7 is used for input DOF. User-defined set U8 is used for output DOF. Refer to the USET and USET1 bulk data entries.

4. For standard matrices, user-defined set U8 is used for output DOF. The mode shape output will be reduced to the DOF defined in DOF set U8. If DOF set U8 is not defined, the mode shape data for all DOF will be written. Refer to the USET and USET1 bulk data entries.
5. For the state-space option, the MATLAB script file contains the [A], [B], and [C] state-space matrices. They are defined as AMAT, BMAT, and CMAT, respectively. The input and output DOF are defined as U7DOF and U8DOF, respectively with the first column being the grid ID and the second column being the direction code (1 through 6).
6. For the standard option, the MATLAB script file contains the modal mass, equivalent modal viscous damping, modal stiffness, mode shapes, and modal forces defined as MMASS, MDAMP, MSTIF, MSHAP, and MFORC, respectively. The physical DOF corresponding one-to-one with the rows of MSHAP are defined as U8DOF. The first column contains the grid ID and the second column contains the direction code (1 through 6).
7. The RECVROP2=YES option is used when you would like results recovery (using the MBDRECVR case control entry) from a system analysis. This option requires the following assignment command:

```
ASSIGN OUTPUT2='name.out' STATUS=UNKNOWN UNIT=20  
FORM=UNFORM
```

be inserted into the file management section of the NX Nastran input file. It will cause an OP2 file with a .out extension to be generated, which can then be used as an input into an NX Nastran SOL 103 run using the MBDRECVR case control command. FLEXBODY=YES is required when specifying RECVROP2=YES.

The data blocks output are:

MGGEW – physical mass external sort with weight mass removed

MAAEW – modal mass

KAAE – modal stiffness

CMODEXT – component modes

This capability is limited to one superelement per NX Nastran model. Residual-only analyses are supported.

8. Setting CHECK=YES (which is only available when RECVROP2=YES) is *not* recommended for models of realistic size due to the amount of data that will be written to the f06 file.

## MBDRECVR Multi-Body Dynamics Results Recovery

Imports required files from third-party multi-body dynamics codes to perform results recovery.

### Format:

$$\text{MBDRECVR} \left[ \left\{ \begin{array}{c} \text{BINARY} \\ \text{ASCII} \end{array} \right\} \right], \left[ \text{MSRMODE} = \left\{ \begin{array}{c} 0 \\ 1 \\ 2 \end{array} \right\} \right], \left[ \text{RGBODY} = \left\{ \begin{array}{c} \text{NO} \\ \text{YES} \\ \text{BOTH} \end{array} \right\} \right], \\
\left[ \text{MSGLVL} = \left\{ \begin{array}{c} 0 \\ 1 - 4 \end{array} \right\} \right], \left[ \text{CHECK} = \left\{ \begin{array}{c} \text{NO} \\ \text{YES} \end{array} \right\} \right]$$

### Examples:

#### RecurDyn Example:

```
ASSIGN INPUTT2='rfi_results.mdf' UNIT=13
...
CEND
STRESS (PLOT)=100
MBDRECVR
```

#### ADAMS Example:


```
ASSIGN INPUTT2='adams_results.mdf' UNIT=13
...
CEND
STRESS (PLOT)=100
MBDRECVR
```

### Describers:

| Describer | Meaning                                                                                            |
|-----------|----------------------------------------------------------------------------------------------------|
| BINARY    | OUTPUT2 file format for RecurDyn or ADAMS modal deformations file (default). (See Remarks 1 and 2) |
| ASCII     | PUNCH file format for RecurDyn or ADAMS modal deformations file. (See Remarks 1 and 2).            |
| MSRMODE   | Specifies stress recovery type (see remarks 6 and 7).                                              |

**360 MBDRECVR**  
**Multi-Body Dynamics Results Recovery**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                                                                                                                                                                       |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0                | Component definitions are stored in an OUTPUT2 file (specifically, an *.out file created by using RECVROP2=YES on the MBDEXPORT ADAMS or RECURDYN case control in a pre-ADAMS/Flex or RecurDyn, respectively, NX Nastran run. The OUTPUT2 files used in this case do not contain data blocks used for MNF or RFI creation (default). |
| 1                | Same as option 0, except that the OUTPUT2 file will contain 10 additional data blocks used for RFI or MNF creation by a RecurDyn or ADAMS pre-processor (specifically, a *.out file created through use of the mnfx.alt DMAP alter capability).                                                                                      |
| 2                | No file reference (specifically, component definitions will be recomputed)                                                                                                                                                                                                                                                           |
| RGBODY           | Requests the addition of rigid body motion with modal deformations (see remark 5).                                                                                                                                                                                                                                                   |
| NO               | Do not include rigid body motion (default).                                                                                                                                                                                                                                                                                          |
| YES              | Include rigid body motion.                                                                                                                                                                                                                                                                                                           |
| BOTH             | Generate two output data blocks; one containing rigid body motion and the other without.                                                                                                                                                                                                                                             |
| MSGLVL           | Level of diagnostic output from Lanczos eigensolver when component definitions are determined (applies only when MSRMODE=2).                                                                                                                                                                                                         |
| 0                | No output (default).                                                                                                                                                                                                                                                                                                                 |
| 1                | Warning and fatal messages.                                                                                                                                                                                                                                                                                                          |
| 2                | Summary output.                                                                                                                                                                                                                                                                                                                      |
| 3                | Detailed output on cost and convergence.                                                                                                                                                                                                                                                                                             |
| 4                | Detailed output on orthogonalization.                                                                                                                                                                                                                                                                                                |
| CHECK            | Requests debug output be written to the f06 file (See Remark 9).                                                                                                                                                                                                                                                                     |
| NO               | No debug output will be written (default).                                                                                                                                                                                                                                                                                           |
| YES              | Debug output will be written.                                                                                                                                                                                                                                                                                                        |





**Remarks:**

1. When modal deformations to be read are in binary (OUTPUT2) format (specifically, BINARY), the following statement needs to be specified near the top of the NX Nastran input file in the file management section:

```
ASSIGN INPUTT2='<MDFilename>' UNIT=13
```

where <MDFilename> is the name of the modal deformations file from ADAMS or RecurDyn.

2. To input the modal deformations file from ADAMS or RecurDyn in ASCII (Punch) format (specifically, ASCII), the following statement needs to be included in the bulk data section:

```
INCLUDE '<MDFilename>' where '<MDFilename>' is the name of the modal deformations file.
```

3. Dynamic stress/strain output can either be in .f06, PUNCH, and/or OUTPUT2 according to standard NX Nastran functionality. However, stress recovery in NX Nastran from ADAMS or RecurDyn results do not support XYPLOT output.
4. If displacements, stresses, and/or strains are to be available for post processing, one or more of the following statements must appear in the case control section of the NX Nastran input file:

```
DISP(PLOT) = <set id>
```

```
STRAIN(FIBER,PLOT) = <set id>
```

```
STRESS(PLOT) = <set id>
```

5. Rigid body motions from an ADAMS simulation are included in the modal deformation file, but they are not applied unless the RGBODY keyword is set to YES or BOTH and the SORT1 option is included in the DISP(PLOT) command in case control. Including rigid body motion affects the display and animation of the flexible component, but it has no effect on dynamic stresses. For RGBODY=YES, the displacements output data block OUGV1 will contain a '0' in word 3 of each header record. For RGBODY=NO, OUGV1 will contain a '1' in word 3 of each header record. For RGBODY=BOTH, two OUGV1 data blocks will be generated; one for RGBODY=YES and one for RGBODY=NO.
6. For MSRMODE=0 or 1, stress recovery references the OUTPUT2 file obtained from the initial CMS analysis (specifically, RECVROP2=YES on the MBDEXPORT ADAMS or RECURDYN case control entry or use of the mnfx.alt (ADAMS only) DMAP alter capability). No other files are required. The geometric data needs to be included in the bulk data of the NX Nastran input file because geometry is missing from the OUTPUT2 file. This mode of stress recovery is faster than the MSRMODE=2 mode. To reference this OUTPUT2

## 362 MBDRECVR Multi-Body Dynamics Results Recovery

file the following line needs to be included in the file specification section of the NX Nastran input file:

```
ASSIGN INPUTT2='<OUTPUT2_filename>' UNIT=20
```

7. For MSRMODE=2, no files are referenced for stress recovery. Instead, a full CMS reanalysis is performed to build the reference data for the stress recovery analysis. Obviously, the analysis time is significantly far greater compared to the MSRMODE=0 or 1 method, but this method frees up disk space. There is also risk in using this method. If the reanalysis generates slightly different component eigenvalues or eigenvectors than were generated during the creation of the ADAMS MNF or RecurDyn RFI in the initial NX Nastran run, then the ADAMS or RecurDyn results in the MDF (modal deformation file) will be inconsistent and incorrect results will be recovered. Something as simple as a sign change for one eigenvector will cause incorrect results to be recovered. It is, therefore, *highly recommended* that MSRMODE=0 or 1 *always* be used.
8. This capability must be performed in SOL 103 and is limited to no more than one superelement per NX Nastran model. Residual-only analyses are supported.
9. Setting CHECK=YES is *not* recommended for models of realistic size due to the amount of data that will be written to the f06.

Modal effective mass output request. Optionally limits mode output by effective mass.

**MEFFMASS** Modal effective mass output request. Optionally limits mode output by effective mass.

Requests the output of the modal effective mass, participation factors, and modal effective mass fractions in normal modes analysis. Optionally can limit mode output by effective mass fraction.

**Format:**

$$\text{MEFFMASS} \left( \left[ \begin{array}{l} \text{PRINT} \\ \text{PUNCH} \\ \text{PLOT} \end{array} \right], [\text{GRID} = \mathbf{grid}], [\text{THRESH} = f], \left[ \begin{array}{l} \text{SUMMARY, PARTFAC,} \\ \text{MEFFM, MEFFW,} \\ \text{FRACSUM, ALL} \end{array} \right] \right) = \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Examples:**

```
MEFFMASS
MEFFMASS (GRID=12, SUMMARY, PARTFAC)
MEFFMASS (PLOT, ALL, THRESH=0.001)=YES
```

**Describers:**

| Describer | Meaning                                                                                                                           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------|
| PRINT     | Writes output to the print file. (Default)                                                                                        |
| PUNCH     | Writes output to the punch file.                                                                                                  |
| PLOT      | Writes output to the output2 file.                                                                                                |
| GRID      | Reference grid point for the calculation of the Rigid Body Mass Matrix. The default is the origin of the basic coordinate system. |
| SUMMARY   | Requests calculation of the Total Effective Mass Fraction, Modal Effective Mass Matrix, and the Rigid Body Mass Matrix. (Default) |
| PARTFAC   | Requests calculation of Modal Participation Factors.                                                                              |
| MEFFM     | Requests calculation of the Modal Effective Mass in units of mass.                                                                |
| MEFFW     | Requests calculation of the Modal Effective Mass in units of weight.                                                              |
| FRACSUM   | Requests calculation of the Modal Effective Mass Fraction.                                                                        |

## 364 MEFFMASS

Modal effective mass output request. Optionally limits mode output by effective mass.

| Describer | Meaning                                                                                                                                                          |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $f$       | Threshold value of effective mass fraction for mode output. (Real; $0.0 < \text{THRESH} < 1.0$ ; Default = all modes are stored). See <a href="#">Remark 8</a> . |

### Remarks:

1. The SUMMARY describer produces three outputs:

Modal Effective Mass Matrix  $[\epsilon^T][m][\epsilon]$  where

$\epsilon$  = Modal Participation Factors

$$= [m]^{-1} [f]^T [M_{aa}] [D_{ar}]$$

$m$  = Generalized mass matrix

$f$  = Eigenvectors

$M_{aa}$  = Mass matrix reduced to the a-set (g-set for superelements)

$D_{ar}$  = Rigid body transformation matrix with respect to the a-set

A-set Rigid Body Mass Matrix:  $[D_{ar}^T][M_{aa}][D_{ar}]$ . For a superelement this is computed at the g-set.

Total Effective Mass Fraction: i.e., diagonal elements of the Modal Effective Mass Matrix divided by the Rigid Body Mass Matrix.

2. The PARTFAC describer outputs the Modal Participation Factors table:  $\epsilon$
3. The MEFFM describer outputs the Modal Effective Mass table:  $\epsilon^2$ , the term-wise square of the Modal Participation Factors table.
4. The MEFFW describer outputs the Modal Effective Weight table; i.e., the Modal Effective mass multiplied by user PARAMeter WTMASS.
5. The FRACSUM describer outputs the Modal Effective Mass Fraction table; i.e., the Generalized Mass Matrix (diagonal term) multiplied by the Modal Effective Mass and then divided by the Rigid Body Mass Matrix (diagonal term).
6. For superelements the MEFFMASS command uses the residual structure eigenvalues and eigenvectors, by default. If however, PARAM, FIXEDB, -1 is specified then MEFFMASS command uses the component mode eigenvalues and eigenvectors.

4

CASE

**Modal effective mass output request. Optionally limits mode output by effective mass.**

7. Effective mass is computed in the basic coordinate system.
8. Modes which have an effective mass fraction greater than the value of THRESH in at least one translational or rotational direction are output in the .f06 and .op2 files. THRESH does not limit modes for consecutive dynamic response solutions (SOL 111 or 112). Use the MODSEL case control command to select/deselect modes in these solutions.

## 366 METHOD Real Eigenvalue Extraction Method Selection

### METHOD Real Eigenvalue Extraction Method Selection

Selects the real eigenvalue extraction parameters.

#### Format:

$$\text{METHOD} \begin{bmatrix} \text{STRUCTURE} \\ \text{FLUID} \end{bmatrix} = n$$

#### Examples:

```
METHOD=33  
METHOD(FLUID)=34
```

#### Describers:

| Describer             | Meaning                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| STRUCTURE<br>or FLUID | The referenced EIGR or EIGRL Bulk Data entry is applied to the structural or fluid portion of the model. (Default = STRUCTURE)                           |
| n                     | Set identification number of an EIGR or EIGRL Bulk Data entry for normal modes or modal formulation, or an EIGB or EIGRL entry for buckling. (Integer>0) |

#### Remarks:

1. An eigenvalue extraction method must be selected when extracting real eigenvalues using DMAP modules READ or REIGL.
2. If the set identification number selected is present on both EIGRL and EIGR and/or EIGB entries, the EIGRL entry will be used. This entry requests the Lanczos eigensolution method.
3. METHOD(FLUID) permits a different request of EIGR or EIGRL for the fluid portion of the model from the structural portion of the model in coupled fluid-structural analysis. See the *NX Nastran User's Guide*.
  - If not specified, then the METHOD selection of the structure will be used for the fluid and modal reduction will not be performed on the fluid portion of the model in the dynamic solution sequences.
  - The METHOD(FLUID) and METHOD(STRUCTURE) may be specified simultaneously in the same subcase for the residual structure only. Do not specify METHOD(FLUID) in a superelement subcase even if the superelement contains fluid elements.

- The auto-omit feature is not recommended. (See the *NX Nastran User's Guide*.) Therefore, only those methods of eigenvalue extraction that can process a singular mass matrix should be used; e.g., EIGRL entry or MHOU on the EIGR entry.

## 368 MFLUID Fluid Boundary Element Selection

### MFLUID Fluid Boundary Element Selection

Selects the MFLUID Bulk Data entries to be used to specify the fluid-structure interface.

**Format:**

MFLUID=n

**Examples:**

MFLUID=919

**Describers:**

| Describer | Meaning                                                                        |
|-----------|--------------------------------------------------------------------------------|
| n         | Set identification number of one or more MFLUID Bulk Data entries. (Integer>0) |

**Remarks:**

1. For a further discussion, see the *NX Nastran User's Guide*.
2. MFLUID must exist above all subcases.



**MODALE**    Energy output selection for SOL 111

Energy output selection for SOL 111. This is not supported for the constraint mode method of enforced motion.

**Format:**

$$\text{MODALE} \left( \left[ \left[ \text{TYPE} = \begin{Bmatrix} \text{ALL} \\ \text{KE} \\ \text{SE} \\ \text{BOTH} \\ \text{TOTAL} \end{Bmatrix}, \begin{Bmatrix} \text{BOTH} \\ \text{CONST} \\ \text{OSCILL} \end{Bmatrix}, \begin{Bmatrix} \text{SORT2} \\ \text{SORT1} \end{Bmatrix}, \begin{Bmatrix} \text{PRINT, PUNCH} \\ \text{NOPRINT} \end{Bmatrix} \right] \right. \right. \\
\left. \left. \begin{Bmatrix} \text{REAL or IMAG} \\ \text{PHASE} \end{Bmatrix}, \begin{Bmatrix} \text{FREQ} = \begin{Bmatrix} \text{ALL} \\ r \end{Bmatrix} \end{Bmatrix} \right] \right) = \begin{Bmatrix} \text{ALL} \\ n \\ \text{NONE} \end{Bmatrix}$$

**Examples:**

```
MODALE=ALL
SET 200=1,3,4,5,7
SET 300=0.1 0.3 0.5
MODALE (TYPE=BOTH, FREQ=300)=200
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                                                                                                                                                   |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TYPE             | Type of energy output:<br><br>All=Strain energy, kinetic energy, and total energy will be output. (Default)<br><br>SE=Only strain energy will be output.<br><br>KE=Only kinetic energy will be output.<br><br>BOTH=Both strain and kinetic energy will be output.<br><br>TOTAL=Only total energy will be output. |
| BOTH             | Both constant and oscillating energy results will be output. (Default)                                                                                                                                                                                                                                           |
| CONST            | Only constant energy results will be output.                                                                                                                                                                                                                                                                     |

**370 MODALE**  
**Energy output selection for SOL 111**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                             |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OSCILL           | Only oscillating energy results will be output.                                                                                                                            |
| SORT1            | Output will be presented as a tabular listing of energy values for the set of frequencies defined by the <b>FREQ</b> describer at each mode in the specified set of modes. |
| SORT2            | Output will be presented as a tabular listing of energy values for the specified set of modes at each frequency defined by the <b>FREQ</b> describer. (Default)            |
| PRINT            | Prints the modal energy results to the .f06 file. (Default)                                                                                                                |
| NOPRINT          | Writes the modal energy results to the OP2 file without writing to the f06 or punch file.                                                                                  |
| PUNCH            | Writes the modal energy results to the punch (.pch) file.                                                                                                                  |
| REAL or<br>IMAG  | Requests rectangular format (real and imaginary) of complex output. Use of either <b>REAL</b> or <b>IMAG</b> yields the same output. (Default)                             |
| PHASE            | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                                                 |
| FREQ             | Computes energies at <b>ALL</b> frequencies or the set of frequencies defined by <b>SET r</b> . (Default= <b>ALL</b> )                                                     |
| ALL, n,<br>NONE  | Computes modal energies for (1) all modes, (2) the modes defined on <b>SET n</b> , or (3) no modes.                                                                        |

**Remarks:**

1. The **FREQ** describer selects from the set of forcing frequencies. If a frequency in the selected set is not identical to a frequency in the set of forcing frequencies, energy values at the closest frequency will be provided. If a frequency in the selected set is greater or less than the range of forcing frequencies, energy values will be provided at the highest or lowest forcing frequency, respectively.
2. Modal energy will be calculated and reported for (1) constant energy and/or (2) oscillating energy (depending on whether **BOTH**, **CONST**, or **OSCILL** is requested) at each frequency for each mode and at each frequency for all modes summed together. The frequencies used are those requested by the **FREQ** describer; the modes used are those requested by **ALL/n** (i.e. **SET n**). Combined

**4**

**CASE**

with the value of the TYPE descriptor, one or more of the following equations will be output (the modal energy computation is valid for the arbitrary loading case denoted by superscript 's', and the arbitrary excitation radian frequency denoted by subscript 'r'):

|                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\text{MSE}_{j,\text{const}} = \frac{1}{4}k_j(\xi_{j,\text{re}}^2 + \xi_{j,\text{im}}^2)$                                                                                                           |
| $\text{MSE}_{j,\text{osc}} = \sqrt{(\text{MSE}_{j,\text{osc},\text{cos}}^2 + \text{MSE}_{j,\text{osc},\text{sin}}^2)}$                                                                              |
| $\phi_{j,\text{MSE}} = \text{atan}\left(\frac{\text{MSE}_{j,\text{osc},\text{cos}}}{\text{MSE}_{j,\text{osc},\text{sin}}}\right)$                                                                   |
| $\text{MKE}_{j,\text{const}} = \frac{1}{4}m_j(\dot{\xi}_{j,\text{re}}^2 + \dot{\xi}_{j,\text{im}}^2)$                                                                                               |
| $\text{MKE}_{j,\text{osc}} = \sqrt{(\text{MKE}_{j,\text{osc},\text{cos}}^2 + \text{MKE}_{j,\text{osc},\text{sin}}^2)}$                                                                              |
| $\phi_{j,\text{MKE}} = \text{atan}\left(\frac{\text{MKE}_{j,\text{osc},\text{cos}}}{\text{MKE}_{j,\text{osc},\text{sin}}}\right)$                                                                   |
| $\text{ME}_{j,\text{const}} = \text{MSE}_{j,\text{const}} + \text{MKE}_{j,\text{const}}$                                                                                                            |
| $\text{ME}_{j,\text{osc}} \cos(2\omega t + \phi_{j,\text{ME}}) = \text{MSE}_{j,\text{osc}} \cos(2\omega t + \phi_{j,\text{MSE}}) + \text{MKE}_{j,\text{osc}} \cos(2\omega t + \phi_{j,\text{MKE}})$ |
| ${}^s_r\text{MSE}_{\text{const}} = \sum_{j=1}^n {}^s_r\text{MSE}_{j,\text{const}}$                                                                                                                  |

**4**  
**CASE**

372 MODALE  
Energy output selection for SOL 111

$${}^sMKE_{const} = \sum_{j=1}^n {}^sMKE_{j,const}$$

$${}^sMSE_{osc} = \sqrt{({}^sMSE_{osc,cos}^2 + {}^sMSE_{osc,sin}^2)}$$

$${}^sMKE_{osc} = \sqrt{({}^sMKE_{osc,cos}^2 + {}^sMKE_{osc,sin}^2)}$$

$${}^s\phi^{MSE} = \text{atan} \frac{{}^sMSE_{osc,sin}}{{}^sMSE_{osc,cos}}$$

$${}^s\phi^{MKE} = \text{atan} \frac{{}^sMKE_{osc,sin}}{{}^sMKE_{osc,cos}}$$

$${}^sME_{const} = {}^sMSE_{const} + {}^sMKE_{const}$$

$$\begin{aligned} {}^sME_{osc} \cos(2\omega t + {}^s\phi^{ME}) &= {}^sMSE_{osc} \cos(2\omega t + {}^s\phi^{MSE}) \\ &+ {}^sMKE_{osc} \cos(2\omega t + {}^s\phi^{MKE}) \end{aligned}$$

4

CASE

3. Both PRINT and PUNCH may be requested.

## MODCON Modal Contribution Request

Requests the output of modal contribution results.

**Format:**

$$\text{MODCON} \left[ \begin{array}{l} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{l} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right], \left[ \begin{array}{l} \text{PRINT} \\ \text{NOPRINT} \end{array} \right], \text{PUNCH},$$

$$\left[ \begin{array}{l} \text{ABS} \\ \text{NORM} \\ \text{BOTH} \end{array} \right], \text{TOPS} = ps, \text{TOPF} = pf, \text{SOLUTION} = \left\{ \begin{array}{l} \text{ALL} \\ \text{setout} \end{array} \right\} = \left\{ \begin{array}{l} n \\ \text{ALL} \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
MODCON=123
MODCON (SORT1, PHASE, PRINT, PUNCH, BOTH, TOPS=5) =ALL
```

**Describers:**

| Describer    | Meaning                                                                                                                          |
|--------------|----------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of modal dof for each frequency or time. (Default)                                 |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each modal dof. This option is not available for SOL 110. |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output. (Default) |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                       |
| PRINT        | The print file (.f06) will be the output medium. (Default)                                                                       |
| PUNCH        | The standard punch file (.pch) will be the output medium.                                                                        |
| NOPRINT      | Generates, but does not print, modal contribution results.                                                                       |
| ABS          | Output modal contributions in absolute terms. (Default)                                                                          |
| NORM         | Output modal contributions in normalized terms.                                                                                  |

## 374 MODCON Modal Contribution Request

| Describer     | Meaning                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BOTH          | Output modal contributions in both absolute and normalized terms.                                                                                                                                                                                                                                                                                                                                  |
| TOPS (or TOP) | The number of structural modes to list in the output that have the greatest contribution to the response at each frequency or time. The output is sorted in descending order from the structural mode having the greatest contribution; $ps > 0$ . If $ps = 0$ , no structural mode contributions will be output, only totals. (Default is $ps = 5$ )                                              |
| TOPF          | The number of fluid modes to list in the output that have the greatest contribution to the response at each frequency or time. The output is sorted in descending order from the fluid mode having the greatest contribution; $pf > 0$ . If $pf = 0$ , no fluid mode contributions will be output, only totals. (Default is $pf = 5$ )                                                             |
| SOLUTION      | SOLUTION = ALL (default) requests that modal contribution calculations be performed at all frequencies or times defined by either the FREQUENCY or TSTEP case control commands, respectively. For SOLUTION = <i>setout</i> , modal contribution calculations are performed at the frequencies or times specified by a SET case control command having the identification number of <i>setout</i> . |
| n             | Calculate modal contributions for the list defined in SETMC n.                                                                                                                                                                                                                                                                                                                                     |
| ALL           | Calculate modal contributions for the lists defined in all SETMC sets defined in and above the current subcase.                                                                                                                                                                                                                                                                                    |
| NONE          | Do not calculate modal contributions. This is useful to turn off modal contribution output for a specific subcase.                                                                                                                                                                                                                                                                                 |

### Remarks:

1. Both PRINT and PUNCH may be requested.
2. MODCON = NONE overrides an overall output request.
3. SOL 110, 111, 112, and 146 are supported. For SOL 110, modal contributions for superelements are not supported. The TOPF keyword is only supported for SOL 111. The SOLUTION keyword is only supported for SOL 111, 112, and 146.
4. Results for SPC forces do not include the effect of any enforced motion applied at the DOF.

5. The parameters LFREQ, LFREQFL, HFREQ, HFREQFL, LMODES, and LMODESFL are supported.
6. The SOLUTION keyword can be abbreviated to SOLU.
7. The SET case control command referenced by SOLUTION = *setout* must contain real values for frequencies or times. Using integer values may lead to erroneous results.

## 376 MODES Subcase Repeater

### MODES Subcase Repeater

Repeats a subcase.

#### Format:

MODES=n

#### Examples:

```
MODES=3
```

#### Describers:

| Describer | Meaning                                                    |
|-----------|------------------------------------------------------------|
| n         | Number of times the subcase is to be repeated. (Integer>0) |

#### Remarks:

1. This command can be illustrated by an example. Suppose stress output is desired for the first five modes only and displacements for the next two modes and forces for the remaining modes. The following example would accomplish this.

```
SUBCASE 1 $ FOR MODES 1 THRU 5
  MODES=5
  STRESS=ALL
SUBCASE 6 $ FOR MODES 6 AND 7
  DISPLACEMENTS=
  MODES=2
SUBCASE 8 $ FOR MODE 8 AND REMAINING MODES
  FORCE=ALL
```

2. This command causes the results for each mode to be considered as a separate, successively numbered subcase, beginning with the subcase number containing the MODES command. In the example above, this means that subcases 1, 2, 3, etc. are assigned to modes 1, 2, 3, etc., respectively.
3. If this command is not used, eigenvalue results are considered to be a part of a single subcase. Therefore, any output requests for the single subcase will apply for all eigenvalues.
4. All eigenvectors with mode numbers greater than the number of subcases defined in Case Control are printed with the descriptors of the last subcase. For example, to suppress all printout for modes beyond the first three, the following Case Control could be used:

```
SUBCASE 1
  MODES=3
  DISPLACEMENTS=ALL
```



```
SUBCASE 4  
DISPLACEMENTS=NONE  
BEGIN BULK
```

5. This command may be of no use in non eigenvalue analysis and may cause data recovery processing to be repeated.

## 378 MODSEL Selects mode numbers

### MODSEL     Selects mode numbers

Used to select mode numbers to include in a modal dynamic response solution.

#### Format:

$$\text{MODSEL} \left( \begin{array}{c} \text{STRUCTURAL} \\ \text{FLUID} \end{array} \right) = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

#### Examples:

MODSEL=3

MODSEL (STRUCTURAL) =4

MODSEL (FLUID) =5

#### Describers:

| Describer  | Meaning                                                                                                                                                                                                                                                                                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| STRUCTURAL | Specifies the structural modes to include in the response solution. (Default)                                                                                                                                                                                                                                                                                                        |
| FLUID      | Specifies the fluid modes to include in the response solution.                                                                                                                                                                                                                                                                                                                       |
| ALL        | Designates that all the structural or fluid modes be used in the response solution. (Default)                                                                                                                                                                                                                                                                                        |
| n          | Identification number of the SET case control command containing either structural or fluid modes. The mode numbers included in the SET case control command are used in the response solution. The mode numbers not included in the SET case control command are removed from the modal space. Mode numbers larger than the number of eigenvalues computed are ignored. (Integer>0) |

#### Remarks:

1. All structural and fluid modes are used in the response solution if a MODSEL entry is not included in the input file.
2. Multiple MODSEL entries can be included in a single input file.
3. The use of MODSEL in a subcase is only effective if the modes are recalculated for the subcase.

**MODTRAK** Mode Tracking Request

Selects mode tracking options in design optimization (SOL 200).

**Format:**

MODTRAK=n

**Examples:**

MODTRAK=100

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                               |
|------------------|--------------------------------------------------------------|
| n                | Set identification of a MODTRAK Bulk Data entry. (Integer>0) |

**Remarks:**

Selection of a MODTRAK Bulk Data entry with the MODTRAK Case Control command activates mode tracking for the current subcase. This request is limited to normal modes subcases (ANALYSIS = MODES) in design optimization (SOL 200).

## 380 MPC Multipoint Constraint Set Selection

### MPC Multipoint Constraint Set Selection

Selects a multipoint constraint set.

#### Format:

MPC=n

#### Examples:

MPC=17

#### Describers:

| Describer | Meaning                                                                                                                                                         |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| n         | Set identification number of a multipoint constraint set. This set identification number must appear on at least one MPC or MPCADD Bulk Data entry. (Integer>0) |

#### Remarks:

1. In cyclic symmetry analysis, this command must appear above the first SUBCASE command.
2. Multiple boundary (MPC sets) conditions are not allowed in superelement analysis. If more than one MPC set is specified per superelement (including the residual), then the second and subsequent sets will be ignored.

4

CASE

**MPCFORCES**      Multipoint Forces of Constraint Output Request

Requests the form and type of multipoint force of constraint vector output.

**Format:**

$$\text{MPCFORCES} \left( \left( \begin{matrix} \text{[SORT1]} \\ \text{[SORT2]} \end{matrix} \right), \left( \begin{matrix} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{matrix} \right), \left( \begin{matrix} \text{REAL or IMAG} \\ \text{PHASE} \end{matrix} \right), \right. \\ \left. \left( \begin{matrix} \text{PSDF} \\ \text{ATOC} \\ \text{CRMS} \\ \text{RALL} \end{matrix} \right), \left( \begin{matrix} \text{RPRINT} \\ \text{NORPRINT} \end{matrix} \right), \left( \text{RPUNCH} \right) \right) = \left\{ \begin{matrix} \text{ALL} \\ \text{n} \\ \text{NONE} \end{matrix} \right\}$$

**Examples:**

```
MPCFORCES=5
MPCFORCES (SORT2, PUNCH, PRINT, IMAG) =ALL
MPCFORCES (PHASE) =NONE
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                  |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1            | Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence. |
| SORT2            | Output will be presented as a tabular listing of frequency or time for each grid point.                                                         |
| PRINT            | The printer will be the output medium.                                                                                                          |
| PUNCH            | The punch file will be the output medium.                                                                                                       |
| PLOT             | Generates, but does not print, multipoint constraint forces.                                                                                    |
| REAL or IMAG     | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                          |
| PHASE            | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                      |

## 382 MPCFORCES Multipoint Forces of Constraint Output Request

| Describer | Meaning                                                                                                                                                                                                         |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PSDF      | Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 9. |
| ATOC      | Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 9.        |
| CRMS      | Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 9.    |
| RALL      | Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 9.         |
| RPRINT    | Writes random analysis results to the print file. (Default) See remark 9.                                                                                                                                       |
| NORPRINT  | Disables the writing of random analysis results to the print file. See remark 9.                                                                                                                                |
| RPUNCH    | Writes random analysis results to the punch file. See remark 9.                                                                                                                                                 |
| ALL       | Multipoint forces of constraint for all points will be output. See Remarks 3 and 6.                                                                                                                             |
| NONE      | Multipoint forces of constraint for no points will be output.                                                                                                                                                   |
| n         | Set identification of a previously appearing SET command. Only multipoint forces constraint for points with identification numbers that appear on this SET command will be output. (Integer>0)                  |

### Remarks:

1. Both PRINT and PUNCH may be requested.
2. The defaults for SORT1 and SORT2 depend on the type of analysis:

- SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
3. In a statics problem, a request for SORT2 causes loads at all points (zero and nonzero) to be output.
  4. MPCFORCES=NONE overrides an overall output request.
  5. In SORT1 format, MPCFORCES recovered at consecutively numbered scalar points are printed in groups of six (sextets) per line of output. But if a scalar point is not consecutively numbered, then it will begin a new sextet on a new line of output. If a sextet can be formed and all values are zero, then the line will not be printed. If a sextet cannot be formed, then zero values may be output.
  6. MPCFORCES results are output in the global coordinate system (see field CD on the GRID Bulk Data entry).
  7. MPCFORCES results are not available in SOL 129.
  8. In inertia relief analysis, the MPCFORCES output includes both the effects of applied and inertial loads.
  9. The following applies to SOL 111 PSD solutions:
    - Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT describers control the frequency response output. The RPRINT,NORPRINT,RPUNCH describers control the random output.
    - The SORT1 and SORT2 describers only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.

### 384 **MPCFORCES** Multipoint Forces of Constraint Output Request

- Any combination of the PSDF, ATOC, and CRMS describers can be selected. The RALL describer selects all three.
- When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.

**4**

**CASE**



**MPRES**    Fluid Pressure Output Request

Requests the pressure for selected surface elements in fluid-structure interaction problems.

**Format:**

$$\text{MPRES} \left[ \left[ \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{c} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
MPRES=5
MPRES (IMAG)=ALL
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                             |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| PRINT            | The printer will be the output medium.                                                                                                     |
| PUNCH            | The punch file will be the output medium.                                                                                                  |
| PLOT             | Generates, but does not print or punch, data.                                                                                              |
| REAL or IMAG     | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                     |
| PHASE            | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                 |
| ALL              | Fluid pressures for all elements will be output.                                                                                           |
| NONE             | Fluid pressures for no elements will be output.                                                                                            |
| n                | Set identification number of a previously appearing SET command. Only fluid pressures for elements in this set will be output. (Integer>0) |

**Remarks:**

PARAM,DDRMM,-1 is also required in the modal solution sequences 111, 112, 146, and 200.

## 386 **NLLOAD** Nonlinear Load Output Request

### **NLLOAD** Nonlinear Load Output Request

Requests the form and type of nonlinear load output for transient problems.

#### **Format:**

$$\text{NLLOAD}[(\text{PRINT}, \text{PUNCH})] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

#### **Examples:**

NLLOAD=ALL

#### **Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                    |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PRINT            | The printer will be the output medium.                                                                                                                                            |
| PUNCH            | The punch file will be the output medium.                                                                                                                                         |
| ALL              | Nonlinear loads for all solution points will be output.                                                                                                                           |
| NONE             | Nonlinear loads will not be output.                                                                                                                                               |
| n                | Set identification of a previously appearing SET command. Only nonlinear loads for points with identification numbers that appear on this SET command will be output. (Integer>0) |

#### **Remarks:**

1. Nonlinear loads are output only in the solution (d or h) set.
2. The output is available in SORT2 format only.
3. Both PRINT and PUNCH may be used.
4. NLLOAD=NONE allows overriding an overall output request.

**NLPARM**    Nonlinear Static Analysis Parameter Selection

Selects the parameters used for nonlinear static analysis.

**Format:**

NLPARM=*n*

**Examples:**

NLPARM=10

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                           |
|------------------|--------------------------------------------------------------------------|
| n                | Set identification of NLPARM and NLPCI Bulk Data entries.<br>(Integer>0) |

**Remarks:**

1. NLPARM and NLPCI entries in the Bulk Data will not be used unless selected.
2. NLPARM may appear above or within a subcase.

## 388 NLSTRESS Nonlinear Element Stress Output Request

### NLSTRESS Nonlinear Element Stress Output Request

Requests the form and type of nonlinear element stress output in SOL 106.

#### Format:

$$\text{NLSTRESS} \left[ \left( \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right] \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

#### Examples:

```
NLSTRESS=5
NLSTRESS (SORT1, PRINT, PUNCH, PHASE)=15
NLSTRESS (PLOT)=ALL
```

#### Describers:

**4**  
CASE

| Describer | Meaning                                                                                                                                                                      |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1     | Output will be presented as a tabular listing of elements for each load.                                                                                                     |
| SORT2     | Output will be presented as a tabular listing of load for each element type.                                                                                                 |
| PRINT     | The printer will be the output medium.                                                                                                                                       |
| PUNCH     | The punch file will be the output medium.                                                                                                                                    |
| PLOT      | Generates nonlinear element stresses for requested set but no printer output.                                                                                                |
| ALL       | Stresses for all nonlinear elements will be output. (Default)                                                                                                                |
| n         | Set identification of a previously appearing SET command. Only stresses for elements with identification numbers that appear on this SET command will be output. (Integer>0) |
| NONE      | No nonlinear element stress will be output.                                                                                                                                  |

#### Remarks:

- Both PRINT and PUNCH may be requested.
- ALL should not be used in a transient problem due to excessive output.

3. See “[DISPLACEMENT](#)” for a discussion of SORT1 and SORT2.
4. If the NLSTRESS command is not specified, then NLSTRESS=ALL is the default.

**390 NONLINEAR**  
**Nonlinear Dynamic Load Set Selection**

**NONLINEAR**      Nonlinear Dynamic Load Set Selection

Selects a nonlinear dynamic load set for transient problems.

**Format:**

NONLINEAR=*n*

**Examples:**

NONLINEAR=75

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                 |
|------------------|--------------------------------------------------------------------------------|
| <i>n</i>         | Set identification of NOLIN <i>i</i> or NLRGAP Bulk Data entry.<br>(Integer>0) |

**Remarks:**

NOLIN*i* Bulk Data entry will be ignored unless selected in the Case Control Section.

**4**

**CASE**

**NOUTPUT**      Normal Output Request in Cyclic Symmetry Problems

Requests physical output in cyclic symmetry problems.

**Format:**

$$\text{NOUTPUT} \left\{ k, \begin{matrix} \text{R} \\ \text{L} \end{matrix} \right\} = \left\{ \begin{matrix} \text{ALL} \\ m \end{matrix} \right\}$$

**Examples:**

```
NOUTPUT (R)=ALL
NOUTPUT (2)=5
NOUTPUT (4,L)=10
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                |
|------------------|-------------------------------------------------------------------------------------------------------------------------------|
| ALL              | Output for all segments is desired.                                                                                           |
| m                | Output for segments specified in SET m is desired. (Integer>0)                                                                |
| k                | Used in eigenvalue analysis to request eigenvector and internal force output for harmonics specified in SET k. (Integer>0)    |
| R, L             | Output for only the right- or left-half of segments specified as ALL or in SET m. R and L are used in dihedral symmetry only. |

**Remarks:**

1. Sets k and m are defined on SET commands.
2. In cyclic symmetry analysis, this command or the HOUTPUT command is required to obtain data recovery.

**392 NSM**  
**Nonstructural Mass**

**NSM** Nonstructural Mass

Selects Nonstructural Mass (NSM) set for mass generation.

**Format:**

NSM=n

**Examples:**

NSM=5

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                          |
|------------------|-------------------------------------------------------------------------------------------------------------------------|
| n                | Set identification number of a nonstructural mass that appears on a NSM, NSM1, or NSMADD bulk data entry. (Integer > 0) |

**Remarks:**

1. Different NSM sets may be selected for superelements and residual; but within a superelement or residual it may not change within the subcase structure.



**OFREQUENCY**    Output Frequency Set

Selects a set of frequencies for output requests.

**Format:**

$$\text{OFREQUENCY} = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

```
OFREQUENCY=ALL
OFREQUENCY=15
```

**Describers:**

| Describer | Meaning                                                                                                                                                    |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Output for all frequencies will be computed.                                                                                                               |
| n         | Set identification of a previously appearing SET command.<br>Output for frequencies closest to those given on this SET command will be output. (Integer>0) |



**Remarks:**

1. In real eigenvalue, buckling, and complex eigenvalue analyses, the OMODES Case Control command allows for an alternate way of selecting the modes to be output based on their mode numbers. In these cases, if both the OMODES and OFREQUENCY requests appear, the OMODES request takes precedence.
2. If this command is not specified in the Case Control Section (or, in the case of real eigenvalue, buckling, and complex eigenvalue analyses, if neither the OMODES nor the OFREQUENCY request is specified), then output will be generated for all frequencies.
3. The number of solutions selected will always be equal to the number of quantities in the selected set. The closest values are used. This is accomplished by working in increasing order of magnitude in the OFREQ set, assigning the closest frequency value from the frequency set for each value in the OFREQ set, and if already previously assigned, then assigning the next closest value. Thus, for example, if the frequency set is 2.5; 3.5; ...; 14.5; 15.5, and the OFREQ set is 3.8; 17.4; 21.7, the program will select 3.5; 15.5; 14.5 from the frequency set in that order, and will sort to end up with 3.5; 14.5; 15.5.

## 394 OFREQUENCY

### Output Frequency Set

- In flutter analysis (SOL 145), the selected set refers to the imaginary part of the complex eigenvalues. The physical interpretation of this quantity depends on the method of flutter analysis as follows:
  - K- or KE-method: Velocity (input units).
  - PK-method: Frequency.
- In aeroelastic response analysis (SOL 146) with RLOAD selection, the selected set refers to the frequency (cycles per unit time).
- In complex eigenvalue analysis (SOLs 107 and 110), the selected set refers to the imaginary part of the complex eigenvalues.
- In the modal solution sequences, if this command is specified in more than one subcase, then it is recommended that the first subcase contain OFREQ=ALL and subsequent subcases contain OFREQ=n. Instead of OFREQ=ALL, a super-set of all OFREQ sets to follow may be used in the first subcase (see exceptions described in Remark 8). Also, data recovery requests should be specified only in the subsequent subcases. For example:

```
SUBCASE 1
  OFREQ=ALL $ 0.0 through 0.5
SUBCASE 2
  SET 10=0.0 0.1 0.3
  OFREQ=10
  DISP=ALL
SUBCASE3
  SET 20=0.4 0.5
  OFREQ=20
  STRESS=ALL
```

- An OFREQ selection in a given subcase is valid for all subsequent subcases of a given batch of frequency response subcases, until a new OFREQ selection is encountered. However, with SOL 200, when a new boundary condition and/or a new frequency set is encountered, a new batch of frequency response subcases starts, and a new OFREQ super-set (see Remark 7) needs to be entered with the first subcase of this new batch, if there was a previous definition of OFREQ.

**OLOAD**    Applied Load Output Request

Requests the form and type of applied load vector output.

**Format:**

$$\text{OLOAD} \left( \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right], \left[ \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right], \right. \\ \left. \left[ \begin{array}{l} \text{[PSDF]} \\ \text{[ATOC]} \\ \text{[CRMS]} \\ \text{[RALL]} \end{array} \right], \left[ \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right], \left[ \text{[RPUNCH]} \right] \right) = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
OLOAD=ALL
OLOAD (SORT1, PHASE) =5
```

**Describers:**

| Describer    | Meaning                                                                                                                                         |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence. |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each grid point.                                                         |
| PRINT        | The printer will be the output medium.                                                                                                          |
| PUNCH        | The punch file will be the output medium.                                                                                                       |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                          |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                      |

## 396 OLOAD Applied Load Output Request

| Describer | Meaning                                                                                                                                                                                                          |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PSDF      | Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 11. |
| ATOC      | Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 11.        |
| CRMS      | Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 11.    |
| RALL      | Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 11.         |
| RPRINT    | Writes random analysis results to the print file. (Default)<br>See remark 11.                                                                                                                                    |
| NORPRINT  | Disables the writing of random analysis results to the print file. See remark 11.                                                                                                                                |
| RPUNCH    | Writes random analysis results to the punch file. See remark 11.                                                                                                                                                 |
| ALL       | Applied loads for all points will be output. See Remarks 2 and <a href="#">Remarks:</a> .                                                                                                                        |
| NONE      | Applied load for no points will be output.                                                                                                                                                                       |
| n         | Set identification of a previously appearing SET command. Only loads on points with identification numbers that appear on this SET command will be output. (Integer>0)                                           |

### Remarks:

1. Both PRINT and PUNCH may be requested.
2. The defaults for SORT1 and SORT2 depend on the type of analysis:

- SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
3. In a statics problem, a request for SORT2 causes loads at all requested points (zero and nonzero) to be output.
  4. OLOAD=NONE overrides an overall output request.
  5. In the statics superelement solution sequences, and in the dynamics SOLs 107 through 112, 118, 145, 146, and 200, OLOADs are available for superelements and the residual structure. Only externally applied loads are printed, and not loads transmitted from upstream superelements. Transmitted loads can be obtained with GPFORCE requests.
    - In the nonlinear transient analysis solution sequences SOLs 129 and 159, OLOADs are available only for residual structure points and include loads transmitted by upstream superelements.
  6. In nonlinear analysis, OLOAD output will not reflect changes due to follower forces.
  7. Loads generated via the SPCD Bulk Data entry do not appear in OLOAD output.
  8. In SORT1 format, OLOADs recovered at consecutively numbered scalar points are printed in groups of six (sextets) per line of output. But if a scalar point is not consecutively numbered, then it will begin a new sextet on a new line of output. If a sextet can be formed and it is zero, then the line will not be printed. If a sextet cannot be formed, then zero values may be output.
  9. OLOAD results are output in the global coordinate system (see field CD on the GRID Bulk Data entry).

## 398 OLOAD

### Applied Load Output Request

10. In inertia relief analysis, the OLOAD output includes both the inertia loads and applied loads.
11. The following applies to SOL 111 PSD solutions:
  - Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT descriptors control the frequency response output. The RPRINT,NORPRINT,RPUNCH descriptors control the random output.
  - The SORT1 and SORT2 descriptors only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.
  - Any combination of the PSDF, ATOC, and CRMS descriptors can be selected. The RALL descriptor selects all three.
  - When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.

4

CASE

## OMODES    Output Modes Set

Selects a set of modes for output requests.

**Format:**

$$\text{OMODES} = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

```
OMODES=ALL
OMODES=20
```

**Describers:**

| Describer | Meaning                                                                                                                                    |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Output for all extracted modes will be computed. (Default)                                                                                 |
| n         | Set identification of a previously appearing SET command. Output for those extracted modes appearing on this SET command will be computed. |



**Remarks:**

1. This command is honored only in SOLs 103, 105, 107, 110, 111, 112, and 200. It is ignored in all other analyses.
2. In contrast to the OFREQUENCY Case Control request, which affords an alternate way of selecting the modes to be output based on their frequencies, the OMODES command allows mode selection based on integer mode ID. For example:

```

SUBCASE 10
...
SET 11=1,3,5,7
OMODES=11
DISP=ALL
...
SUBCASE 20
...
SET 21=25., 28., 31.
OFREQ=21
DISP=ALL
...

```

3. If both the OMODES and the OFREQUENCY requests appear, the OMODES request takes precedence.

## 400 OMODES Output Modes Set

4. If neither the OMODES nor the OFREQUENCY request is specified, output will be generated for all modes.
5. It is important to note that the OMODES request has no effect whatsoever on the number of modes computed. Instead, it only provides a means for selecting a subset of the computed modes for which output is to be generated.
6. In superelement analysis, the set definition of an OMODES request for an upstream superelement will not be honored unless a similar request appears for its downstream neighbor. The downstream request should either be comprised of the union of all upstream requests, or left blank, as the OMODES default is ALL. Note that the code does not check to see if this condition is satisfied.
7. If the parameter SECOMB is set to "YES", then OMODES must be the same for all superelements.

4

CASE



## OTIME    Output Time Set

Selects a set of times for output requests.

### Format:

$$\text{OTIME} = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

### Examples:

```
OTIME=ALL
OTIME=15
```

### Describers:

| Describer | Meaning                                                                                                                                                    |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Output for all times will be computed.                                                                                                                     |
| n         | Set identification number of a previously appearing SET command. Output for times closest to those given on this SET command will be computed. (Integer>0) |

**4**  
CASE

### Remarks:

1. If the OTIME command is not supplied in the Case Control Section, then output for all times will be computed.
2. This command is particularly useful for requesting a subset of the output (e.g., stresses at only peak times, etc.).
3. This command can be used in conjunction with the MODACC module to limit the times for which modal acceleration computations are performed.
4. If this command is specified in more than one subcase in the modal solution sequences, then it is recommended that the first subcase contain OTIME=ALL and subsequent subcases contain OTIME=n. Also, data recovery requests should be specified only in the subsequent subcases. For example:

```
SUBCASE 1
  OTIME ALL
SUBCASE 2
  OTIME=10
  SET10= . . .
  DISP=ALL
SUBCASE 3
  OTIME=20
  SET 20= . . .
```

## 402 OTIME

### Output Time Set

STRESS=ALL

5. The OTIME command is not effective in nonlinear transient analysis.
6. In superelement analysis, the set definition of an OTIME request for an upstream superelement will not be honored unless a similar request appears for its downstream neighbor. The downstream request should either be comprised of the union of all upstream requests, or left blank, as the OTIME default is ALL. Note that the program does not check to see if this condition is satisfied.


4

CASE

## OUTPUT    Case Control Delimiter

Delimits the various types of commands for the structure plotter, curve plotter, grid point stress, and MSGSTRESS.

**Format:**

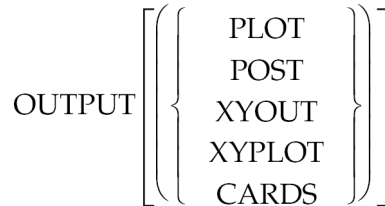

**Examples:**

```
OUTPUT
OUTPUT (PLOT)
OUTPUT (XYOUT)
```

**Describers:**

| Describer          | Meaning                                                                                                                                                                                                                   |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PLOT               | Beginning of the structure plotter request. This command must precede all structure plotter control commands. Plotter commands are described in <a href="#">“OUTPUT(PLOT) Commands”</a> .                                 |
| POST               | Beginning of grid point stress SURFACE and VOLUME commands. This command must precede all SURFACE and VOLUME commands.                                                                                                    |
| XYOUT or<br>XYPLOT | Beginning of curve plotter request. This command must precede all curve plotter control commands. XYPLOT and XYOUT are entirely equivalent. Curve plotter commands are described in <a href="#">“X-Y PLOT Commands”</a> . |
| CARDS              | The OUTPUT(CARDS) packet is used by the MSGSTRESS program. These commands have no format rules. This package must terminate with the command ENDCARDS (starting in column 1).                                             |

**Remarks:**

1. The structure plotter request OUTPUT(PLOT), the curve plotter request OUTPUT(XYOUT or XYPLOT), and the grid point stress requests (OUTPUT(POST)) must follow the standard Case Control commands.



## 404 **OUTPUT**

### **Case Control Delimiter**

2. If OUTPUT is specified without a describer, then the subsequent commands are standard Case Control commands.
3. Case Control commands specified after OUTPUT(POST) are SURFACE and VOLUME.

**OUTRCV**    P-element Output Option Selection

Selects the output options for the p-elements defined on an OUTRCV Bulk Data entry.

**Format:**

OUTRCV=*n*

**Examples:**

```
OUTRCV=10  
OUTR=25
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                        |
|------------------|-----------------------------------------------------------------------|
| <i>n</i>         | Set identification number of a OUTRCV Bulk Data entry.<br>(Integer>0) |

**Remarks:**

The OUTRCV command is optional. By default, p-element output uses the defaults specified for CID and VIEW under the OUTRCV Bulk Data entry description.

## 406 P2G Direct Input Load Matrix Selection

### P2G Direct Input Load Matrix Selection

Selects direct input load matrices.

#### Format:

P2G=name

#### Examples:

```
P2G=LDMIG
P2G=L1, L2, L3
SET 100=LDMIG, L1, L8
P2G=100
P2G=1.25*L1, 1.0*L2, 0.75*L3
```

#### Describers:

| Describer | Meaning                                                                                                                                                                                                                                        |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| name      | Name of a [ $P_g^2$ ] matrix that is input on the DMIG Bulk Data entry. (Character) Scale factors may be included (see remarks 4 and 5). See “Applied Static Loads in SubDMAPs SELG, SELR, and SELRRS” in the <i>NX Nastran User’s Guide</i> . |

#### Remarks:

1. DMIG matrices will not be used unless selected.
2. Terms are added to the load matrix before any constraints are applied.
3. The matrix must be columnar in form (field 4 on the DMIG entry must contain the integer 9).
4. The associated DMIG matrices can be scaled using either in-line scale factors on P2G (for example, P2G =1.25\*L1), using the parameter CP2 (for example, PARAM,CP2,1.25), or both. See “[Parameter Descriptions](#)”.
5. Multiple matrices separated by a comma or a blank are additive. When multiple matrices and in-line scale factors are used together, each matrix name in the list must include a scale factor. A scale factor of 1.0 should be used for matrices in the list which are not scaled. For example,

```
P2G=1.25*L1, 1.0*L2, 0.75*L3
```

The parameter CP2 when defined will scale all P2G. For example, if PARAM,CP2,1.30 is defined with the P2G example above, the result would be P2G=1.30(1.25\*L1 + 1.0\*L2 + 0.75\*L3).

**PAGE** Page Eject

Causes a page eject in the echo of the Case Control Section.

**Format:**

PAGE

**Examples:**

PAGE

**Remarks:**

1. PAGE appears in the printed echo prior to the page eject.
2. PAGE is used to control paging in large Case Control Sections.

408 **PANCON**  
Acoustic Panel Contribution Request

**PANCON** Acoustic Panel Contribution Request

Requests acoustic panel contribution results.

**Format:**

$$\text{PANCON} \left[ \begin{array}{l} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{l} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right], \left[ \begin{array}{l} \text{PRINT} \\ \text{NOPRINT} \end{array} \right], \text{PUNCH}, \\
 \left[ \begin{array}{l} \text{ABS} \\ \text{NORM} \\ \text{BOTH} \end{array} \right], \text{TOPP} = pp, \text{TOPG} = pg, \text{SOLUTION} = \left\{ \begin{array}{l} \text{ALL} \\ \text{setf} \end{array} \right\}, \\
 \text{PANEL} = \left\{ \begin{array}{l} \text{ALL} \\ \text{setp} \\ \text{NONE} \end{array} \right\}, \text{GRID} = \left\{ \begin{array}{l} \text{NONE} \\ \text{setg} \\ \text{ALL} \end{array} \right\} = \left\{ \begin{array}{l} n \\ \text{ALL} \\ \text{NONE} \end{array} \right\}$$

**Examples:**

PANCON=123  
PANCON (SORT1, PHASE, PRINT, PUNCH, BOTH, TOPP=5) =ALL

**Describers:**

| Describer    | Meaning                                                                                                                          |
|--------------|----------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of panels or grids for each frequency. (Default)                                   |
| SORT2        | Output will be presented as a tabular listing of frequency for each panel or grid.                                               |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output. (Default) |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                       |
| PRINT        | The print file (.f06) will be the output medium. (Default)                                                                       |
| PUNCH        | The standard punch file (.pch) will be the output medium.                                                                        |





| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NOPRINT          | Generates, but does not print, contribution results.                                                                                                                                                                                                                                                                                                                                                      |
| ABS              | Output contributions in absolute terms. (Default)                                                                                                                                                                                                                                                                                                                                                         |
| NORM             | Output contributions in normalized terms.                                                                                                                                                                                                                                                                                                                                                                 |
| BOTH             | Output contributions in both absolute and normalized terms.                                                                                                                                                                                                                                                                                                                                               |
| TOPP             | The number of structural panels to list in the output that have the greatest contribution to the response at each frequency. The output is sorted in descending order from the structural panel having the greatest contribution; pp > 0. If pp = 0, no structural panel contributions will be output, only totals. (Default is pp = 5)                                                                   |
| TOPG             | The number of structural grids to list in the output that have the greatest contribution to the response at each frequency. The output is sorted in descending order from the structural grid having the greatest contribution; pg > 0. If pg = 0, no structural grid contributions will be output, only totals. (Default is pg = 20)                                                                     |
| SOLUTION         | SOLUTION = ALL (default) requests that contribution calculations be performed at all frequencies defined by the FREQUENCY case control commands. For SOLUTION = <i>setf</i> , contribution calculations are performed at the frequencies specified by a SET case control command having the identification number of <i>setf</i> .                                                                        |
| PANEL            | Specifies the set of panels to output panel contributions. PANEL = ALL (default) requests that contributions from all panels defined in the bulk entry section be output. PANEL = <i>setp</i> requests contributions from panels included in the SET case control command having the identification number of <i>setp</i> . PANEL = NONE requests that no contributions from panels be output.            |
| GRID             | Specifies the set of grids to output contributions. GRID = NONE (default) requests that no structural grid contributions be output. GRID = <i>setg</i> requests contributions from structural grids included in the SET case control command having the identification number of <i>setg</i> . GRID = ALL requests contributions from all structural grids that are part of the acoustic coupling matrix. |
| n                | Calculate panel and/or grid contributions for the list defined in SETMC n. Any response defined in SETMC n that is not an acoustic response will be ignored.                                                                                                                                                                                                                                              |

## 410 PANCON Acoustic Panel Contribution Request

| Describer | Meaning                                                                                                                                                                                                          |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Calculate panel and/or grid contributions for the lists defined in all SETMC sets defined in and above the current subcase. Any response defined in SETMC sets that is not an acoustic response will be ignored. |
| NONE      | Do not calculate panel or grid contributions. This is useful to turn off contribution output for a specific subcase.                                                                                             |

### Remarks:

1. Both PRINT and PUNCH may be requested.
2. PANCON = NONE overrides an overall output request.
3. SOL 108 and 111 are supported.
4. The parameters LFREQ, LFREQFL, HFREQ, HFREQFL, LMODES, and LMODESFL are supported.
5. The SOLUTION and PANEL keywords can be abbreviated to SOLU and PANE, respectively.
6. The SET case control command referenced by SOLUTION = *setf* must contain real values for frequencies or times. Using integer values may lead to unintended results.
7. The SET case control command referenced by PANEL = *setp* must contain the alphanumeric name of existing panels defined by PANEL bulk entries.

## PARAM Parameter Specification

Specifies values for parameters. Parameters are described in [Parameters](#).

### Format:

PARAM,n,V1,V2

### Examples:

```
PARAM,GRDPNT,0
PARAM,K6ROT,1.0
```

### Describers:

| Describer | Meaning                                                                            |
|-----------|------------------------------------------------------------------------------------|
| n         | Parameter name (1 to 8 alphanumeric characters, the first of which is alphabetic). |
| V1, V2    | Parameter value based on parameter type, as follows:                               |

| Type                      | V1                     | V2                     |
|---------------------------|------------------------|------------------------|
| Integer                   | Integer                | Blank                  |
| Real, single precision    | Real                   | Blank                  |
| Character                 | Character              | Blank                  |
| Real, double precision    | Real, Double Precision | Blank                  |
| Complex, single precision | Real or Blank          | Real or Blank          |
| Complex, double precision | Real, Double Precision | Real, Double Precision |

### Remarks:

1. The PARAM command is normally used in the Bulk Data Section and is described in [Bulk Data Entries](#).
2. The parameter values that may be defined in the Case Control Section are described in [Parameters](#). Case Control PARAM commands in user-written DMAPs require the use of the PVT module, described in the *NX Nastran DMAP Programmer's Guide*.

## 412 PARTN Partitioning Vector Specifications

### **PARTN** Partitioning Vector Specifications

Specifies a list of grid point identification numbers that will be partitioned with the DMAP module MATMOD (Option 17). In SOLs 111 and 200, the PARTN command specifies the points at which modal participation factors are to be computed.

#### **Format:**

PARTN=n

#### **Examples:**

PARTN=10

#### **Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                                        |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| n                | Set identification number of a previously appearing SET command. Only modal participation factors for points with identification numbers that appear on the SET=n command will be output. (Integer>0) |

#### **Remarks:**

1. The PARTN command and the DMAP module MATMOD provide a convenient method for building a partitioning vector for use in the DMAP modules such as PARTN and MERGE.
2. Modal participation factors are computed automatically in SOLs 111 and 200 when coupled fluid-structure analysis is performed. See the *NX Nastran User's Guide*.

## **PLOTID** Plotter Identification

Defines a character string that will appear on the first frame of any plotter output.

### **Format:**

PLOTID=title

### **Examples:**

PLOTID=BLDG. 125 BOX 91

### **Describers:**

| <b>Describer</b> | <b>Meaning</b>        |
|------------------|-----------------------|
| title            | Any character string. |

### **Remarks:**

1. PLOTID must appear before the OUTPUT(PLOT) or OUTPUT(XYOUT) commands.
2. The presence of PLOTID causes a special header frame to be plotted with the supplied identification plotted several times. The header frame allows plotter output to be identified easily.
3. If no PLOTID command appears, no ID frame will be plotted.
4. The PLOTID header frame will not be generated for the table plotters.

**414 PRESSURE**  
**Pressure Output Request**

**PRESSURE**      Pressure Output Request

Requests form and type pressure output. Analogous to the DISPLACEMENT Case Control command.

See the description for [DISPLACEMENT](#).

**RANDOM**    Random Analysis Set Selection

Selects the RANDPS and RANDT1 Bulk Data entries to be used in random analysis.

**Format:**

RANDOM=n

**Examples:**

RANDOM=177

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                              |
|------------------|-------------------------------------------------------------------------------------------------------------|
| n                | Set identification number of RANDPS and RANDT1 Bulk Data entries to be used in random analysis. (Integer>0) |

**Remarks:**

1. RANDOM must select RANDPS Bulk Data entries to perform random analysis.
2. RANDOM must appear in the first subcase of the current loop. RANDPS Bulk Data entries may not reference subcases in a different loop. Loops are defined by a change in the FREQUENCY command or changes in the K2PP, M2PP, or B2PP commands.
3. If RANDPS entries are used in a superelement analysis, the RANDOM command may be specified above the subcase level if a condensed subcase structure (SUPER=ALL) is used. If a condensed subcase structure is not used, then a unique RANDOM selection of a unique RANDPS entry must be specified within each of the desired superelement subcases.
4. P-elements are not supported in random analysis.

## 416 RCROSS Cross-Power Spectral Density and Cross-correlation Function Output Requests

**RCROSS** Cross-Power Spectral Density and Cross-correlation Function Output Requests

Requests computation and output of cross-power spectral density and cross-correlation functions in random analysis.

**Format:**

$$\text{RCROSS} \left[ \left[ \left[ \begin{array}{c} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right], \left[ \begin{array}{c} \text{PRINT} \\ \text{NOPRINT} \end{array} \right], [\text{PUNCH}], \left[ \begin{array}{c} \text{PSDF} \\ \text{CORF} \\ \text{RALL} \end{array} \right] \right] \right] = n$$

**Examples:**

```
RCROSS (PHASE)=10
RCROSS (PSDF, NOPRINT, PUNCH)=20
```

**Describers:**

**4**  
**CASE**

| Describer    | Meaning                                                                                                                                                                      |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output (for cross-power spectral density function). Use of either REAL or IMAG yields the same output. (Default) |
| PHASE        | Requests polar format (magnitude and phase) of complex output (for cross-power spectral density function). Phase output is in degrees.                                       |
| PRINT        | Writes output to print file. (Default)                                                                                                                                       |
| NOPRINT      | Does not write output to the print file.                                                                                                                                     |
| PUNCH        | Writes output to punch file.                                                                                                                                                 |
| PSDF         | Requests the cross-power spectral density function be calculated and output for random analysis post-processing. (Default)                                                   |
| CORF         | Requests the cross-correlation function be calculated and output for random analysis post-processing.                                                                        |
| RALL         | Requests both the cross-power spectral density and cross-correlation function be calculated and output for random analysis post-processing.                                  |
| n            | Identification number of RCROSS bulk data entry to be used in random analysis. (Integer > 0)                                                                                 |



**Cross-Power Spectral Density and Cross-correlation Function Output Requests****Remarks:**

1. The case control RCROSS entry must be used in conjunction with the case control RANDOM entry. See remarks under the RANDOM case control entry.
2. Response quantities, such as DISPLACEMENT, STRESS, and FORCE, must be requested by corresponding case control entries in order to compute cross-power spectral density and cross-correlation functions between the two response quantities specified by the RCROSS bulk data entry. It is recommended that the DISPLACEMENT, STRESS, and FORCE requests be put above the subcase level to ensure that these response quantities exist when the random analysis post-processing occurs.
3. The response quantities must belong to the same superelement. The cross-power spectral density and cross-correlation functions between two responses that belong to different superelements are not supported.
4. The parameter RPOSTS controls the SORT1/SORT2 output format.

## 418 REPCASE

Repeat Output Subcase Delimiter

### REPCASE Repeat Output Subcase Delimiter

Delimits and identifies a repeated output subcase.

**Format:**

REPCASE=n

**Examples:**

REPCASE=137

**Describers:**

| Describer | Meaning                                    |
|-----------|--------------------------------------------|
| n         | Subcase identification number. (Integer>1) |

**Remarks:**

1. n must be strictly increasing (i.e., must be greater than all previous subcase identification numbers).
2. REPCASE defines a subcase that is used to make additional output requests for the previous real subcase. This command is required because multiple output requests for the same item are not permitted in the same subcase.
3. REPCASE may only be used in statics and normal modes problems. However, in normal modes, only output for the first mode is obtained. This feature is not supported in SOLs 106 or 153.
4. One or more repeated subcases (REPCASEs) must immediately follow the subcase (SUBCASE) to which they refer.
5. If the referenced subcases contain thermal loads or element deformations, the user must define the temperature field in the REPCASE with a TEMP(LOAD) Case Control command or the element deformation state with a DEFORM command. P-elements are not supported in random analysis.

## RIGID    Rigid Element Method

Selects the rigid element processing method for RBAR, RBE1, RBE2, RBE3, RROD and RTRPLT elements.

**Format:**

$$\text{RIGID} = \left\{ \begin{array}{l} \text{LINEAR} \\ \text{LAGRAN} \end{array} \right\}$$

**Examples:**

RIGID=LAGRAN

**Describers:**

| Descriptor | Meaning                                 |
|------------|-----------------------------------------|
| LINEAR     | Selects the linear elimination method.  |
| LAGRAN     | Selects the Lagrange multiplier method. |



**Remarks:**

1. The RIGID command must be above the SUBCASE level.
2. The LAGRAN method allows for the thermal expansion of the rigid elements.
3. The RIGID command can only be used in SOLs 101 through 112. For all other solution sequences, RIGID command is ignored and RIGID=LINEAR is used.
4. If the RIGID command is not specified, RIGID=LINEAR is used.
5. LINEAR processing will not compute the thermal loads. Also, in SOLs 103 through 112, LAGRAN method must be used to compute the differential stiffness due to the thermal expansion of the rigid elements.
6. The TEMP(LOAD) and TEMP(INIT) value used on RBAR, RROD, and RTRPLT elements is an average calculated from the grid point values. On RBE1, RBE2 and RBE3 elements, an average TEMP(LOAD) and TEMP(INIT) is calculated for each leg of the element using the values on the independent/dependent grid pairs such that each leg can have a different thermal strain if the temperatures vary at the grids.

The rigid element thermal strains are calculated by  
 $\epsilon_{\text{thermal}} = a(\text{AVGTEMP(LOAD)} - \text{AVGTEMP(INIT)})$ .

If TEMP(LOAD) or TEMP(INIT) are not defined, they are assumed to be zero.

**420 RIGID**  
**Rigid Element Method**

7. When using RIGID=LAGRAN, K6ROT must be defined as non-zero.

**Requests output of MIN/MAX and RMS values from solutions 101, 109, and 112.**

**RMAXMIN** Requests output of MIN/MAX and RMS values from solutions 101, 109, and 112.

Defines parameters to output the minimum, maximum, absolute value maximum, average, and RMS value of stress, force and displacement results generated during solutions 101, 109, and 112.

**Format:**

$$\begin{aligned}
 & \text{RMAXMIN} \left( \{ \text{FORCE, STRESS, DISP} \}, \begin{bmatrix} \text{PRINT} \\ \text{NOPRINT} \end{bmatrix}, \begin{bmatrix} \text{PUNCH, PLOT} \end{bmatrix}, \begin{bmatrix} \text{ABSOLUTE} \\ \text{MINIMUM} \\ \text{MAXIMUM} \end{bmatrix} \right) \\
 & \text{RMXTRAN} = \begin{bmatrix} \text{yes} \\ \text{no} \end{bmatrix}, \text{NPAVG}=\text{n}, \text{START}=\text{a}, \text{END}=\text{b} \quad = \quad \begin{bmatrix} \text{YES} \\ \text{NO} \end{bmatrix}
 \end{aligned}$$

**Examples:**

```

RMAXMIN (NOPRINT, STRESS, ABSOLUTE) = YES
RMAXMIN (STRESS, PRINT, MAX, NPAVG=3, START=.3, END=1.2) = yes
    
```

**Describers:**

| Describer           | Meaning                                                          |
|---------------------|------------------------------------------------------------------|
| FORCE, STRESS, DISP | Result tables to be searched.                                    |
| PRINT               | Writes output to the print file. (Default)                       |
| NOPRINT             | Does not write output to the print file.                         |
| PUNCH               | Writes output to the punch file.                                 |
| PLOT                | Writes output to .plt file.                                      |
| ABSOLUTE            | Specifies output of absolute maximum values. See Remarks 1 & 2.  |
| MINIMUM             | Specifies output of minimum values. See Remarks 1 & 2.           |
| MAXIMUM             | Specifies output of maximum values. (Default) See Remarks 1 & 2. |



## 422 RMAXMIN

Requests output of MIN/MAX and RMS values from solutions 101, 109, and 112.

| Describer     | Meaning                                                                                                                                        |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| RMXTRAN       | Turns on or off the normal printing of output data when RMAXMIN output is requested. See Remark 7.                                             |
| = YES         | Results will be output according to the DISPLACEMENT, STRESS, and FORCE case control entries.                                                  |
| = NO          | Results are not output if RMAXMIN is activated.                                                                                                |
| NPAVG         | Defines the number of extremes in a subcase history (SOL 101) or peaks in a time history (SOL 109 and 112) to be averaged. See Remarks 2 & 3.  |
| START=a,END=b | Limits the RMAXMIN evaluation over a specific range in the subcase history (SOL 101) or the time history (SOL 109 and 112). See Remarks 1 & 4. |
| YES           | Activates RMAXMIN.                                                                                                                             |
| NO            | Disables RMAXMIN.                                                                                                                              |

### Remarks:

1. RMAXMIN outputs maximum/minimum/absolute tables and RMS tables. Both tables are evaluated using the START and/or END values when they are defined. Only one of MAXIMUM (default), MINIMUM and ABSOLUTE can be selected, and the one selected determines the values reported in the maximum/minimum/absolute tables. The RMS tables are independent of this selection.
2. NPAVG is the number of extremes in a subcase range (SOL 101) or the number of peak responses (see Remark 3) in a time range (SOLs 109 and 112) to be averaged when calculating the maximum/minimum/absolute tables. The extremes/peak responses used depend on which of MAXIMUM, MINIMUM, or ABSOLUTE is defined. When NPAVG=1, an extreme value is reported with no averaging. NPAVG is ignored by the RMS calculation.
3. In solutions 109 and 112, a peak search algorithm is used to determine the peak responses in the time range. This algorithm is comparing peaks relative to one another to find "NPAVG" peak responses for averaging.
4. The START=a and END=b describers can be used to limit the RMAXMIN evaluation to a specific subcase or time range. By default, START is the beginning, and END is the final, such that one can be defined without the other.

**Requests output of MIN/MAX and RMS values from solutions 101, 109, and 112.**

5. RMAXMIN only processes SORT1 output requests.
6. One or more of STRESS, FORCE and DISP must be selected for any output to be generated. RMAXMIN processes displacement for the grid points specified by the DISP case control and processes stress and force for elements specified by the STRESS and FORCE case control respectively.
7. The parameter RMXTRAN can also be used to control the output of transient results for STRESS, FORCE, DISP case control when RMAXMIN is activated, but only if the RMXTRAN input on RMAXMIN is not defined. The parameter default, RMXTRAN=NO will suppress output of transient results. The RMXTRAN describer on the RMAXMIN case control command, when defined, takes precedence over the RMXTRAN parameter.
8. The output datablocks generated by RMAXMIN are OES1MX, OEF1MX, and OUGV1MX for stress, force and displacement respectively.
9. The maximum, minimum, absolute, and RMS results are captured and stored on a component basis in the OES1MX, OEF1MX, and OUGV1MX datablocks. For example, the maximum displacement is computed and stored for all six DOF on a grid and each value may correspond to different times in the transient history.
10. When NPAVG is >1 or RMAXMIN is used with solution sequence 101, the RMAXMIN calculations are performed in system memory. If insufficient memory is allocated with the memory command line option, RMAXMIN will attempt to perform the calculations using scratch disk space. The scratch disk method can be used by default by setting system cell 497=1.

**424 RMETHOD**  
ROTORD Selection

**RMETHOD** ROTORD Selection

Selects the ROTORD bulk data entry used for rotor dynamics analysis.

**Formats:**

RMETHOD=n

**Examples:**

RMETHOD=77

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                 |
|------------------|----------------------------------------------------------------|
| n                | Identification number of a ROTORD Bulk Data entry. (Integer>0) |

**Remarks:**

1. ROTORD bulk data entries will not be used unless selected in the Case Control section.
2. RMETHOD entry must be above any SUBCASE Case Control entries.
3. RMETHOD is only supported in SOLs 110 and 111.

**4**

**CASE**



**RSMETHOD** Real Eigenvalue Extraction Method Selection

Selects the real eigenvalue extraction parameters in the component mode reduction of the residual structure for direct and modal solutions.

**Format:**

RSMETHOD = n

**Examples:**

RSMETHOD=33

**Describers:**

| Describer | Meaning                                                                    |
|-----------|----------------------------------------------------------------------------|
| n         | Set identification number of an EIGR or EIGRL Bulk Data entry. (Integer>0) |

**Remarks:**

1. RSMETHOD specifies the set identification number of an EIGR or EIGRL entry to be used in the computation of the normal modes on the o-set (fixed boundary modes) or v-set (mixed boundary modes) of the residual structure depending on the b-set and/or c-set entries. These modes are calculated for a component mode reduction of the residual structure when QSET type entries exist. If QSET type entries do not exist in the residual structure a component mode reduction for SE 0 is not performed.
2. Component mode reduction of a residual structure is used to account for local residual flexibility in the residual. Similar to component mode reduction of a superelement in which residual flexibility effects are obtained for the exterior DOF, a component mode reduction on the residual accounts for residual flexibility at DOF identified with ASET, BSET, and CSET type entries.
3. If the set identification number selected is present on both EIGRL and EIGR entries, the EIGRL entry will be used. This entry requests the Lanczos eigensolution method.
4. For CMR of RS the user must have QSET type entries along with ASET, BSET, and CSET type entries. In contrast, when using CMR of a superelement other than 0, the user must use SEBSET, SECSET, SEQSET, or SESET type entries.
5. If any of the following conditions exist, a Guyan reduction is executed and the results may be poor because of the absence of a dynamic portion of the reduction:
  - DOF referenced by QSET do not exist.



**426 RSMETHOD**  
**Real Eigenvalue Extraction Method Selection**

- RSMETHOD specified but QSET does not exist.

**SACCELERATION**    Solution Set Acceleration Output Request

Requests the form and type of solution set acceleration output.

**Format:**

$$\text{SACCELERATION} \left[ \left( \left[ \begin{array}{l} \text{SORT1} \\ \text{SORT2} \end{array} \right], \text{PRINT}, \text{PUNCH} \left[ \begin{array}{l} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
SACCELERATION=ALL
SACCELERATION (PUNCH, IMAG) =142
```

**Describers:**

| Describer    | Meaning                                                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.                                       |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each grid point (or mode number).                                                                              |
| PRINT        | The printer will be the output medium.                                                                                                                                                |
| PUNCH        | The punch file will be the output medium.                                                                                                                                             |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                                                                |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                                                            |
| ALL          | Acceleration for all solution set points (modes) will be output.                                                                                                                      |
| NONE         | Acceleration for no solution set points (modes) will be output.                                                                                                                       |
| n            | Set identification number of a previously appearing SET command. Only accelerations of points with identification numbers that appear on this SET command will be output. (Integer>0) |

## 428 SACCELERATION

### Solution Set Acceleration Output Request

#### Remarks:

1. Acceleration output is only available for transient and frequency response problems.
2. The defaults for SORT1 and SORT2 depend on the type of analysis and are discussed under [DISPLACEMENT](#). If SORT1 is selected for any of the commands SACC, SDIS, and SVEL, then the remaining commands will also be SORT1.
3. SACCELERATION=NONE allows an overall output request to be overridden.
4. Due to the differences in formulations, the modal responses for the constraint mode method of enforced motion will be different than the modal responses for the absolute displacement method of enforced motion. In order to highlight this difference, the f06 output for the constraint mode method will be labeled *alternative* solution set.

4

CASE

## SDAMPING    Structural Damping Selection

Requests modal damping as a function of natural frequency in modal solutions or viscoelastic materials as a function of frequency in direct frequency response analysis.

**Format:**

$$\text{SDAMPING} \left[ \left( \begin{array}{c} \text{STRUCTURE} \\ \text{FLUID} \end{array} \right) \right] = n$$

**Examples:**

SDAMPING=77

**Describers:**

| Describer             | Meaning                                                                                                                                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| STRUCTURE<br>or FLUID | Modal damping is requested for the structural or fluid portion of the model.                                                                                                                                 |
| n                     | Set identification number of a TABDMP1 (modal solutions such as 111 or MFREQ in SOL 200) or TABLEDi (direct solutions such as SOL 108 or DFREQ in SOL 200) bulk data entry. (Integer>0) See Remarks 1 and 2. |



**Remarks:**

1. In the modal solutions (e.g., SOLs 110, 111, 112, 145, 146, and 200), SDAMPING must reference a TABDMP1 entry.
2. In direct frequency response (e.g., SOL 108), SDAMPING must reference a TABLEDi entry with ID=n and another TABLEDi entry with ID=n+1, which define viscoelastic (frequency-dependent) material properties. See the *NX Nastran Advanced Dynamic Analysis User's Guide*.
3. SDAMPING may be requested for superelements as long as PARAM,SESDAMP,YES is specified.
4. The SDAMPING command is supported across subcases. A SDAMPING command selecting a different TABDMP1 or TABLEDi bulk data entry can be defined for each subcase.

**430 SDISPLACEMENT**  
**Solution Set Displacement Output Request**

**SDISPLACEMENT**      Solution Set Displacement Output Request

Requests the form and type of solution set displacement output.

**Format:**

$$\text{SDISPLACEMENT} \left( \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right], \text{PRINT}, \text{PUNCH} \left[ \begin{array}{c} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right) = \left[ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right]$$

**Examples:**

```
SDISPLACEMENT=ALL
SDISPLACEMENT (SORT2, PUNCH, PHASE) =NONE
```

**Describers:**

| Describer    | Meaning                                                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.                                       |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each grid point (or mode number).                                                                              |
| PRINT        | The printer will be the output medium.                                                                                                                                                |
| PUNCH        | The punch file will be the output medium.                                                                                                                                             |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                                                                |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                                                            |
| ALL          | Displacements for all solution set points (modes) will be output.                                                                                                                     |
| NONE         | Displacements for no solution set points (modes) will be output.                                                                                                                      |
| n            | Set identification number of a previously appearing SET command. Only displacements on points with identification numbers that appear on this SET command will be output. (Integer>0) |



**Remarks:**

1. The defaults for SORT1 and SORT2 depend on the type of analysis and are discussed in Remark 2 under the “DISPLACEMENT” . If SORT1 is selected for any of the commands SACC, SDIS, and SVEL then the remaining commands will also be SORT1.
2. SDISPLACEMENT=NONE allows an overall output request to be overridden.
3. The SDISPLACEMENT command is required to output normalized complex eigenvectors.
4. Due to the differences in formulations, the modal responses for the constraint mode method of enforced motion will be different than the modal responses for the absolute displacement method of enforced motion. In order to highlight this difference, the f06 output for the constraint mode method will be labeled *alternative* solution set.

## 432 SEALL Superelement Generation and Assembly

### SEALL Superelement Generation and Assembly

Specifies the superelement identification numbers of Phase 1 processing in which all matrices and loads are generated and assembled. Controls execution of the solution sequence.

#### Format:

$$\text{SEALL} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

#### Examples:

```
SEALL=ALL  
SEALL=7
```

#### Describers:

| Describer | Meaning                                                                                                                                                                                      |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Generate and assemble all superelements.                                                                                                                                                     |
| n         | Set identification number of a previously appearing SET command. Only superelements with identification numbers that appear on this SET command will be generated and assembled. (Integer>0) |
| i         | Identification number of a single superelement that will be generated and assembled. (Integer>0)                                                                                             |

#### Remarks:

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number of the residual structure and can only appear as a member of a SET.
3. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
4. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.



5. This command combines, in one command, the functions of the SEMG, SELG, SEKR, SELR, and SEMR commands.
6. This command does not control superelement data recovery (Phase 3). See [SEDR](#).
7. SEALL=ALL is the default in the Structured Solution Sequences (SOLs 101 through 200). This default can be overridden by specifying any of the following Phase 1 commands: SEALL, SEMG, SELG, SEKR, SELR, or SEMR.

## 434 SEDR Superelement Data Recovery

### SEDR      Superelement Data Recovery

Specifies the superelement identification numbers for which data recovery will be performed.

#### Format:

$$\text{SEDR} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

#### Examples:

```
SEDR=ALL  
SEDR=7
```

#### Describers:

| Describer | Meaning                                                                                                                                                                                     |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Performs data recovery for all superelements.                                                                                                                                               |
| n         | Set identification number of a previously appearing SET command. Data recovery will be performed for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which data recovery will be performed. (Integer>0)                                                                                       |

#### Remarks:

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number for the residual structure and can only appear as a member of a SET.
3. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
4. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.

5. If this command is not present, data recovery is performed for all superelements for which there are output requests (i.e., the default for this command is SEDR=ALL).

## 436 SEDV Superelement Design Variable Processing

### SEDV Superelement Design Variable Processing

Specifies the superelement identification numbers for which the design variables will be processed.

#### Format:

$$\text{SEDV} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

#### Examples:

```
SEDV=ALL  
SEDV=18
```

#### Describers:

| Describer | Meaning                                                                                                                                                                                                  |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Requests design variable processing for all superelements.                                                                                                                                               |
| n         | Set identification number of a previously appearing SET command. Design variable processing will be performed for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which design variable processing will be performed. (Integer>0)                                                                                       |

#### Remarks:

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number of the residual structure and can only appear as a member of a SET.
3. For a further discussion of superelement sensitivity analysis, see the *NX Nastran Design Sensitivity and Optimization User's Guide*.
4. Zero (0) can only appear as a member of a SET.
5. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.

6. If both the SEDV and SERESP commands are not present, then the design variable processing and design sensitivity matrix generation will be performed for all superelements.

## 438 SEEXCLUDE Superelement Matrix and Load Assembly Exclusion

### SEEXCLUDE      Superelement Matrix and Load Assembly Exclusion

Specifies the superelement identification numbers for which all matrices and loads will not be assembled into the downstream superelement.

#### Format:

$$\text{SEEXCLUDE} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

#### Examples:

```
SEEXCLUDE=ALL  
SEEXCLUDE=18
```


#### Describers:

| Describer | Meaning                                                                                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | All upstream superelements will be excluded.                                                                                                                                        |
| n         | Set identification number of a previously appearing SET command. Only those superelements with identification numbers that appear on this SET command will be excluded. (Integer>0) |
| i         | Identification number of a single superelement for which matrices will be excluded. (Integer>0)                                                                                     |

#### Remarks:

1. If this command is present, then it must be located before the first SUBCASE command.
2. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.
3. This command is not meaningful when applied to the residual structure.
4. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
5. If the SEEXCLUDE command is specified in a restart of SOLs 101 through 200, then PARAM,SERST,MANUAL must be specified. Also the SEKR command must be specified for the superelement immediately downstream from the

excluded superelement. For example, if superelement 10 is excluded in the superelement tree:



then you must specify the following commands in the Case Control Section:

```
SEKR=30  
PARAM, SERST, MANUAL
```

## 440 SEFINAL Final Superement for Assembly

### SEFINAL Final Superement for Assembly

Specifies the superement identification number for the final superement to be assembled.

#### Format:

$$\text{SEFINAL} = \left\{ \begin{array}{c} n \\ i \end{array} \right\}$$

#### Examples:

```
SEFINAL=14
```

#### Describers:

| Describer | Meaning                                                                                                                                                                      |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| n         | Set identification of a previously appearing SET command.<br>Each superement identification number appearing on the SET command must belong to a disjoint model. (Integer>0) |
| i         | Identification number of the final superement to be assembled.<br>(Integer>0)                                                                                                |

#### Remarks:

1. If this command is not present, the program selects the order of the superements for assembly operations.
2. If this command is present, then it must be located before the first SUBCASE command.
3. If i is used, the superement identification number must be unique with respect to any SET identification numbers used.
4. This command can be used on restarts to ensure that minor modeling changes do not also change the processing order. For this usage, inspect the SEMAP table to determine which superements were final superements on the prior run.
5. See the *NX Nastran Superement User's Guide* for a further discussion of this command.
6. If all of the superements in the model are on a single level, (i.e. No superement connections except to residual structure), then SEFINAL is ignored and superement processing order is set according to the superement ID.



Superelement Stiffness Matrix Assembly and Reduction

**SEKREDUCE** Superelement Stiffness Matrix Assembly and Reduction

Specifies the superelement identification numbers for which stiffness matrices are assembled and reduced.

**Format:**

$$\text{SEKREDUCE} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

**Examples:**

SEKREDUCE=ALL  
SEKREDUCE=9

**Describers:**

| Describer | Meaning                                                                                                                                                                                     |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Assembles and reduces matrices for all superelements.                                                                                                                                       |
| n         | Set identification number of a previously appearing SET command. Matrices will only be assembled for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which the stiffness matrix will be assembled and reduced. (Integer>0)                                                                    |

**Remarks:**

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number for the residual structure and can only appear as a member of a SET.
3. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
4. SEKREDUCE is an alternate form and is entirely equivalent to the obsolete command SEMASSEMBLE.



## 442 **SEKREDUCE** Superelement Stiffness Matrix Assembly and Reduction

5. SEALL=ALL is the default in the Structured SOLs 101 through 200. This default can be overridden by specifying any of the following Phase 1 commands: SEALL, SEMG, SELG, SEKR, SELR, or SEMR.

## **SELGENERATE**      Superelement Load Generation

Specifies the superelement identification numbers for which static loads will be generated.

**Format:**

$$\text{SELGENERATE} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

**Examples:**

```
SELGENERATE=ALL
SELGENERATE=18
```

**Describers:**

| Describer | Meaning                                                                                                                                                                                                 |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Generates static loads for all superelements.                                                                                                                                                           |
| n         | Set identification number of a previously appearing SET command. Static load matrices will only be generated for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which load matrices will be generated. (Integer>0)                                                                                                   |

**Remarks:**

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number of the residual structure and can only appear as a member of a SET.
3. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
4. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.

**444 SELGENERATE**  
**Superelement Load Generation**

5. SEALL=ALL is the default in the Structured SOLs 101 through 200. This default can be overridden by specifying any of the following Phase 1 commands: SEALL, SEMG, SELG, SEKR, SELR, or SEMR.

**SELREDUCE**    Superelement Load Assembly and Reduction

Specifies the superelement identification numbers for which the static load matrices will be assembled and reduced.

**Format:**

$$\text{SELREDUCE} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

**Examples:**

```
SELREDUCE=ALL
SELREDUCE=9
```

**Describers:**

| Describer | Meaning                                                                                                                                                                                     |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Assembles and reduces matrices for all superelements.                                                                                                                                       |
| n         | Set identification number of a previously appearing SET command. Matrices will be assembled only for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which the load matrices will be assembled and reduced. (Integer>0)                                                                       |



**Remarks:**

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number for the residual structure and can only be appear as a member of a SET.
3. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
4. This command is used on restarts to selectively assemble and reduce load matrices.
5. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.

## 446 **SELREDUCE** Superelement Load Assembly and Reduction

6. In superelement static analysis, SELREDUCE is equivalent to SELASSEMBLE.
7. In dynamic analysis, SELASSEMBLE combines the functions of SELREDUCE and SEMREDUCE.
8. SEALL=ALL is the default in the Structured SOLs 101 through 200. This default can be overridden by specifying any of the following Phase 1 commands: SEALL, SEMG, SELG, SEKR, SELR, or SEMR.

**4**

**CASE**

**SEMGENERATE**    Superelement Matrix Generation

Specifies the superelement identification numbers for which stiffness, mass, and damping matrices will be generated.

**Format:**

$$\text{SEMGENERATE} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

**Examples:**

```
SEMGENERATE=ALL
SEMGENERATE=7
```

**Describers:**

| Describer | Meaning                                                                                                                                                                                                |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Generates structural matrices for all superelements.                                                                                                                                                   |
| n         | Set identification number of a previously appearing SET command. Structural matrices will only be generated for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which structural matrices will be generated. (Integer>0)                                                                                            |

**Remarks:**

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number for the residual structure and can only appear as a member of a SET.
3. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
4. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.

**448 SEMGENERATE**  
**Superelement Matrix Generation**

5. SEALL=ALL is the default in the Structured SOLs 101 through 200. This default can be overridden by specifying any of the following Phase 1 commands: SEALL, SEMG, SELG, SEKR, SELR, or SEMR.



**SEMREDUCE**      Superelement Mass and Damping Assembly and Reduction

Specifies the superelement identification numbers for which the mass and damping matrices will be assembled and reduced. In buckling analysis, the differential stiffness matrices will be assembled and reduced.

**Format:**

$$\text{SEMREDUCE} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

**Examples:**

```
SEMREDUCE=ALL
SEMREDUCE=9
```

**Describers:**

| Describer | Meaning                                                                                                                                                                                     |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Assembles and reduces matrices for all superelements.                                                                                                                                       |
| n         | Set identification number of a previously appearing SET command. Matrices will only be assembled for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which the load matrices or the mass and damping matrices will be assembled and reduced. (Integer>0)                                      |

**Remarks:**

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number for the residual structure and can only appear as a member of a set.
3. This command is used on restart to selectively assemble and reduce mass and damping matrices. For a further discussion of this command, see the *NX Nastran Superelement User's Guide*.
4. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.

## 450 **SEMREDUCE** Superelement Mass and Damping Assembly and Reduction

5. In dynamic analysis, SELASSEMBLE combines the functions of SELREDUCE and SEMREDUCE.
6. This command has no function in static analysis.
7. SEALL=ALL is the default in the Structured SOLs 101 through 200. This default can be overridden by specifying any of the following Phase 1 commands: SEALL, SEMG, SELG, SEKR, SELR, or SEMR.

**4**

**CASE**

**SENSITY**    Sensitivity Matrix Request

Requests the generation of the combined constraint/design sensitivity matrix for original design sensitivity analysis (DSA).

**Format:**

$$\text{SENSITY} \left[ \left( \begin{array}{ccc} \text{PRINT} & \text{NOSTORE} & \text{NOFORT} \\ \text{NOPRINT} & \text{STORE} & \text{FORT} \end{array} \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

SENSITY=19

**Describers:**

| Describer | Meaning                                                                                                                                                                                                                                                           |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PRINT     | The printer will be the output medium.                                                                                                                                                                                                                            |
| NOPRINT   | No printed output is requested.                                                                                                                                                                                                                                   |
| STORE     | The results will be stored on the database.                                                                                                                                                                                                                       |
| NOSTORE   | The results will not be stored on the database.                                                                                                                                                                                                                   |
| FORT      | The results will be output on a user-written FORTRAN file.                                                                                                                                                                                                        |
| NOFORT    | There will be no FORTRAN output.                                                                                                                                                                                                                                  |
| ALL       | Combines design sensitivity/constraint matrix requests for all DSCONS and DVAR entries in the Bulk Data.                                                                                                                                                          |
| n         | Set identification of a previously appearing SET2 command. Only those DSCONS and DVAR entries with identification numbers that appear on the SET2=n command will be included in the combined design sensitivity/constraint matrix generation request. (Integer>0) |

**Remarks:**

1. For further discussion see the *NX Nastran Design Sensitivity and Optimization User's Guide*.
2. NOPRINT is ignored for the printout of eigenvector derivatives.

## 452 SERESP Superelement Response Sensitivity

### SERESP Superelement Response Sensitivity

Specifies the superelement identification numbers for which the design sensitivity matrices will be generated.

#### Format:

$$\text{SERESP} = \left\{ \begin{array}{c} \text{ALL} \\ n \\ i \end{array} \right\}$$

#### Examples:

```
SERESP=ALL  
SERESP=18
```

#### Describers:

| Describer | Meaning                                                                                                                                                                                                   |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Requests design sensitivity matrix generation for all superelements.                                                                                                                                      |
| n         | Set identification number of a previously appearing SET command. Design sensitivity matrices will be generated for superelements with identification numbers that appear on this SET command. (Integer>0) |
| i         | Identification number of a single superelement for which the design sensitivity matrix will be generated.                                                                                                 |

#### Remarks:

1. If this command is present, then it must be located before the first SUBCASE command.
2. Zero (0) is the identification number of the residual structure and can only appear as a member of a SET.
3. For a further discussion of this command, see the *NX Nastran Design Sensitivity and Optimization User's Guide*.
4. If i is used, the superelement identification number must be unique with respect to any SET identification numbers used.

5. If both SEDV and SERESP commands are not present, then the design variable processing and design sensitivity matrix generation will be performed for all superelements.

## 454 SET Set Definition, General Form

### SET Set Definition, General Form

Sets are used to define the following lists:

#### Lists

1. Identification numbers (point, element, or superelement) for processing and output requests.
2. Times for which output will be printed in transient response problems using the OTIME case control command or the MODCON case control command with the SOLUTION = *setout* describer specified.
3. Frequencies for which output will be printed in frequency response problems using the OFREQ case control command or the MODCON case control command with the SOLUTION = *setout* describer specified or the PANCON case control command with the SOLUTION = *setf* describer specified.
4. Panels for which output will be printed in frequency response problems using the PANCON case control command with the PANEL describer specified.
5. Surface or volume identification numbers to be used in GPSTRESS or STRFIELD case control commands.
6. With SOL 200, DRESP1 design responses that are assigned to a specific subcase via a DRSPAN case control command which refers to a particular SET.

#### Formats:

SET n = { $i_1$ [, $i_2$ ,  $i_3$ , THRU  $i_4$ , EXCEPT  $i_5$ ,  $i_6$ ,  $i_7$ ,  $i_8$ , THRU  $i_9$ ]}

SET n = { $r_1$ , [ $r_2$ ,  $r_3$ ,  $r_4$ ]}

SET n = { $name_1$ , [ $name_2$ ,  $name_3$ ,  $name_4$ ]}

SET n = ALL

#### Examples:

```
SET 77=5
SET 88=5, 6, 7, 8, 9, 10 THRU 55 EXCEPT 15, 16, 77, 78, 79, 100 THRU 300
SET 99=1 THRU 100000
SET 101=1.0, 2.0, 3.0
SET 105=1.009, 10.2, 13.4, 14.0, 15.0
SET 5=PANL1, PANL3, PANL4
```

**Describers:**

| <b>Describer</b>                              | <b>Meaning</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| n                                             | Set identification number. Any set may be redefined by reassigning its identification number. SETs specified under a SUBCASE command are recognized for that SUBCASE only. (Integer>0)                                                                                                                                                                                                                                                                           |
| $i_1, i_2, \text{ etc.}$                      | Identification numbers. If no such identification number exists, the request is ignored. (Integer $\geq 0$ )                                                                                                                                                                                                                                                                                                                                                     |
| $i_3 \text{ THRU } i_4$                       | Identification numbers ( $i_4 > i_3$ ). (Integer>0)                                                                                                                                                                                                                                                                                                                                                                                                              |
| EXCEPT                                        | Set identification numbers following EXCEPT will be deleted from the output list as long as they are in the range of the set defined by the immediately preceding THRU. An EXCEPT list may not include a THRU list or ALL.                                                                                                                                                                                                                                       |
| $r_1, r_2, \text{ etc.}$                      | Frequencies or times for output. The nearest solution frequency or time will be output. EXCEPT and THRU cannot be used. If an OFREQ, OTIME, MODCON (with SOLUTION = <i>setout</i> describer specified), or PANCON (with SOLUTION = <i>setf</i> describer specified) case control command references the set, then the values must be listed in ascending sequences, $r_1 > r_2 > r_3 > r_4 \dots \text{etc.}$ , otherwise some output may be missing. (Real>0.0) |
| $\text{name}_1, \text{ name}_2, \text{ etc.}$ | Alphanumeric names of panels defined by PANEL bulk entries. (Character)                                                                                                                                                                                                                                                                                                                                                                                          |
| ALL                                           | All members of the set will be processed. This option may not be used in a DRSPAN referenced set.                                                                                                                                                                                                                                                                                                                                                                |

**Remarks:**

1. A SET command may be more than one physical command. A comma at the end of a physical command signifies a continuation command. Commas may not end a set. THRU may not be used for continuation. Place a number after the THRU.
2. Set identification numbers following EXCEPT within the range of the THRU must be in ascending order.
3. In SET 88 in the example section above, the numbers 77, 78, etc., are included in the set because they are outside the prior THRU range.

## 456 SET Set Definition OUTPUT(PLOT)

### SET Set Definition OUTPUT(PLOT)

Defines a set of element or grid point numbers to be plotted.

#### Format:

$$\text{SET } n = \left[ \text{ALL} \left[ \begin{array}{l} \text{ELEMENTS} \\ \text{GRID POINTS} \end{array} \right] \left[ \text{EXCEPT} \left\{ \begin{array}{l} \text{type1 type2 ... typej} \\ k1 \quad k2 \quad \dots \quad kj \text{ THRU } kk \text{ BY } \text{incj} \end{array} \right\} \right] \right],$$

$$\left[ \begin{array}{l} \text{INCLUDE} \\ \text{EXCLUDE} \end{array} \right] \left[ \begin{array}{l} \text{ELEMENTS} \\ \text{GRID POINTS} \end{array} \right] \left\{ \begin{array}{l} \text{type1 type2 ... typej} \\ k1 \quad k2 \quad \dots \quad kj \text{ THRU } kk \text{ BY } \text{incj} \end{array} \right\},$$

$$\left[ \text{EXCEPT} \left\{ \begin{array}{l} \text{type1 typem ... typen} \\ k1 \quad km \quad \dots \quad kn \text{ THRU } ko \text{ BY } \text{incn} \end{array} \right\} \right]$$

#### Examples:

- SET 1 consists of elements 1, 5, 10, 11, 13, 14, 15, 20, 22, 24, and 26.  

```
SET 1=INCLUDE 1, 5, 10 THRU 15 EXCEPT 12, INCLUDE 20
THRU 26 BY 2
```
- SET 2 consists of all CTRIA3 and CQUAD4 elements except element 21.  

```
SET 2=QUAD4 TRIA3 EXCEPT 21
```
- SET 10 includes all CTRIAR elements plus elements 70 through 80.  

```
SET 10 TRIAR INCLUDE ELEMENTS 70 THRU 80
```
- SET 15 includes all elements from 15 to 20 and 26 to 100.  

```
SET 15=15 THRU 100 EXCEPT 21 THRU 25
```
- SET 2 includes all elements except CTETRA elements.  

```
SET 2=ALL EXCEPT TETRA
```

#### Describers:

| Describer   | Meaning                                                         |
|-------------|-----------------------------------------------------------------|
| n           | Set identification number. (0<Integer<999999)                   |
| ALL         | Selects all elements or grid points. See typei.                 |
| ELEMENTS    | Specifies that all identification numbers refer to elements.    |
| GRID POINTS | Specifies that all identification numbers refer to grid points. |



|                  |                                                                                              |
|------------------|----------------------------------------------------------------------------------------------|
| <b>Describer</b> | <b>Meaning</b>                                                                               |
| INCLUDE          | Includes specified element or grid point identification numbers or elements in the set.      |
| EXCLUDE          | Excludes specified element or grid point identification numbers or element types in the set. |
| EXCEPT           | Modifies a prior ALL, INCLUDE, or EXCLUDE specification.                                     |
| typei            | Element types. The allowed element types are (Character):                                    |

| typei | Element Entry Name |
|-------|--------------------|
| TRIA3 | CTRIA3             |
| TRIA6 | CTRIA6             |
| TRIAR | CTRIAR             |
| QUAD4 | CQUAD4             |
| QUAD8 | CQUAD8             |
| QUADR | CQUADR             |
| HEXA  | CHEXA              |
| PENTA | CPENTA             |
| TETRA | CTETRA             |

|      |                                                  |
|------|--------------------------------------------------|
| THRU | Specifies a range of identification numbers.     |
| BY   | Specifies an increment for a THRU specification. |
| inci | Increment for THRU range. (Integer>0)            |

**Remarks:**

1. This form of the SET command must and can only be specified after an OUTPUT(PLOT) delimiter.
2. The INCLUDE, EXCLUDE, and EXCEPT specifications may be specified more than once in the same set. See Examples above.
3. Commas or spaces may be used as separators.
4. Not all of the identification numbers in a THRU range have to correspond to elements or grid points. For example, elements 2, 4, 7, and 9 may be selected with 2 THRU 9, even if elements 3, 5, 6, and 8 do not exist. This is called an open set. It should be noted that large open sets can cause higher computational costs.

**458 SET2**  
**Set Definition for Design Constraints and Design Variables**

**SET2** Set Definition for Design Constraints and Design Variables

Lists paired set numbers for design sensitivity. These sets refer to constraint and design variable set identification numbers.

**Format:**

SET2 N =  $\{(i_1, j_1), (i_2, j_2), \dots\}$

SET N =  $\{((i_1[, i_2, i_3 \text{ THRU } i_4 \text{ EXCEPT } i_5]), (j_1[, j_2, j_3 \text{ THRU } j_4 \text{ EXCEPT } j_6]))\}$

**Examples:**

```
SET2 7=(1,2), (3,3), (2,3)
SET2 11=((1,2,3), (5))
SET2 15=(1,2), ((3,2), (3))
SET2 22=(ALL, (3,2))
SET2 24=((1,2,3), ALL)
```

**Describers:**

| Descriptor              | Meaning                                                                                                                                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| N                       | Set identification. Must be unique between SET and SET2 commands. (Integer>0)                                                                                                                               |
| $i_1, i_2$ , etc.       | Set identification number of SET commands. The DSCONS Bulk Data entries referenced by these sets define constraint output requests. All i's must be enclosed in parentheses.                                |
| $i_3 \text{ THRU } i_4$ | Output of set identification numbers $i_3$ thru $i_4$ ( $i_4 > i_3$ ). (Integer>0)                                                                                                                          |
| EXCEPT                  | Set identification numbers following EXCEPT will be deleted from output lists as long as they are in the range of the set defined by the immediately preceding THRU. (Integer>0)                            |
| $j_1, j_2$ , etc.       | Set identification numbers of SET commands. The DVAR Bulk Data entries referenced by these sets define design variable output requests. Note: j's follow the same rules as those given for i's. (Integer>0) |
| ALL                     | All members of the set (DSCONS and/or DVAR) will be processed.                                                                                                                                              |

**Remarks:**

1. A SET2 command may be more than one physical command. A comma at the end of a physical command signifies a continuation command. Commas may not end a set. A complete set identification pair must be defined on a physical command.



2. Set identification numbers following EXCEPT within the range of the THRU must be in ascending order.
3. A set identification pair request must be enclosed in parentheses, (e.g., (7,3),(8,14)...).
4. SET2 commands are selected by the SENSITY command.

## 460 SETMC Modal Contribution Set Definition

### SETMC Modal Contribution Set Definition

Set definitions for modal contribution results.

#### Formats:

SETMC n = rtype / id1 (item1), id2 (item2), ...

#### Examples:

```
SETMC 121 = ACCE/99(T3),1200(T1),1399(R2)
SETMC 222 = STRESS/134(22)
SETMC 343 = ACCE/99(T3),1200(T1),1399(R2),STRESS/134(22)
```

#### Describers:

| Describer                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--|------|--------------|------|--------------|------|---------------|------|----------------------------------|------|--------|------|--------|------|----------|
| n                         | Set identification number. Any set may be redefined by reassigning its identification number. SETMCs specified under a SUBCASE command are recognized for that SUBCASE only. (Integer>0)                                                                                                                                                                                                                                                                              |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| rtype                     | <table border="1"> <thead> <tr> <th colspan="2">Response type (Character)</th> </tr> </thead> <tbody> <tr> <td>ACCE</td> <td>Acceleration</td> </tr> <tr> <td>DISP</td> <td>Displacement</td> </tr> <tr> <td>ELFO</td> <td>Element force</td> </tr> <tr> <td>SPCF</td> <td>Single-point force of constraint</td> </tr> <tr> <td>STRA</td> <td>Strain</td> </tr> <tr> <td>STRE</td> <td>Stress</td> </tr> <tr> <td>VELO</td> <td>Velocity</td> </tr> </tbody> </table> | Response type (Character) |  | ACCE | Acceleration | DISP | Displacement | ELFO | Element force | SPCF | Single-point force of constraint | STRA | Strain | STRE | Stress | VELO | Velocity |
| Response type (Character) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| ACCE                      | Acceleration                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| DISP                      | Displacement                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| ELFO                      | Element force                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| SPCF                      | Single-point force of constraint                                                                                                                                                                                                                                                                                                                                                                                                                                      |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| STRA                      | Strain                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| STRE                      | Stress                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| VELO                      | Velocity                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| idj                       | Element or grid point identification number for j-th value. (Integer>0)                                                                                                                                                                                                                                                                                                                                                                                               |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |
| Itemj                     | <p>Item code for j-th value. (Character or integer&gt;0)</p> <p>For elements, the code represents a component of the element stress or force and is described in the Item Codes topic in this guide.</p> <p>For grid points, the code is one of the mnemonics T1, T2, T3, R1, R2, or R3, where Ti stands for the i-th translation component and Ri stands for the i-th rotational component.</p>                                                                      |                           |  |      |              |      |              |      |               |      |                                  |      |        |      |        |      |          |

**Remarks:**

1. The SETMC command may be continued on the next line as long as “SETMC n = rtype” is specified on the first line.
2. A SETMC command may be more than one physical command. A comma at the end of a physical command signifies a continuation command. Commas may not end a set. A slash (i.e. “/”) or a parenthesis i.e. (“(” or “)”) may not begin a continuation line.

**462 SETS DEFINITION**  
Case Control Processing Delimiter

**SETS DEFINITION** Case Control Processing Delimiter

Delimits the various type of commands under grid point stress and/or p-version element set definitions. This command is synonymous with OUTPUT(POST)

**Format:**

SETS DEFINITION

**Examples:**

SETS DEFINITION

**Remarks:**

SETS DEFINITION is synonymous with OUTPUT(POST). Either SETS DEFINITION or OUTPUT(POST) may be specified but not both.

**SHELLTHK**    Shell Thickness Output Request

Requests the form of shell thickness output (SOLs 601 and 701).

**Format:**

$$\text{SHELLTHK} \left( \begin{array}{c} \text{PRINT} \\ \text{PLOT} \end{array} \right) = \text{ALL or NONE}$$

**Examples:**

SHELLTHK (PLOT)=ALL

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                          |
|------------------|-----------------------------------------------------------------------------------------|
| PRINT            | The printer will be the output medium.                                                  |
| PLOT             | Computes and puts shell thickness results in op2 file only.                             |
| ALL              | Shell thickness results will be output for all applicable shell elements. See remark 1. |
| NONE             | Shell thickness results will not be output.                                             |



**Remarks:**

1. Shell thickness results are output only for large strain analysis, i.e., PARAM, LGSTRN, 1. Note that large strain formulation is not available for 8-node shell elements. However, by specifying ELCV=1 in the NXSTRAT entry, 8-node shell elements will be converted to 9-node shell elements which support large strain.
2. Large strain shell elements require the use of an elastic-plastic material through the MATS1 entry with TYPE=PLASTIC. On the MATS1 entry, either TID must be specified to define a multilinear plastic material, or H and LIMIT1 must be specified to define a bilinear plastic material for the shell elements.
3. Shell thickness results are output at nodes on elements.

## 464 SKIP Case Control Processing Delimiter

### SKIP Case Control Processing Delimiter

Activates or deactivates the execution of subsequent commands in the Case Control (including plot commands).

#### Format:

$$\text{SKIP} \left\{ \begin{array}{l} \text{ON} \\ \text{OFF} \end{array} \right\}$$

#### Examples:

```
SKIPOFF
```

#### Remarks:

1. SKIPON and SKIPOFF commands may appear as many times as needed in the Case Control.
2. Commands that are skipped will be printed.
3. SKIPON ignores subsequent commands until either a SKIPOFF or BEGIN BULK command is encountered. This allows the user to omit requests without deleting them from his data. In the following example, plot commands will be skipped.

```
TITLE = EXAMPLE  
SPC = 5  
LOAD = 6  
SKIPON $ SKIP PLOT REQUEST  
OUTPUT (PLOT)  
SET 1 INCLUDE ALL  
FIND  
PLOT  
BEGIN BULK
```



**SMETHOD**    Iterative Solver Method Selection

Selects iterative solver parameters.

**Format:**

SMETHOD=n

**Examples:**

SMETHOD=77

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                             |
|------------------|------------------------------------------------------------|
| n                | Set identification of an ITER Bulk Data entry. (Integer>0) |

**Remarks:**

1. The iterative solver is requested by specifying ITER=YES on the NASTRAN statement. The SMETHOD command is optional and only required to override defaults shown on the ITER Bulk Data entry.
2. SMETHOD is only available in SOLs 101, 106, 108, and 111.

## 466 **SPC** Single-Point Constraint Set Selection

### **SPC** Single-Point Constraint Set Selection

Selects a single-point constraint set to be applied.

#### **Format:**

SPC=n

#### **Examples:**

SPC=10

#### **Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                             |
|------------------|----------------------------------------------------------------------------------------------------------------------------|
| n                | Set identification number of a single-point constraint that appears on a SPC, SPC1, or SPCADD Bulk Data entry. (Integer>0) |

#### **Remarks:**

1. In cyclic symmetry analysis, this command must appear above the first SUBCASE command.
2. Multiple boundary conditions are only supported in SOLs 101, 103, 105, 145 and 200. Multiple boundary conditions are not allowed for upstream superelements. The BC command must be specified to define multiple boundary conditions for the residual structure in SOLs 103, 105, 145 and 200.

**SPCFORCES**      Single-Point Forces of Constraint Output Request

Requests the form and type of single-point force of constraint vector output.

**Format:**

$$\text{SPCFORCES} \left( \left( \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right), \left( \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right), \left( \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right), \right. \\
 \left. \left( \begin{array}{l} \text{[PSDF]} \\ \text{[ATOC]} \\ \text{[CRMS]} \\ \text{[RALL]} \end{array} \right), \left( \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right), \left( \text{[RPUNCH]} \right) \right) = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```

SPCFORCES=5
SPCFORCES (SORT2, PUNCH, PRINT, IMAG) =ALL
SPCFORCES (PHASE) =NONE
    
```

**Describers:**

| Describer    | Meaning                                                                                                                                         |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence. |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each grid point.                                                         |
| PRINT        | The printer will be the output medium.                                                                                                          |
| PUNCH        | The punch file will be the output medium.                                                                                                       |
| PLOT         | Generates, but does not print, single-point forces of constraint.                                                                               |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                          |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                      |

468 **SPCFORCES**  
Single-Point Forces of Constraint Output Request

| Describer | Meaning                                                                                                                                                                                                          |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PSDF      | Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 10. |
| ATOC      | Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 10.        |
| CRMS      | Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 10.    |
| RALL      | Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 10.         |
| RPRINT    | Writes random analysis results to the print file. (Default) See remark 10.                                                                                                                                       |
| NORPRINT  | Disables the writing of random analysis results to the print file. See remark 10.                                                                                                                                |
| RPUNCH    | Writes random analysis results to the punch file. See remark 10.                                                                                                                                                 |
| ALL       | Single-point forces of constraint for all points will be output. See Remarks 2 and 5.                                                                                                                            |
| NONE      | Single-point forces of constraint for no points will be output.                                                                                                                                                  |
| n         | Set identification of a previously appearing SET command. Only single-point forces constraint for points with identification numbers that appear on this SET command will be output. (Integer>0)                 |

**Remarks:**

1. Both PRINT and PUNCH may be requested.

2. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
3. In a statics problem, a request for SORT2 causes loads at all points (zero and nonzero) to be output.
4. SPCFORCES=NONE overrides an overall output request.
5. In SORT1 format, SPCFORCESs recovered at consecutively numbered scalar points are printed in groups of six (sextets) per line of output. But if a scalar point is not consecutively numbered, then it will begin a new sextet on a new line of output. If a sextet can be formed and all values are zero, then the line will not be printed. If a sextet cannot be formed, then zero values may be output.
6. SPCFORCES results are output in the global coordinate system (see field CD on the GRID Bulk Data entry).
7. In SOLs 129 and 159, SPCFORCES results do not include the effects of mass and damping elements.
8. In all solution sequences except SOLs 129 and 159, SPCFORCES results do include the effects of mass and damping, except damping selected by SDAMPING command. PARAM,DYNSPCF,OLD may be specified to obtain SPCFORCES results, which do not include mass and damping effects.
9. In inertia relief analysis, the SPCFORCE output includes both the effects due to inertial loads and applied loads.
10. The following applies to SOL 111 PSD solutions:

## 470 **SPCFORCES** Single-Point Forces of Constraint Output Request

- Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT descriptors control the frequency response output. The RPRINT,NORPRINT,RPUNCH descriptors control the random output.
- The SORT1 and SORT2 descriptors only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.
- Any combination of the PSDF, ATOC, and CRMS descriptors can be selected. The RALL descriptor selects all three.
- When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.

### Remarks related to SOLs 601 and 701:

1. Output is restricted to REAL format. IMAG, PHASE, PSDF, ATOC and RALL are ignored.
2. SOLs 601 and 701 do not support PUNCH requests.
3. SPCFORCES is not supported for SOLs 601,153 and 601,159

**4**

**CASE**

**STATSUB**     Static Solution Selection for Differential Stiffness

Selects the static solution to use in forming the differential stiffness for buckling analysis, normal modes, complex eigenvalue, frequency response and transient response analysis.

**Format:**

$$\text{STATSUB} \left[ \begin{array}{c} \text{(BUCKLING)} \\ \text{(PRELOAD)} \end{array} \right] = n$$

**Examples:**

```
STATSUB=23
STAT=4
STATSUB (PREL) =7
```

**Describers:**

| Describer | Meaning                                                                                                        |
|-----------|----------------------------------------------------------------------------------------------------------------|
| BUCKLING  | Subcase id number corresponding to static subcase of buckling or varying load. (Default in buckling analysis.) |
| PRELOAD   | Subcase id number corresponding to static subcase of preload or constant load. (Default in dynamic analysis.)  |
| n         | Subcase identification number of a prior SUBCASE specified for static analysis (Integer>0)                     |



**Remarks:**

1. STATSUB may be used in SOLs 103, 105, 107 through 112, and SOL 200 (ANALYSIS = BUCKLING) only.
2. STATSUB must be specified in the same subcase that contains the METHOD selection for buckling or normal modes, CMETHOD for complex eigenvalue analysis, TSTEP for transient response and FREQ for frequency response.
3. In SOL 105, if it is intended that results from the first static subcase are used to compute the differential stiffness, then the STATSUB command is not required. In other words, the default for STATSUB is the first static subcase identification. In SOLs 103 and 107 through 112, 115, and 116, STATSUB must reference a separate static subcase.
4. In dynamic analysis, only one STATSUB command may be specified in each dynamic subcase. In buckling analysis with a pre-load, both STATSUB

## 472 **STATSUB** Static Solution Selection for Differential Stiffness

(BUCKLING) and STATSUB(PRELOAD) must be specified in each buckling subcase.

5. If superelements are used , the static subcase which is identified in the STATSUB command must include the residual superelement or the solution will fail with an error.
6. If multiple superelements are used with the STATSUB command, each must be used in a static subcase or their differential stiffness will not be included. All superelements can be used in a single static subcase using SUPER=ALL, or a separate subcase can exist for each one (order of subcases is not important). In either case, the STATSUB command should point to the subcase which references the residual (see above remark).



## STRAIN    Element Strain Output Request

Requests the form and type of strain output. Note: ELSTRAIN is an equivalent command.

**Format:**

$$\text{STRAIN} \left[ \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right], \left[ \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right], \left[ \begin{array}{l} \text{[VON MISES]} \\ \text{[MAXS or SHEAR]} \end{array} \right], \right. \\ \left. \left[ \begin{array}{l} \text{[STRCUR]} \\ \text{FIBER} \end{array} \right], \left[ \begin{array}{l} \text{[CENTER]} \\ \text{[CORNER or BILIN]} \\ \text{SG AGE} \\ \text{CUBIC} \end{array} \right], \left[ \begin{array}{l} \text{[PSDF]} \\ \text{[ATOC]} \\ \text{[CRMS]} \\ \text{[RALL]} \end{array} \right], \left[ \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right], \left[ \text{[RPUNCH]} \right] \right] = \left\{ \begin{array}{c} \text{ALL} \\ \text{n} \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
STRAIN=5
STRAIN (CORNER) =ALL
STRAIN (PRINT, PHASE) =15
STRAIN (PLOT) =ALL
```

**Describers:**

| Describer    | Meaning                                                                                                                                      |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of elements for each load, frequency, eigenvalue, or time, depending on the solution sequence. |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each element.                                                         |
| PRINT        | The printer will be the output medium.                                                                                                       |
| PUNCH        | The punch file will be the output medium.                                                                                                    |
| PLOT         | Generates strain for the requested set but no printer output.                                                                                |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                       |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                   |

## 474 STRAIN Element Strain Output Request

| Describer        | Meaning                                                                                                                                                                                                          |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PSDF             | Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 10. |
| ATOC             | Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 10.        |
| CRMS             | Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 10.    |
| RALL             | Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 10.         |
| RPRINT           | Writes random analysis results to the print file. (Default) See remark 10.                                                                                                                                       |
| NORPRINT         | Disables the writing of random analysis results to the print file. See remark 10.                                                                                                                                |
| RPUNCH           | Writes random analysis results to the punch file. See remark 10.                                                                                                                                                 |
| VONMISES         | von Mises strains are output.                                                                                                                                                                                    |
| MAXS or<br>SHEAR | Maximum shear strains are output.                                                                                                                                                                                |
| STRCUR           | Strain at the reference plane and curvatures is output for plate elements.                                                                                                                                       |
| FIBER            | Strain at locations Z1, Z2 is computed for plate elements.                                                                                                                                                       |
| CENTER           | Outputs CQUAD4, CQUADR, CTRIAR strains at the center only.                                                                                                                                                       |

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                             |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CORNER or BILIN  | Outputs CQUAD4, CQUADR, CTRIAR element strains at the center and grid points using strain gage approach with bilinear extrapolation.                                       |
| SGAGE            | Outputs CQUAD4 element strains at the center and grid points using strain gage approach.                                                                                   |
| CUBIC            | Outputs CQUAD4 or CQUADR element strains at the center and grid points using cubic bending correction.                                                                     |
| ALL              | Output strain for all elements.                                                                                                                                            |
| n                | Set identification of a previously appearing SET command. Only strain for elements with identification numbers that appear on this SET command will be output. (Integer>0) |
| NONE             | No element strain will be output.                                                                                                                                          |

**Remarks:**

1. In SOLs 106 and 129, nonlinear strains for nonlinear elements are requested by the STRESS/NLSTRESS commands and appear in the nonlinear stress output. The STRAIN command will generate additional output for total strain except for hyperelastic elements. The additional STRAIN output request will also be ignored for nonlinear material elements when the parameter LGDISP is -1, which is the default (strains will appear in the nonlinear stress output).
2. Both PRINT and PUNCH may be requested.
3. STRAIN=NONE overrides an overall output request.
4. The PLOT option is used when strains are requested for postprocessing but no printer output is desired.
5. Definitions of stress, strain, curvature, and output locations are given in the *NX Nastran Element Library Reference Manual*.
6. If the STRCUR option is selected, the values of Z1 will be set to 0.0. and Z2 will be set to -1.0 on the output.
7. The VONMISES, MAXS, and SHEAR options are ignored in the complex eigenvalue and frequency response solution sequences.

## 476 STRAIN

### Element Strain Output Request

8. The options CENTER, CORNER, CUBIC, SGAGE, and BILIN are recognized only in the first subcase and determine the option to be used in all subsequent subcases with the STRESS, STRAIN, and FORCE commands. (In superelement analysis, the first subcase refers to the first subcase of each superelement. Therefore, it is recommended that these options be specified above all subcases.) Consequently, options specified in subcases other than the first subcase will be ignored. See also **FORCE** command for further discussion. These options are discussed in the section “Understanding Plate and Shell Element Output” in chapter 4 of the *NX Nastran Element Library Reference*.
9. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCE, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCE, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
10. The following applies to SOL 111 PSD solutions:
  - Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT descriptors control the frequency response output. The RPRINT,NORPRINT,RPUNCH descriptors control the random output.
  - The SORT1 and SORT2 descriptors only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.
  - Any combination of the PSDF, ATOC, and CRMS descriptors can be selected. The RALL descriptor selects all three.
  - When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.

4

CASE

## STRESS Element Stress Output Request

Requests the form and type of element stress output. Note: ELSTRESS is an equivalent command.

### Format:

$$\text{STRESS} \left( \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right], \left[ \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right], \left[ \begin{array}{l} \text{[VONMISES]} \\ \text{[MAXS or SHEAR]} \end{array} \right], \right. \\ \left. \left[ \begin{array}{l} \text{[CENTER]} \\ \text{[CORNER or BILIN]} \\ \text{SGAGE} \\ \text{CUBIC} \end{array} \right], \left[ \begin{array}{l} \text{[PSDF]} \\ \text{[ATOC]} \\ \text{[CRMS]} \\ \text{[RALL]} \end{array} \right], \left[ \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right], \left[ \text{[RPUNCH]} \right] \right) = \left\{ \begin{array}{l} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

### Examples:

```
STRESS=5
STRESS (CORNER)=ALL
STRESS (SORT1, PRINT, PUNCH, PHASE)=15
STRESS (PLOT)=ALL
```

### Describers:

| Describer    | Meaning                                                                                                                                      |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of elements for each load, frequency, eigenvalue, or time, depending on the solution sequence. |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each element type.                                                    |
| PRINT        | The printer will be the output medium.                                                                                                       |
| PUNCH        | The punch file will be the output medium.                                                                                                    |
| PLOT         | Generates stresses for requested set but no printer output.                                                                                  |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                       |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                   |

**478 STRESS**  
**Element Stress Output Request**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                                                   |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PSDF             | Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 13. |
| ATOC             | Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 13.        |
| CRMS             | Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 13.    |
| RALL             | Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 13.         |
| RPRINT           | Writes random analysis results to the print file. (Default)<br>See remark 13.                                                                                                                                    |
| NORPRINT         | Disables the writing of random analysis results to the print file. See remark 13.                                                                                                                                |
| RPUNCH           | Writes random analysis results to the punch file. See remark 13.                                                                                                                                                 |
| VONMISES         | Requests von Mises stress.                                                                                                                                                                                       |
| MAXS or SHEAR    | Requests maximum shear in the plane for shell elements and octahedral stress for solid elements.                                                                                                                 |
| CENTER           | Requests CQUAD4, CQUADR, CTRIAR element stresses at the center only.                                                                                                                                             |
| CUBIC            | Requests CQUAD4 or CQUADR element stresses at the center and grid points using strain gage approach with cubic bending correction.                                                                               |
| SGAGE            | Requests CQUAD4 element stresses at center and grid points using strain gage approach.                                                                                                                           |

| <b>Describer</b>   | <b>Meaning</b>                                                                                                                                                                |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CORNER or<br>BILIN | Requests CQUAD4, CQUADR, CTRIAR element stresses at center and grid points using bilinear extrapolation.                                                                      |
| ALL                | Stresses for all elements will be output.                                                                                                                                     |
| n                  | Set identification of a previously appearing SET command. Only stresses for elements with identification numbers that appear on this SET command will be output. (Integer >0) |
| NONE               | No element stress will be output.                                                                                                                                             |

**Remarks:**

1. Both PRINT and PUNCH may be requested.
2. ALL should not be used in a transient problem due to excessive output.
3. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
4. ELSTRESS is an alternate form and is entirely equivalent to STRESS.
5. STRESS=NONE overrides an overall output request.
6. The PLOT option is used when contour plots of stresses are requested but no printer output of stresses is desired. However in nonlinear analysis, the nonlinear stresses will still be printed unless NLSTRESS(PLOT) is specified.

## 480 STRESS

### Element Stress Output Request

7. The VONMISES option is ignored for ply stresses.
8. The VONMISES, MAXS, and SHEAR options are ignored in the complex eigenvalue and frequency response solution sequences.
9. The options CENTER, CORNER, CUBIC, SGAGE, and BILIN are recognized only in the first subcase and determine the option to be used in all subsequent subcases with the STRESS, STRAIN, and FORCE commands. (In superelement analysis, the first subcase refers to the first subcase of each superelement. Therefore, it is recommended that these options be specified above all subcases.) Consequently, options specified in subcases other than the first subcase will be ignored. See also **FORCE** command for further discussion. These options are discussed in the section “Understanding Plate and Shell Element Output” in chapter 4 of the *NX Nastran Element Library Reference*.
10. For composite ply output, the grid point option for CQUAD4 elements will be reset to the default option (CENTER).
11. For nonlinear analysis, the grid point option for CQUAD4 elements will be reset to the default (CENTER) option for nonlinear elements.
12. MAXS for shell elements is not an equivalent stress.
13. The following applies to SOL 111 PSD solutions:
  - Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT describers control the frequency response output. The RPRINT,NORPRINT,RPUNCH describers control the random output.
  - The SORT1 and SORT2 describers only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.
  - Any combination of the PSDF, ATOC, and CRMS describers can be selected. The RALL describer selects all three.
  - When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.

#### Remarks related to SOLs 601 and 701:

1. Output is restricted to REAL format and CENTER or CORNER for CQUAD4 element stresses. IMAG, PHASE, CUBIC, SGAGE, PSDF, ATOC and RALL are ignored.
2. The same request is used for element strain output in both linear and nonlinear analysis, i.e., the STRAIN command is ignored for linear analysis.



3. For both linear and nonlinear analysis, stress and strain results at grid points may be requested for single-ply elements by specifying the CORNER option.
4. If there is any nonlinearity in the model, i.e., large displacements, contact, or nonlinear material models, elements results are output in the op2 file using nonlinear element stress/strain data block, including elements with linear material models. Exceptions are the CQUAD8 and CTRIA6 elements, where both linear and nonlinear element stress/strain data blocks are output. However, in a future release, the output of linear stress/strain data blocks for CQUAD8 and CTRIA6 elements may be discontinued for a nonlinear analysis.
5. SOLs 601 and 701 do not support PUNCH requests.

## 482 STRFIELD Grid Point Stress Output Request

### STRFIELD      Grid Point Stress Output Request

Requests the computation of grid point stresses for graphical postprocessing and mesh stress discontinuities.

#### Format:

$$\text{STRFIELD} = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

#### Examples:

```
STRFIELD=ALL  
STRFIELD=21
```

#### Describers:

| Describer | Meaning                                                                                                                                                                                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | Grid point stress requests for all surfaces and volumes defined in the OUTPUT(POST) section will be saved for postprocessing.                                                                                                                                                   |
| n         | Set identification number of a previously appearing SET command. Only surfaces and volumes with identification numbers that appear on this SET command and in the OUTPUT(POST) section will be included in the grid point stress output request for postprocessing. (Integer>0) |

#### Remarks:

1. The STRFIELD command is required for the graphical display of grid point stresses in postprocessors that use the .xdb file (PARAM,POST,0), or when the GPSDCON or ELSDCON commands are specified. The GPSTRESS command can be used to obtain printed output.
2. Only grid points connected to elements used to define the surface or volume are output. See the SURFACE and VOLUME commands.
3. Element stress output (STRESS) must be requested for elements referenced on requested SURFACE and VOLUME commands.
4. In nonlinear static and transient analysis, grid point stresses are computed only if parameter LGDISP is -1, which is the default. Also, in nonlinear transient analysis, grid point stresses are computed for elements with linear material properties only.

## **SUBCASE**    Subcase Delimiter

Delimits and identifies a subcase.

### **Format:**

SUBCASE=n

### **Examples:**

SUBCASE=101

### **Describers:**

| <b>Describer</b> | <b>Meaning</b>                             |
|------------------|--------------------------------------------|
| n                | Subcase identification number. (Integer>0) |

### **Remarks:**

1. The subcase identification number, n, must be greater than all previous subcase identification numbers.
2. Plot requests and RANDPS requests refer to n.
3. See the MODES command for use of this command in normal modes analysis.
4. If a comment follows n, then the first few characters of the comment will appear in the subcase label in the upper right-hand corner of the output.

### **Remarks related to SOLs 601 and 701:**

1. For SOL 601,106, SOL 601,129 and SOL 701, only one subcase is used. If more than one subcase is specified, the first subcase is used.
2. For SOL 601,153 and SOL 601,159, two subcases are required. The first two subcases must be one with ANALYSIS=STRUC (default) and one with ANALYSIS=HEAT. The parameter COUP in TMC PARA bulk entry is used to specify the type of coupling between the structural and heat transfer analysis.

## 484 SUBCOM Combination Subcase Delimiter

### SUBCOM      Combination Subcase Delimiter

Delimits and identifies a combination subcase.

#### Format:

SUBCOM = n

#### Examples:

SUBCOM = 125

#### Describers:

| Describer | Meaning                                   |
|-----------|-------------------------------------------|
| n         | SUBCOM identification number. (Integer>2) |

#### Remarks:

1. The SUBCOM identification number, n, must be greater than all previous subcase and SUBCOM identification numbers.
2. A SUBSEQ command must follow this command.
3. SUBCOM may only be used in statics problems.
4. Output requests above the subcase level will be used.
5. If the referenced subcases contain thermal loads or element deformations, the user must define the temperature field in the SUBCOM with a TEMP(Load) command or the element deformations with a DEFORM command.
6. SUBCOMs may be specified in superelement analysis with the following recommendations:
  - For each superelement, specify its SUBCASEs consecutively, directly followed by its SUBCOM(s).
  - Specify a SUPER command with a new load sequence number under each SUBCOM command.

The following example is given for a model with one superelement and one load combination:

```
SUBCASE 101
SUPER=1,1
LOAD=100
SUBCASE 102
SUPER=1,2
```

**SUBCOM 485**  
**Combination Subcase Delimiter**

```
LOAD=200
SUBCOM 110
LABEL=COMBINE SUBCASES 101 AND 102
SUPER=1,3
SUBSEQ=1.,1.
SUBCASE 1001
SUBCASE 1002
SUBCOM 1010
LABEL=COMBINE SUBCASES 1001 AND 1002
SUBSEQ=1.,1.
```

## 486 SUBSEQ Subcase Sequence Coefficients

### SUBSEQ Subcase Sequence Coefficients

Gives the coefficients for forming a linear combination of the previous subcases.

#### Format:

SUBSEQ=R1 [, R2, R3, ..., Rn]

#### Examples:

```
SUBSEQ=1.0, -1 .0, 0.0, 2.0
```

#### Describers:

| Describer | Meaning                                                                  |
|-----------|--------------------------------------------------------------------------|
| Ri        | Coefficients of the previously occurring subcases. See Remark 4 . (Real) |

#### Remarks:

1. The SUBSEQ command can only appear after a SUBCOM command.
2. This command may only be used in statics problems.
3. This command list is limited to a maximum of 200 numbers.
4. R1 to Rn refer to the immediately preceding subcases. In other words Rn is applied to the most recently appearing subcase and R(n - 1) is applied to the second most recently appearing subcase, and so on. The comments (\$) describe the following example:

```
DISPL=ALL
SUBCASE 1
SUBCASE 2
SUBCOM 3
SUBSEQ=1.0, -1.0 $ SUBCASE 1 - SUBCASE 2
SUBCASE 11
SUBCASE 12
SUBCOM 13
SUBSEQ=0.0, 0.0, 1.0, -1 .0 $ SUBCASE 11 - SUBCASE 12
or
SUBSEQ=1.0, - 1.0 $ EQUIVALENT TO PRECEDING COMMAND.
USE ONLY ONE.
```

**SUBTITLE** Output Subtitle

Defines a subtitle that will appear on the second heading line of each page of printer output.

**Format:**

SUBTITLE=subtitle

**Examples:**

SUBTITLE=PROBLEM NO. 5-1A

**Describers:**

| <b>Describer</b> | <b>Meaning</b>        |
|------------------|-----------------------|
| subtitle         | Any character string. |

**Remarks:**

1. SUBTITLE appearing under a SUBCASE command will appear in the output for that subcase only.
2. SUBTITLE appearing before all SUBCASE commands will appear in the output for all subcases except those in Remark 1 .
3. If no SUBTITLE command is present, the subtitle line will be blank.
4. The subtitle also appears on plotter output.

## 488 SUPER Superelement Subcase Assignment

### SUPER Superelement Subcase Assignment

Assigns a subcase(s) to a superelement or set of superelements.

**Format:**

$$\text{SUPER} = \left\{ \begin{array}{c} \text{ALL} \\ \left\{ \begin{array}{c} n \\ i \end{array} \right\} [ , l ] \end{array} \right\}$$

**Examples:**

```
SUPER=17, 3  
SUPER=15  
SUPER=ALL
```

**Describers:**

| Describer | Meaning                                                                                                                                                                                |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| i         | Superelement identification number. (Integer≥0)                                                                                                                                        |
| ALL       | The subcase is assigned to all superelements and all loading conditions. (Default)                                                                                                     |
| n         | Set identification number of a previously appearing SET command. The subcase is assigned to all superelements with identification numbers that appear on this SET command. (Integer>0) |
| l         | Load sequence number. (Integer>0; Default = 1)                                                                                                                                         |

**Remarks:**

1. All subcases with requests for specific superelement(s) must contain the SUPER command. If no SUPER command is specified in the Case Control Section then all subcases will be assigned to all superelements. In other words, SUPER=ALL is the default.
2. All subcases associated with superelements must precede those for the residual structure except when SUPER=ALL or SUPER=n and the selected set includes the residual structure.
3. The load sequence number is only used in static analysis and frequency response analysis when there are multiple loading conditions. Also, the residual structure



must have a subcase specified for each unique load condition. This is required because the number of residual structure subcases is used to determine the number of load conditions for all superelements.

4. The load sequence number is associated with the order of the subcases for the residual structure; i.e., the third loading condition is associated with the third subcase for the residual structure.
5. Subcases are required for superelements when there is a load, constraint, or output request.
6. If a set is referenced by n, then the SET identification number must be unique with respect to any superelement identification numbers. In addition, the same sets must be used for all loading conditions.
7. If the ALL option is used, it must be used for all loading conditions.
8. When  $i=0$ , the residual structure is used instead of a superelement. See the *NX Nastran Superelement User's Guide* for a complete description of this option.

## 490 SUPORT1 Fictitious Support Set Selection

### SUPPORT1 Fictitious Support Set Selection

Selects the fictitious support set (SUPORT1 entries only) to be applied to the model.

#### Format:

SUPPORT1=n

#### Examples:

```
SUPPORT1=15  
SUPO=4
```

#### Describers:

| Describer | Meaning                                                                                          |
|-----------|--------------------------------------------------------------------------------------------------|
| n         | Set identification of fictitious support set defined on the SUPORT1 Bulk Data entry. (Integer>0) |

#### Remarks:

1. SUPORT1 entries will not be used unless selected in Case Control by the SUPORT1 command.
2. SUPORT entries will be applied in all subcases.

## SURFACE    Surface Definition

Defines a surface for the calculation of grid point stresses, strains, or mesh stress discontinuities.

**Format:**

$$\text{SURFACE id SET sid, } \left[ \text{FIBRE } \left\{ \begin{array}{l} \text{ALL} \\ Z1 \\ Z2 \\ \text{MID} \end{array} \right\} \right], \\
 \left[ \text{SYSTEM } \left\{ \begin{array}{l} \text{ELEMENT} \\ \text{BASIC} \\ \text{CORD cid} \end{array} \right\} \right], \left[ \text{AXIS } \left\{ \begin{array}{l} X1 \\ X2 \\ X3 \end{array} \right\} \right], \left[ \text{NORMAL [M]} \left\{ \begin{array}{l} R \\ X1 \\ X2 \\ X3 \end{array} \right\} \right], \\
 \left[ \text{TOPOLOGICAL} \right] \left[ \text{GEOMETRIC} \right] \left[ \text{TOLERANCE\{THETA\}} \right], \left[ \text{BRANCH} \left[ \left\{ \begin{array}{l} \text{MESSAGE} \\ \text{NOMESSAGE} \end{array} \right\} \right], \left[ \begin{array}{l} \text{BREAK} \\ \text{NOBREAK} \end{array} \right] \right]$$



**Examples:**

SURFACE 10 SET 9 NORMAL X3

**Describers:**

| Describer | Meaning                                                                                                                   |
|-----------|---------------------------------------------------------------------------------------------------------------------------|
| id        | Surface identification number (required).                                                                                 |
| SET       | References a SET command that defines the elements in the surface (required). Either form of the SET command may be used. |
| sid       | Set identification number.                                                                                                |
| FIBRE     | Specifies the fiber location at which stresses will be calculated.                                                        |
| ALL       | Requests output at all fiber locations; i.e., z=Z1, Z2, and MID.                                                          |

**492 SURFACE**  
Surface Definition

| <b>Describer</b>         | <b>Meaning</b>                                                                                                                                                         |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Z1                       | Requests output $z=Z1$ only.                                                                                                                                           |
| Z2                       | Requests output $z=Z2$ only.                                                                                                                                           |
| MID                      | Requests output $z=(Z1+Z2)/2$ only.                                                                                                                                    |
| SYSTEM                   | Specifies the coordinate system to be used to define the output coordinate system.                                                                                     |
| ELEMENT                  | Specifies the element coordinate system for output.                                                                                                                    |
| CORD cid                 | Specifies the coordinate system defined on a CORDij Bulk Data entry for output.                                                                                        |
| BASIC                    | Specifies the basic coordinate system for output.                                                                                                                      |
| AXIS                     | Specifies the axis of the coordinate system to be used as the x output axis and the local x-axis when geometric interpolation is used.                                 |
| X1, X2, X3               | Specifies the direction of the axis or the normal. X, Y, and Z may be substituted for X1, X2, and X3, respectively.                                                    |
| NORMAL                   | Specifies the reference direction for positive fiber and shear stress output, but has no effect when ELEMENT is specified.                                             |
| M                        | Specifies the reverse of the direction given by R, X1, X2, or X3.                                                                                                      |
| R                        | Specifies the radius vector from the origin of reference coordinate system to the grid point.                                                                          |
| TOPOLOGICAL<br>GEOMETRIC | Specifies the method to calculate the average grid point stress or strain. The default is TOPOLOGICAL.                                                                 |
| theta                    | Specifies the interelement slope difference tolerance (in degrees) to detect stress discontinuity between elements, (not used with TOPOLOGICAL). (Real; Default = 0.0) |
| BRANCH                   | Selects whether multiple element intersections (BREAK/NOBREAK) are to be treated as discontinuities and if warning messages (MESSAGE/NOMESSAGE) are to be issued.      |
| BREAK<br>NOBREAK         | Multiple element intersections are (or are not) to be treated as stress discontinuities.                                                                               |

| <b>Describer</b> | <b>Meaning</b>                                               |
|------------------|--------------------------------------------------------------|
| MESSAGE          | A warning message will (or will not) be issued when multiple |
| NOMESSAGE        | element intersections are encountered.                       |

**Remarks:**

1. SURFACE commands must be specified after OUTPUT(POST).
2. The surface identification number must be referenced on a SET command, specifically the SET command which comes after OUTPUT(POST). This SET identification number may then be referenced on the GPSTRESS, GPSTRAIN, STRFIELD, ELSDCON, and GPSDCON commands.
3. The surface normal is also used in the definition of the local reference surface for geometric interpolation. Two options are available. In the first option, the radius vector (R) from the origin of the reference coordinate system to the grid point is used. In the second option, one axis (X1, X2, or X3) of the coordinate system is used. The direction can be reversed using the modification parameter, M. The positive side of an element is defined as a side from which the NORMAL direction emerges rather than the side determined by the connection specified on the element connection entries.
4. When the parameter ELEMENT is present, the element stresses or strains are used unmodified (defaults to output stresses in the output system). The CORD keyword references a CORDij Bulk Data entry with coordinate system identification number cid.
5. When theta=0, no testing is made. When theta is negative, grid point stresses will be calculated for each element connected to an exception point; otherwise, the best estimation of the grid point stress will be output.
6. BREAK is the default if theta is nonzero.
7. For all elements defined in SET 9 in the Examples section:
  - All fiber locations are output.
  - The basic output system is used.
  - The x-axis is x-axis of the basic system.
  - The surface normal direction point is z-axis of the basic system.
  - The topological interpolation method is used.

**494 SURFACE**  
**Surface Definition**

- No tolerance test is made.
- No branch test is made.

The example illustrates a good choice for regular two-dimensional problems in the x-y plane.

**SVECTOR**    Solution Set Eigenvector Output Request

Requests the form and type of solution set eigenvector output.

**Format:**

$$\text{SVECTOR}[(\text{PRINT}, \text{PUNCH})] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
SVECTOR=ALL
SVECTOR (PUNCH) =NONE
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                 |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PRINT            | The printer will be the output medium.                                                                                                                                         |
| PUNCH            | The punch file will be the output medium.                                                                                                                                      |
| ALL              | Displacements for all points (modes) will be output.                                                                                                                           |
| NONE             | Displacements for no points (modes) will be output.                                                                                                                            |
| n                | Set identification of a previously appearing SET command. Only displacements of points with identification numbers that appear on this SET command will be output. (Integer>0) |

**Remarks:**

1. Both PRINT and PUNCH may be requested.
2. SVECTOR=NONE overrides an overall output request.
3. Output will be presented as a tabular listing of grid points for each eigenvector.
4. SVECTOR can be useful, for example, if you would like to output eigenvectors for all grids in the OP2 file, yet only print the eigenvectors for a specific grid set to the f06 file. In this example, both DISPLACEMENT(PLOT) = ALL and SVECTOR(PRINT) = 101 would be included in the case control.

**496 SVELOCITY**  
**Solution Set Velocity Output Request**

**SVELOCITY**      Solution Set Velocity Output Request

Requests the form and type of solution set velocity output.

**Format:**

$$\text{SVELOCITY} \left[ \left( \left[ \begin{array}{l} \text{SORT1} \\ \text{SORT2} \end{array} \right], \text{PRINT}, \text{PUNCH} \left[ \begin{array}{l} \text{REAL or IMAG} \\ \text{PHASE} \end{array} \right] \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

SVELOCITY=5  
 SVELOCITY (SORT2, PUNCH, PRINT, PHASE) =ALL

**Describers:**



| Describer    | Meaning                                                                                                                                                                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence.                             |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each grid point (or mode number).                                                                    |
| PRINT        | The printer will be the output medium.                                                                                                                                      |
| PUNCH        | The punch file will be the output medium.                                                                                                                                   |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                                                      |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                                                  |
| ALL          | Velocity for all solution points (modes) will be output.                                                                                                                    |
| NONE         | Velocity for no solution points (modes) will be output.                                                                                                                     |
| n            | Set identification of a previously appearing SET command. Only velocities of points with identification numbers that appear on this SET command will be output. (Integer>0) |



**Remarks:**

1. Both PRINT and PUNCH may be requested.
2. Velocity output is only available for transient and frequency response problems.
3. The defaults for SORT1 and SORT2 depend on the type of analysis and are discussed in [DISPLACEMENT](#). If SORT1 is selected for any of the commands SACC, SDIS, and SVEL then the remaining commands will also be SORT1.
4. SVELOCITY=NONE overrides an overall output request.
5. Due to the differences in formulations, the modal responses for the constraint mode method of enforced motion will be different than the modal responses for the absolute displacement method of enforced motion. In order to highlight this difference, the f06 output for the constraint mode method will be labeled *alternative* solution set.

**498**   **SYM**  
**Symmetry Subcase Delimiter**

**SYM**   Symmetry Subcase Delimiter

Delimits and identifies a symmetry subcase.

**Format:**

SYM=*n*

**Examples:**

SYM=123

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                             |
|------------------|--------------------------------------------|
| <i>n</i>         | Subcase identification number. (Integer>0) |

**Remarks:**

1. The subcase identification number, *n*, must be greater than all previous subcase identification numbers.
2. Plot commands should refer to *n*.
3. Overall output commands will not propagate into a SYM subcase (i.e., any output desired must be requested within the subcase).
4. SYM may only be used in statics or inertia relief problems.

**4**

**CASE**

**SYMCOM**    Symmetry Combination Subcase Delimiter

Delimits and identifies a symmetry combination subcase.

**Format:**

SYMCOM=n

**Examples:**

SYMCOM=1 2 3

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                             |
|------------------|--------------------------------------------|
| n                | Subcase identification number. (Integer>2) |

**Remarks:**

1. The subcase identification number, n, must be greater than all previous subcase identification numbers.
2. SYMCOM may only be used in statics problems.
3. If the referenced subcases contain thermal loads or element deformations, the user must define the temperature field in the SYMCOM by use of a TEMP(Load) command, or the element deformations by a DEFORM command.
4. An alternate command is the SUBCOM command.
5. SYMCOMs may be specified in superelement analysis with the following recommendations:
  - For each superelement, specify its SUBCASEs consecutively, directly followed by its SYMCOM(s).
  - Specify a SUPER command with a new load sequence number under each SYMCOM command.

The following example is given for a model with one superelement and one load combination:

```
SUBCASE 101
SUPER=1,1
LOAD=100
SUBCASE 102
SUPER=1,2
LOAD=200
SYMCOM 110
LABEL=COMBINE SUBCASES 101 AND 102
```

**500 SYMCOM**  
**Symmetry Combination Subcase Delimiter**

```
SUPER=1,3  
SYMSEQ=1.,1.  
SUBCASE 1001  
SUBCASE 1002  
SYMCOM 1010  
LABEL=COMBINE SUBCASES 1001 AND 1002  
SYMSEQ=1.,1.
```

**SYMSEQ**    Symmetry Sequence Coefficients

Gives the coefficients for combining the symmetry subcases into the total structure.

**Format:**

SYMSEQ=R1 [,R2,R3,...., Rn]

**Examples:**

SYMSEQ=1.0, -2.0, 3.0, 4.0

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                  |
|------------------|-----------------------------------------------------------------|
| Ri               | Coefficients of the previously occurring n SYM subcases. (Real) |

**Remarks:**

1. SYMSEQ may only appear after a SYMCOM command.
2. The default value for the coefficients is 1.0 if no SYMSEQ command appears.
3. SYMSEQ may only be used in statics or inertia relief.
4. Ri is limited to a maximum of 200 numbers.

## 502 TEMPERATURE

### Temperature Set Selection

## TEMPERATURE

### Temperature Set Selection

Selects the temperature set to be used in either material property calculations or thermal loading in heat transfer and structural analysis.

**Format:**

$$\text{TEMPERATURE} \left[ \begin{array}{c} \text{INITIAL} \\ \text{MATERIAL} \\ \text{LOAD} \\ \text{BOTH} \end{array} \right] = n$$

**Examples:**

```
TEMPERATURE (LOAD)=15  
TEMPERATURE (MATERIAL)=7  
TEMPERATURE=7
```

**Describers:**

| Describer | Meaning                                                                                                                                                          |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MATERIAL  | The selected temperature set will be used to determine temperature-dependent material properties indicated on the MATTi Bulk Data entries. See Remarks 6 and 7.  |
| LOAD      | The selected temperature set will be used to determine an equivalent static load and to update material properties in a nonlinear analysis. See Remarks 6 and 7. |
| BOTH      | Both MATERIAL and LOAD will use the same temperature set.                                                                                                        |
| n         | Set identification number of TEMP, TEMPD, TEMPP1, TEMPRB, TEMPF, or TEMPAX Bulk Data entries. (Integer>0)                                                        |
| INITIAL   | The selected temperature table will be used to determine initial temperature distribution. See Remarks 6 and 7.                                                  |

**Remarks:**

1. In a linear, non-superelement analysis, only one temperature-dependent material request can be made, and should be specified above the subcase level. A fatal error will occur if multiple temperature-dependent material requests are made. See also Remarks 6 and 7.

4

CASE

In a superelement analysis, each superelement subcase can have a different TEMPERATURE(MATERIAL), but consecutive load cases must have consistent TEMPERATURE(MATERIAL).

2. The total load applied will be the sum of the external (LOAD command), thermal (TEMP(LOAD) command), element deformation (DEFORM command) and constrained displacement (SPC command) loads.
3. Static, thermal, and element deformation loads should have unique set identification numbers.
4. INITIAL is used in steady state heat transfer analysis for conduction material properties and provides starting values for iteration.
5. In superelement data recovery restarts, TEMPERATURE(LOAD) requests must be respecified in the Case Control Section.
6. TEMPERATURE(MATERIAL) and TEMPERATURE(INITIAL) cannot not be specified simultaneously in the same run.
7. TEMPERATURE(BOTH) cannot not be specified simultaneously with TEMPERATURE(LOAD) or TEMPERATURE(MATERIAL).
8. The TEMPERATURE case control inputs for thermal strain and temperature dependent material properties in linear solutions are described as follows.

Thermal strain in linear solutions is calculated from

$$\epsilon = a(T_2 - T_1)$$

where T2=TEMPERATURE(LOAD) and T1=TEMPERATURE(INITIAL) if it is defined, otherwise T1=TREF. TREF is defined on material bulk entries (MAT1, MAT2, ..., MATi) or the PCOMP and PCOMPG bulk entries and defaults to "0.0".

#### **Linear Solution Input Combinations**

- If TEMPERATURE(LOAD) and TEMPERATURE(INITIAL) are defined, T1=TEMPERATURE(INITIAL), and MATTi temperature dependent material properties are evaluated at TEMPERATURE(INITIAL).

$$\epsilon = a_{init}(T_{load} - T_{init})$$

- If TEMPERATURE(LOAD) and TEMPERATURE(MATERIAL) are defined, T1=TREF, and MATTi temperature dependent material properties are evaluated at TEMPERATURE(MATERIAL).

$$\epsilon = a_{mat}(T_{load} - T_{ref})$$

## 504 TEMPERATURE

### Temperature Set Selection

- If TEMPERATURE(BOTH) is defined, T1=TREF, and MATTi temperature dependent material properties are evaluated at TEMPERATURE(BOTH).

$$\epsilon = a_{\text{mat}}(T_{\text{load}} - T_{\text{ref}})$$

- If TEMPERATURE(LOAD) is defined and neither of TEMPERATURE(INITIAL) or TEMPERATURE(MATERIAL) are defined, T1=TREF, and MATTi temperature dependent material properties are ignored. Material properties are obtained from the MATi entries.

$$\epsilon = a(T_{\text{load}} - T_{\text{ref}})$$

where a on the MATi entry is used.

- If TEMPERATURE(LOAD) is not defined, material properties are evaluated at TEMPERATURE(MATERIAL) or TEMPERATURE(INITIAL) if either is defined, and no thermal strains result for that subcase.
- If none of TEMPERATURE(LOAD), TEMPERATURE(INITIAL) or TEMPERATURE(MATERIAL) are defined, no thermal strains result for that subcase, and MATTi temperature dependent material properties are ignored. Material properties are obtained from the MATi entries.

9. The TEMPERATURE case control inputs for thermal strain and temperature dependent material properties in solutions 106, 601 and 701 are described as follows.

Thermal strain in the nonlinear solutions is calculated from

$$\epsilon = a_{\text{load}}(T_{\text{load}} - T_{\text{ref}}) - a_{\text{init}}(T_{\text{init}} - T_{\text{ref}})$$

where  $a_{\text{load}}$  is evaluated at TEMPERATURE(LOAD) and  $a_{\text{init}}$  is evaluated at TEMPERATURE(INIT).

#### Input Combinations for Nonlinear Solutions 106, 601 and 701

- For SOL 106, TEMPERATURE(INITIAL) is required when TEMPERATURE(LOAD) is defined, and should be above the subcase level. See SOLs 601 and 701 remark 4.
- For solutions 106, 601 and 701, the specification of TEMPERATURE(MATERIAL) or TEMPERATURE(BOTH) will cause a fatal error.
- For solutions 106, 601 and 701, TEMPERATURE(LOAD) is used to update temperature-dependent material properties. Temperature-dependent material properties are specified with MATi, MATTi, MATS1, and/or TABLEST bulk entries.

4

CASE



- For solutions 106, 601 and 701, if TEMPERATURE(INITIAL) is defined but TEMPERATURE(LOAD) is not defined, MATTi temperature dependent material properties are evaluated at TEMPERATURE(INITIAL), and no thermal strains result for that subcase.
  - For solutions 106, 601 and 701, if neither TEMPERATURE(LOAD) or TEMPERATURE(INITIAL) is defined, MATTi temperature dependent material properties are evaluated at "0.0".
10. TEMPERATURE(INIT) is not used with TEMPAX.
  11. Temperature loads cause incorrect stresses in dynamic analysis.

**Remarks related to SOLs 601 and 701:**

1. n should reference the set identification number of the TEMP or TEMPD Bulk Data entry only.
2. Temperature loads can be used in both static and transient analysis.
3. TEMPERATURE(LOAD) is used to select a constant temperature load. For time-dependent temperature load, DLOAD command is used instead. The total temperature load is the sum of the constant temperature load and the time-dependent temperature load.
4. If TEMPERATURE(INITIAL) is not specified, then the initial temperatures are assumed to be "0.0".

## 506 TFL Transfer Function Set Selection

### TFL Transfer Function Set Selection

Selects the transfer function set(s) to be added to the direct input matrices.

#### Formats:

TFL={n<sub>1</sub>, [n<sub>2</sub>, n<sub>3</sub> THRU n<sub>4</sub>, EXCEPT n<sub>5</sub>, n<sub>6</sub>, n<sub>7</sub>]}

#### Examples:

```
TFL=77
TFL=1, 25, 77
TFL=5, 6, 7, 8, 9, 10 THRU 55 EXCEPT 15, 16, 77, 78, 79
TFL=1 THRU 10
```

#### Describers:

| Describer                              | Meaning                                                                                                                                                                                             |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| n <sub>1</sub> , n <sub>2</sub> , etc. | Identification numbers of TF Bulk Data entries. (Integer>0)                                                                                                                                         |
| n <sub>3</sub> THRU n <sub>4</sub>     | Identification numbers of TF bulk data entries (n <sub>3</sub> >n <sub>4</sub> ). (Integer>0)                                                                                                       |
| EXCEPT                                 | Identification numbers following EXCEPT will be deleted from the list as long as they are in the range of the set defined by the immediately preceding THRU. An EXCEPT list may not include a THRU. |

#### Remarks:

1. Transfer functions will not be used unless selected in the Case Control Section.
2. Transfer functions are supported in dynamics problems only.
3. Transfer functions are described in the *NX Nastran Advanced Dynamic Analysis User's Guide*.
4. It is recommended that PARAM,AUTOSPC,NO be specified when using transfer functions. See the *NX Nastran User's Guide*.
5. The transfer functions are additive if multiple TF values are referenced on the TFL command.
6. Identification numbers following EXCEPT within the range of the THRU must be in ascending order.
7. In the third example in the Examples section, the numbers 77, 78, 79 are included because they are outside the prior THRU range.

8. The TFL command is supported across subcases. A TFL command selecting different TF bulk data entries can be defined for each subcase.

**508 THERMAL**  
Temperature Output Request

**THERMAL**      Temperature Output Request

Requests the form and type of temperature output.

**Format:**

$$\text{THERMAL} \left[ \left( \left[ \begin{array}{c} \text{SORT1} \\ \text{SORT2} \end{array} \right], \left[ \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right] \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
THERMAL=5
THER (PRINT, PUNCH) =ALL
```

**Describers:**



| Describer | Meaning                                                                                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1     | Output is presented as a tabular listing of point temperatures for each load or time step.                                                                                    |
| SORT2     | Output is presented as a tabular listing of loads or time steps for each point temperature.                                                                                   |
| PRINT     | The printer will be the output medium.                                                                                                                                        |
| PUNCH     | The punch file will be the output medium.                                                                                                                                     |
| PLOT      | Compute temperatures but do not print.                                                                                                                                        |
| ALL       | Temperatures for all points will be output.                                                                                                                                   |
| NONE      | Temperatures for no points will be output.                                                                                                                                    |
| n         | Set identification of a previously appearing SET command. Only temperatures of points with identification numbers that appear on this SET command will be output. (Integer>0) |

**Remarks:**

1. The THERMAL output request is designed for use with the heat transfer option. The printed output will have temperature headings. The PUNCH option produces TEMP Bulk Data entries, and the SID on the entries will be the subcase number (=1 if no SUBCASES are specified).

**THERMAL    509**  
**Temperature Output Request**

2. SORT1 is the default in steady state heat transfer analysis. SORT2 is the default in transient heat transfer analysis.
3. In a transient heat transfer analysis, the SID on the punched TEMP Bulk Data entries, equals the time step number.

**Remarks related to SOL 601:**

1. THERMAL output request is supported for heat transfer analysis in SOL 601,153 and SOL 601,159.

**510 TITLE**  
**Output Title**

**TITLE**      Output Title

Defines a character string that will appear on the first heading line of each page of NX Nastran printer output.

**Format:**

TITLE=title

**Examples:**

TITLE=RIGHT WING, LOAD CASE 3.

**Describers:**

| <b>Describer</b> | <b>Meaning</b>        |
|------------------|-----------------------|
| title            | Any character string. |

**Remarks:**

1. If this command appears under a SUBCASE command, then the title appears in the output for that subcase only.
2. If this command appears before all SUBCASE commands, then the title is used in all subcases without a TITLE command.
3. If no TITLE command is present, then the title line will contain data and page numbers only.
4. The title also appears on plotter output.

**TRIM**      Aerodynamic Trim Variable Constraint Selection

Selects trim variable constraints in static aeroelastic response.

**Format:**

TRIM=n

**Examples:**

TRIM=1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                   |
|------------------|------------------------------------------------------------------|
| n                | Set identification number of a TRIM Bulk Data entry. (Integer>0) |

**Remarks:**

Aerodynamic extra points (trim variables) that are not constrained by a TRIM Bulk Data entry will be free during the static aeroelastic response solution.



## 512 TSTEP Transient Time Step Set Selection

### TSTEP Transient Time Step Set Selection

Selects integration and output time steps for linear or nonlinear transient analysis.

**For SOLs 601 and 701:** Selects time stepping for advanced nonlinear analysis.

#### Format:

TSTEP=*n*

#### Examples:

TSTEP=731

#### Describers:

| Describer                       | Meaning                                                                      |
|---------------------------------|------------------------------------------------------------------------------|
| <i>n</i>                        | Set identification number of a TSTEP or TSTEPNL Bulk Data entry. (Integer>0) |
| <i>n</i> (For SOLs 601 and 701) | Set identification number of a TSTEP Bulk Data entry. (Integer>0)            |

#### Remarks:

1. A TSTEP entry must be selected to execute a linear transient analysis (SOLs 109 or 112) and TSTEPNL for a nonlinear transient analysis (SOLs 129 and 159).
2. A TSTEPNL entry must be selected in each subcase to execute a nonlinear transient problem.
3. For the application of time-dependent loads in modal frequency response analysis (SOLs 111 and 146), a TSTEP entry must be selected by the TSTEP command. The time-dependent loads will be recomputed in frequency domain by a Fourier Transform.

#### Remarks related to SOLs 601 and 701:

1. In SOL 601, TSTEP selects the solution time steps for a static or transient analysis.
2. In SOL 701, the actual time step size may be based on the critical time step size for stability calculated by the program. However, the total solution time is considered. For example, if the TSTEP entry specifies 5 time steps of step size 0.001, the program will execute up to solution time 0.005 using an appropriate time step size. To request that the program use the time step size specified in TSTEP Bulk Data entry, specify XSTEP=1 in the NXSTRAT entry. See the



*Advanced Nonlinear Theory and Modeling Guide* on the critical time step size and when results are output.

**514 TSTEPNL**  
**Transient Time Step Set Selection for Nonlinear Analysis**

**TSTEPNL** Transient Time Step Set Selection for Nonlinear Analysis

See the description for [TSTEP](#).

**TSTRU**      Temperature Set ID for a Structures Run

Defines a temperature set ID for a structures run based on a heat transfer subcase.

**Format:**

TSTRU=n

**Examples:**

TSTRU=999

**Describers:**

| Describer | Meaning                                                    |
|-----------|------------------------------------------------------------|
| n         | Set identification for use on TEMP(LOAD)=n or TEMP(INIT)=n |

**Remarks:**

1. TSTRU should be placed in the heat transfer subcase.
2. If TSTRU does not explicitly appear in the heat transfer subcase, it is defaulted to TSTRU=Heat Transfer Subcase ID.
3. In a structures run, a temperature set generated from a heat transfer run will override an existing temperature set with an identical set ID defined with TEMP, TEMPD, TEMPF, TEMPP1, TEMPRB or any combination.
4. TSTRU may be placed in the first subcase of a PARAM,HEATSTAT,YES run.
5. TSTRUs may be placed in each subcase of an APPHEAT run. The associated structures run then requires the following:

```
ASSIGN heat_run='heat transfer job name.MASTER'  

DBLOC DATABLK=(UG,EST,BGPPTS,CASECCR/CASEHEAT) LOGICAL=heat_run
```

6. Heat transfer runs and structure runs must have the same mesh. P-elements should also have the same geometry description. P-order between runs can be different.
7. For nonlinear heat transfer SOL 106 or SOL 153 the INOUT field on the NLPARM Bulk Data entry must be blank or NO if the results of the run are to be transferred to a linear structures run.

PARAM,NLHTLS,-1 should be placed in the nonlinear heat run. This will place UG heat transfer on the database.



**516 VECTOR**  
**Displacement Output Request**

**VECTOR** Displacement Output Request

Requests the form and type of displacement vector output.

See the description for [DISPLACEMENT](#).

## VELOCITY    Velocity Output Request

Requests the form and type of velocity vector output.

**Format:**

$$\text{VELOCITY} \left[ \left[ \begin{array}{l} \text{[SORT1]} \\ \text{[SORT2]} \end{array} \right], \left[ \begin{array}{l} \text{[PRINT, PUNCH]} \\ \text{PLOT} \end{array} \right], \left[ \begin{array}{l} \text{[REAL or IMAG]} \\ \text{PHASE} \end{array} \right], \right. \\ \left. \left[ \begin{array}{l} \text{[ABS]} \\ \text{[REL]} \end{array} \right], \left[ \begin{array}{l} \text{[PSDF]} \\ \text{[ATOC]} \\ \text{[CRMS]} \\ \text{[RALL]} \end{array} \right], \left[ \begin{array}{l} \text{[RPRINT]} \\ \text{[NORPRINT]} \end{array} \right], \left[ \text{[RPUNCH]} \right] \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \\ \text{NONE} \end{array} \right\}$$

**Examples:**

```
VELOCITY=5
VELOCITY (SORT2, PHASE, PUNCH) =ALL
```

**Describers:**

| Describer    | Meaning                                                                                                                                         |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| SORT1        | Output will be presented as a tabular listing of grid points for each load, frequency, eigenvalue, or time, depending on the solution sequence. |
| SORT2        | Output will be presented as a tabular listing of frequency or time for each grid point.                                                         |
| PRINT        | The printer will be the output medium.                                                                                                          |
| PUNCH        | The punch file will be the output medium.                                                                                                       |
| PLOT         | Generates, but does not print, velocities.                                                                                                      |
| REAL or IMAG | Requests rectangular format (real and imaginary) of complex output. Use of either REAL or IMAG yields the same output.                          |
| PHASE        | Requests polar format (magnitude and phase) of complex output. Phase output is in degrees.                                                      |
| ABS          | For enforced motion dynamic analysis, velocity results will be output as absolute velocity.                                                     |

518 **VELOCITY**  
Velocity Output Request

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                                                  |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REL              | For enforced motion dynamic analysis, velocity results will be output relative to the enforced motion input.                                                                                                    |
| PSDF             | Requests the power spectral density function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 7. |
| ATOC             | Requests the autocorrelation function be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 7.        |
| CRMS             | Requests the cumulative root mean square function be calculated for random analysis post-processing. Request must be made above the subcase level and RANDOM must be made in the Case Control. See remark 7.    |
| RALL             | Requests all of PSDF, ATOC, and CRMS be calculated for random analysis post-processing. The request must be made above the subcase level and RANDOM must be selected in the Case Control. See remark 7.         |
| RPRINT           | Writes random analysis results to the print file. (Default)<br>See remark 7.                                                                                                                                    |
| NORPRINT         | Disables the writing of random analysis results to the print file. See remark 7.                                                                                                                                |
| RPUNCH           | Writes random analysis results to the punch file. See remark 7.                                                                                                                                                 |
| ALL              | Velocity for all solution points will be output.                                                                                                                                                                |
| NONE             | Velocity for no solution points will be output.                                                                                                                                                                 |
| n                | Set identification of a previously appearing SET command. Only velocities of points with identification numbers that appear on this SET command will be output. (Integer>0)                                     |

**Remarks:**

1. Both PRINT and PUNCH may be requested.

2. Velocity output is only available for transient and frequency response problems.
3. The defaults for SORT1 and SORT2 depend on the type of analysis:
  - SORT1 is the default in static analysis, frequency response, steady state heat transfer analysis, real and complex eigenvalue analysis, flutter analysis, and buckling analysis. If SORT2 is selected in a frequency response solution for one or more of the commands ACCE, DISP, FORC, GPFO, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT2 format.
  - SORT2 is the default in transient response analysis (structural and heat transfer). SORT2 is not available for real eigenvalue (including buckling), complex eigenvalue, or flutter analysis. If SORT1 is selected in a transient solution for one or more of the commands ACCE, DISP, ENTH, FORC, GPFO, HDOT, MPCF, OLOA, SPCF, STRA, STRE, and VELO then the remaining commands will also be output in SORT1 format.
  - XY plot requests will force SORT2 format thus overriding SORT1 format requests.
4. VELOCITY=NONE overrides an overall output request.
5. The PLOT option is used when curve plots are desired in the magnitude/phase representation and no printer request is present for magnitude/phase representation.
6. Velocity results are output in the global coordinate system (see field CD on the GRID Bulk Data entry).
7. The following applies to SOL 111 PSD solutions:
  - Frequency response output occurs in addition to any random output. The PRINT,PUNCH,PLOT describers control the frequency response output. The RPRINT,NORPRINT,RPUNCH describers control the random output.
  - The SORT1 and SORT2 describers only control the output format for the frequency response output. The output format for random results is controlled using the parameter RPOSTS.
  - Any combination of the PSDF, ATOC, and CRMS describers can be selected. The RALL describer selects all three.
  - When requesting PSDF, CRMS, ATOC, or RALL, both the overall RMS and the Number of Zero Crossing tables are always calculated.

## 520 VELOCITY

### Velocity Output Request

8. When doing enforced motion dynamic analysis and relative output is requested (using the REL descriptor), the output will be relative to the input as described by the equation:

$$u_f = y_f - K_{ff}^{-1} K_{fs} u_s$$

where  $u_f$  = absolute displacement

$y_f$  = relative displacement

$u_s$  = enforced motion.

The REL descriptor does not apply to PSDF, ATOC, CRMS, or RALL.

#### Remarks related to SOLs 601 and 701:

1. Output is restricted to REAL format. IMAG, PHASE, PSDF, ATOC and RALL are ignored.
2. Displacements, velocities and accelerations must be output for the same set of grid points if requested. Output requested for set n in this command will be combined with the sets requested in the DISPLACEMENT and ACCELERATION commands, and velocities will be output at the grid points of the combined set.
3. SOLs 601 and 701 do not support PUNCH requests.



## VOLUME      Volume Definition

Defines a volume for the calculation of grid point stresses, strains, or mesh stress discontinuities.

### Format:

$$\text{VOLUME id SET sid, [PRINCIPAL, DIRECT STRESS], \left[ \text{SYSTEM} \left\{ \begin{array}{l} \text{ELEMENT} \\ \text{CORD cid} \\ \text{BASIC} \end{array} \right\} \right]}$$

### Examples:

```
VOLUME 21 SET 2
```

### Describers:

| Describer | Meaning                                                                                                                                                                                                                    |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| id        | Volume identification number.                                                                                                                                                                                              |
| sid       | Set identification number of a SET command that defines the elements in the volume. Either form of the SET command may be used. The default is all elements.                                                               |
| PRINCIPAL | Requests principal stresses or strains, direction cosines, mean pressure, and von Mises equivalent stresses or strains to be calculated. If neither PRINCIPAL nor DIRECT is specified, then the default is to output both. |
| DIRECT    | Requests direct stress or strains, mean pressure stress and von Mises equivalent stress to be calculated. If neither PRINCIPAL nor DIRECT is specified, then the default is to output both.                                |
| SYSTEM    | Used to specify the reference coordinate system to be used to define the output stress orientation coordinate system.                                                                                                      |
| ELEMENT   | Specifies the element coordinate system.                                                                                                                                                                                   |
| CORD cid  | Specifies the coordinate system specified on a CORDij entry.                                                                                                                                                               |
| BASIC     | Specifies the basic coordinate system.                                                                                                                                                                                     |

### Remarks:

1. VOLUME commands must be specified after OUTPUT(POST).

## 522 VOLUME

### Volume Definition

2. The volume identification number must be referenced on a SET command, specifically the SET command which comes after OUTPUT(POST). This SET identification number may then be referenced on the GPSTRESS, GPSTRAIN, STRFIELD, ELSDCON, and GPSDCON commands.
3. If ELEMENT is specified, element stresses or strains are not transformed.
4. In the example given above, for all elements in SET 2:
  - Both PRINCIPAL and DIRECT stress are output.
  - The BASIC output system is used.

**VUGRID**    View Geometry Output for p-Version Analysis

Requests output of view grid and view element entries used in p-version element data recovery.

**Format:**

$$\text{VUGRID} \left[ \left( \begin{array}{c} \text{PRINT, PUNCH} \\ \text{PLOT} \end{array} \right) \right] = \left\{ \begin{array}{c} \text{ALL} \\ n \end{array} \right\}$$

**Examples:**

VUGRID (PRINT) =n

**Describers:**

| Describer | Meaning                                                                                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALL       | All view element and grid entries will be output.                                                                                                                               |
| n         | Set identification of a previously appearing SET command. Only those p-version elements with identification numbers that appear on this SET command will be output. (Integer>0) |
| PRINT     | The printer will be the output medium.                                                                                                                                          |
| PUNCH     | The punch file will be the output medium.                                                                                                                                       |
| PLOT      | Generate entries but do not print or punch.                                                                                                                                     |

**Remarks:**

1. VUGRID is processed only when an analysis with p-version elements is requested.
2. Only one VUGRID command per analysis is allowed.
3. The VUGRID command is used only for output control and does not in anyway affect the p-version analysis.
4. See parameters VUHEXA, VUTETRA, and VUPENTA in [Parameters](#), for renaming element entries.
5. See parameters VUELJUMP and VUGJUMP in [Parameters](#) for numbering of view grid and view element entries.

**524 WEIGHTCHECK**  
**Rigid Body Mass Reduction Check**

**WEIGHTCHECK** Rigid Body Mass Reduction Check

At each stage of the mass matrix reduction, compute the rigid body mass and compare with the rigid body mass of the g-set.

**Format:**

$$\text{WEIGHTCHECK} \left[ \left( \left[ \begin{array}{c} \text{PRINT} \\ \text{NOPRINT} \end{array} \right], \text{SET} = \left( \left\{ \begin{array}{c} \text{G, N, N + AUTOSPC, F, A, V} \\ \text{ALL} \end{array} \right\} \right) \right) \right] = \left\{ \begin{array}{c} \text{YES} \\ \text{NO} \end{array} \right\}$$

$$\left[ \text{GRID} = \text{gid}, \text{CGI} = \left[ \begin{array}{c} \text{YES} \\ \text{NO} \end{array} \right], \left[ \begin{array}{c} \text{WEIGHT} \\ \text{MASS} \end{array} \right] \right]$$

**Examples:**

```
WEIGHTCHECK=YES
WEIGHTCHECK (GRID=12, SET=(G, N, A), MASS)=YES
```

**Describers:**



| Describer   | Meaning                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------|
| PRINT       | Writes output to the print file (default).                                                                               |
| NOPRINT     | Does not write output to the print file.                                                                                 |
| SET         | Selects degree-of-freedom set(s). (Default SET=G)                                                                        |
| gid         | Reference grid point for the calculation of rigid body motion. The default is the origin of the basic coordinate system. |
| CGI         | For CGI≠YES, CGI=YES requests output of center of gravity and mass moments of inertia. (Default: CGI=NO).                |
| WEIGHT/MASS | Selects output in units of weight or mass. (Default=WEIGHT)                                                              |

**Remarks:**

1. WEIGHTCHECK must be specified above the subcase level.
2. For SET=N, N+AUTOSPC, F, or A, the WEIGHTCHECK command also outputs a percentage loss or gain in the reduced rigid body mass matrix (e.g., MAA) as compared to the g-set rigid body mass matrix (e.g., MGG). G must also be requested to obtain this comparison; e.g., WEIGHTCHECK(SET=(G,A))=YES.
3. SET=N+AUTOSPC uses the mass matrix for the n-set with the rows corresponding to degrees-of-freedom constrained by the PARAM, AUTOSPC

operation zeroed out. If AUTOSPC was not performed then this check is redundant with respect to SET=N.

4. WEIGHTCHECK is available in all SOLs. However, in SOLs 101, 105, 114, and 116, because no mass reduction is performed, only WEIGHTCHECK(SET=G) is available.

## 4.5 Case Control Applicability Tables

The following tables describe the applicability of Case Control commands to Solution Sequences:

|                                                         |                                                                                                              |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <a href="#">Table 4-1</a> and <a href="#">Table 4-2</a> | SOLs 101 through 200, 601, 701<br>- Subcase Definition, Superelement Control,<br>and Auxiliary Model Control |
| <a href="#">Table 4-3</a> and <a href="#">Table 4-4</a> | SOLs 101 through 200. 601, 701<br>- Data Selection                                                           |
| <a href="#">Table 4-5</a> and <a href="#">Table 4-6</a> | SOLs 101 through 200, 601, 701<br>- Output Selection                                                         |

**Table 4-1. Case Control Commands – Subcase Definition, Superelement Control, and Auxiliary Model Control**

| Command Name                     | Solution Number |     |     |     |     |     |     |     |     |     |
|----------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                                  | 101             | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| ADACT                            | X               | X   |     |     |     |     |     |     |     |     |
| ANALYSIS                         |                 |     |     |     |     |     |     |     |     |     |
| AUXCAS                           |                 |     |     |     |     |     |     |     |     |     |
| AUXMODEL                         |                 |     |     |     |     |     |     |     |     |     |
| BEGIN BULK                       | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| EXTSEOUT                         | X               | X   | X   |     | X   | X   | X   | X   | X   | X   |
| MASTER                           | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| MODES                            |                 | X   |     |     |     |     |     |     |     |     |
| OUTPUT(blank)                    | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| OUTPUT(PLOT)                     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| OUTPUT (POST) or SETS DEFINITION | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| OUTPUT(XYPLOT)                   | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| REPCASE                          | X               | X   |     |     |     |     |     |     |     |     |
| SEALL                            | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| SEDR                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| SEDV                             |                 |     |     |     |     |     |     |     |     |     |
| SEEXCLUD                         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| SEFINAL                          | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| SEKR                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| SELG                             | X               |     | X   | X   |     | X   | X   |     | X   | X   |
| SELR                             | X               |     | X   | X   |     | X   | X   |     | X   | X   |
| SEMR                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |





| Table 4-2. Case Control Commands – Subcase Definition, Superelement Control, and Auxiliary Model Control |                 |     |     |     |     |     |     |     |     |     |     |     |         |
|----------------------------------------------------------------------------------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---------|
| Command Name                                                                                             | Solution Number |     |     |     |     |     |     |     |     |     |     |     |         |
|                                                                                                          | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601&701 |
| OUTPUT (blank)                                                                                           | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| OUTPUT(PLOT)                                                                                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| OUTPUT (POST) or SETS DEFINITION                                                                         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| OUTPUT(XYPLOT)                                                                                           | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| REPCASE                                                                                                  |                 |     |     |     |     |     |     |     |     |     | X   | X   |         |
| SEALL                                                                                                    | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| SEDR                                                                                                     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| SEDV                                                                                                     |                 |     |     |     |     |     |     |     |     |     |     | X   |         |
| SEEXCLUD                                                                                                 | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| SEFINAL                                                                                                  | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| SEKR                                                                                                     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| SELG                                                                                                     | X               |     | X   | X   | X   | X   |     | X   | X   | X   |     | X   |         |
| SELR                                                                                                     | X               |     | X   | X   | X   | X   |     | X   | X   | X   |     | X   |         |
| SEMR                                                                                                     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| SEMR                                                                                                     |                 | X   | X   | X   | X   | X   | X   | X   |     | X   | X   | X   |         |
| SERE                                                                                                     |                 |     |     |     |     |     |     |     |     |     |     | X   |         |
| SUBCASE                                                                                                  | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X       |
| SUBCOM                                                                                                   |                 |     |     |     |     |     |     |     |     |     |     | X   |         |
| SUBSEQ                                                                                                   |                 |     |     |     |     |     |     |     |     |     |     | X   |         |
| SUPER                                                                                                    | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |         |
| SYM                                                                                                      |                 |     |     |     |     |     |     |     |     |     |     | X   |         |

**4**  
CASE

## 530 Case Control Applicability Tables

| <b>Table 4-2. Case Control Commands – Subcase Definition, Superelement Control, and Auxiliary Model Control</b> |                 |     |     |     |     |     |     |     |     |     |     |     |         |
|-----------------------------------------------------------------------------------------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---------|
| Command Name                                                                                                    | Solution Number |     |     |     |     |     |     |     |     |     |     |     |         |
|                                                                                                                 | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601&701 |
| SYMCOM                                                                                                          |                 |     |     |     |     |     |     |     |     |     |     | X   |         |
| SYMSEQ                                                                                                          |                 |     |     |     |     |     |     |     |     |     |     | X   |         |

| <b>Table 4-3. Case Control Commands – Data Selection</b> |                 |     |     |     |     |     |     |     |     |     |   |
|----------------------------------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|
| Command Name                                             | Solution Number |     |     |     |     |     |     |     |     |     |   |
|                                                          | 101             | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |   |
| A2GG                                                     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X |
| ADAPT                                                    | X               | X   |     |     |     |     |     |     |     |     |   |
| AXISYMME                                                 | X               | X   | X   |     | X   | X   | X   | X   | X   | X   | X |
| B2GG                                                     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X |
| B2PP                                                     |                 |     |     |     | X   | X   | X   | X   | X   | X   | X |
| BC                                                       |                 | X   |     |     |     |     |     |     |     |     |   |
| BCSET                                                    | X               | X   |     |     |     |     |     |     | X   | X   |   |
| BGSET                                                    | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X |
| BOLTLD                                                   | X               | X   | X   |     | X   | X   | X   | X   | X   | X   | X |
| CLOAD                                                    |                 |     |     | X   |     |     |     |     |     |     |   |
| CMETHOD                                                  |                 |     |     |     | X   |     |     | X   |     |     |   |
| DEFORM                                                   | X               |     | X   |     |     |     |     |     |     |     |   |
| DESGLB                                                   |                 |     |     |     |     |     |     |     |     |     |   |
| DESOBJ                                                   |                 |     |     |     |     |     |     |     |     |     |   |
| DESSUB                                                   |                 |     |     |     |     |     |     |     |     |     |   |
| DLOAD                                                    |                 |     |     |     | X   | X   | X   | X   | X   | X   | X |

**4**  
CASE

| Command Name | Solution Number |     |     |     |     |     |     |     |     |     |
|--------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|              | 101             | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| DSYM         |                 |     |     |     |     |     |     |     |     |     |
| FMETHOD      |                 |     |     |     |     |     |     |     |     |     |
| FREQUENC     |                 |     |     |     |     | X   |     |     | X   |     |
| GUST         |                 |     |     |     |     |     |     |     |     |     |
| HARMONIC     | X               | X   | X   |     | X   | X   | X   | X   | X   | X   |
| IC           |                 |     |     |     |     |     | X   |     |     |     |
| K2GG         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| K42GG        | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| K2PP         |                 |     |     |     | X   | X   | X   | X   | X   | X   |
| LOAD         | X               |     | X   | X   |     | X   | X   |     | X   | X   |
| LOADSET      | X               |     | X   | X   |     | X   | X   |     | X   | X   |
| M2GG         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| M2PP         |                 |     |     |     | X   | X   | X   | X   | X   | X   |
| MAXMIN       | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| METHOD       |                 | X   |     | X   | X   | X   | X   | X   | X   | X   |
| MFLUID       |                 | X   |     |     | X   | X   | X   | X   | X   | X   |
| MODSEL       |                 | X   | X   | X   |     |     |     | X   | X   | X   |
| MODTRAK      |                 |     |     |     |     |     |     |     |     |     |
| MPC          | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| NLPARM       |                 |     |     | X   |     |     |     |     |     |     |
| NONLINEA     |                 |     |     |     |     |     | X   |     |     | X   |
| OMODES       |                 | X   | X   |     |     |     |     | X*  | X*  | X*  |
| P2G          | X               |     | X   | X   |     | X   | X   |     | X   | X   |



| Table 4-4. Case Control Commands - Data Selection |                 |     |     |     |     |     |     |     |     |     |     |     |           |
|---------------------------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
| Command Name                                      | Solution Number |     |     |     |     |     |     |     |     |     |     |     |           |
|                                                   | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| ADAPT                                             |                 |     |     |     |     |     |     |     |     |     | X   |     |           |
| AXISYMME                                          |                 |     |     |     |     |     |     |     |     |     | X   | X   |           |
| B2GG                                              | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| B2PP                                              |                 |     |     | X   | X   |     | X   | X   |     | X   |     | X   |           |
| BC                                                |                 |     |     |     |     |     |     |     |     |     | X   |     |           |
| BCSET                                             |                 |     |     |     |     |     |     |     |     |     |     |     | X         |
| BGSET                                             | X               | X   | X   | X   | X   |     |     |     | X   | X   | X   | X   | 601       |
| BOLTL D                                           |                 |     |     |     |     |     |     |     |     |     |     |     | 601       |
| CLOAD                                             |                 |     |     |     |     |     |     |     | X   |     |     |     |           |
| CMETHOD                                           |                 |     |     |     |     |     | X   |     |     |     |     |     |           |
| DEFORM                                            | X               |     | X   |     |     | X   |     |     |     |     |     | X   |           |
| DESGLB                                            |                 |     |     |     |     |     |     |     |     |     |     | X   |           |
| DESOBJ                                            |                 |     |     |     |     |     |     |     |     |     |     | X   |           |
| DESSUB                                            |                 |     |     |     |     |     |     |     |     |     |     | X   |           |
| DLOAD                                             |                 |     |     | X   | X   |     | X   | X   |     | X   |     | X   | X         |
| DSYM                                              | X               | X   | X   | X   |     |     |     |     |     |     |     |     |           |
| EBDSET                                            |                 |     |     |     |     |     |     |     |     |     |     |     | X         |
| FREQUENC                                          |                 |     |     | X   |     |     |     | X   |     |     |     | X   |           |
| GUST                                              |                 |     |     |     |     |     |     | X   | X   |     |     |     |           |
| HARMONIC                                          | X               | X   | X   | X   |     |     |     |     |     |     | X   | X   |           |
| IC                                                |                 |     |     |     |     |     |     |     |     | X   |     |     | X         |
| K2GG                                              | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |

## 534 Case Control Applicability Tables

**Table 4-4. Case Control Commands – Data Selection**

| Command Name | Solution Number |     |     |     |     |     |     |     |     |     |     |     |           |
|--------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|              | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| K42GG        | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| K2PP         |                 |     |     | X   | X   |     | X   | X   |     | X   |     | X   |           |
| LOAD         | X               |     | X   | X   | X   | X   |     | X   | X   |     |     | X   | X         |
| LOADSET      | X               |     | X   | X   | X   | X   |     | X   | X   | X   |     | X   |           |
| M2GG         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| M2PP         |                 |     |     | X   | X   |     | X   | X   |     | X   |     | X   |           |
| MAXMIN       | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| METHOD       |                 | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| MFLUID       |                 | X   | X   | X   | X   | X   | X   | X   |     |     | X   | X   |           |
| MODSEL       |                 | X   | X   |     |     |     | X   | X   |     |     | X   |     |           |
| MODTRAK      |                 |     |     |     |     |     |     |     |     |     |     |     |           |
| MPC          | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X         |
| NLPARM       |                 |     |     |     |     |     |     |     | X   |     |     |     |           |
| NONLINEA     |                 |     |     |     | X   |     |     |     |     | X   |     |     |           |
| OMODES       |                 | X   |     |     |     |     |     |     |     |     | X   | X   |           |
| P2G          | X               |     | X   | X   | X   | X   |     | X   | X   |     |     | X   |           |
| RANDOM       |                 |     |     | X   |     |     |     | X   |     |     |     |     |           |
| RMETHOD      |                 |     |     |     |     |     |     |     |     |     |     |     |           |
| RSMETHOD     |                 |     |     | X   | X   |     | X   | X   |     | X   | X   | X   |           |
| SDAMPING     |                 |     |     |     |     |     | X   | X   |     |     |     | X   |           |
| SDENSITY     |                 |     |     |     |     |     |     |     |     |     | X   |     |           |
| SMETHOD      |                 |     |     |     |     |     |     |     |     |     |     |     |           |

**4**  
CASE



## 536 Case Control Applicability Tables

**Table 4-5. Case Control Commands – Output Selection**

| Command Name | Solution Number |     |     |     |     |     |     |     |     |     |
|--------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|              | 101             | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| DSAPRT       |                 |     |     |     |     |     |     |     |     |     |
| ECHO         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| ECHOOFF      | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| ECHOON       | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| EDE          |                 | X   |     |     |     | X   |     | X*  | X   | X*  |
| EKE          |                 | X   |     |     |     | X   |     | X*  | X   | X*  |
| ELSDCON      | X               |     | X   |     |     |     |     |     |     |     |
| ELSUM        | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| ENTHALPY     |                 |     |     |     |     |     |     |     |     |     |
| ESE          | X               | X   | X   |     |     | X   |     | X*  | X   | X*  |
| FLUX         | X               |     |     |     |     |     |     |     |     |     |
| FORCE        | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| GPFORCE      | X               | X   | X   | X   |     | X   | X   |     | X   | X   |
| GPKE         |                 | X   |     |     |     |     |     | X*  | X*  | X*  |
| GPSDCON      | X               |     | X   |     |     |     |     |     |     |     |
| GPSTRAIN     | X               | X   |     | X   |     |     | X   |     |     | X   |
| GPSTRESS     | X               | X   |     | X   |     |     | X   |     |     | X   |
| GROUNDCHECK  | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| HARMONIC     | X               | X   | X   |     | X   | X   | X   | X   | X   | X   |
| HDOT         |                 |     |     |     |     |     |     |     |     |     |
| HOUTPUT      |                 |     |     |     |     |     |     |     |     |     |
| LABEL        | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| LINE         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |

**4**  
CASE



**Table 4-5. Case Control Commands - Output Selection**

| Command Name | Solution Number |     |     |     |     |     |     |     |     |     |
|--------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|              | 101             | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| MAXLINES     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| MBDEXPORT    |                 | X   |     |     |     |     |     |     |     |     |
| MBDRECVR     |                 | X   |     |     |     |     |     |     |     |     |
| MODALE       |                 |     |     |     |     |     |     |     | X   |     |
| MODCON       |                 |     |     |     |     |     |     | X   | X   | X   |
| MPCFORCES    | X               | X   | X   |     | X   | X   | X   | X   | X   | X   |
| MPRESSURE    |                 | X   |     |     | X   | X   | X   | X   | X   | X   |
| NLOAD        |                 |     |     |     |     |     | X   |     |     | X   |
| NOUTPUT      |                 |     |     |     |     |     |     |     |     |     |
| OFREQUEN     |                 |     |     |     |     | X   |     |     | X   |     |
| OLOAD        | X               |     | X   | X   |     | X   | X   |     | X   | X   |
| OTIME        |                 |     |     |     |     |     | X   |     |     | X   |
| OUTRCV       | X               | X   |     |     |     | X   | X   |     |     | X   |
| PAGE         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| PANCON       |                 |     |     |     |     | X   |     |     | X   |     |
| PARTN        | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| PLOTID       | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |
| PRESSURE     |                 | X   |     |     | X   | X   | X   |     |     |     |
| RCROSS       |                 |     |     |     |     | X   |     |     | X   |     |
| RMAXMIN      |                 |     |     |     |     |     |     |     |     | X   |
| SACCELER     |                 |     |     |     |     | X   | X   |     | X   | X   |
| SDISPLAC     |                 | X   | X   |     | X   | X   | X   |     | X   | X   |
| SET          | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   |

**4**  
**CASE**



| Table 4-6. Case Control Commands –Output Selection |                 |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------------------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
| Command Name                                       | Solution Number |     |     |     |     |     |     |     |     |     |     |     |           |
|                                                    | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| ADMRECVR                                           |                 |     |     |     |     |     |     |     |     |     |     |     |           |
| AEROF                                              |                 |     |     |     |     | X   |     | X   |     |     |     | X   |           |
| APRESS                                             |                 |     |     |     |     | X   |     |     |     |     |     | X   |           |
| BCRESULTS                                          |                 |     |     |     |     |     |     |     |     |     |     |     | X         |
| BOUTPUT                                            |                 |     |     |     | X   |     |     |     | X   | X   |     |     |           |
| DATAREC                                            |                 |     |     |     |     |     |     |     |     |     | X   | X   |           |
| DISPLACE                                           | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X         |
| DSAPRT                                             |                 |     |     |     |     |     |     |     |     |     |     | X   |           |
| ECHO                                               | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| ECHOFF                                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| ECHOON                                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| EDE                                                |                 | X   |     | X   |     |     |     |     |     |     | X   | X   |           |
| EKE                                                |                 | X   |     | X   |     |     |     |     |     |     | X   | X   |           |
| ELSDCON                                            |                 |     |     |     |     | X   |     |     |     |     |     | X   |           |
| ELSUM                                              | X               | X   | X   | X   | X   | X   | X   | X   |     |     | X   | X   |           |
| ENTHALPY                                           |                 |     |     |     |     |     |     |     |     | X   |     |     |           |
| ESE                                                | X               | X   | X   | X   |     | X   |     |     |     |     | X   | X   |           |
| FLUX                                               | X               |     |     |     |     |     |     |     | X   | X   |     | X   |           |
| FORCE                                              | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| GKRESULTS<br>(only 601)                            |                 |     |     |     |     |     |     |     |     |     |     |     | 601       |
| GPFORCE                                            | X               | X   | X   | X   |     | X   |     | X   |     |     | X   | X   | 601       |
| GPKE                                               |                 | X   |     |     |     |     |     |     |     |     | X   | X   |           |

**4**  
CASE

## 540 Case Control Applicability Tables

**Table 4-6. Case Control Commands -Output Selection**

| Command Name | Solution Number |     |     |     |     |     |     |     |     |     |     |     |           |
|--------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|              | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| GPSDCON      | X               |     |     |     |     | X   |     |     | X   |     |     | X   |           |
| GPSTRAIN     | X               | X   | X   |     | X   |     |     | X   |     |     | X   | X   |           |
| GPSTRESS     | X               | X   | X   |     | X   | X   |     |     |     |     | X   | X   |           |
| GROUNDCHECK  | X               | X   | X   | X   | X   | X   | X   | X   |     |     | X   | X   |           |
| HARMONY      | X               | X   | X   | X   |     |     |     |     |     |     | X   | X   |           |
| HDOT         |                 |     |     |     |     |     |     |     |     | X   |     |     |           |
| HOUTPUT      | X               | X   | X   | X   |     |     |     |     |     |     |     |     |           |
| LABEL        | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| LINE         | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| MAXLINES     | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| MBDEXPORT    |                 | X   |     |     |     |     |     |     |     |     |     |     |           |
| MBDRECVR     |                 | X   |     |     |     |     |     |     |     |     |     |     |           |
| MODALE       |                 |     |     |     |     |     |     |     |     |     |     |     |           |
| MODCON       |                 |     |     |     |     |     |     | X   |     |     |     |     |           |
| MPCFORCES    | X               | X   | X   | X   |     | X   | X   | X   |     |     | X   | X   |           |
| MPRESSURE    |                 | X   |     | X   |     | X   | X   | X   |     |     | X   | X   |           |
| NLLOAD       |                 |     |     |     |     |     |     |     |     | X   |     |     |           |
| NOUTPUT      | X               | X   | X   | X   |     |     |     |     |     |     |     |     |           |
| OFREQUEN     |                 |     |     | X   |     |     |     | X   |     |     |     | X   |           |
| OLOAD        | X               |     | X   | X   | X   | X   |     | X   | X   | X   |     | X   |           |
| OTIME        | X               |     | X   | X   | X   | X   |     | X   | X   | X   | X   | X   |           |
| OUTRCV       |                 |     |     |     |     |     |     |     |     |     | X   |     |           |

**4**  
CASE

| Table 4-6. Case Control Commands –Output Selection |                 |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------------------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
| Command Name                                       | Solution Number |     |     |     |     |     |     |     |     |     |     |     |           |
|                                                    | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| PAGE                                               | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| PANCON                                             |                 |     |     |     |     |     |     |     |     |     |     |     |           |
| PARTN                                              | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| PLOTID                                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| PRESSURE                                           |                 |     |     |     |     |     |     |     |     |     | X   | X   |           |
| RCROSS                                             |                 |     |     | X   |     |     |     | X   |     |     |     |     |           |
| SACCELER                                           |                 |     |     | X   | X   |     |     | X   |     |     |     | X   |           |
| SDISPLAC                                           |                 | X   |     | X   | X   |     | X   | X   |     | X   | X   | X   |           |
| SET                                                | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X         |
| SET2                                               |                 |     |     |     |     |     |     |     |     |     | X   |     |           |
| SHELLTHK                                           |                 |     |     |     |     |     |     |     |     |     |     |     | X         |
| SKIP                                               | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| SPCFORCE                                           | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X         |
| STRAIN                                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| STRESS                                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X         |
| STRFIELD                                           | X               | X   | X   |     |     | X   |     |     |     |     | X   | X   |           |
| SUBTITLE                                           | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| SURFACE                                            | X               | X   | X   |     |     |     |     |     |     |     | X   | X   |           |
| SVECTOR                                            |                 | X   | X   | X   |     |     | X   |     | X   |     | X   | X   |           |
| SVELOCITY                                          |                 |     |     | X   | X   |     |     | X   |     | X   |     | X   |           |
| THERMAL                                            | X               |     |     |     |     |     |     |     | X   | X   | X   | X   |           |
| TITLE                                              | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X         |

**4**  
CASE

## 542 Case Control Applicability Tables

| Table 4-6. Case Control Commands -Output Selection |                 |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------------------------------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
| Command Name                                       | Solution Number |     |     |     |     |     |     |     |     |     |     |     |           |
|                                                    | 114             | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| VECTOR                                             | X               | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   | X   |           |
| VELOCITY                                           |                 |     |     | X   | X   |     |     | X   |     |     |     | X   | X         |
| VOLUME                                             | X               | X   | X   |     |     |     |     |     |     |     | X   | X   |           |
| VUGRID                                             |                 |     |     |     |     |     |     |     |     |     |     |     |           |

\* For modal portion of solution only.

Chapter

# **5 Case Control OUTPUT(PLOT) Commands**

The PLOT command requests the generation of undeformed, deformed, or contour plots. All other commands specify how the model will be plotted, the type of projection, view angles, scales, etc. All commands have default actions if not specified by the user. The FIND command may be used to calculate an optimal SCALE, ORIGIN, and/or VANTAGE POINT to allow the construction of a plot in a user-specified region of the paper or film. All the commands used in the generation of the various plots will be printed out as part of the output, whether they are directly specified, defaulted or established using the FIND command. Initialization of commands to default values occurs only once. Subsequently, these values remain until altered by direct command input. The only exceptions are the view angles, scale factors, vantage points, and the origins. Whenever the plotter or the method of projection is changed, the view angles are reset to the default values, unless they are respecified by the user. In addition, the scale factors, vantage points, and the origin must be respecified by the user.

The commands are listed here in a logical sequence; however, they need not be so specified. Any order may be used, but if a command is specified more than once, the value or choice stated last will be used.

|                     |                                                                                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| PLOTTER             | Selects format of plot file for interpretation by plotter post-processor.                                                                           |
| ORTHOGRAPHIC        | Selects orthographic projection.                                                                                                                    |
| PERSPECTIVE         | Selects perspective projection.                                                                                                                     |
| STEREOSCOPIC        | Selects stereoscopic projection.                                                                                                                    |
| AXES                | Assigns axes of the basic coordinate system to the observer's coordinate system.                                                                    |
| VIEW                | Defines the angular relationship between observer's coordinate system (r, s, and t axes specified on the AXES command) and basic coordinate system. |
| MAXIMUM DEFORMATION | Defines the magnification of the maximum displacement.                                                                                              |
| SCALE               | Defines reduction, as a scale factor, of model's dimensions so that the model fits on a plot frame.                                                 |
| DISTORTION          | Specifies the distortion scale factors of the axes in the basic coordinate system.                                                                  |
| CSCALE              | Defines scale factor for characters in the plot frame.                                                                                              |



|                   |                                                                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ORIGIN            | Defines the origin of the plot frame with respect to the origin of the (r, s, t) coordinate system defined on the AXES command.                                                       |
| VANTAGE POINT     | Defines the location of the observer with respect to the model in the (r, s, t) coordinate system defined on the AXES command for perspective and stereoscopic projections only.      |
| PROJECTION PLANE  | Defines the separation, along the r-axis, between the observer and the projection plane if not already specified on the VANTAGE POINT command. Used by stereoscopic projections only. |
| OCULAR SEPARATION | Defines the separation of the left and right eye vantage points along the s-axis for stereoscopic projections.                                                                        |
| CAMERA            | Specifies microfilm plotter options.                                                                                                                                                  |
| PAPER SIZE        | Defines the size and type of the paper.                                                                                                                                               |
| PEN               | Generates a message on the printed output to inform the plotter operator as to what size and color pen point to mount in the various pen holders.                                     |
| PTITLE            | Defines a character string that will appear at the top of the plot frame on the line below the sequence number.                                                                       |
| SET               | Defines a set of elements and/or grid points to be plotted.                                                                                                                           |
| FIND              | Requests the plotter to optimally compute any of the parameters that can be specified on the SCALE, ORIGIN i, and/or VANTAGE POINT commands.                                          |
| CONTOUR           | Specifies contour plot options for stress, displacement, or temperature.                                                                                                              |
| PLOT              | Generates an undeformed plot or a deformed plot per subcase, mode number, frequency, or time step. A contour plot may also be requested with an undeformed or deformed plot.          |

**546 AXES**  
**Orientation of Observer's Coordinate System**

**AXES**      Orientation of Observer's Coordinate System

Assigns axes of the basic coordinate system to the observer's coordinate system.

**Format:**

$$\text{AXES } r \ s \ t \ \left[ \begin{array}{c} \text{SYMMETRIC} \\ \text{ANTISYMMETRIC} \end{array} \right]$$

**View toward negative x-axis of model.**

AXES MX, Y, MZ

**Mirror image of model.**

AXES Y X Z

**Describers:**

| Describer     | Meaning                                                                                              |
|---------------|------------------------------------------------------------------------------------------------------|
| r,s,t         | Assigns axes of basic coordinate system to axes of observer's coordinate system: (Default = X, Y, Z) |
| X             | X-direction of basic coordinate system. (Default for r)                                              |
| Y             | Y-direction of basic coordinate system. (Default for s)                                              |
| Z             | Z-direction of basic coordinate system. (Default for t)                                              |
| MX            | Negative X-direction of basic coordinate system.                                                     |
| MY            | Negative Y-direction of basic coordinate system.                                                     |
| MZ            | Negative Z-direction of basic coordinate system.                                                     |
| SYMMETRIC     | Specifies a symmetric orientation of the view. See Remark 5 . (Default)                              |
| ANTISYMMETRIC | Specifies an antisymmetric orientation of the view. See Remark 5 .                                   |

**Remarks:**

1. If no AXES command is specified then AXES X, Y, Z is the default.



2. The direction of view is in the negative r-direction; i.e., the projection plane is parallel to the s-t plane.
3. The VIEW command depends on the AXES command specification and defines the angular relationship between the observer's coordinate system and the basic coordinate system.
4. The AXES command can be used to reposition the object in 90° increments in such a manner that only rotations less than 90° are required by the VIEW command to obtain the desired orientation. MX, MY, MZ can be used to define left-handed coordinate systems. Note that the default system is right-handed.
5. An undeformed or deformed plot of the symmetric portion of an object can be obtained by reversing the sign of the axis that is normal to the plane of symmetry. In the case of multiple planes of symmetry, the signs of all associated planes should be reversed. The ANTISYMMETRIC option should be specified when a symmetric model is loaded in an unsymmetrical manner. This will cause the deformations to be plotted antisymmetrically with respect to the specified plane or planes. Since the AXES command applies to all parts (SETs) of a single frame, symmetric and antisymmetric combinations cannot be made with this command (see the symmetry option description in [PLOT](#)).
6. To avoid a mirror image, ensure that the r, s, and t axes obey the right-hand rule.

548 **CAMERA**  
Microfilm Plotter Options

**CAMERA** Microfilm Plotter Options

Specifies microfilm plotter options.

**Format:**

$$\text{CAMERA} \left[ \begin{array}{l} \text{PAPER} \\ \text{FILM} \quad \text{BLANK FRAME } n \\ \text{BOTH} \end{array} \right]$$

**Examples:**

CAMERA FILM

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                              |
|------------------|-------------------------------------------------------------|
| FILM             | Requests 35mm or 16mm film and positive or negative images. |
| PAPER            | Requests positive prints.                                   |
| BOTH             | Requests positive prints and 35mm or 16mm film.             |

**Remarks:**

1. If the CAMERA command is not specified, then CAMERA PAPER BLANK FRAMES 0 is assumed.
2. If FILM or BOTH is specified, then these options must be communicated to the plotter operator through normal means of communications at the installation.
3. If FILM or BOTH are specified and if n is greater than 0, then n blank frames will be inserted between plots. The plotter must be operated in the manual mode in order to have blank frames inserted between positive prints. If blank frames are desired only on film, and not on paper, the plotter must be operated in the automatic mode.

## CONTOUR    Contour Plot Options

Specifies contour plot options for stress, displacement, or temperature.

**Format:**

$$\text{CONTOUR component} \left\{ \begin{array}{l} \text{EVEN } n \\ \text{LIST } a, b, \dots \end{array} \right\} \left\{ \begin{array}{l} Z1 \\ Z2 \\ \text{MAX} \\ \text{MID} \end{array} \right\} \left\{ \begin{array}{l} \text{COMMON} \\ \text{SHADE} \end{array} \right\}$$

**Examples:**

```
CONTOUR    MAGNIT    LIST    2.0, 4.0, 6.0, 8.0, 10.0
```

**Describers:**

| Describer | Meaning                                                                                                                                                                                                                           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| component | Name of stress, displacement or temperature component. (Character, Default = "MAJPRIN")                                                                                                                                           |
| MAJPRIN   | Major principal stress. Not available for nonlinear elements. (Default)                                                                                                                                                           |
| MINPRIN   | Minor principal stress. Not available for nonlinear elements.                                                                                                                                                                     |
| EQUIVAL   | von Mises stress. When STRESS(MAXS) is requested in Case Control, von Mises stress is used for plotting. For nonlinear analysis, Mohr-Coulomb or Drucker-Prager stress may also be plotted in conjunction with the MATS1 command. |
| XNORMAL   | X component of normal stress.                                                                                                                                                                                                     |
| YNORMAL   | Y component of normal stress.                                                                                                                                                                                                     |
| ZNORMAL   | Z component of normal stress.                                                                                                                                                                                                     |
| XYSHEAR   | XY component of shear stress.                                                                                                                                                                                                     |

## 550 CONTOUR

### Contour Plot Options

| Describer      | Meaning                                                                                                  |
|----------------|----------------------------------------------------------------------------------------------------------|
|                | XZSHEAR XZ component of shear stress.                                                                    |
|                | YZSHEAR YZ component of shear stress.                                                                    |
|                | XDISP T1 component of displacement in global coordinate system.                                          |
|                | YDISP T2 component of displacement in global coordinate system.                                          |
|                | ZDISP T3 component of displacement in global coordinate system.                                          |
|                | MAGNIT Magnitude of displacement or temperature.                                                         |
| EVEN n         | Number of contours. ( $50 \geq \text{Integer} > 0$ , Default is EVEN 10)                                 |
| LIST a, b, ... | List of stresses, displacements or temperatures which define the contours. (Real)                        |
| Z1             | Stresses at Z1 from neutral plane. (Default.)                                                            |
| Z2             | Stresses at Z2 from neutral plane.                                                                       |
| MAX            | Maximum of stress at Z1 and Z2.                                                                          |
| MID            | Average of stress (membrane stress) at Z1 and Z2.                                                        |
| COMMON         | Plot stress contours in basic coordinate system (Default).                                               |
| LOCAL          | Plot stress contours in element coordinate system. This is the coordinate system used in printed output. |

#### Remarks:

1. The CONTOUR command should be specified immediately before its associated PLOT command.
2. A STRESS request must appear in the Case Control Section for all elements included in a CONTOUR request. If printed output is not desired then STRESS(PLOT)=sid should be specified.

3. In linear analysis, stress contour plots are available for the following elements: CTRIA3, CQUAD4, CSHEAR, and CTRIAX6. In nonlinear analysis, stress contour plots are available for CQUAD4 and CTRIA3 elements. The Bulk Data element connection entries for all elements must list the grid points in either clockwise or counterclockwise order. Mixing the order will result in meaningless or confusing plots.
4. When selecting contour options, note:
  - MAJPRIN, MINPRIN, EQUIVAL are the same in COMMON and LOCAL.
  - ZNORMAL, XZSHEAR, YZSHEAR, if selected in LOCAL, will be changed to COMMON.
  - CSHEAR elements only have the MAXSHEAR value.
5. The CTRIAX6 element stress contour plots are different in that they must be selected as COMMON. Also, the following equivalences apply:

XNORMAL is radial

YNORMAL is azimuthal

ZNORMAL is axial

XYSHEAR is shear

XZSHEAR is maximum principal

YZSHEAR is von Mises

EQUIVAL is octahedral

**552 CSCALE**  
**Character Scale Factor**

**CSCALE**      Character Scale Factor

Defines scale factor for characters in the plot frame.

**Format:**

CSCALE cs

**Examples:**

CSCA 2.0

| <b>Describer</b> | <b>Meaning</b>                                        |
|------------------|-------------------------------------------------------|
| cs               | Scale factor applied to characters in the plot frame. |

**Remarks:**

1. CSCALE is used to control the spacing of characters when plots are made with the NASTRAN plotter and they are postprocessed with the NX/NASPLOT routine. For example, if the SCALE FACTOR on the NASPLOT data command is 2.0, a value for cs of 0.5 will result in characters of default size (.07 inches) at the regular spacing. A value of 1.8 produces good spacing when using the post-processing plotter programs NASTPLT, TEKPLT, and NEUPS. On the other hand, if the user wishes to double the size of both the plot and the characters, the SCALE FACTOR and the CSCALE FACTOR on the NASPLOT data command should both be set equal to 2.0.
2. The CSCALE command must immediately precede the PLOTTER command. If a second CSCALE command is specified then a second PLOTTER command must also be specified.



## **DISTORTION**      Distortion Scale Factors

Specifies the distortion scale factors of the axes in the basic coordinate system.

**Format:**

DISTORTION dx dy dz

**Examples:**

DIST 0.5 1.0 1.0

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                      |
|------------------|-------------------------------------------------------------------------------------|
| dx               | Distortion scale factor of the basic coordinate system's x-axis.<br>(Default = 1.0) |
| dy               | Distortion scale factor of the basic coordinate system's y-axis.<br>(Default = 1.0) |
| dz               | Distortion scale factor of the basic coordinate system's z-axis.<br>(Default = 1.0) |

**Remarks:**

1. If no DISTORTION command is specified, then no distortion is applied.
2. If DISTORTION is specified, then all three values for dx, dy, and dz must be specified even though one or two will use the default.
3. The distortion factors are applied prior to any of the other scaling commands, such as: SCALE, MAXIMUM DEFORMATION, CSCALE, etc.

## 554 FIND Automatic Calculation of Scale, Origin, and Vantage Point

### FIND Automatic Calculation of Scale, Origin, and Vantage Point

Requests the plotter to optimally compute any of the parameters that can be specified on the SCALE, ORIGIN i, and/or VANTAGE POINT commands.

#### Format:

FIND [ SCALE ORIGIN oid VANTAGE POINT SET setid , REGION { le be re te } ]

#### Examples:

```
FIND SCALE ORIGIN 5 SET 2
```

#### Describers:

| Describer | Meaning                                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------|
| oid       | Origin identification number. (Integer > 0)                                                                                   |
| setid     | Set identification number. (Integer > 0)                                                                                      |
| le        | Fractional distance of the left edge of the plot region from the lower left corner of the image area. (Real, Default = 0.0)   |
| be        | Fractional distance of the bottom edge of the plot region from the lower left corner of the image area. (Real, Default = 0.0) |
| re        | Fractional distance of the right edge of the plot region from the lower left corner of the image area. (Real, Default = 1.0)  |
| te        | Fractional distance of the top edge of the plot region from the lower left corner of the image area. (Real, Default = 1.0)    |

#### Remarks:

1. The FIND command is recommended over the specification of SCALE, ORIGIN, and VANTAGE POINT commands and should be specified prior to its associated PLOT or CONTOUR command.
2. The FIND command requests the plotter to optimally compute any of the parameters that can be specified on the SCALE, ORIGIN, and/or VANTAGE POINT commands and is based on the specification of the following commands:
  - PLOTTER command
  - PROJECTION PLANE command
  - SET and REGION specifications on the FIND command

- VIEW and/or AXES commands,
- MAXIMUM DEFORMATION command and
- PAPER SIZE command.

All of these commands must precede the associated FIND command.

3. The FIND command can be used to compute any or all of SCALE, ORIGIN, or VANTAGE POINT as long as they have not been previously specified.
4. If SET is not specified then the first defined SET will be used.
5. If no options are specified on the FIND command, a SCALE and VANTAGE POINT are selected and an ORIGIN is located, using the first defined SET, so that the plotter object is located within the image area.
6. The plot region is defined as some fraction of the image area (image area = 0.0, 0.0, 1.0, 1.0 and first quadrant = 0.5, 0.5, 1.0, 1.0). The image area is located inside the margins on the paper.

## 556 MAXIMUM DEFORM

### Length of Maximum Displacement

## MAXIMUM DEFORM      Length of Maximum Displacement

Defines the magnification of the maximum displacement. All other displacements are scaled accordingly.

### Format:

MAXIMUM DEFORMATION d

### Examples:

Magnify the displacements such that the maximum displacement is equal to two units of length of the model.

```
MAXI DEFO 2.
```

| Describer | Meaning                                                                                                                                                                                                                                          |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| d         | Specifies the length in units of the model and not of the plot frame to which the maximum displacement is scaled. (Default = 5% of the largest dimension of the model represented by the elements in the SET specification on the PLOT command.) |

### Remarks:

1. If no MAXIMUM DEFORMATION command is specified, then the default shown above is assumed.
2. If you wish the FIND command to utilize the d value, a MAXIMUM DEFORMATION command should precede the FIND command.
3. If you wish the plot deformation scaling to be different than the FIND scaling, a different MAXIMUM DEFORMATION command can appear first before the PLOT command.
4. For nonlinear plotting, MAXIMUM DEFORMATION d and the MAXIMUM DEFORMATION field on the PLOT command should have the same value.

**OCULAR SEPARATION** Separation of the Vantage Points

Defines the separation of the left and right eye vantage points along the s-axis for stereoscopic projections.

**Format:**

OCULAR SEPARATION os

**Examples:**

OCULAR SEPARATION 2.0

| <b>Describer</b> | <b>Meaning</b>                                                                                    |
|------------------|---------------------------------------------------------------------------------------------------|
| os               | Separation, in inches, of the two vantage points along the s-axis. (Real, Default = 2.756 inches) |

**Remarks:**

The default value is the separation used in the standard stereoscopic cameras and viewers (70mm). The default value is recommended.

## 558 ORIGIN

### Origin of Plot Frame

## ORIGIN

Origin of Plot Frame

Defines the origin of the plot frame with respect to the origin of the (r, s, t) coordinate system defined on the AXES command.

### Format:

ORIGIN oid u v

### Examples:

```
ORIG 3 -1. -2.
```

### Describers:

| Describer | Meaning                                                                                                           |
|-----------|-------------------------------------------------------------------------------------------------------------------|
| oid       | Origin identification number which may be specified after the ORIGIN describer on the PLOT command. (Integer > 0) |
| u         | Horizontal displacement of plot frame origin from the rst origin. (Real, Default = 0.0)                           |
| v         | Vertical displacement of paper origin from the rst origin. (Real, Default = 0.0)                                  |

### Remarks:

1. In the transformation performed for any of the three projections, the origins of both the basic coordinate system and the observer's coordinate system are coincident. The ORIGIN command may be used to locate the plot frame origin (lower left hand corner) from the rst origin. The units are inches and are not subject to the scaling of the plotted object.
2. The ORIGIN command is not recommended for general use. See [FIND](#) have the origin optimally located so as to place the plotted object in the center of the plot frame.
3. Ten origins may be specified at one time. However, any one can be redefined at any time. An eleventh origin is also provided if more than ten origins are erroneously defined; i.e., only the last of these surplus origins will be retained.
4. If a projection, for example, ORTHOGRAPHIC, STEREOSCOPIC, or PERSPECTIVE, is changed in the plot packet, or the PLOTTER command is changed, then all previously defined origins are deleted.

**ORTHOGRAPHIC, etc.**      Type of Projection

Selects type of projection.

**Format:**

```
ORTHOGRAPHIC  
PERSPECTIVE  
STEREOSCOPIC
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                             |
|------------------|--------------------------------------------|
| ORTHOGRAPHIC     | Selects orthographic projection. (Default) |
| PERSPECTIVE      | Selects perspective projection.            |
| STEREOSCOPIC     | Selects stereoscopic projection.           |

**Remarks:**

If none of the above projections are specified, then ORTHOGRAPHIC is used.

## 560 PAPER SIZE

### Paper Dimensions

## PAPER SIZE

Paper Dimensions

Defines the size and type of the paper.

### Format:

PAPER SIZE h X or BY v [ TYPE ptype ]

### Examples:

```
PAPER SIZE 10. BY 10.
```

### Describers:

| Describer | Meaning                                                    |
|-----------|------------------------------------------------------------|
| h         | Horizontal size of paper in inches. (Real, Default = 20.0) |
| v         | Vertical size of paper in inches. (Real, Default = 20.0)   |
| ptype     | Paper type. (Character, Default = "VELLUM")                |

### Remarks:

1. The default paper size for the PLOTTER NAST is 20 by 20 inches which is converted to a 7 by 7 inch plot frame by the NASPLOT postprocessor.
2. PAPER SIZE can be specified along with the NASPLOT postprocessor to create rectangular plots. For example, the command will result in a 14 by 7 inch plot frame if the default value of 1.0 is used for the SCALE FACTOR on the NASPLOT command. The SCALE FACTOR on the NASPLOT data command can be used to make larger plots having the shape defined with PAPER SIZE.
3. PAPER SIZE also affects the raster count for the NASTRAN plotter. The default raster count is 1000 for a paper size of 20 by 20. Doubling the paper size to 40 by 40 will double the raster count to 2000.



**PEN** Pen Color and Size Assignments

Generates a message on the printed output which may be used to inform the plotter operator as to what size and color pen point to mount in the various pen holders.

**Format:**

PEN pn [ COLOR cname ]

**Examples:**

PEN 2 COLOR RED

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                 |
|------------------|------------------------------------------------|
| pn               | Pen identification number. (Integer > 0)       |
| COLOR            | Flag indicating the next word is a color name. |
| cname            | Pen color. (Character)                         |

**Remarks:**

1. The actual number of pens available will depend on the plotter hardware configuration at each installation.
2. The PEN command does not control the pen used in generating the plot. See the PEN describer for **PLOT**.
3. The PEN command is optional and is not appropriate for microfilm plotters.

**562 PERSPECTIVE**  
Selects Perspective Projection

**PERSPECTIVE**      Selects Perspective Projection

See the description for [ORTHOGRAPHIC](#), etc..

**PLOT** Undeformed or Deformed Plot Request

Generates an undeformed plot of the model or a deformed plot for a subcase, mode number or time step.

**Format:**

PLOT [analysis][dtype][CONTOUR][i1, i2 THRU i3, i4, etc.] { RANGE f1, f2 } ,  
 TIME t1, t2 } ,

{ PHASE LAG  $\phi$  }  
 MAGNITUDE } [MAXIMUM DEFORMATION d] ,

[SET sid1] [ORIGIN oid1] [ { SYMMETRY }  
 ANTISYMMETRY }<sub>w</sub>] [ { PEN  
 DENSITY }<sub>p</sub>] [SYMBOLS m[,n

[LABEL label] [ SHAPE ]  
 OUTLINE ] [VECTOR v] , [PRINT] ,

[SHRINK t, o] [NORMALS] ,  
 [SET sid2] [ORIGIN oid2] etc.

**Examples:**

See after Remarks Section.

**Describers:**

| Describer | Meaning                                                                                                                |
|-----------|------------------------------------------------------------------------------------------------------------------------|
| analysis  | Type of analysis results. (Character, Default results in an undeformed plot or undeformed underlay for contour plots.) |
| STATIC    | Plot static deformations.                                                                                              |
| MODAL     | Plot mode shapes or eigenvectors.                                                                                      |
| CMODAL    | Plot complex mode shapes or eigenvectors.                                                                              |

## 564 PLOT

### Undeformed or Deformed Plot Request

| Describer   | Meaning                                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
|             | TRANSIENT Plot transient solutions.                                                                                                               |
|             | FREQUENCY Plot frequency solutions.                                                                                                               |
|             | SENOMOVE Plot undeformed superelements in their original position; i.e., ignore SELOC Bulk Data entry.                                            |
| dtype       | Specifies plot quantity. (Character, Default = "DEFORMATION")                                                                                     |
|             | DEFORMATION Plot displacements or temperatures in the Z direction. (Default)                                                                      |
|             | VELOCITY Plot velocities.                                                                                                                         |
|             | ACCELERATION Plot accelerations.                                                                                                                  |
| CONTOUR     | Request for contour plot.                                                                                                                         |
| i1, i2,...  | Subcase identification numbers. See SHAPE and VECTOR for use of "0" (underlay) command. See Remark 3 (Integer $\geq 0$ , Default is all subcases) |
| RANGE f1 f2 | Specifies range of natural frequencies, eigenvalues, excitation.                                                                                  |
| TIME t1,t2  | Frequencies, time steps, or load factors. Used to minimize the amount of plotted data. See Remark 4. (Real)                                       |
| PHASE LAG f | Specified phase lag, in degrees, for plotting complex quantities. See Remark 5. (Real, Default = 0.0)                                             |
| MAGNITUDE   | Requests magnitude of complex quantities.                                                                                                         |
| MAXIMUM     |                                                                                                                                                   |
| DEFORMATION | Specifies the magnification of the maximum displacement. See Remark 6. (Real)                                                                     |
| d           |                                                                                                                                                   |
| SET sid     | Set identification number which defines the set of elements or grid points to be plotted. (Default is first SET command.)                         |

| <b>Describer</b>             | <b>Meaning</b>                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ORIGIN oid                   | Origin identification number. (Default is first origin defined by the ORIGIN or FIND command.)                                                                                                                                                                                                                                                                                                            |
| SYMMETRY w<br>ANTISYMMETRY w | Request plot of the symmetric portion of the symmetrically or antisymmetrically loaded model. This symmetric portion will be located in the space adjacent to the region originally defined by ORIGIN oid, and will appear as a reflection of the antisymmetrically deformed model about the plane whose normal is oriented parallel to the coordinate direction w. See Remark 7. (Default is no action.) |
| PEN p                        | Specifies pen number that is used to generate the plot. (Integer > 0)                                                                                                                                                                                                                                                                                                                                     |
| DENSITY d                    | Specifies line density scale factor for film plotters which is d times heavier than a line density of 1. (Integer > 0)                                                                                                                                                                                                                                                                                    |
| SYMBOLS m[,n]                | All the grid points associated with the specified set will have symbol m overprinted with symbol n printed at its location. If n is not specified, only symbol m will be printed. See Remark 8.                                                                                                                                                                                                           |

| <b>m or n</b> | <b>Symbol</b> |
|---------------|---------------|
| 0             | none          |
| 1             | X             |
| 2             | *             |
| 3             | +             |
| 4             | -             |
| 5             | .             |
| 6             | ×             |
| 7             | [ ]           |
| 8             | < >           |
| 9             | / \           |

## 566 PLOT

### Undeformed or Deformed Plot Request

| Describer   | Meaning                                                                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LABEL label | Specifies labeling options at elements and grid points:                                                                                                                                                                                                                                                    |
|             | <b>GRID</b> All the grid points included in the specified set have their identification number printed to the right of the undeformed or deformed location (undeformed location in the case of superimposed plots). (Default)                                                                              |
|             | <b>ELEMENTS</b> All the elements included in the specified set are identified by the element identification number and type at the center of each element (undeformed location in the case of superimposed plots). See Remarks 11 and 12.                                                                  |
|             | <b>BOTH</b> Both GRID and ELEMENT options.                                                                                                                                                                                                                                                                 |
|             | <b>GSPC</b> Label those degrees-of-freedom that are constrained to zero through permanent single point constraints on GRID and GRDSET Bulk Data entries, or are constrained through SPC and SPC1 Bulk Data entries. The label consists of the grid point ID number and the constrained degrees-of-freedom. |
|             | <b>EPID</b> Label elements with their respective property identification (PID) numbers. The label consists of the standard element labels and element PID.                                                                                                                                                 |
| SHAPE       | All the elements included in the specified set are shown by connecting the associated grid points in a predetermined manner. See Remark 9 .                                                                                                                                                                |
| OUTLINE     | Only the outline of all the elements in the specified set are shown. Elements not supported by contour plots are ignored. Outlines are always drawn with PEN 1. See Remark 9 .                                                                                                                             |

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VECTOR v         | <p>A line will be plotted at the grid points of the set representing by length and direction the deformation of the point. See Remark 10 . Possible values of v are:</p> <p>X, Y, or Z                      Requesting individual components.</p> <p>XY, XZ, or YZ                 Requesting two specified components.</p> <p>XYZ                                Requesting all three components.</p> <p>RXY, RXZ, or RYZ          Requesting vector sum of two components.</p> <p>R                                     Requesting total vector deformation.</p> <p>N                                     Used with any of the above combinations to request that no underlay shape be drawn.</p> |
| PRINT            | A list of the average stresses at the interior grid points in the set will be printed for contour stress plots.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| SHRINK t,o       | <p>t is the ratio of the reduction to the original dimensions of all two-dimensional elements except the CQUAD8 and CTRIA6 (<math>0.0 \leq t \leq 1.0</math>) (Real, Default = 0.1) which results in a 10% reduction.</p> <p>o is the ratio of the reduction in length to the original length for one-dimensional elements. There is no default value for o. t must be specified to shrink one-dimensional elements.</p>                                                                                                                                                                                                                                                                            |
| NORMALS          | Plot vector normal to CHBDYP and CHBDYG elements.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Remarks:**

1. If PLOT is specified with no describers then a picture of the undeformed model will be prepared using the first defined set and the first defined origin.
2. Describers analysis through PHASE LAG must be specified in the order shown above.
3. The following should be noted when using subcase numbers for plotting eigenvectors:

## 568 PLOT

### Undeformed or Deformed Plot Request

- If subcase numbers are specified then the convention for displacement vectors is that the list of subcases must refer to subcase IDs whenever the number of modes recovered is equal to or less than the number of subcases defined. If the number of modes recovered is more than the subcases defined, the plot request for those modes associated with the subcases must refer to subcase IDs. After the mode associated with the last defined subcase, higher modes will be identified by incrementing the last defined subcase ID by one for each such higher mode.
  - For the display of element quantities in contour plots, the automatic incrementing beyond the last defined subcase does not occur. All subcase numbers to be plotted must be defined. A MODES command in the Case Control Section may be used for this purpose.
  - In problems using cyclic symmetry solution sequences, the plot requests for segments of the model must refer to the coded subcase identification numbers (see “Cyclic Symmetry Theory” in the *NX Nastran User’s Guide*). All eigenvectors recovered for the segment will be plotted. The RANGE option can be used to select a subset of all eigenvectors for plotting without use of coded subcase IDs.
  - RANGE does not require the use of subcase numbers.
4. RANGE specifies the range of values using requested subcases for which plots will be prepared. If only one number is input, it is used as the lower bound and the upper bound is set to the highest value computed. Unless otherwise noted, the default range is all values computed.
- In real eigenvalue analysis, the values are natural frequencies in units of cycles per unit time.
  - In buckling analysis, the values are eigenvalues.
  - In frequency response, the values are excitation frequencies in units of cycles per unit time.
  - In transient response, the values are in units of time.
  - In static nonlinear analysis (SOLs 106 and 153), the values are load factors. The default range is the highest load factor of each subcase.
  - In transient nonlinear analysis (SOLs 129 and 159), the values are in units of time. The default range is the last time step for each subcase.
5. PHASE LAG  $f$  is used in the equation:



$$u_R \cos \phi - u_I \sin \phi$$

where  $u_R$  and  $u_I$  are the real and imaginary parts of the response quantity, respectively. The printed output for magnitude and phase uses the convention of a phase lead.

6. MAX DEFO is not recommended for general use. Each subcase is separately scaled according to its own maximum if this item is absent. If d is omitted, the set will be scaled to the maximum within the set being plotted.
7. w specifies the basic coordinates X, Y or Z or any combination thereof. This option allows the plotting of symmetric and/or antisymmetric combinations, provided that an origin is selected for the portion of the model defined in the Bulk Data Section that allows sufficient room for the complete plot. This does not permit the combination of symmetric and antisymmetric subcases, as each plot must represent a single subcase. In the case of a double reflection, the figure will appear as one reflected about the plane whose normal is parallel to the first of the coordinates w, followed by a reflection about the plane whose normal is oriented parallel to the second of the coordinates w. This capability is primarily used in the plotting of models that are loaded in a symmetric or an antisymmetric manner. The plane of symmetry must be one of the basic coordinate planes.
8. Grid points excluded from the set will not have a symbol. Grid points in an undeformed underlay will be identified with symbol 2.
9. In order to get a deformed shape, either SHAPE or OUTLINE must be present in the PLOT command. Both deformed and undeformed shapes or outlines may be specified. All the deformed shapes relating to the subcases listed may be underlaid on each of their plots by including "0" with the subcase string on the PLOT command. The undeformed plot will be drawn using PEN 1 or DENSITY 1 and symbol 2 (if SYMBOLS is specified).
10. All plots requesting the VECTOR option will have an underlay generated of the undeformed shape using the same sets, PEN 1 or DENSITY 1, and symbol 2 (if SYMBOLS is specified). If SHAPE and VECTOR are specified, the underlay will depend on whether "0" is used along with the subcases with DEFORMATION. It will be the deformed shape when not used and will be both deformed and undeformed shapes when it is used. The part of the vector at the grid point will be the tail when the underlay is undeformed and the head when it is deformed. If v="N" then no shape will be drawn but other options such as SYMBOLS will still be valid.
11. Element type labels are given below. Plot labels QH and TH indicate hyperelastic elements.

**570 PLOT**  
**Undeformed or Deformed Plot Request**

| Element Type | Plot Label |  | Element Type | Plot Label |
|--------------|------------|--|--------------|------------|
| CAERO1       | AE         |  | PLOTEL       | PL         |
| CAXIF2       | A2         |  | CQUAD        | QH         |
| CAXIF3       | A3         |  | CQUAD4       | Q4 or QH   |
| CAXIF4       | A4         |  | CQUAD8       | Q8 or QH   |
| CBAR         | BR         |  | CQUADR       | QR         |
| CBEAM        | BM         |  | CQUADX       | QH         |
| CBEND        | BD         |  | CROD         | RD         |
| CONEAX       | CN         |  | CSHEAR       | SH         |
| CONROD       | CR         |  | CSLOT3       | S3         |
| CDUMI        | Di         |  | CSLOT4       | S4         |
|              |            |  | CTETRA       | TE         |
| CFLUID2      | F2         |  | CTRIAX6      | D1         |
| CFLUID3      | F3         |  | CTRIA3       | T3 or TH   |
| CFLUID4      | F4         |  | CTRIA6       | T6 or TH   |
| CHBDYG       | HB         |  | CTRIAR       | TR         |
| CHBDYP       | HB         |  | CTRIAX       | TH         |
| CHEXA        | HA         |  | CTUBE        | TU         |
| CPENTA       | HA         |  | CVISC        | VS         |



12. The heat transfer boundary condition elements CHBDYG and CHBDYP can be plotted for undeformed plots. There are several types of CHBDYi elements as shown below.

| Type  | No. of Primary Grid Points | Normals Available |
|-------|----------------------------|-------------------|
| POINT | 1                          | yes               |
| LINE  | 2                          | yes               |
| AREA3 | 3                          | yes               |
| AREA4 | 4                          | yes               |
| REV   | 2                          | no                |
| ELCYL | 2                          | no                |

| Type  | No. of Primary Grid Points | Normals Available |
|-------|----------------------------|-------------------|
| TUBE  | 2                          | yes               |
| FTUBE | 2                          | yes               |
| AREA6 | 6                          | yes               |
| AREA6 | 8                          | yes               |

The secondary grid points are used for ambient conditions and are ignored by the plotter. Type POINT must have a nonzero associated area (see AF on the associated PHBDY entry) and a defined normal direction (see V1, V2, V3 on the CHBDYP entry) to be plotted. It is plotted as a hexagon with approximately the correct area. Type LINE must have a nonzero width (see AF on the associated PHBDY entry) and a normal defined in order to plot.

- To assign the PLOT command to superelements SEUPPLOT or a SEPLOTT command is required.

**Examples:**

- Undeformed SHAPE using first defined SET, first defined ORIGIN and PEN 1 (or DENSITY 1).

```
PLOT
```

- Undeformed SHAPE using SET 3, ORIGIN 4, PEN 2 (or DENSITY 2) with each grid point of the set having a + placed at its location, and its identification number printed adjacent to it.

```
PLOT SET 3 ORIGIN 4 PEN 2 SHAPE SYMBOLS 3 LABEL
```

- Modal deformations as defined in subcase 5 using first defined SET, first defined ORIGIN, and PEN 1 (or DENSITY 1).

```
PLOT MODAL DEFORMATION 5 SHAPE
```

- STATIC deformations as defined in subcases 3, 4, 5, and 8 deformed SHAPE; drawn with PEN 4, using first defined SET and ORIGIN, underlaid with undeformed SHAPE drawn with PEN 1. This command will cause four plots to be generated.

```
PLOT STATIC DEFORMATION 0, 3 THRU 5, 8 PEN 4, SHAPE
```

- Deformations as defined in subcases 1, 2, 3, 4, and 5 undeformed underlay with PEN 1, consisting of SET 2 at ORIGIN 3, SET 2 at ORIGIN 4 (with a < placed at each grid point location), and SET 35 at ORIGIN 4. Deformed data as follows: SHAPE using SET 2 at ORIGIN 3 (PEN 3) and SET 35 at ORIGIN 4 (PEN 4); 3

## 572 PLOT

### Undeformed or Deformed Plot Request

VECTORS (X, Y and Z) drawn at each grid point of SET 2 at ORIGIN 4 (PEN 4) (less any excluded grid points), with o placed at the end of each vector.

```
PLOT STATIC DEFORMATION 0 THRU 5,  
SET 2 ORIGIN 3 PEN 3 SHAPE,  
SET 2 ORIGIN 4 PEN 4 VECTORS XYZ SYMBOLS 0,  
SET 35 SHAPE
```

6. Static deformations as defined in subcases 3 and 4, both halves of a problem solved by symmetry using the X-Y principal plane as the plane of symmetry. SET 1 at ORIGIN 2 and SET 2 at ORIGIN 3, with the deformed shape plotted using DENSITY 3 and the undeformed model plotted using DENSITY 1. The deformations of the “opposite” half will be plotted to correspond to symmetric loading. This command will cause two plots to be generated.

```
PLOT STATIC DEFORMATIONS 0, 3, 4,  
SET 1 ORIGIN 2 DENSITY 3 SHAPE,  
SET 1 SYMMETRY Z SHAPE,  
SET 2 ORIGIN 3 SHAPE,  
SET 2 SYMMETRY Z SHAPE
```

7. Transient deformations as defined in subcase 1 for time = 0.1 to time = 0.2, using SET 1 at ORIGIN 1. The undeformed SHAPE using PEN or DENSITY 1 with an \* at each grid point location will be drawn as an underlay for the resultant deformation vectors using PEN or DENSITY 2 with an < typed at the end of each vector drawn. In addition, a plotted value of 2.0 will be used for the single maximum deformation occurring on any of the plots produced. All other deformations on all other plots will be scaled relative to this single maximum deformation. This command will cause a plot to be generated for each output time step which lies between 0.1 and 0.2.

```
PLOT TRANSIENT DEFORMATION, TIME 0.1, 0.2,  
MAXIMUM DEFORMATION 2.0, SET 1, ORIGIN 1, PEN 2,  
SYMBOLS 2,  
VECTOR R
```

8. Contour plot of x-component of normal stress for elements in SET 2 in basic coordinate system at a distance Z1 from neutral plane with 10 contour lines, an outline of elements in SET 2, and using ORIGIN 4.

```
CONTOUR XNORMAL  
PLOT CONTOUR, SET 2, ORIGIN 4, OUTLINE
```

9. Contour plot of magnitude of displacements at grid points associated with elements in SET 5 with 5 contours having values of 2., 4., 6., 8., 10., and an outline of the elements in SET 5 using ORIGIN 4.

```
CONTOUR MAGNIT, LIST 2., 4., 6., 8., 10.  
PLOT CONTOUR, SET 5, OUTLINE
```

10. Plot the imaginary part of the complex eigenvector in SET 1.

```
PLOT CMODAL DEFORMATION PHASE LAG 90. SET 1 VECTOR R
```

**PLOTTER** Plot File Format

Selects format of plot file for interpretation by plotter post-processor.

**Format:**

$$\text{PLOTTER} \left\{ \begin{array}{c} \text{NAST} \\ \text{SC} \end{array} \right\}$$

**Examples:**

PLOTTER NAST

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                               |
|------------------|--------------------------------------------------------------|
| NAST             | Specifies format suitable for postscript plotters. (Default) |
| SC               | Specifies Stromberg-Carlson microfilm plotter format.        |

**Remarks:**

If no PLOTTER command is specified, then PLOTTER NAST is the default.

## 574 PROJECTION Separation Between Projection Plane and Observer

### PROJECTION      Separation Between Projection Plane and Observer

Defines the separation along the r-axis and between the observer and the projection plane if not already specified on the VANTAGE POINT command. Used by stereoscopic projections only.

#### Format:

PROJECTION PLANE SEPARATION do

#### Examples:

```
PROJ PLAN SEPA 1.5
```

| Describer | Meaning                                                                                                                                                            |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| do        | Separation of the observer and the projection plane on the r-axis in model units. The VANTAGE POINT command may also specify the separation. (Real, Default = 2.0) |

#### Remarks:

1. The PROJECTION PLANE SEPARATION command is not recommended. The FIND command is recommended because it automatically calculates the optimum separation.
2. A theoretical description of projection plane separation is contained in *The NASTRAN Theoretical Manual*.

**PTITLE**    Plot Frame Title

Defines a character string that will appear at the top of the plot frame on the line below the sequence number.

**Format:**

PTITLE ptitle

**Examples:**

```
PTITLE    RIGHT WING -- LOAD CASE 3
```

| <b>Describer</b> | <b>Meaning</b>                                     |
|------------------|----------------------------------------------------|
| ptitle           | Any character string. (Character, Default = blank) |

**Remarks:**

1. PTITLE may not be continued to the next command line.
2. Up to four lines of title information will be printed in the lower left-hand corner of each plot. The text for the top three lines is taken from the TITLE, SUBTITLE, and LABEL commands in the Case Control Section. (See [Case Control Commands](#) for a description of the TITLE, SUBTITLE, and LABEL commands.) The text for the bottom line may be of two forms depending on the type of plot requested. One form contains the word UNDEFORMED SHAPE. The other form contains the type of plot (statics, modal, etc.) subcase number, load set or mode number, frequency or eigenvalue or time, and (for complex quantities) the phase lag or magnitude. The sequence number for each plot is printed in the upper corners of each frame. The sequence number is determined by the relative position of each PLOT execution command in the plot package. The information on the PTITLE command is printed on the line below the sequence number. The date and (for deformed plots) the maximum deformation are also printed at the top of each frame.

## 576 SCALE

Scale Factor

### SCALE Scale Factor

Defines reduction, as a scale factor, of a model's dimensions, so that the model fits on a plot frame.

#### Format:

SCALE a [ b ]

#### Examples:

```
SCALE 0.5
```

#### Describers:

| Describer | Meaning                                                                |
|-----------|------------------------------------------------------------------------|
| a         | Scale factor. (Default = 1.0)                                          |
| b         | Ratio of model size/real object size for stereoscopic projection only. |

#### Remarks:

1. The SCALE command is not recommended. The FIND command is recommended because it automatically calculates the optimum scale factor.
2. For orthographic or perspective projections, a is the ratio of the plotted object in inches to the real object in units of the model; i.e., one inch of paper equals one unit of model.
3. For stereoscopic projections, the stereoscopic effect is enhanced by first reducing the real object to a smaller model according to b, and then applying a. The ratio of plotted/real object is then the product of a and b.
4. If the NASTRAN general purpose plotter is used in combination with the PLOTPS postprocessing routine, a scale factor may be computed as follows:

$$a = p \cdot \frac{20}{7} \cdot K$$

where



$p$  = ratio of plot size to object size. For instance, if your model is 100 inches long and your plot size is 7 inches:

$$p = \frac{7}{100} = .007$$

$\frac{20}{7}$  = ratio of default PAPER SIZE to default PLOTPS frame size.

$K$  = SCALE value on PLOTPS command. (Default = 1.0)

(See “**Using the Utility Programs**” in the *NX Nastran Installation and Operations Guide*.)

## 578 SEPLOT Superelement Plot Delimiter

### SEPLOT      Superelement Plot Delimiter

Assigns the subsequent plot commands to one or more superelements.

#### Format:

```
SEPLOT seid1 [ seid2 ... ]
```

#### Examples:

```
SEPLOT 5  
SEPLOT 0 3 7 200
```

#### Describers:

| Describer | Meaning                                                 |
|-----------|---------------------------------------------------------|
| seidi     | Superelement identification number. (Integer $\geq 0$ ) |

#### Remarks:

1. See also related command SEUPPLOT.
2. Any plot commands appearing above all SEPLOT (or SEUPPLOT) commands will apply in all SEPLOT (or SEUPPLOT) packets.
3. For multiple PLOT commands, there should be a SEPLOT command with each PLOT. For the special case where the PLOTs refer to the same superelements and all plots use the same FIND, a single SEPLOT followed by a single FIND may be placed above all PLOT commands.

**SET** Set Definition Under OUTPUT(PLOT)

Defines a set of elements or grid point numbers to be plotted.

**Remarks:**

The SET command specifies sets of elements or grid points, corresponding to portions of the model, which may be referenced by PLOT and FIND commands. The SET command is required. Each set of elements defines by implication a set of grid points connected by those elements. The set may be modified by deleting some of its grid points. The elements are used for creating the plot itself and element labeling, while the grid points are used for labeling, symbol printing, and drawing deformation vectors.

| Element Type | Name on SET Command |  | Element Type | Name on SET Command |
|--------------|---------------------|--|--------------|---------------------|
| CAERO1       | AERO1               |  | CQUAD        | QUAD                |
| CAXIF2       | AXIF2               |  | CQUAD4       | QUAD4               |
| CAXIF3       | AXIF3               |  | CQUAD8       | QUAD8               |
| CAXIF4       | AXIF4               |  | CQUADR       | QUADR               |
| CBAR         | BAR                 |  | CQUADX       | QUADX               |
| CBEAM        | BEAM                |  | CROD         | ROD                 |
| CBEND        | BEND                |  | CSHEAR       | SHEAR               |
| CONEAX       | CONE                |  | CSLOT3       | SLOT3               |
| CONROD       | CONROD              |  | CSLOT4       | SLOT4               |
| CDUMi        | DUMi                |  | CTETRA       | TETRA               |
| CFLUID2      | FLUID2              |  | CTRIAX6      | TRIAX6              |
| CFLUID3      | FLUID3              |  | CTRIA3       | TRIA3               |
| CFLUID4      | FLUID4              |  | CTRIA6       | TRIA6               |
| CHBDYG       | HBDY                |  | CTRIAR       | TRIAR               |
| CHBDYP       | HBDY                |  | CTRIAX       | TRIAX               |
| CHEXA        | HEXA                |  | CTUBE        | TUBE                |
| CPENTA       | PENTA               |  | CVISC        | VISC                |
| PLOTEL       | PLOTEL              |  |              |                     |

## 580 SEUPPLOT Superelement Plot Delimiter

### SEUPPLOT      Superelement Plot Delimiter

Assigns the subsequent plot commands to a superelement and all of its upstream superelements.

#### Format:

SEUPPLOT seid

#### Examples:

```
SEUPPLOT 7
```

#### Describers:

| Describer | Meaning                                                 |
|-----------|---------------------------------------------------------|
| seid      | Superelement identification number. (Integer $\geq 0$ ) |

#### Remarks:

1. See also related command [SEPLOT](#) .
2. Any plot commands appearing above all SEUPPLOT (or SEPLOT) commands will apply in all SEUPPLOT (or SEPLOT) packets.
3. For multiple PLOT commands, there should be a SEUPPLOT command with each PLOT. For the special case where the PLOTS refer to the same superelements and all plots use the same FIND, a single SEUPPLOT followed by a single FIND may be placed above all the PLOT commands.

**STEREOSCOPIC** Selects Stereoscopic Projection

See the description for [ORTHOGRAPHIC, etc.](#), etc.

## 582 VANTAGE POINT

Location of the Observer

### VANTAGE POINT      Location of the Observer

Defines the location of the observer with respect to the model in the (r, s, t) coordinate system defined on the AXES command for perspective and stereoscopic projections only.

#### Format:

VANTAGE POINT ro so to do sor

#### Examples:

VANT 100.

#### Describers:

| Describer | Meaning                                                                                                                                                           |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ro        | Location of the observer on the r-axis in model units. (Real)                                                                                                     |
| so        | Location of the observer and left eye of the observer on the s-axis, in model units, for perspective and stereoscopic projections, respectively. (Real)           |
| to        | Location of the observer on the t-axis in model units. (Real)                                                                                                     |
| do        | Separation of the observer and the projection plane on the r-axis in model units. The PROJECTION PLANE SEPARATION command may also specify the separation. (Real) |
| sor       | Location of the observer's right eye for stereoscopic projections in model units. (Real)                                                                          |

#### Remarks:

1. VANTAGE POINT or the FIND command must be specified if the PERSPECTIVE or STEREOSCOPIC command is also specified.
2. The VANTAGE POINT command is not recommended. The FIND command is recommended because it automatically calculates the optimum vantage point.
3. A theoretical description of the vantage point is contained in *The NASTRAN Theoretical Manual*.

**VIEW**    Angular Relationship of Observer's Coordinate System

Defines the angular relationship between the observer's coordinate system (r, s, and t axes specified on the AXES command) and the basic coordinate system.

**Format:**

**VIEW gamma beta alpha**

**Examples:**

1. View the model from the r-axis.

```
VIEW 0. 0. 0.
```

2. View the model midway between the r- and s-axes.

```
VIEW 45. 0. 0.
```


**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                                                         |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| gamma            | Angle of rotation, in degrees, of t axis specified on AXES command. (Default = 34.27)                                                                                                  |
| beta             | Angle of rotation, in degrees, of s axis specified on AXES command. (Default = 23.17 if ORTHOGRAPHIC or STEREOSCOPIC command is specified and 0.0 if PERSPECTIVE command is specified) |
| alpha            | Angle of rotation, in degrees, of r axis specified on AXES command. (Default = 0.0)                                                                                                    |

**Remarks:**

1. If no VIEW command is specified then VIEW 34.27 23.17 0.0 is assumed for orthographic and stereoscopic projections; and VIEW 34.27 0.0 0.0 for perspective projections. The default values produce a plot in which unit vectors on the axes of the basic coordinate system have equal lengths.
2. The angles are rotated in sequence: gamma rotates the t-axes, followed by beta which rotates the s-axes, followed by alpha which rotates the r-axes.

584 **VIEW**  
Angular Relationship of Observer's Coordinate System

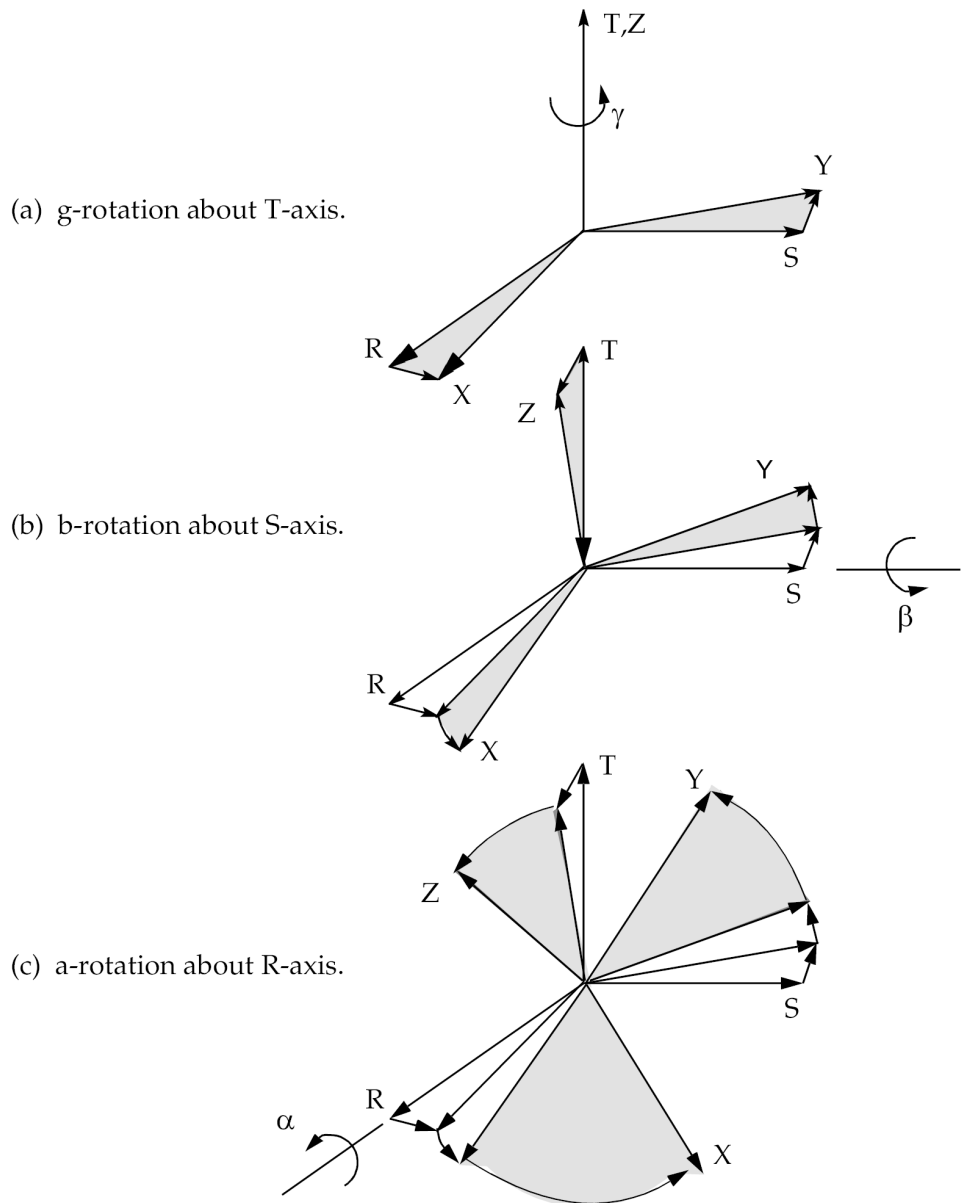

**5**  
PLOT

3. The VIEW command specifies the position of the model with respect to the s-t plane. gamma and beta represent the angles of turn and tilt. alpha is normally not used since it does not affect the orientation of the s-t plane, but only its orientation on the plot frame.



Chapter

# 6 Case Control X-Y PLOT Commands

The X-Y output request packet of the Case Control Section includes all commands between either OUTPUT(XYPLOT) or OUTPUT(XYOUT) and either BEGIN BULK or OUTPUT(PLOT). The remainder of this section describes the X-Y output commands.

A single set of plotted X-Y pairs is known as a curve. Curves are the entities that the user requests to be plotted. The surface (paper, microfilm frame, etc.) on which one or more curves is plotted is known as a frame. Curves may be plotted on a whole frame, an upper-half frame, or a lower-half frame. Grid lines, tic marks, axes, axis labeling and other graphic control options may be chosen by the user. The program will select defaults for parameters not selected by the user.

Only two commands are required for an X-Y output request.

1. Only one of OUTPUT(XYPLOT) or OUTPUT(XYOUT) at the beginning of the X-Y output command packet.
2. At least one of the commands XYPLOT, XYPEAK, XYPRINT, XYPUNCH, or XYPAPLOT.

The commands OUTPUT(XYPLOT) and OUTPUT(XYOUT) are equivalent. If the X-Y output is to be printed and/or punched, a PLOTTER command is not required.

If only the required commands are used, the graphic control options will all assume default values. Curves using all default parameters have the following general characteristics:

1. Tic marks are drawn on all edges of the frame. Five spaces are provided on each edge of the frame.
2. All tic marks are labeled with their values.
3. Linear scales are used.
4. Scales are selected such that all points fall within the frame.
5. The plotter points are connected with straight lines.
6. The plotted points are not identified with symbols.

The above characteristics may be modified by inserting any of the parameter definition commands in the next section, ahead of the XY\_\_\_ command(s). The use of a parameter definition command sets the value of that parameter for all following command operation commands unless the CLEAR command is inserted. If grid lines are requested, they will be drawn at the locations of all tic marks that result from defaults or user requests. The locations of tic marks (or grid lines) for logarithmic scales cannot be selected by the user. Values for logarithmic spacing are selected by the program. The values for the number of tic marks (or grid lines)

per cycle depend on the number of logarithmic cycles required for the range of the plotted values.

The definition and rules for the X-Y output commands follow. The form of X-Y output commands differs in many instances from that of similar commands used in the OUTPUT(PLOT) section.

## 6.1 X-Y Output Command Summary

### Commands Applied To All Curves

|                |                                                                           |
|----------------|---------------------------------------------------------------------------|
| PLOTTER        | Selects format of plot file for interpretation by plotter post-processor. |
| CAMERA         | Selects plotter media.                                                    |
| PENSIZE        | Selects pen number.                                                       |
| DENSITY        | Selects the line density for microfilm plotters only.                     |
| XPAPER         | Defines the size of the paper in x-direction.                             |
| YPAPER         | Defines the size of the paper in y-direction.                             |
| XMIN           | Specifies the minimum value on the x-axis.                                |
| XMAX           | Specifies the maximum value on the x-axis.                                |
| XLOG           | Selects logarithmic or linear x-axis.                                     |
| YAXIS          | Controls the plotting of the y-axis on all curves.                        |
| XINTERCEPT     | Specifies the location of the x-axis on the y-axis.                       |
| UPPER TICS     | Specifies how to draw tic marks on the upper edge.                        |
| LOWER TICS     | Specifies how to draw tic marks on the lower edge.                        |
| CURVELINE      | Selects lines and/or symbols to be drawn through the x-y points.          |
| XDIVISIONS     | Specifies spacing of tic marks on the x-axis for all curves.              |
| XVALUE<br>SKIP | Specifies how often to print the x-values alongside the x-axis tic marks. |
| CLEAR          | Resets X-Y PLOT commands to their default value.                          |
| XTITLE         | Defines a character string that will appear along the x-axis.             |
| TCURVE         | Defines a character string that will appear at the top of the plot frame. |

|        |                                                            |
|--------|------------------------------------------------------------|
| LONG   | Controls amount of curve's summary printout.               |
| CSCALE | Defines the scale factor for characters in the plot frame. |

### Commands Applied to Whole Frame Curves Only

|                 |                                                                                        |
|-----------------|----------------------------------------------------------------------------------------|
| YMIN            | Specifies the minimum value on the y-axis.                                             |
| YMAX            | Specifies the maximum value on the y-axis.                                             |
| XAXIS           | Controls the plotting of the x-axis.                                                   |
| YINTERCEPT      | Specifies the location of the y-axis on the x-axis.                                    |
| YLOG            | Selects the logarithmic or linear y-axis.                                              |
| LEFT TICS       | Specifies how to draw tic marks on the left edge of the frame.                         |
| RIGHT TICS      | Specifies how to draw tic marks on the right edge of the frame.                        |
| ALLEDGE TICS    | Specifies how to draw tic marks on all edges of the frame.                             |
| YDIVISIONS      | Specifies spacing of tic marks on the y-axis.                                          |
| YVALUE<br>PRINT | Specifies how often to print the y-values alongside the y-axis tic marks.              |
| XGRID LINES     | Controls the drawing of the grid lines parallel to the y-axis at the x-axis tic marks. |
| YGRID LINES     | Controls the drawing of the grid lines parallel to the x-axis at the y-axis tic marks. |
| YTITLE          | Defines a character string that will appear along the y-axis.                          |

### Commands Applied to Upper Half Frame Curves Only

|        |                                            |
|--------|--------------------------------------------|
| YTMIN  | Specifies the minimum value on the y-axis. |
| YTMAX  | Specifies the maximum value on the y-axis. |
| YTAXIS | Controls the plotting of the y-axis.       |

## 590 X-Y Output Command Summary

|                  |                                                                                        |
|------------------|----------------------------------------------------------------------------------------|
| YTINTERCEPT      | Specifies the location of the y-axis on the x-axis.                                    |
| YTLOG            | Selects the logarithmic or linear y-axis.                                              |
| TLEFT TICS       | Specifies how to draw tic marks on the left edge.                                      |
| TRIGHT TICS      | Specifies how to draw tic marks on the right edge.                                     |
| TALL EDGE<br>TIC | Specifies how to draw tic marks on all edges.                                          |
| YTDIVISIONS      | Specifies spacing of tic marks on the y-axis.                                          |
| YTVALUE<br>PRINT | Specifies how often to print the y-values alongside the y-axis tic marks.              |
| XTGRID LINES     | Controls the drawing of the grid lines parallel to the y-axis at the x-axis tic marks. |
| YTGRID LINES     | Controls the drawing of the grid lines parallel to the x-axis at the y-axis tic marks. |
| YTTITLE          | Defines a character string that will appear along the y-axis.                          |

### Commands Applied to Lower Half Frame Curves Only

|                  |                                                     |
|------------------|-----------------------------------------------------|
| YBMIN            | Specifies the minimum value on the y-axis.          |
| YBMAX            | Specifies the maximum value on the y-axis.          |
| XBAXIS           | Controls the plotting of the x-axis.                |
| YBINTERCEPT      | Specifies the location of the y-axis on the x-axis. |
| YBLOG            | Selects the logarithmic or linear y-axis.           |
| BLEFT TICS       | Specifies how to draw tic marks on left edge.       |
| BRIGHT TICS      | Specifies how to draw tic marks on right edge.      |
| BALL EDGE<br>TIC | Specifies how to draw tic marks on all edges.       |
| YBDIVISIONS      | Specifies spacing of tic marks on the y-axis.       |

|                  |                                                                                        |
|------------------|----------------------------------------------------------------------------------------|
| YBVALUE<br>PRINT | Specifies how often to print the y-values alongside the y-axis tic marks.              |
| XBGRID LINES     | Controls the drawing of the grid lines parallel to the y-axis at the x-axis tic marks. |
| YBGRID LINES     | Controls the drawing of the grid lines parallel to the x-axis at the y-axis tic marks. |
| YBTITLE          | Defines a character string that will appear along the y-axis.                          |

### X-Y Plot Generation Commands

|          |                                                    |
|----------|----------------------------------------------------|
| XYPAPLOT | Generates X-Y plots for a printer.                 |
| XYPEAK   | Prints only the summary for all curves.            |
| XYPLOT   | Generates X-Y plots for a plotter.                 |
| XYPRINT  | Generates a table of X-Y pairs for a printer.      |
| XYPUNCH  | Generates a table of X-Y pairs for the PUNCH file. |

## 592 ALLEDGE TICS

### Controls Drawing of Tic Marks on All Edges

## ALLEDGE TICS

### Controls Drawing of Tic Marks on All Edges

Specifies how to draw tic marks on all edges of the frame.

#### Format:

ALLEDGE TICS tic

#### Examples:

```
ALLEDGE -1
```

#### Describers:

| Describer | Meaning                                                 |
|-----------|---------------------------------------------------------|
| tic       | Specifies how to draw tic marks. (Integer, Default = 0) |
| -1        | Draw tic marks only.                                    |
| 0         | Do not draw tic marks or associated values. (Default)   |
| 1         | Draw tic marks and associated values.                   |

#### Remarks:

1. ALLEDGE TICS applies to whole frame curves only.
2. To determine if on any given edge (a) tic marks will be drawn without values, (b) no tic marks or values will be drawn, or (c) tic marks with values will be drawn, the following sum must be computed by the user. Add the tic values of the edge in question to its associated ALLEDGE TICS, TALL EDGE TICS, or BALL EDGE TICS tic values. If the resulting value is less than zero, tic marks will be drawn without values. If the resulting value is zero, no tic marks or values will be drawn. If the resulting value is greater than zero, tic marks with values will be drawn. The user should be careful in his use of the ALLEDGE TICS, TALL EDGE TICS, or BALL EDGE TICS commands. For example, the use of only the ALLEDGE TICS = -1 command will result in no tic marks or values being drawn since the default values for individual edges is +1. Tic values input may only be -1, 0, or 1.



**BALL EDGE TICS** Controls Drawing of Tic Marks on Lower Half

Specifies how to draw tic marks on lower half of frame.

**Format:**

BALL EDGE TICS tic

**Examples:**

BALL EDGE TICS -1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| tic              | Specifies how to draw tic marks. (Integer, Default = 0) |
| -1               | Draw tic marks only.                                    |
| 0                | Do not draw tic marks or associated values. (Default)   |
| 1                | Draw tic marks and associated values.                   |

**Remarks:**

1. BALL EDGE TICS applies to lower frame curves only.
2. See [ALLEDGE TICS](#).

## 594 BLEFT TICS

Controls Drawing of Tic Marks on Left Edge

### BLEFT TICS Controls Drawing of Tic Marks on Left Edge

Specifies how to draw tic marks on the left edge of the lower half of the frame.

#### Format:

BLEFT TICS tic

#### Examples:

```
BLEFT TICS -1
```

#### Describers:

| Describer | Meaning                                                 |
|-----------|---------------------------------------------------------|
| tic       | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1        | Draw tic marks only.                                    |
| 0         | Do not draw tic marks or associated values.             |
| 1         | Draw tic marks and associated values. (Default)         |

#### Remarks:

1. BLEFT TICS applies to lower frame curves only.
2. See [ALLEDGE TICS](#).
3. See related command [BRIGHT TICS](#).

**BRIGHT TICS**    Controls Drawing of Tic Marks on Right Edge

Specifies how to draw tic marks on the right edge of the lower half of the frame.

**Format:**

BRIGHT TICS tic

**Examples:**

BRIGHT TICS -1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| tic              | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1               | Draw tic marks only.                                    |
| 0                | Do not draw tic marks or associated values.             |
| 1                | Draw tic marks and associated values. (Default)         |

**Remarks:**

1. BRIGHT TICS applies to lower frame curves only.
2. See [ALLEDGE TICS](#).

**596 CAMERA**  
**Plotter Media Selection**

**CAMERA** Plotter Media Selection

Selects plotter media.

**Format:**

CAMERA ctype

**Examples:**

CAMERA 1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                 |
|------------------|------------------------------------------------|
| ctype            | Camera type. (Integer 1, 2, or 3; Default = 2) |
| 1                | Film                                           |
| 2                | Paper (Default)                                |
| 3                | Both                                           |

**Remarks:**

If the CAMERA command is not specified then CAMERA 2 is assumed.

**CLEAR** Resets X-Y PLOT Commands

Resets X-Y PLOT commands to their default value.

**Format**

CLEAR

**Remarks:**

All commands except XTITLE, YTITLE, YTTITLE, YBTITLE, and TCURVE will revert to their default values.

**598** **CSCALE**  
Character Scale Factor

**CSCALE** Character Scale Factor

Defines the scale factor for characters in the plot frame. See [CSCALE](#) in the OUTPUT(PLOT) Section.

**CURVELINESYMBOL**    Curve, Line and Symbol Selection

Selects lines and/or symbols to be drawn through the x-y points.

**Format:**

CURVELINESYMBOL symtype

**Examples:**

CURV 4

**Describers:**

**Descriptor**  
symtype

**Meaning**

Specifies the symbol drawn at the x-y points. If symtype is 0 then only lines will be drawn through the points with no symbol. If symtype is less than zero then only the symbol and not the lines will be drawn. If symtype is greater than zero then both the symbol and the lines will be drawn. ( $-9 \leq \text{Integer} \leq 9$ , Default = 0)

| symtype | Symbol |
|---------|--------|
| 0       | none   |
| 1       | X      |
| 2       | *      |
| 3       | +      |
| 4       | —      |
| 5       | .      |
| 6       | ×      |
| 7       | [ ]    |
| 8       | < >    |
| 9       | / \    |

**Remarks:**

If more than one curve is plotted per frame then the symbol number is incremented by 1 for each curve.

**600 DENSITY**  
**Microfilm Plotter Line Density**

**DENSITY**      Microfilm Plotter Line Density

Selects the line density for microfilm plotters only.

**Format**

DENSITY d

**Example**

DENS 3

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                                                               |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| d                | Specifies line density scale factor for microfilm plotters. A line density of d is d times heavier than a line density of 1. (Integer $\geq$ 0, Default = 1) |



**LEFT TICS**    Controls Drawing of Tic Marks on Left Edge

Specifies how to draw tic marks on the left edge of whole frame curves.

**Format:**

LEFT TICS tic

**Examples:**

LEFT -1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| tic              | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1               | Draw tic marks only.                                    |
| 0                | Do not draw tic marks or associated values.             |
| 1                | Draw tic marks and associated values. (Default)         |

**Remarks:**

1. LEFT TICS applies to whole frame curves only.
2. See [ALLEDGE TICS](#).
3. See related command [RIGHT TICS](#).

**602 LONG**  
**Summary Print Control**

**LONG** Summary Print Control

Controls amount of curve's summary printout.

**Format:**

$$\text{LONG} \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                               |
|------------------|----------------------------------------------|
| YES              | One page for each curve's summary. (Default) |
| NO               | Condensed curve summary.                     |

**Remarks:**

If LONG is not specified then LONG=NO is assumed.

## **LOWER TICS**    Controls Drawing of Tic Marks on Lower Edge

Specifies how to draw tic marks on lower edge.

**Format:**

LOWER TICS tic

**Examples:**

LOWER -1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| tic              | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1               | Draw tic marks only.                                    |
| 0                | Do not draw tic marks or associated values.             |
| 1                | Draw tic marks and associated values. (Default)         |

**Remarks:**

1. LOWER TICS applies to all curves.
2. See [ALLEDGE TICS](#).

**604 PENSIZE**  
Pen Selection

**PENSIZE** Pen Selection

Selects pen number.

**Format:**

PENSIZE p

**Examples:**

PENS 3

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                     |
|------------------|------------------------------------------------------------------------------------|
| p                | Specifies pen number that is used to generate the plot. (Integer > 0, Default = 1) |

**PLOTTER** X-Y Plot File Format

See the command, [PLOTTER](#) in the OUTPUT(PLOT) Section.

## 606 RIGHT TICS

### Controls Drawing of Tic Marks on Right Edge

## RIGHT TICS

### Controls Drawing of Tic Marks on Right Edge

Specifies how to draw tic marks on the right edge of the frame.

#### Format:

RIGHT TICS tic

#### Examples:

```
RIGHT -1
```

#### Describers:

| Describer | Meaning                                                 |
|-----------|---------------------------------------------------------|
| tic       | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1        | Draw tic marks only.                                    |
| 0         | Do not draw tic marks or associated values.             |
| 1         | Draw tic marks and associated values. (Default)         |

#### Remarks:

1. RIGHT TICS applies to whole frame curves only.
2. See [ALLEDGE TICS](#).
3. See related command [LEFT TICS](#).

**TALL EDGE TICS** Controls Drawing of Tic Marks on All Edges

Specifies how to draw tic marks on all edges of the upper half of the frame.

**Format:**

TALL EDGE TICS tic

**Examples:**

TALL -1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| tic              | Specifies how to draw tic marks. (Integer, Default = 0) |
| -1               | Draw tic marks only.                                    |
| 0                | Do not draw tic marks or associated values. (Default)   |
| 1                | Draw tic marks and associated values.                   |

**Remarks:**

1. TALL EDGE TICS applies to upper half frame curves only.
2. See [ALLEDGE TICS](#).

**608 TCURVE**  
Curve Title

**TCURVE**      Curve Title

Defines a character string that will appear at the top of the plot frame.

**Format:**

TCURVE ctitle

**Examples:**

```
TCUR RIGHT WING -- LOAD CASE 3
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                     |
|------------------|----------------------------------------------------|
| ctitle           | Any character string. (Character, Default = blank) |

**Remarks:**

TCURVE may not be continued to the next command line.



## **TLEFT TICS**      Controls Drawing of Tic Marks on the Left-Edge

Specifies how to draw tic marks on the left edge of the upper half of the frame.

### **Format:**

TLEFT TICS tic

### **Examples:**

```
TLEFT -1
```

### **Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| tic              | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1               | Draw tic marks only.                                    |
| 0                | Do not draw tic marks or associated values.             |
| 1                | Draw tic marks and associated values. (Default)         |

### **Remarks:**

1. TLEFT TICS applies to upper half frame curves only.
2. See [ALLEDGE TICS](#).
3. See related command [TRIGHT TICS](#).

## 610 TRIGHT TICS

Controls Drawing of Tic Marks on the Right Edge

### TRIGHT TICS

Controls Drawing of Tic Marks on the Right Edge

Specifies how to draw tic marks on the right-edge of the upper half of the frame.

**Format:**

TRIGHT TICS tic

**Examples:**

```
TRIGHT -1
```

**Describers:**

| Describer | Meaning                                                 |
|-----------|---------------------------------------------------------|
| tic       | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1        | Draw tic marks only.                                    |
| 0         | Do not draw tic marks or associated values.             |
| 1         | Draw tic marks and associated values. (Default)         |

**Remarks:**

1. TRIGHT TICS applies to upper half frame curves only.
2. See [ALLEDGE TICS](#).
3. See related command [TLEFT TICS](#).

## **UPPER TICS**      Controls Drawing Of Tic Marks On Upper Edge

Specifies how to draw tic marks on the upper edge.

**Format:**

UPPER TICS tic

**Examples:**

UPPER -1

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| tic              | Specifies how to draw tic marks. (Integer, Default = 1) |
| -1               | Draw tic marks only.                                    |
| 0                | Do not draw tic marks or associated values.             |
| 1                | Draw tic marks and associated values. (Default)         |

**Remarks:**

1. UPPER TICS applies to all curves.
2. See [ALLEDGE TICS](#).
3. See related command [LOWER TICS](#).

**612 XAXIS**  
**X-Axis Plot Control**

**XAXIS** X-Axis Plot Control

Controls the plotting of the x-axis on whole frame curves only.

**Format:**

$$\text{XAXIS} \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                    |
|------------------|-----------------------------------|
| YES              | Plot the x-axis.                  |
| NO               | Do not plot the x-axis. (Default) |

**Remarks:**

1. XAXIS applies to whole frame curves only.
2. See related command [YAXIS](#).

**XBAXIS** X-Axis Plot Control

Controls the plotting of the x-axis on lower half frame curves only.

**Format:**

$$\text{XBAXIS} \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                    |
|------------------|-----------------------------------|
| YES              | Plot the x-axis.                  |
| NO               | Do not plot the x-axis. (Default) |

**Remarks:**

XBAXIS applies to lower half frame curves only.

**614 XBGRID LINES**  
Plot X-Axis Grid Lines

**XBGRID LINES** Plot X-Axis Grid Lines

Controls the drawing of the grid lines parallel to the y-axis at the x-axis tic marks on lower half frame curves only.

**Format:**

XBGRID LINES { YES }  
                  { NO }

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                               |
|------------------|----------------------------------------------|
| YES              | Plot the x-axis grid lines.                  |
| NO               | Do not plot the x-axis grid lines. (Default) |

**Remarks:**

1. XBGRID applies to lower half frame curves only.
2. See the related command [YBGRID LINES](#).

## **XDIVISIONS**    Tic Spacing on Y-Axis

Specifies spacing of tic marks on the x-axis for all curves.

**Format:**

XDIVISIONS xd

**Examples:**

XDIV 10

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                           |
|------------------|--------------------------------------------------------------------------|
| xd               | Number of spaces between tic marks on x-axis. (Integer > 0, Default = 5) |

**Remarks:**

1. XDIVISIONS applies to all curves and to the commands: UPPER TICS, LOWER TICS, and YINTERCEPT.
2. XDIVISIONS is ignored for logarithmic x-axes.

**616 XGRID LINES**  
Plot X-Axis Grid Lines

**XGRID LINES** Plot X-Axis Grid Lines

Controls the drawing of the grid lines parallel to the y-axis at the x-axis tic marks on whole frame curves only.

**Format:**

$$\text{XGRID LINES} \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                               |
|------------------|----------------------------------------------|
| YES              | Plot the x-axis grid lines.                  |
| NO               | Do not plot the x-axis grid lines. (Default) |

**Remarks:**

1. XGRID applies to whole frame curves only.
2. See the related command [YGRID LINES](#) .



**XINTERCEPT** Location of X-Axis on Y-Axis

Specifies the location of the x-axis on the y-axis.

**Format:**

XINTERCEPT xi

**Examples:**

XINT 50.

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| xi               | Location of x-axis on the y-axis. (Real, Default = 0.0) |

**618 XLOG**  
Logarithmic or Linear X-Axis

**XLOG**      Logarithmic or Linear X-Axis

Selects logarithmic or linear x-axis.

**Format:**

XLOG { YES }  
          { NO }

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                  |
|------------------|---------------------------------|
| YES              | Plot a logarithmic x-axis.      |
| NO               | Plot a linear x-axis. (Default) |

**Remarks:**

1. XLOG applies to all curves.
2. The default value for tic division interval depends on the number of log cycles. The default values for tic divisions are given below but will range over whole cycles

| <b>Number of Cycles</b> | <b>Intermediate Values</b>     |
|-------------------------|--------------------------------|
| 1, 2                    | 2., 3., 4., 5., 6., 7., 8., 9. |
| 3                       | 2., 3., 5., 7., 9.,            |
| 4                       | 2., 4., 6., 8.,                |
| 5                       | 2., 5., 8.                     |
| 6, 7                    | 3., 6.                         |
| 8, 9, 10                | 3.                             |

**XMAX** Maximum X-Axis Value

Specifies the maximum value on the x-axis.

**Format:**

XMAX xmax

**Examples:**

XMAX 100.

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| xmax             | Maximum value on the x-axis. (Real) |

**Remarks:**

1. If XMAX is not specified then the maximum value is set to the highest value of x.
2. See related commands [XMIN](#), [YMIN](#), and [YMAX](#).

**620 XMIN**  
**Minimum X-Axis Value**

**XMIN**     Minimum X-Axis Value

Specifies the minimum value on the x-axis.

**Format:**

XMIN xmin

**Examples:**

XMIN 100.

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| xmin             | Minimum value on the x-axis. (Real) |

**Remarks:**

1. XMIN applies to all curves.
2. If XMIN is not specified then the minimum value is set to the lowest value of x.
3. See related commands [XMAX](#), [YMIN](#), and [YMAX](#).

**XPAPER** Paper Size in the X-Direction

Defines the size of the paper in the x-direction.

**Format:**

XPAPER xsize

**Examples:**

XPAP 10.

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                         |
|------------------|------------------------------------------------------------------------|
| xsize            | Size of paper in the x-direction and in inches. (Real, Default = 20.0) |

**Remarks:**

1. The default paper size is 20 by 20 inches.
2. See related command [YPAPER](#).

**622 XTGRID LINES**  
Plot X-Axis Grid Lines

**XTGRID LINES** Plot X-Axis Grid Lines

Controls the drawing of the grid lines parallel to the y-axis at the x-axis tic marks on upper half frame curves only.

**Format:**

XTGRID LINE { YES }  
                  { NO }

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                               |
|------------------|----------------------------------------------|
| YES              | Plot the x-axis grid lines.                  |
| NO               | Do not plot the x-axis grid lines. (Default) |

**Remarks:**

XTGRID applies to upper half frame curves only.

**XTITLE**    X-Axis Title

Defines a character string that will appear along the x-axis.

**Format:**

XTITLE xtit

**Examples:**

```
XTIT    RIGHT WING CASE 3 - TIME
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                     |
|------------------|----------------------------------------------------|
| xtit             | Any character string. (Character, Default = blank) |

**Remarks:**

1. XTITLE may not be continued to the next command line.
2. XTITLE applies to all curves.

**624 XYPAPLOT**  
Generate X-Y Plots for a Printer

**XYPAPLOT**      Generate X-Y Plots for a Printer

Generates X-Y plots for a printer.

See [XYPLOT](#) for Format, Describers, and additional Remarks.

**Remarks:**

1. The x-axis moves vertically along the page and the y-axis moves horizontally along the page.
2. An asterisk (\*) identifies the points associated with the first curve of a frame, then for successive curves on a frame, the points are designated by symbols O, A, B, C, D, E, F, G and H.



**XYPEAK** Print Curve Summary

Prints only the summary for all curves. The summary output is titled:

“X Y - O U T P U T S U M M A R Y”

and is also printed under XYPLOT, XYPUNCH, XYPRINT, and XYPAPLOT. This output contains the maximum and minimum values of y for the range of x.

See [XYPLOT](#) for Format, Describers, and additional Remarks.

## 626 XYPLOT

Generates X-Y Plots for a Plotter

### XYPLOT

Generates X-Y Plots for a Plotter

Generates X-Y Plots for a Plotter.

#### Format

```
XYPLOT          yvtype ptype [ i1, i2, i3,... ] /  
                id11 (itemu11 [, iteml11]) , id12 (itemu12 [, iteml12]) , ... /  
                id21 (itemu21 [, iteml21]) , id22 (itemu22 [, iteml22]) , ... / ....
```

#### Describers:

| Describer | Meaning                                        |
|-----------|------------------------------------------------|
| yvtype    | Type of y-value to be plotted: (Character)     |
| ACCE      | Acceleration in the physical set               |
| BOUT      | Slideline contact output                       |
| DISP      | Displacement in the physical set               |
| ELFORCE   | Element force                                  |
| ENTHALPY  | Enthalpy in the physical set                   |
| FLUX      | Element Heat flux                              |
| HDOT      | Rate of change of enthalpy in the physical set |
| NONLINEAR | Nonlinear applied load                         |
| OLOAD     | Applied Load                                   |
| PRESSURE  | Pressure of fluid-structure body               |
| SACCE     | Acceleration in the solution set               |
| SDISP     | Displacement in the solution set               |
| SPCF      | Single-point force of constraint               |
| STEMP     | Temperature in the solution set                |

| <b>Describer</b>                     | <b>Meaning</b>                                                                                                                                                                                                                                                                                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                      | STRESS      Element stress                                                                                                                                                                                                                                                                                            |
|                                      | SVELO      Velocity in the solution set                                                                                                                                                                                                                                                                               |
|                                      | TEMP      Temperature in the physical set                                                                                                                                                                                                                                                                             |
|                                      | VECTOR    Displacement in the physical set                                                                                                                                                                                                                                                                            |
|                                      | VELO      Velocity in the physical set                                                                                                                                                                                                                                                                                |
|                                      | VG         Flutter analysis                                                                                                                                                                                                                                                                                           |
| p <sub>type</sub>                    | Plot type defining the meaning of i <sub>1</sub> , i <sub>2</sub> , ... etc., i <sub>di</sub> , i <sub>temui</sub> and i <sub>temli</sub> . (Character, Default = "RESPONSE")                                                                                                                                         |
|                                      | RESPONSE    Time or frequency in SORT2 format or grid identification numbers in SORT1 format. (Default)                                                                                                                                                                                                               |
|                                      | AUTO        Autocorrelation function on whole frame curves only.                                                                                                                                                                                                                                                      |
|                                      | PSDF        Power spectral density function on whole frame curves only.                                                                                                                                                                                                                                               |
|                                      | SPECTRAL    Response spectrum on whole frame curves only.                                                                                                                                                                                                                                                             |
| i <sub>1</sub> , i <sub>2</sub> ,... | Subcase identification numbers for p <sub>type</sub> = RESPONSE. The list must be specified in ascending order. For p <sub>type</sub> = SPECTRAL, the subcase refers to the RECNO in the DTI,SPSEL Bulk Data entry. The list is ignored for p <sub>type</sub> = AUTO and PSDF. (Integer ≥ 0, Default is all subcases) |
| i <sub>dij</sub>                     | Element, grid, scalar, or extra point identification number for y-value for frame i. For v <sub>type</sub> = VG, i <sub>dij</sub> refers to the loop count of a flutter analysis. (Integer > 0)                                                                                                                       |

## 628 XYPLOT

Generates X-Y Plots for a Plotter

| Describer | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| itemuij,  | <p>Item code for y-value. itemuij is for the upper half or whole itemlij curves on frame i and itemlij is for lower half curves only on frame i. If itemlij is not specified, then whole frame curves will be plotted with itemuij. itemlij is ignored for ptype = "AUTO", "PSDF", and "SPECTRAL". (Character or Integer &gt; 0)</p> <p>For elements, the code represents a component of the element stress, strain, or force and is described in the <i>Item Codes</i> topic in this guide. For ptype = "AUTO" and "PSDF", the complex stress or strain item codes need to be used. As the output quantities are real, you can use either the real or the imaginary item code. Both will give the same result.</p> <p>For grid points and ptype = "RESPONSE", the code is one of the mnemonics T1, T2, T3, R1, R2, R3, T1RM, T2RM, T3RM, R1RM, R2RM, R3RM, T1IP, T2IP, T3IP, R1IP, R2IP, or R3IP, where Ti stands for the i-th translational component, Ri stands for the i-th rotational component, RM means real or magnitude, and IP means imaginary or phase. For scalar or extra points or heat transfer analysis, use T1, T1RM, or T1IP.</p> <p>For grid points and ptype = "AUTO" or "PSDF", the code is one of the mnemonics T1, T2, T3, R1, R2, R3. For scalar or extra points, use T1.</p> <p>For yvtype = VG, itemui and/or itemli can be "F" for frequency or "G" for damping.</p> |

### Remarks:

1. Multiple XYPLOT, XYPUNCH, XYPRINT, XYPEAK and/or XYPAPLOT commands may be specified in the OUTPUT(XYPLOT) section.
2. Solution set requests are more efficient, because the time consuming recovery of the dependent displacements can be avoided.
3. The item codes also appear in printed summaries as "CURVE ID" for grid points as well as element data. For grid points, the "component" number in this listing will have the values 3 through 8, corresponding to directions X through RZ, respectively. For scalar points, the component value is always 3.

4. The information after each slash (/) specifies the curve(s) that are to be plotted on the same frame. The descriptor idij identifies the grid point j or element j associated with the frame number i. All plot requests on one command are sorted on idij to improve the efficiency of the plotting process. Symbols are assigned in order by idij.
5. If any of the item codes, itemlij or itemuij, are not specified; e.g. (8,) or (,5), the corresponding half frame curve is not plotted. If both the comma (,) and itemlij not specified; e.g., (8), then whole frame curves will be plotted. Also, for any single frame, the specifications of “(itemuij,itemlij)” must be consistently half frame (upper and/or lower) or whole frame. For example on half frame curves, if iteml11 and the comma is not specified then either iteml12 or itemu12 must not be specified and on whole frame curves, the commas, iteml11, and iteml12 must not be specified. In other words, the curves on each plot frame must be all whole or half (upper and/or lower).
6. The XYPLOT command may be continued on the next line as long as “XYPLOT yvtype ptype [ i1, i2, i3,... ] /” is specified on the first line.
7. Specifying a nonexistent grid point may cause the program to exit in the XYTRAN module and missing plots to occur.

**630 XYPRINT**  
**Generate Table of X-Y Pairs for a Printer**

**XYPRINT**      Generate Table of X-Y Pairs for a Printer

Generates tabular printer output of the X-Y pairs.

See [XYPLOT](#) for Format, Describers, and additional Remarks.

**XYPUNCH**    Generate Table of X-Y Pairs for the PUNCH File

Generates tabular punch output of the X-Y pairs. This is the same as XYPRINT, except that the output is written to the PUNCH file.

See [XYPLOT](#) for Format, Describers, and additional Remarks.

**632 XVALUE PRINT SKIP**  
Print Values on X-Axis Tic Marks

**XVALUE PRINT SKIP**      Print Values on X-Axis Tic Marks

Specifies how often to print the x-values alongside the x-axis tic marks.

**Format:**

XVALUE PRINT SKIP *xvps*

**Examples:**

XVAL 5

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                   |
|------------------|------------------------------------------------------------------------------------------------------------------|
| <i>xvps</i>      | Number of tic marks to be skipped between labeled tic marks with their corresponding values. (Integer $\geq 0$ ) |

**Remarks:**

XVALUE applies to all curves.



**YAXIS** Y-Axis Plot Control

Controls the plotting of the y-axis on all curves.

**Format:**

YAXIS { YES }  
          { NO }

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                    |
|------------------|-----------------------------------|
| YES              | Plot the y-axis.                  |
| NO               | Do not plot the y-axis. (Default) |

**634 YBDIVISIONS**  
Tic Spacing on Y-Axis

**YBDIVISIONS**      Tic Spacing on Y-Axis

Specifies spacing of tic marks on the y-axis for lower half frame curves only.

**Format:**

YBDIVISIONS ybd

**Examples:**

YBDI 10

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                           |
|------------------|--------------------------------------------------------------------------|
| ybd              | Number of spaces between tic marks on y-axis. (Integer > 0, Default = 5) |

**Remarks:**

1. YBDIVISIONS applies to lower half frame curves only.
2. YBDIVISIONS is ignored for logarithmic y-axes.

**YBINTERCEPT** Location of Y-Axis on X-Axis

Specifies the location of the y-axis on the x-axis for lower half frame curves only.

**Format:**

YBINTERCEPT ybi

**Examples:**

YBINT 50

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| ybi              | Location of y-axis on the x-axis. (Real, Default = 0.0) |

**Remarks:**

YBINTERCEPT applies to lower half frame curves only.

**636 YBGRID LINES**  
Plot Y-Axis Grid Lines

**YBGRID LINES** Plot Y-Axis Grid Lines

Controls the drawing of the grid lines parallel to the x-axis at the y-axis tic marks on lower half frame curves only.

**Format:**

YBGRID LINES { YES }  
                          { NO }

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                               |
|------------------|----------------------------------------------|
| YES              | Plot the y-axis grid lines.                  |
| NO               | Do not plot the y-axis grid lines. (Default) |

**Remarks:**

YBGRID applies to lower half frame curves only.

**YBLOG** Logarithmic or Linear Y-Axis

Selects logarithmic or linear y-axis for lower half frame curves only.

**Format:**

$$\text{YBLOG} \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                  |
|------------------|---------------------------------|
| YES              | Plot a logarithmic y-axis.      |
| NO               | Plot a linear y-axis. (Default) |

**Remarks:**

1. YBLOG applies to lower half frame curves only.
2. See [XLOG](#).

**638 YBMAX**  
Maximum Y-Axis Value

**YBMAX** Maximum Y-Axis Value

Specifies the maximum value on the y-axis for lower half frame curves only.

**Format:**

YBMAX ymax

**Examples:**

YBMAX 100

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| ymax             | Maximum value on the y-axis. (Real) |

**Remarks:**

1. YBMAX applies to lower half frame curves only.
2. If YBMAX is not specified, then the maximum value is set to the highest value of y.
3. See the related command [YBMIN](#).

**YBMIN**    Minimum Y-Axis Value

Specifies the minimum value on the y-axis for lower half frame curves only.

**Format:**

YBMIN ymin

**Examples:**

YBMIN 100

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| ymin             | Minimum value on the y-axis. (Real) |

**Remarks:**

1. YBMIN applies to lower half frame curves only.
2. If YBMIN is not specified, then the minimum value is set to the lowest value of y.
3. See the related command [YBMAX](#).

**640 YBTITLE**  
Y-Axis Title

**YBTITLE**      Y-Axis Title

Defines a character string that will appear along the y-axis for lower half frame curves only.

**Format:**

YBTITLE ytit

**Examples:**

```
YBTIT    RIGHT WING LOADS - CASE 3
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                     |
|------------------|----------------------------------------------------|
| ytit             | Any character string. (Character, Default = blank) |

**Remarks:**

1. YBTITLE may not be continued to the next command line.
2. YBTITLE applies to lower half frame curves only.



**YBVALUE PRINT SKIP** Print Values on Y-Axis Tic Marks

Specifies how often to print the y-values alongside the y-axis tic marks on lower half frame curves only.

**Format:**

YBVALUE PRINT SKIP *yvps*

**Examples:**

YBVAL 5

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                   |
|------------------|------------------------------------------------------------------------------------------------------------------|
| <i>yvps</i>      | Number of tic marks to be skipped between labeled tic marks with their corresponding values. (Integer $\geq 0$ ) |

**Remarks:**

YBVALUE applies to lower half frame curves only.

## 642 YDIVISIONS

Tic Spacing on Y-Axis

### YDIVISIONS Tic Spacing on Y-Axis

Specifies spacing of tic marks on the y-axis for whole frame curves only.

**Format:**

YDIVISIONS yd

**Examples:**

YDIV 10

**Describers:**

| Describer | Meaning                                                                      |
|-----------|------------------------------------------------------------------------------|
| yd        | Number of spaces between tic marks on the y-axis. (Integer > 0, Default = 5) |

**Remarks:**

1. YDIVISIONS applies to whole frame curves only and to the commands: LEFT TICS, RIGHT TICS, and XINTERCEPT.
2. YDIVISIONS is ignored for logarithmic y-axes.

**YINTERCEPT**      Location of Y-Axis on X-Axis

Specifies the location of the y-axis on the x-axis for whole frame curves only.

**Format:**

YINTERCEPT yi

**Examples:**

YINT 50

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| yi               | Location of y-axis on the x-axis. (Real, Default = 0.0) |

**Remarks:**

YINTERCEPT applies to lower half frame curves only.

**644 YGRID LINES**  
Plot Y-Axis Grid Lines

**YGRID LINES** Plot Y-Axis Grid Lines

Controls the drawing of the grid lines parallel to the x-axis at the y-axis tic marks on whole frame curves only.

**Format:**

YGRID LINES { YES }  
                  { NO }

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                               |
|------------------|----------------------------------------------|
| YES              | Plot the y-axis grid lines.                  |
| NO               | Do not plot the y-axis grid lines. (Default) |

**Remarks:**

YGRID applies to whole frame curves only.

**YLOG**    Logarithmic or Linear Y-Axis

Selects logarithmic or linear y-axis for whole frame curves only.

**Format:**

$$\text{YLOG} \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                  |
|------------------|---------------------------------|
| YES              | Plot a logarithmic y-axis.      |
| NO               | Plot a linear y-axis. (Default) |

**Remarks:**

1. YLOG applies to whole frame curves only.
2. See [XLOG](#).

**646 YMAX**  
Maximum Y-Axis Value

**YMAX** Maximum Y-Axis Value

Specifies the maximum value on the y-axis.

**Format:**

YMAX ymax

**Examples:**

YMAX 100

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| ymax             | Maximum value on the y-axis. (Real) |

**Remarks:**

1. If YMAX is not specified, then the maximum value is set to the highest value of y.
2. See the related command [YMIN](#) .

**YMIN** Minimum Y-Axis Value

Specifies the minimum value on the y-axis.

**Format:**

YMIN ymin

**Examples:**

YMIN 100

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| ymin             | Minimum value on the y-axis. (Real) |

**Remarks:**

1. YMIN applies to all curves.
2. If YMIN is not specified, then the minimum value is set to the lowest value of y.
3. See the related command [YMAX](#).

**648 YPAPER**  
Paper Size in Y-Direction

**YPAPER** Paper Size in Y-Direction

Defines the size of the paper in the y-direction.

**Format:**

YPAPER ysize

**Examples:**

YPAP 10

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                             |
|------------------|----------------------------------------------------------------------------|
| ysize            | Size of the paper in the y-direction and in inches. (Real, Default = 20.0) |

**Remarks:**

1. The default paper size is 20 by 20 inches.
2. See the related command [XPAPER](#).



**YTAXIS** Y-Axis Plot Control

Controls the plotting of the y-axis on upper half frame curves only.

**Format:**

$$\text{YTAXIS} \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                    |
|------------------|-----------------------------------|
| YES              | Plot the x-axis.                  |
| NO               | Do not plot the x-axis. (Default) |

**Remarks:**

YTAXIS applies to upper half frame curves only.

**650 YTDIVISIONS**  
The Spacing on Y-Axis

**YTDIVISIONS**      The Spacing on Y-Axis

Specifies spacing of tic marks on the y-axis for upper half frame curves only.

**Format:**

YTDIVISIONS ytd

**Examples:**

YTDI 10

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                           |
|------------------|--------------------------------------------------------------------------|
| ytd              | Number of spaces between tic marks on y-axis. (Integer > 0, Default = 5) |

**Remarks:**

1. YTDIVISIONS applies to upper half frame curves only.
2. YTDIVISIONS is ignored for logarithmic y-axes.

**YTGRID LINES** Plot Y-Axis Grid Lines

Controls the drawing of the grid lines parallel to the x-axis at the y-axis tic marks on upper half frame curves only.

**Format:**

YTGRID LINES { YES }  
                          { NO }

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                               |
|------------------|----------------------------------------------|
| YES              | Plot the y-axis grid lines.                  |
| NO               | Do not plot the y-axis grid lines. (Default) |

**Remarks:**

YTGRID applies to upper half frame curves only.

**652 YTINTERCEPT**  
Location of Y-Axis on X-Axis

**YTINTERCEPT**      Location of Y-Axis on X-Axis

Specifies the location of the y-axis on the x-axis for upper half frame curves only.

**Format:**

YTINTERCEPT yti

**Examples:**

```
YTINT 50
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                          |
|------------------|---------------------------------------------------------|
| yti              | Location of y-axis on the x-axis. (Real, Default = 0.0) |

**Remarks:**

YTINTERCEPT applies to upper half frame curves only.

**YTITLE**    Y-Axis Title

Defines a character string that will appear along the y-axis for whole frame curves only.

**Format:**

YTITLE ytit

**Examples:**

```
YTIT    RIGHT WING LOADS - CASE 3
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                     |
|------------------|----------------------------------------------------|
| ytit             | Any character string. (Character, Default = blank) |

**Remarks:**

1. YTITLE may not be continued to the next command line.
2. YTITLE applies to whole frame curves only.

**654 YTLOG**  
**Logarithmic or Linear Y-Axis**

**YTLOG**      Logarithmic or Linear Y-Axis

Selects logarithmic or linear y-axis for upper half frame curves only.

**Format:**

$$\text{YT}(\text{LOG}) \left\{ \begin{array}{l} \text{YES} \\ \text{NO} \end{array} \right\}$$

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                  |
|------------------|---------------------------------|
| YES              | Plot a logarithmic y-axis.      |
| NO               | Plot a linear y-axis. (Default) |

**Remarks:**

1. YTLOG applies to upper half frame curves only.
2. See [XLOG](#).

**YTMAX** Maximum Y-Axis Value

Specifies the maximum value on the y-axis for upper half frame curves only.

**Format:**

YTMAX ymax

**Examples:**

YTMAX 100

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| ymax             | Maximum value on the y-axis. (Real) |

**Remarks:**

1. YTMAX applies to upper half frame curves only.
2. If YTMAX is not specified, then the maximum value is set to the highest value of y.
3. See the related command [YTMIN](#).

**656 YTMIN**  
**Minimum Y-Axis Value**

**YTMIN**      Minimum Y-Axis Value

Specifies the minimum value on the y-axis for upper half frame curves only.

**Format:**

YTMIN ymin

**Examples:**

```
YTMIN 100
```

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                      |
|------------------|-------------------------------------|
| ymin             | Minimum value on the y-axis. (Real) |

**Remarks:**

1. YTMIN applies to upper half frame curves only.
2. If YTMIN is not specified, then the minimum value is set to the lowest value of y.
3. See the related command [YTMAX](#).



**YTTITLE**    Y-Axis Title

Defines a character string that will appear along the y-axis for upper half frame curves only.

**Format:**

YTTITLE ytit

**Examples:**

YTTIT    RIGHT WING LOADS - CASE 3

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                     |
|------------------|----------------------------------------------------|
| ytit             | Any character string. (Character, Default = blank) |

**Remarks:**

1. YTTITLE may not be continued to the next command line.
2. YTTITLE applies to upper half frame curves only.

**658 YTVALUE PRINT SKIP**  
Print Values on Y-Axis Tic Marks

**YTVALUE PRINT SKIP**      Print Values on Y-Axis Tic Marks

Specifies how often to print the y-values alongside the y-axis tic marks on upper half frame curves only.

**Format:**

YTVALUE PRINT SKIP *yvps*

**Examples:**

YTVAL 5

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                   |
|------------------|------------------------------------------------------------------------------------------------------------------|
| <i>yvps</i>      | Number of tic marks to be skipped between labeled tic marks with their corresponding values. (Integer $\geq 0$ ) |

**Remarks:**

YTVALUE applies to upper half frame curves only.

**YVALUE PRINT SKIP** Print Values on Y-Axis Tic Marks

Specifies how often to print the y-values alongside the y-axis tic marks on whole frame curves only.

**Format:**

YVALUE PRINT SKIP yvps

**Examples:**

YVAL 5

**Describers:**

| <b>Describer</b> | <b>Meaning</b>                                                                                                   |
|------------------|------------------------------------------------------------------------------------------------------------------|
| yvps             | Number of tic marks to be skipped between labeled tic marks with their corresponding values. (Integer $\geq 0$ ) |

**Remarks:**

YVALUE applies to whole frame curves only.

**660 YVALUE PRINT SKIP**  
Print Values on Y-Axis Tic Marks

**6**

**X-Y  
PLOT**

Chapter

# 7 Parameters and Parameter Applicability Tables

- *Parameter Descriptions*
- *Parameter Applicability Tables*

## 7.1 Parameter Descriptions

Parameters are used extensively in the solution sequences for input of scalar values and for requesting special features. Parameters values are specified on PARAM Bulk Data entries or PARAM Case Control commands. For more information on the PARAM Bulk Data entry, see [PARAM](#). For more information on the PARAM Case Control command, see [PARAM](#). A complete alphabetical list of PARAMeter names and their functions is given in this section. [Table 7-2](#) at the end of this section summarizes parameter applicability in the solution sequences.

NX Nastran allows the specification of PARAM statements as follows:

1. Inside of the input file.
2. In the `nastrrc` (UNIX) and `nastr.rcf` (WINDOWS).
3. Parameters can be assigned a user defined keyword. The new keyword can then be used to specify a value for the parameter on the command line or in the nastran resource file. The keywords can be defined in the “nastran.params” file in the architecture directory.

See the section “Parameter Specification” in chapter 3 of the *NX Nastran Installation and Operations Guide* for details.

### A – Parameters

ACOUT            Default = PEAK

ACOUT specifies the type of output to be used with the FORCE Case Control command in coupled fluid-structural analysis (see “Performing a Coupled Fluid-Structural Analysis” in the *NX Nastran User’s Guide*). ACOUT=RMS requests root-mean-square output.

To obtain sound pressure level in units of dB and dBA given by the FORCE command, a peak reference pressure must be specified with PARAM, PREFDB. The dB level is defined as:

$$\text{dB} = 20 \cdot \log\left(\frac{P}{\text{PREFDB}}\right)$$

ACSYM Default = YES

By default, the dynamic equations for coupled fluid-structure analysis in frequency response are symmetrized for efficiency. PARAM,ACSYM,NO requests the pre-MSC.Nastran Version 69 formulation which involves no symmetrization and will require more CPU time. See the “Formulation of Dynamic Equations in SubDMAP GMA” in the *NX Nastran User’s Guide*.

If the iterative solver is selected (see the ITER=YES keyword on the NASTRAN statement) then the external work diagnostic will be different between ACSYM=YES and ACSYM=NO.

ADPCON Default = 1.0

Initial penalty values used in contact analysis are calculated automatically by the program and are given by  $k \cdot \text{SFAC} \cdot |\text{ADPCON}|$  where  $k$  is a number selected for each slave node based on the diagonal stiffness matrix coefficients that are in the contact region, and SFAC is the value specified by the user in the SFAC field of the BCONP Bulk Data entry. The ADPCON value applies to all the contact regions in the model. During the analysis, if convergence problems are encountered, penalty values are automatically reduced. Still there may be some problems where convergence cannot be achieved with default values. In such cases, analysis may be restarted with a lower value of ADPCON.

In some cases the default penalty values may be low. In such situations, analysis may be restarted with a higher value of ADPCON.

Generally, penalty values are recalculated every time there is a change in stiffness. However, if ADPCON is negative, penalty values are calculated only at the beginning of each subcase, and penalty values are not adjusted during analysis. This is useful if the contact between two elastic bodies is being analyzed.

ADSTAT Default = YES (SOL 109 and 112 only)

Used in transient analysis data recovery with differential stiffness (see the Case Control Command, STATSUB) to request whether the static solution (displacements, SPC forces, and MPC forces) is to be included (YES) or excluded (NO) in the transient results.

## 664 Parameter Descriptions

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AESDISC           | Default = 1.E-8<br>Tolerance for discarding generalized coordinates in the RITZ method (see AESMETH) which are not linearly independent.                                                                                                                                                                                                                                                                                                                                                                                          |
| AESMAXIT          | Default = 15<br>Maximum number of iterations for the ITER method (see AESMETH).                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| AESMETH           | Default = SELECT<br>Solution method for static aeroelastic analysis.<br><br>SELECT    selects the DIRECT method on models with less than 5000 DOF in the solution set; otherwise selects AUTO.<br>AUTO      selects the reduced basis method for an approximate solution, which is used as starting vectors for an ITER solution.<br>DIRECT    selects the direct solution.<br>RITZ      selects the reduced basis approximate solution.<br>ITER      selects the iterative solution.                                             |
| AESRNDM           | Default = 2<br>Number of random vectors to use as generalized functions in the RITZ method (see AESMETH).                                                                                                                                                                                                                                                                                                                                                                                                                         |
| AESTOL            | Default = 1.E-10<br>Convergence criteria for the iterative solver.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ALPHA1,<br>ALPHA2 | Default = (0.0,0.0)<br>In frequency and transient response analysis, if PARAM,ALPHA1 and/or ALPHA2 are not equal to complex zero, then Rayleigh damping is added to the viscous damping. ALPHA1 is the complex scale factor applied to the mass matrix and ALPHA2 to the stiffness matrix. The scale factors are applied to the d-set or h-set matrices. See “Formulation of Dynamic Equations in SubDMAP GMA” in the <i>NX Nastran User’s Guide</i> .<br>$[B\ddot{q}] = [B] + \text{ALPHA1} \cdot [M] + \text{ALPHA2} \cdot [k]$ |



ALTRED Default = NO

ALTRED=YES requests the alternate stiffness and load reduction technique for superelement analysis in SOLs 101 and 114. This technique is described in “Static Condensation in SubDMAPs SEKR and SEMR2” and “Data Recovery Operations in SubDMAP SEDISP” in the *NX Nastran User’s Guide*.

ALTSHAPE Default = 0

ALTSHAPE selects the set of displacement shape functions to be used in p-version analysis. PARAM,ALTSHAPE,0 selects the MacNeal set. PARAM,ALTSHAPE,1 selects the Full Product Space set. For ALTSHAPE=1, IN=1 and ISOP=1 must be specified on the PSOLID entry.

ASCOUP Default = YES

In coupled fluid-structure analysis, if PARAM,ASCOUP,YES is specified in or omitted from the input file, and the A2GG case control command is also omitted from the input file, coupling for the stiffness and mass is computed. If PARAM,ASCOUP,NO is specified and A2GG is omitted, the coupling is not computed.

When ASCOUP and A2GG are both specified, direct input acoustic/fluid-structure coupling matrices can be added to the computed coupling matrix or the computed coupling matrix can be ignored altogether in favor of direct input matrices. In either case, the coupling matrices can be scaled by:

- Specifying one or both of the CA1 and CA2 parameters.
- Specifying in-line scale factors using the A2GG case control command.
- Specifying both in-line scale factors using the A2GG case control command and one or both of the CA1 and CA2 parameters.

If PARAM,ASCOUP,YES and A2GG are both specified, the total acoustic/fluid-structure coupling matrix is:

$$[A_{ij}] = CA1 \cdot [A_{ij}^x] + CA2 \cdot [A_{ij}^2]$$

## 666 Parameter Descriptions

where  $[A_{ij}^x]$  is the computed acoustic/fluid-structure coupling matrix and  $[A_{ij}^2]$  is the direct input acoustic/fluid-structure coupling matrix specified using A2GG.

If PARAM, ASCOUP, NO and A2GG are both specified, the computed coupling matrix is ignored and the total acoustic/fluid coupling matrix is:

$$[A_{ij}] = CA2 \cdot [A_{ij}^2]$$

where  $[A_{ij}^2]$  is the direct input acoustic/fluid-structure coupling matrix specified using A2GG.

For additional information, see “Performing a Coupled Fluid-Structural Analysis” in the *NX Nastran User’s Guide*

ASING

Default = 0

ASING specifies the action to take when singularities (null rows and columns) exist in the  $[K_{ij}]$  in statics). If ASING=-1, then a User Fatal Message will result.

If ASING=0 (the default), singularities are removed by appropriate techniques depending on the type of solution being performed. The procedures used are described in “Formulation of Dynamic Equations in SubDMAP GMA” and “Real Eigenvalue Analysis in SubDMAPs SEMR3 and MODERS” in the *NX Nastran User’s Guide*.

AUNITS

Default = 1.0

AUNITS is used in SOL 144 to convert accelerations specified in units of gravity on the TRIM Bulk Data entry to units of distance per time squared.

AUTOADJ

Default = YES

In SOL 200, a value of YES will automatically select the direct or the adjoint method for sensitivity analysis based on the performance criteria. AUTOADJ=NO requests that the adjoint method not be selected for sensitivity analysis and the direct method is enforced. The default should be preferred in all cases. However, the presence of this parameter allows investigation of the alternative of using direct methods in place of adjoint methods in the sensitivity calculations.

AUTOMPC Default = NO

AUTOMPC=YES specifies that the software automatically selects the m-set dofs rather than use the m-set values as specified on MPC or RIGID element cards (RBE\*, RBAR, RROD, etc.) in the bulk data definition except as noted below.

This option relieves the need to carefully define rigid elements (or MPCs) so as to not have a conflict of the m-sets between elements. In addition, any redundant constraints will be eliminated.

This option is not available in some circumstances and will be automatically set to NO for:

1. A p-element analysis with local coordinate systems or RSSCON elements.
2. A design optimization solution (SOL=200) with DVGRID data.

The AUTOMPC option is not recommended for use in models with RSSCON elements connected to CPENTA elements.

If an RBE3 element contains UM information on the m-set data, those dofs will be used in the m-set. SPOINTS in MPC equations will always be made part of the m-set.

When using this option, it is possible to specify that selected dofs must not be made part of the m-set. This is accomplished by defining these dofs on USET/USET1 bulk data cards making them part of the U5 set. If specified, the UM information on RBE3 elements will be ignored.

An option also exists to specify that selected dof must be made part of the m-set. Again, using USET/USET1 bulk data cards, but making them part of the U4 set.

AUTOSEEL Default = NO

Requests that elements connected totally to external (boundary) grids (b-set and c-set) of super elements be included in the super element rather than the residual structure. AUTOSEEL = NO (default) means such elements are included in the residual structure. AUTOSEEL = YES means they are included in the super element.

## 668 Parameter Descriptions

AUTOSPC Default = YES (In all SOLs, except 106, 129, 153, and 159)

Default = NO (In SOLs 106, 129, 153, and 159)

AUTOSPC specifies the action to take when singularities exist in the stiffness matrix  $[K_{gg}]$ . AUTOSPC=YES means that singularities will be constrained automatically. AUTOSPC=NO means that singularities will not be constrained. If AUTOSPC=NO is set, then the user should take extra caution analyzing the results of the grid point singularity table and epsilon.

See “Constraint and Mechanism Problem Identification in SubDMAP SEKR” in the *NX Nastran User’s Guide* for details of singularity identification and constraint. Singularity ratios smaller than PARAM,EPPRT (default = 1.E-8) are listed as potentially singular. If PARAM,AUTOSPC has the value YES, identified singularities with a ratio smaller than PARAM,EPZERO (default = 1.E-8) will be automatically constrained with single-point constraints. If PARAM,EPPRT has the same value as PARAM,EPZERO (the default case), all singularities are listed. If PARAM,EPPRT is larger than PARAM,EPZERO, the printout of singularity ratios equal to exactly zero is suppressed. If PARAM,PRGPST is set to NO (default is YES), the printout of singularities is suppressed, except when singularities are not going to be removed. If PARAM,SPCGEN is set to 1 (default = 0), the automatically generated SPCs are placed in SPCi Bulk Data entry format on the PUNCH file.

AUTOSPC provides the correct action for superelements in all contexts. It does not provide the correct action for the residual structure in SOL 129 and is ignored for the residual structure in SOLs 106 and 153. PARAM,AUTOSPCR, not AUTOSPC, is used for the o-set (omitted set) in the residual structure in SOLs 106 and 153.

AUTOSPCR Default = NO (SOLs 106 and 153 only)

AUTOSPCR specifies the action to take when singularities exist in the linear stiffness matrix of the residual structure after multipoint constraints are processed. AUTOSPCR=YES means that singularities will be constrained and AUTOSPCR=NO means they will not be constrained. It is recommended that all degrees-of-freedom attached to nonlinear elements be specified on ASETi entries. Parameters EPPRT, EPZERO, PRGPST, and SPCGEN may be used with AUTOSPCR.

AUTOSPRT Default = YES

By default, models that are not fully constrained, so that they are free in one or more degrees of freedom, will be automatically constrained as long as  $F1 \leq 0.0$  on the EIGR Bulk Data entry or  $V1 \leq 0.0$  on the EIGRL bulk data entry (for SOLs 103 and 110, this only applies if residual vectors are requested). The auto-SUPPORT capability may be deactivated by specifying a SUPORTi entry; PARAM,AUTOSPRT,NO; or  $F1/V1 > 0.0$ . The parameter FZERO is the maximum frequency (Hz) assumed for a rigid body mode. FZERO is used by the auto-SUPPORT capability to extract rigid body frequencies.

## B – Parameters

BAILOUT Default = 0

In a normal modes analysis, Sturm sequence number techniques are used to check the agreement with the number of modes actually computed in the range. If a disagreement occurs, the computed modes are likely incorrect and the run is terminated with a fatal message by default. PARAM, BAILOUT, -1 may be used to allow the solution to proceed after the Sturm sequence check error.

See also MAXRATIO.

BETA Default = (0.333333,0.0)

BETA specifies the transient integration control factor for the Newmark method in SOLs 129 and 159. The stability limits are  $0.25 \leq b < 0.5$ .

## 670 Parameter Descriptions

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BIGER,<br>BIGER1,<br>BIGER2 | Default = 0.0<br>See S1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| BOLTFACT                    | Real, default = 1.0e7<br><br>Factor used to reduce the bolt stiffness during the first phase of a bolt preload analysis.                                                                                                                                                                                                                                                                                                                                                                    |
| BSHDAMP                     | Default = DIFF<br><br>Determines if the PBUSH/PBUSHT bulk entry fields GE2-GE6/TGEID2-TGEID6 are used.<br><br>SAME: The fields GE2-GE6/TGEID2-TGEID6 are ignored, and only fields GE1/TGEID1 are considered.<br><br>DIFF: The fields GE2-GE6/TGEID2-TGEID6 are used. If any of the fields GE2-GE6 and TGEID2-TGEID6 are defined, then all PBUSH and PBUSHT bulk entries are assumed to have all GE1-GE6 and TGEID1-TGEID6 fields defined, and any blank fields are considered a zero value. |
| BUCKLE                      | Default = -1<br><br>BUCKLE=1 requests a nonlinear buckling analysis in a restart run of SOLs 106 or 153. See the <i>NX Nastran Handbook for Nonlinear Analysis</i> .<br><br>BUCKLE=2 requests buckling in a SOL 106 cold start run.                                                                                                                                                                                                                                                         |

### C – Parameters

|          |                                                                                                                                                                               |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CA1, CA2 | Default =(1.0, 0.0)<br><br>CA1 and CA2 specify factors for scaling the total acoustic/fluid-structure coupling matrix. The total acoustic/fluid-structure coupling matrix is: |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

$$[A_{ij}] = CA1 \cdot [A_{ij}^x] + CA2 \cdot [A_{ij}^2]$$

where  $[A_{ij}^x]$  is the computed acoustic/fluid-structure coupling matrix and  $[A_{ij}^2]$  is the direct input acoustic/fluid-structure coupling matrix specified using the A2GG case control command. CA1 and CA2 are only effective if A2GG is specified in the case control section.

CB1, CB2 Default =(1.0, 0.0)  
 CB1 and CB2 specify factors for the total damping matrix. The total damping matrix is:

$$[B_{jj}] = \text{CB1} \cdot [B_{jj}^x] + \text{CB2} \cdot [B_{jj}^2]$$

where  $B_{jj}^2$  is selected using the B2GG case control command and  $B_{jj}^x$  comes from CDAMPi or CVISC element bulk entries. These parameters are effective only if B2GG is selected in the case control section.

CDIF Default = YES for shape optimization with or without property optimization.

Default = NO for property optimization only.

CDIF may be used to override the default finite difference scheme used in the calculation of pseudoloads in SOL 200. PARAM,CDIF,YES forces the selection of the central difference scheme used in the semianalytic approach regardless of the type of optimization requested. PARAM,CDIF,NO forces the selection of the forward difference scheme.

CDITER Default = 0

CDPCH Default = NO

CDPRT Default = YES

If CDITER>0, perform constrained displacement iterations in SOL 101. The value is the maximum number of iterations. If CDPRT=YES, print those negative displacements and tension forces which do not satisfy constraints. If CDPCH=YES, punch DMIG CDSHUT entries for final state; by default all gaps are closed. These can be used for initial conditions for a restart. Potential contact points must be specified on the SUPORTi entries. The SUPORTi points must be in the residual structure. Optional DMIG entries to define the initial shut vector may be specified. Degrees-of-freedom that are specified on the SUPORT entry and have a value of 1.0 defined on the DMIG,CDSHUT entry will be considered closed initially. If the DMIG,CDSHUT entry is not supplied, then all degrees-of-freedom specified on the

## 672 Parameter Descriptions

SUPPORT entries will be considered shut initially. A fatal message will be issued if this parameter is used and PARAM,INREL is specified.

CHECKOUT Default = NO (structured solutions only)

CHECKOUT=YES requests a model checkout in SOLs 101 through 200. See “Geometry Processing in SubDMAP PHASEO” in the *NX Nastran User’s Guide*. The run will terminate prior to phase 1 of superelement analysis. The PARAM,POST options are also available with PARAM,CHECKOUT,YES. The following options and their user parameters are also available with PARAM,CHECKOUT,YES,

1. PARAM,PRTGPL,YES

Prints a list of external grid and scalar point numbers in internal sort. It also lists external grid and scalar point numbers along with the corresponding sequence numbers in internal sort. The sequence numbers are defined as (1000\*external number) and will reflect any user-requested resequencing.

2. PARAM,PRTEQXIN,YES

Prints a list of external and internal grid and scalar numbers in external sort. It also lists external grid and scalar numbers with the corresponding coded SIL number in external sort. The coded SIL numbers are defined as:

$$10 \cdot \text{SIL} + \begin{cases} 1 & \text{for grid point} \\ 2 & \text{for scalar point} \end{cases}$$

The SIL numbers correspond to degrees-of-freedom, i.e., one SIL number for scalar point and six SIL numbers for a grid point.

3. PARAM,PRTGPDT,YES

Prints, for each grid and scalar point, the following information in the internal sort:

- Coordinate system ID in which grid point geometry is defined (ID=-1 for scalar points).
- Spatial location of grid points in the “CP” coordinate system. For scalar points, all entries are zero.



- Coordinate system ID for grid point displacements, forces, and constraints (ID=0 for scalar points).
- Permanent single-point constraints defined on GRID Bulk Data entries. A zero is entered for scalar points.

4. PARAM,PRTCSTM,YES

Prints for each coordinate system type the transformation matrix from the global to the basic coordinate system, and the origin of the indicated coordinate system in the basic coordinate system. Coordinate system types are: 1 = rectangular; 2 = cylindrical; 3 = spherical.

5. PARAM,PRTBGPDT,YES

Prints all grid and scalar points listed in internal sort with their x, y, and z coordinates in the basic coordinate system. In addition, the coordinate system ID for grid point displacements, forces, and constraints is indicated for each grid point (ID=-1 for scalar points). The x, y, and z coordinates of scalar points are zero.

6. PARAM,PRTGPTT,YES

Prints, for each temperature load set, information on element and grid point temperatures.

7. PARAM,PRTMGG,YES

Prints the g-size mass matrix labeled by grid point/degree-of-freedom.

8. PARAM,PRTPG,YES

Prints the g-size load vectors labeled by grid point/degree-of-freedom.

9. The summation of forces and moments of applied loads in the basic coordinate system is automatically output for each loading condition requested in the Case Control Section. Related parameters are GPECT, PROUT, and EST.

## 674 Parameter Descriptions

CK1, CK2 Default =(1.0, 0.0)

CK1 and CK2 specify factors for the total stiffness matrix. The total stiffness matrix (exclusive of GENEL entries) is

$$[K_{jj}^x] = CK1 \cdot [K_{jj}^z] + CK2 \cdot [K_{jj}^2]$$

where  $[K_{jj}^2]$  is selected via the Case Control command K2GG and  $[K_{jj}^z]$  is generated from structural element (e.g., CBAR) entries in the Bulk Data. These are effective only if K2GG is selected in Case Control. A related parameter is CK3. Note that stresses and element forces are not factored by CK1, and must be adjusted manually.

CK3 Default = (1.0, 0.0)

CK3 specifies a factor for the stiffness derived from GENEL Bulk Data entries. The total stiffness matrix is

$$[K_{jj}] = [K_{jj}^x] + CK3 \cdot [K_{jj}^y]$$

where  $[K_{jj}^y]$  comes from the GENEL Bulk Data entries and  $[K_{jj}^x]$  is derived using PARAMs CK1 and CK2. CK3 is effective only if GENEL entries are defined. Related parameters include CK1 and CK2.

CK41, CK42 Default =(1.0, 0.0)

CK41 and CK42 specify factors for the total structural damping matrix. The total structural damping matrix is

$$[K_{jj}^{4x}] = CK41 \cdot [K_{jj}^{4z}] + CK42 \cdot [K_{jj}^{42}]$$

where  $[K_{jj}^{4,2}]$  is selected via the Case Control command K42GG and  $[K_{jj}^{4,z}]$  is generated from the stiffness of structural element (e.g., CBAR) entries in the Bulk Data times the structural damping coefficient GE on material entries (e.g. MAT1). These are effective only if K42GG is selected in Case Control. Note that stresses and element forces are not factored by CK41, and must be adjusted manually.

CLOSE Default = 1.0

See SCRSPEC.

CM1, CM2 Default = (1.0, 0.0)

CM1 and CM2 specify factors for the total mass matrix. The total mass matrix is

$$[M_{jj}] = \text{CM1} \cdot [M_{jj}^x] + \text{CM2} \cdot [M_{jj}^2]$$

where  $[M_{jj}^2]$  is selected via the Case Control command M2GG and  $[M_{jj}^x]$  is derived from the mass element entries in the Bulk Data Section. These are effective only if M2GG is selected in the Case Control Section.

CNSTRT No longer required.

COMPMATT Default=NO

During SOL 106 solutions, composite materials compute temperature-dependent properties for the plies only at the reference temperature given on the PCOMP bulk data entry. The resulting ply properties are smeared and used for all load steps, regardless of whether the temperature is changing through application of thermal loads. If the parameter equals YES, the temperature-dependent properties for the plies are updated and smeared at the current temperature for each load step. This parameter only applies to SOL 106, and CQUAD4/CTRIA3 elements only.

CONFAC Default = 1.E-5

In superelement analysis, CONFAC specifies the tolerance factor used in checking the congruence of the location and displacement coordinate systems of the boundary points between image superelements and their primaries (see the Bulk Data entry, [CSUPER](#)). Specification of this parameter is recommended instead of DIAG 37 (DIAG 37 ignores User Fatal Messages 4277 and 4278).

## 676 Parameter Descriptions

CORROPT Default = NO

This parameter is valid only for SOL 103 when used with the NX Model Update product. The documentation for this product is included in the NX Help Library.

NO: Output for the NX Model Update product is deactivated.

YES: Output for the NX Model Update product is activated.

COUPMASS Default = -1

COUPMASS>0 requests the generation of coupled rather than lumped mass matrices for elements with coupled mass capability, as listed in “Element Summary – Small Strain Elements” in the *NX Nastran Element Library*. This option applies to both structural and nonstructural mass for the following elements: CBAR, CBEAM, CONROD, CHEXA, CPENTA, CPYRAM, CQUAD4, CQUAD8, CQUADR, CQUADX4, CQUADX8, CRAC2D, CRAC3D, CROD, CTETRA, CTRAX3, CTRAX6, CTRIA3, CTRIA6, CTRIAR, CTRIAX6, CTUBE. A negative value (the default) causes the generation of lumped mass matrices (translational components only) for all of the above elements.

COUPMASS needs to be > 0 for mass residual vectors to be generated during SOL 111 & 112.

P-elements are always generated with coupled mass and are not affected by COUPMASS.

CP1, CP2 Default = (1.0, 0.0)

The load vectors are generated from the equation

$$\{P_j\} = CP1 \cdot \left\{ P_j^x \right\} + CP2 \cdot \left\{ P_j^2 \right\}$$

where

$\{P_j^2\}$  is selected via the Case Control command P2G, and  $\{P_j^x\}$  comes from Bulk Data static load entries.

CURV

Default = -1

PARAM,CURV,1 requests that the CTRIA3 and CQUAD4 element stress and/or strain output be computed in a material coordinate system (normal output is in the element or basic coordinate system) and/or to interpolate it to grid points. (CQUAD4 element corner stress output is not supported.)

The integer parameter OG controls the calculation of stress and/or strain data at grid points. If OG is set to -1, the calculation for stresses and/or strain data at grid points is not performed. The default value of zero provides the calculation of these quantities at those grid points to which the selected elements connect.

User parameters S1G, S1M, S1AG, and S1AM, set to 1, request the printout of stresses at grid points, stresses in the material coordinate system, strains at grid points and strains in the material coordinate system, respectively.

The integer parameter OUTOPT may be set in accordance with the below options to select print, punch, and/or plotter output for stress and/or strain data that are computed in user-defined material coordinate systems.

| OUTOPT Value | Description                                        |
|--------------|----------------------------------------------------|
| 0            | Default-standard NX Nastran device codes are used. |
| 1            | Print only                                         |
| 2            | Plot only                                          |
| 4            | Punch only                                         |

The above values may be combined additively to select two or more forms of output. For example, OUTOPT=6 requests both plot and punch output. Related parameters include BIGER, CURVPLOT, DOPT, NUMOUT, NINTPTS, S1G, S1M.

For stress and/or strain/curvature output in a user-defined material coordinate system MCSID must be defined on MAT1 and MAT2 Bulk Data entries. The values of MCSID reference CORDiR, CORDiC, and CORDiS Bulk Data entries. A value of zero for MCSID does not imply the basic coordinate and will eliminate all elements which reference the MATi from the subject calculations.

1. If these data are requested at the element centers, the program will compute the unit vector  $\hat{i}_m$  along the T1 or

x-axis of the material coordinate system, and compare  $|\bar{n} \cdot \dot{i}_m|$  for each element that references the material coordinate system, where  $\bar{n}$  is the normal to the surface of the element.

If  $|\bar{n} \cdot \dot{i}_m|^2 \geq 4$  the projection of the y-axis on the surface of the element is taken as the reference axis. Otherwise, the projection of the x-axis on the surface of the element is taken as the reference axis. The angle between the x-axis of the element coordinate system and the projection of the selected reference axis of the material coordinate system is used to transform the stress and/or strain data into the material coordinate system at the element centers.

2. If, on the other hand, the user requests these data at the grid points to which the elements connect, the program will interpolate the results from (a) to the grid points to which the elements connect. The parameter NINTPTS = N, the stress and/or strain data at the N closest element centers to the grid point in question will be used in the interpolation. The program may include more than N points in the interpolation if the distance of other element centers is not more than 10% greater than the closest N element centers.

The following specifies the output headings for stresses and/or strains in the material coordinate system.

Element stresses (PARAM,S1M,1) are:

1. Available in CQUAD4 and CTRIA3 elements.
2. In page headings:  
 STRESSES IN QUADRILATERAL ELEMENTS (CQUAD4)  
 STRESSES IN TRIANGULAR ELEMENTS (CTRIA3)
3. Under the column FIBER DISTANCE:  
 Z1 is replaced by MCSID.  
 Z2 is replaced by 1.0 if the x-axis of the material coordinate system is selected as the reference axis, and by 2.0 if the y-axis of the material coordinate system is selected as the reference axis.

Grid point stresses (PARAM,S1G,1 and PARAM,OG,1)

1. Available for CQUAD4 and CTRIA3 elements.

- In page heading:

STRESSES AT GRID POINTS

- Under the  $\left\{ \begin{array}{c} \text{MAT1 - COORD1 - ID} \\ \text{PROJ-CODE} \end{array} \right\}$  column:

Z1 is replaced by MCSID:

Z2 = A+10\*N where A is 1.0, 2.0, or 3.0, depending on whether the x-, y-, or z-axis of the material coordinate system is most nearly normal to the projected plane of the field of elements involved in the calculation.

Element strains (PARAM,S1AM,1) are:

- Available for CQUAD4 and CTRIA3 elements.
- In page headings:

STRAINS IN QUADRILATERAL ELEMENTS (CQUAD4)

STRAINS IN TRIANGULAR ELEMENTS (CTRIA3)

- Under the column FIBER DISTANCE:

Z1 is replaced by MCSID.

Z2 is replaced by 1.0 if the x-axis of the material coordinate system is selected as the reference axis, and by 2.0 if the y-axis of the material coordinate system is selected as the reference axis.

Grid point strains (PARAM,S1AG,1 and PARAM,OG,1):

- Available for CQUAD4 and CTRIA3 elements.
- In page heading:

STRAINS AND CURVATURES AT GRID POINTS

- Under the  $\left\{ \begin{array}{c} \text{MAT1 - COORD1 - ID} \\ \text{PROJ-CODE} \end{array} \right\}$  column:

Z1 is replaced by MCSID.

Z2 = A+10\*N where A is 1.0, 2.0, or 3.0, depending on whether the x-, y-, or z-axis of the material coordinate system

## 680 Parameter Descriptions

is most nearly normal to the projected plane of the field of elements involved in the calculation.

CURVPLOT Default=-1

PARAM,CURVPLOT,1 requests x-y (or curve) plots whose abscissas are a sequence of grid points and whose ordinates may be displacements, loads, SPC forces, or grid point stresses. To obtain stress plots, set the CURV parameter to +1. The default for DOPT is the length between grid points

Specify the XYOUTPUT Case Control command in the usual manner, replacing the point ID with the SID of SET1 Bulk Data entries.

The SET1 Bulk Data entries must contain unique SIDs for each set of grid points to be plotted.

User requests for xy-plots of output quantities appear in the Case Control Section in the standard form. For example,

```
.  
. .  
OUTPUT (XYOUT)  
. .  
XYPLOT DISP 1/4 (T3)  
. .  
XYPLOT SPCF 2/5 (T1)  
. .  
BEGIN BULK
```

The first XYPLOT command will produce an xy-plot from the displacement output of subcase 1. The abscissa of the curve will reflect the grid point IDs listed on the SET1 entry with a SID of 4, and the ordinate will reflect the T3 component of displacement at these grid points. The second XYPLOT command will produce an xy-plot whose ordinates are the T1 components of the forces of constraint in subcase 2 at the grid points listed on the SET1 entry with a SID of 5.

The user has some degree of control over the scaling of the abscissas on these xy-plots. This control is exercised through the parameter DOPT on a PARAM Bulk Data entry. The legal values of this parameter provide the following scaling options for the abscissas.



| Value of DOPT | Scaling for Abscissa |
|---------------|----------------------|
| 0 (default)   | $  g_j - g_i  $      |
| 1             | $ x_j - x_i $        |
| 2             | $ y_j - y_i $        |
| 3             | $ z_j - z_i $        |
| 4             | 1.                   |

Thus, the default value of DOPT will place the first grid point listed on the referenced SET1 card at the origin, and subsequent grid points will be located along the abscissa at intervals proportional to the distance between that grid point and its predecessor. Values of DOPT equal to 1, 2, or 3 will scale the abscissa so that the interval between adjacent grid points is proportional to the difference in the X, the Y, and the Z components of the subject grid points respectively. DOPT = 4 will space the grid points equally along the abscissa.

## D – Parameters

DBALL            Default = DBAL

By default, all data to be stored on the database for restart purposes will be located on the DBALL database set DBset. These parameters permit the storage of some data blocks on DBsets other than DBALL, which are defined by the user and specified on the INIT File Management statement. Any or all of these parameters may be set to SCRATCH in order to reduce overall disk space usage; e.g., PARAM,DBUP,SCRATCH or PARAM,DBALL,SCRATCH. However, automatic restarts will be less efficient because data normally assigned to a permanent DBset will have to be recomputed.

A unique value for each superelement may be specified in the Case Control Section for the parameters DBALL, DBDN, DBRCV, and DBUP. Certain DBsets may be taken offline depending on which phase of superelement analysis is being performed (see “Summary of Solution Sequence Operations” in the *NX Nastran User’s Guide*). PARAM,DBALL specifies the default value for parameters DBDN, DBUP, and DBRCV.

The DBDN DBset contains data blocks necessary for “downstream” processing. For example, the stiffness, mass,

## 682 Parameter Descriptions

damping, and static loads matrices that have been reduced to the boundary of the superelement are stored in this DBset.

The DBRCV DBset contains data blocks that must be online during the first pass through data recovery (Phase 3). These data blocks are used to recover the total displacement vector  $u_g$  of the superelement. This operation is performed by the SSG3 and SDR1 modules. On subsequent data recovery restarts, this DBset may be taken offline. Its default is determined from the value of DBUP.

The DBUP DBset contains data blocks necessary for “upstream” processing. For example, the geometry and property tables along with the stiffness, mass, damping, and static loads matrices related to the interior grid points of the superelement are stored in this DBset. These matrices and tables must be online during the reduction (Phase 1) and data recovery (Phase 3) of the superelement.

The IFP DBset contains data blocks that are required for all phases of the analysis. These data blocks are related to the entire model; examples are Bulk Data, superelement map, IFP module outputs, and resequenced grid points. This DBset must be online for all runs.

|          |                                     |
|----------|-------------------------------------|
| DBCCONV  | Default = XL<br>See PARAM, POST, 0. |
| DBCDIAG  | Default = 0<br>See PARAM, POST, 0.  |
| DBCOVWRT | Default = YES<br>See PARAM, POST.   |

|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DBDICT  | <p>Default = -1</p> <p>Controls the printout of the database directory at the beginning and end of the run. See DBDICT FMS statement description in Section 2. If DBDICT = 0, then the database directory will be printed at the start of the run. If DBDICT=1, then the directory will be printed at the end of the run. If DBDICT <math>\geq</math> 2, then it will be printed at the beginning and end of the run. If DBDICT = -1 (the default), the directory is not printed at the beginning or end of the run.</p> <p>If multiple versions and/or projects exist on the database, then the parameters DBDRPRJ and DBDRVER allow the user to select the desired project and version, respectively. The appropriate values may be found in the Project/Version Table that is printed upon restart. If DBDRVER = 0 (or DBDRPRJ=0), then the current version (or project) is selected. If DBDRPRJ=-1 (or DBDRVER = -1), then all projects (or versions) are selected.</p> |
| DBDN    | <p>Default = value of PARAM,DBALL.</p> <p>See DBALL.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| DBDRPRJ | <p>Default = 0</p> <p>Specifies the desired project-identification number. See DBDICT.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| DBDRVER | <p>Default = 0</p> <p>Specifies the desired version-identification number. See DBDICT.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| DBRCV   | <p>Default=value of PARAM,DBUP.</p> <p>See DBALL.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| DBUP    | <p>Default=value of PARAM,DBALL.</p> <p>See DBALL.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| DDRMM   | <p>Default = 0</p> <p>By default, the matrix method of data recovery is used in the modal transient and frequency response solutions. DDRMM=-1 will force calculation of complete g-set solution vectors by the mode displacement method.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## 684 Parameter Descriptions

DESPCH Default = 0

DESPCH specifies in SOL 200 when the optimized (updated) Bulk Data entries are written to the PUNCH file. Currently, all the property entries, material entries, and connectivity entries that can be designed and DESVAR, DRESP1, and GRID entries can be written.

DESPCH < 0 never.

DESPCH = 0 at the last design cycle only. (Default)

DESPCH > 0 at every design cycle that is a multiple of DESPCH and the last design cycle. For example, if  $n=2$  and the maximum number of design cycles is 5 (DESMAX=5 on the DOPTPRM entry), then, DESVAR and GRID entries at design cycle 2, 4, and 5 are written in the punch file.

DESPCH1 Default=6

DESPCH1 specifies in SOL 200 the amount of data to be written to the.pch file. A positive DESPCH1 value requests large field formats while a negative value requests small field formats. Any updated EIGN or FREQ type DRESP1 written to the punch file due to mode tracking will be in small field format regardless of the sign of DESPCH1. For a shape optimization job, if  $DESPCH1 < 0$ , the updated GRID entries of the whole model will be written in the.pch file.

Descriptions of various DESPCH1 values are given below:

DESPCH1 = 0, writes no data.

DESPCH1 =  $\pm 1$ , writes the property entries that are designed.

DESPCH1 =  $\pm 2$ , writes all the property entries of a given type when one property of that type is designed.

DESPCH1 =  $\pm 4$ , writes DESVAR and DRESP1 entries.

DESPCH1 =  $\pm n$ , writes combine quantities by summing the DESPCH1 values. For example,  $n=1+4=5$  requests writing all the designed property entries, DESVAR and DRESP1 entries to the.pch file.

DFREQ Default =  $10^{-5}$

DFREQ specifies the threshold for the elimination of duplicate frequencies on all FREQ*i* Bulk Data entries. Two frequencies,  $f_1$  and  $f_2$ , are considered duplicated if

$$|f_1 - f_2| < \text{DFREQ} \cdot |f_{MAX} - f_{MIN}|$$

where  $f_{MAX}$  and  $f_{MIN}$  are the maximum and minimum excitation frequencies of the combined FREQ*i* entries.

DOF123 Default: 0

Valid only when PARAM,CORROPT,YES exists.

0: Nodes in Display Set will have all DOFs (123456) available in back expansion matrix (GOA).

1: Nodes in Display Set will have translational DOFs (123) available in back expansion matrix (GOA). If SPOINTs are present in the Display Set, DOF123 is forced to 0 so that all DOFs are made available.

DOPT Default = 0

See CURVPLOT.

DPEPS Default = 1.0E-4

In SOL 200, if any difference between the property value on the property entries and the value calculated from the design variable values on the DESVAR entry (through DVPREL*i* relations) is greater than DPEPS, the design model values override the analysis values. If all the differences are less than DPEPS, analysis results from a previous run are accepted in a subsequent sensitivity/optimization task, thereby avoiding a reanalysis. The PTOL parameter on the DOPTPRM entry is a related parameter that checks the maximum difference.

## 686 Parameter Descriptions

DPREONLY Default = NO

DPREONLY is used to signal the SOL 187 analysis to stop execution before the Fortran NAVSHOK program is started. This option is used when you want to run the Fortran program outside the Nastran job.

If PARAM,DPREONLY,YES is specified, the DDAM solution will stop after the OUTPUT4 files are written, but just before the Fortran program is executed.

If PARAM,DPREONLY,NO is specified, the DDAM solution will start the Fortran NAVSHOK program once the OUTPUT4 files have been created.

DSNOKD Default = 0.0

DSNOKD specifies a scale factor to the differential stiffness matrix in buckling design sensitivity analysis. If DSNOKD>0.0, the effect of the differential stiffness matrix is included in buckling the design sensitivity analysis.

If PARAM,DSNOKD > 0 is specified in SOL 105, under the original Design Sensitivity Analysis (DSA), the differential stiffness sensitivity calculation is performed under the assumption that all the displacements are enforced; i.e., the change in the stiffness matrix due to the changes in the displacements are not computed. Therefore, PARAM,DSNOKD,0.0 is recommended in SOL 105. If PARAM,DSNOKD,1.0 is specified in SOL 200, the differential stiffness sensitivity calculation is performed more accurately; i.e., the change in the stiffness matrix due to the changes in the displacements are computed. However, the calculation is more expensive than with PARAM,DSNOKD,0.0.

Non-zero values of PARAM,DSNOKD cannot be used in SOL 200 with multiple buckling design subcases unless each subcase contains the same STATSUB command.

DSZERO Default = 0.0

DSZERO specifies the minimum absolute value for the printout of design sensitivities.

**DYNPCF** Default = NEW (structured solutions only)

PARAM,DYNPCF,NEW requests that mass and damping coupled to ground be included in the SPCForce calculations for the linear dynamic solutions: SOLs 103, 107 through 112, 115, 118, 145, 146, and 200. OLD neglects these effects and gives the same SPCForce results obtained in versions prior to MSC.Nastran Version 68.

## E – Parameters

**EIGD** Default = NO

PARAM,EIGD,YES requests the calculation of eigenvector derivatives in normal modes original design sensitivity analysis (DSA) in SOL 103.

PARAM,NORM specifies and must correspond to the type of eigenvector normalization specified on the EIGR or EIGRL Bulk Data entry: The default, 0, means NORM=“MASS” on the EIGR or EIGRL entry and 1 means NORM=“MAX” or “POINT”.

**ELITASPC** Default = NO

Set to YES to perform the autospc in the element iterative solver. Normally the element iterative solver does not perform an autospc function as it is usually not necessary. For solid elements, the rotational dofs are eliminated directly. If K6ROT is specified for linear shell elements, there is no issue either. But for CQUAD8 and CTRIA6 elements and possibly other special cases, the autospc function is required. The drawback of this option is that it requires the assembly of the KGG matrix which is used in the autospc and this can have a significant impact on performance. This parameter will also generate the rigid body mass properties.

If MPCFORCES output is requested, this parameter will automatically be set to YES since a partition of the assembled stiffness matrix is needed for the calculation of the mpc forces.

**EPPRT** Default = 1.E-8

Specifies the maximum value of singularities that will be printed. See AUTOSPC.

## 688 Parameter Descriptions

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPZERO             | Default = 1.E-8<br><br>Specifies the minimum value that indicates a singularity. See AUTOSPC.                                                                                                                                                                                                                                                                                                                                                                               |
| ERROR              | Default = -1<br><br>If ERROR is set to 0, errors in superelement generation or assembly (e.g., a singular matrix, a mechanism, a nonpositive definite matrix, no stiffness, or all upstream superelements not available) will not terminate the run. The remaining computations for that superelement will be skipped, and additional superelements will be attempted. The default value causes a User Fatal Message to terminate the run. A related parameter is MAXRATIO. |
| EST                | Default = 2<br><br>EST = +1 requests that the measure (length, area or volume) and volume be computed and printed for each element in the model, or in the case of superelement analysis, for the SEMG-selected superelements. The default value of 2 causes this data to be computed but not printed, making it available for element strain energy density calculations. If EST is set to -1, the calculation is skipped, and the density data will not be calculated.    |
| EXTDR,<br>EXTDROUT | Default = NO. See EXTOUT                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| EXTDRUNT           | Default = 31. See EXTOUT                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| EXTUNIT            | Default = 30.                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| EXTOUT             | Default = NO                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



When inputting the matrices for a reduced external superelement (SEBULK, CSUPER), there are four options that can be selected using the parameter EXTOUT. EXTOUT must be placed in the Case Control Section above any subcase or in the main Bulk Data Section. The options for Step 1 (see the table at the end of this discussion) are as follows:

If EXTOUT is set to MATRIXDB, the reduced structural matrices and loading are stored on the database.

If EXTOUT is set to DMIGDB, the reduced structural matrices and loading are stored on the database in a format which allows automatic connection to the analysis model if the identification numbers of the reduction grid points and scalar points are the same as the grid points and scalar points used in the analysis model.

If EXTOUT is set to DMIGOP2, the reduced structural matrices and loading are written in OUTPUT2 format to a tape unit specified by the parameter EXTUNIT (default=30). The storage format is the same as the DMIGDB option and allows automatic connection to the analysis model if the identification numbers of the reduction grid points and scalar points are the same as the grid points and scalar points used in the analysis model. The output unit can be assigned to a specific file by using an ASSIGN command in the File Management Section.

If EXTOUT is set to DMIGPCH, the reduced structural matrices and loading are output on the punch file (.pch) in DMIG format.

The procedure for accessing the external superelement information depends on the option used to output the external superelement in Step 1. The methods are as follows:

1. If EXTOUT was MATRIXDB or DMIGDB in Step 1, use the following commands in the File Management Section:

```
ASSIGN SEXXX='step1.MASTER'
DBLOCATE DATAblk=(EXTDB) CONVERT (SEID=xxx) ,
LOGICAL=SEXXX
```

where

step1.MASTER is the database from Step 1.

and

xxx is the superelement identification number given to the partitioned Bulk Data Section for the external superelement.

2. If EXTOUT was DMIGOP2 in Step 1, then use the following commands in the File Management Section:

```
ASSIGN INPUTT2='step1_output2_file',UNIT=extunit
```

where

step1\_output2\_file is the OUTPUT2 file from Step 1.

and

extunit is the unit number specified by the parameter EXTUNIT (default = 30).

3. If EXTOUT was DMIGPCH in Step 1, then include the punch file from Step 1 in the partitioned Bulk Data Section. In addition, add the following Case Control commands in the subcase for the external superelement:

```
K2GG=KAAX
P2G=PAX
```

The SEBULK entry defining the superelement as an external superelement and the EXTRN entry in the partitioned Bulk Data Section should not be specified.

If data recovery is desired for the external component in SOLs 101, 103, and 107 through 112, there are three methods of transmitting the displacements of the reduced model to the external full model. The method is selected by the parameter EXTDROUT in the partitioned Bulk Data Section. The options are as follows:

1. EXTDROUT set to MATRIXDB. The displacements of the reduced component model are stored directly on the database. The sequencing of the displacement degrees-of-freedom corresponds to the sequencing in the reduced model.
2. EXTDROUT set to DMIGDB. The displacements of the reduced model are stored on the database in a format which allows automatic connection to the reduced component model if the reduction grid points and scalar points are the same grid points and scalar points used in the analysis model. This option can only be used if EXTOUT was set to DMIGDB or DMIGOP2.
3. EXTDROUT set to DMIGOP2. The same as EXTDROUT set to DMIGDB except that the displacements of the reduced model are written in OUTPUT2 format to a tape unit specified

by parameter EXTDRUNT (default = 31). The output unit can be assigned to a specific file by using an ASSIGN command in the File Management Section. This option can only be used if EXTOUT was set to DMIGDB or DMIGOP2.

Data recovery for the external component is limited to SOLs 101 and 103 and 107 through 112. Data recovery is accomplished using a restart procedure from the data base created in Step 1 and setting parameter EXTDR to YES. The method on inputting the reduced displacements into the component model depends on the method used to output the external component in Step 2. The input methods are as follows:

1. If EXTDROUT was MATRIXDB or DMIGDB in Step 2, then add the following commands in the File Management Section:

```
ASSIGN SEXX='step1.MASTER'
RESTART LOGICAL=SEXX
ASSIGN SEYYY='step2.MASTER'
DBLOCATE DATAblk=(EXTDB) WHERE (SEID=yyy),
LOGICAL=SEYYY
```

where:

step1.MASTER is the database from the Step 1.

step2.MASTER is the database from the Step 2.

and

yyy is the superelement identification number given to the partitioned Bulk Data Section for the external superelement in Step 2.

2. If EXTDROUT was DMIGOP2 in Step 2, then add the following commands in the File Management Section:

```
ASSIGN INPUTT2='step2_output2_file',UNIT=extdrunt
```

where

step2\_output2\_file is the OUTPUT2 file from Step 2.

and

extdrunt is the unit number specified by the parameter EXTDRUNT (default = 31).

For SOL 101, the Case Control structure must match the system model subcase structure in the numbers of loading conditions. The loading used in Step 1 to generate the loads transmitted to the analysis model must also be specified in this step. If the

## 692 Parameter Descriptions

analysis model had more loading conditions than the component model, then the loadings defined in Step 1 must be specified first.

For SOL 103 and 107 through 112, the Case Control structure must match the analysis model subcase structure in the number of eigenvalue extractions, **FREQ/DLOAD** or **TSTEP/DLOAD** subcases.

| Step 1<br>Create<br>External SE | Step 2<br>Perform Analysis                                                                                                                                                                                                        | Step 3<br>Data Recovery for External SE                                                                                                                                                                                                                                      |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PARAM,<br>EXTOUT,<br>MATRIXDB   | a    ASSIGN<br>SEXX='step1.MASTER'<br><br>DBLOCATE<br>DATABLK=(EXTDB),<br>CONVERT (SEID=xxx),<br><br>LOGICAL=SEXX<br><br>b    PARAM,EXDROUT,MATRIXDB                                                                              | a    ASSIGN SEXX='step1.MASTER'<br><br>RESTART LOGICAL=SEXX<br><br>ASSIGN SEYYY='step2.MASTER'<br><br>DBLOCATE DATABLK=(EXTDB),<br>WHERE(SEID=YYY),<br><br>LOGICAL=SEYYY<br><br>b    PARAM,EXTDR,YES                                                                         |
| PARAM,<br>EXTOUT,<br>DMIGDB     | a    ASSIGN<br>SEXX='step1.MASTER'<br><br>DBLOCATE<br>DATABLK=(EXTDB),<br>CONVERT (SEID=xxx),<br><br>LOGICAL=SEXX<br><br>b    PARAM,EXDROUT,MATRIXDB<br><br>or<br><br>PARAM,EXDROUT,DMIGDB<br><br>or<br><br>PARAM,EXDROUT,DMIGOP2 | a    ASSIGN SEXX='step1.MASTER'<br><br>RESTART LOGICAL=SEXX<br><br>ASSIGN SEYYY='step2.MASTER'<br><br>DBLOCATE DATABLK=(EXTDB),<br>WHERE(SEID=YYY),<br><br>LOGICAL=SEYYY<br><br>a    ASSIGN<br>INPUTT2='step2_output_file',<br><br>UNIT=Extdrunt<br><br>b    PARAM,EXTDR,YES |
| PARAM,<br>EXTOUT,<br>DMIGOP2    | a    ASSIGN<br>INPUTT2='step1_output2_file',<br>Unit = extunit<br><br>b    PARAM,EXDROUT,MATRIXDB<br><br>or<br><br>PARAM,EXDROUT,DMIGDB<br><br>or<br><br>PARAM,EXDROUT,DMIGOP2                                                    | a    ASSIGN SEXX='step1.MASTER'<br><br>RESTART LOGICAL=SEXX<br><br>ASSIGN SEYYY='step2.MASTER'<br><br>DBLOCATE DATABLK=(EXTDB),<br>WHERE(SEID=YYY),<br><br>LOGICAL=SEYYY                                                                                                     |

|  |                                                                                                                         |                                                                                             |
|--|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|  | PARAM,EXDROUT,DMIGOP2                                                                                                   | <p>a ASSIGN<br/>INPUTT2='step2_output_file',<br/>UNIT=Extdrunt</p> <p>b PARAM,EXTDR,YES</p> |
|  | <p>Include the.PCH file in partitioned Bulk Data Section and for external SE subcase</p> <p>a K2GG=KAAX<br/>P2G=PAX</p> |                                                                                             |

**EXTRCV** Default = 0

EXTRCV > 0 indicates that data recovery is to be performed on an external superelement. In this type of run, the database for the external superelement must be attached as the primary database (See “Database Concepts” in the *NX Nastran User’s Guide*), and the database that contains the solution vectors, superelement map, and external/internal grid point equivalence table for its downstream superelement must be attached via the DBLOCATE statements. The value of EXTRCV must also be specified in the CONVERT clause of the DBLOCATE statement for the EMAP data block.

The following example shows the DBLOCATE statements for external superelement data recovery in SOL 101.

```

ASSIGN DOWNSE=... $ DOWNSTREAM SUPERELEMENT DATABASE
DBLOC DB=EMAP CONVERT (EXTRCV=500) LOGICAL=DOWNSE
DBLOC DB=UL WHERE (SEID=0) LOGICAL=DOWNSE
DBLOC DB=UG WHERE (SEID=0) LOGICAL=DOWNSE
DBLOC DB=BGPPTS WHERE (PEID=0) LOGICAL=DOWNSE
SOL 101
CEND
SEDR=... $ EXTERNAL SUPERELEMENT ID
.
.
.
BEGIN BULK
PARAM,EXTRCV,500
    
```

## F – Parameters

FACTOR Default = 10000

See [OLDSEQ](#) .

FIXEDB Default = 0

FIXEDB is used to reduce the cost of superelement checkout.

FIXEDB = -2 (SOL 101 only) is used on the initial runs when the user suspects that the superelement may contain errors and that only operations necessary for fixed-boundary solutions need be performed. In particular, the generation of the  $[G_{oa}]$  matrix is branched over in the SEKR operation and  $[P_a]$  is not generated in the SELR operation. These operations typically result in 50% of the reduction cost and are not needed in the fixed-boundary data recovery operations described in the next paragraph. After this operation has been completed, the keyword SELANG will appear in the database dictionary, indicating that the  $[P_a]$  stored there is incomplete, and should not be summed into the downstream superelement, because System Fatal Message 4252 will be issued.

FIXEDB  $\leq$  -1 (SOLs 101 and 103 only) allows uncoupled solutions for any superelement with conventional output requests.

This output may be obtained as soon as the superelement is successfully generated and reduced and does not require that the entire model be assembled. In superelement statics, the solution is the component due to the  $\{u^o\}$  vector, i.e., a fixed-boundary solution. In superelement modes, the solution is the uncoupled eigenvectors of the component. If PARAM,FIXEDB,-1 is specified in the Bulk Data or in the residual structure subcase, the modes of the residual structure will not be computed. For a printout or plotting of the component mode eigenvectors it is recommended that PARAM,FIXEDB,-1 be specified in the Bulk Data Section or above the subcase level in Case Control. If the modes of the residual structure are desired, then PARAM,FIXEDB,0 should be specified in the residual structure subcase. Exterior degrees-of-freedom listed on SECSETi and SESUP entries are free, and those on SEBSETi degrees-of-freedom are fixed. Data recovery for the residual structure should not be requested for this option.

FIXEDB = +1 (SOL 101 only) is used after the superelement has been proven valid. In the SEKR and SELR operations, it provides a branch over all operations already completed in the SEKR and SELR phases and completes the generation of the  $[G_{oa}]$  matrix

and the boundary stiffness and load matrices. It is also a method to recover the factor of the  $[K_{oo}]$  matrix if the run aborted while computing  $[G_{oa}]$ .

FKSYMFAC Default=1.0

FKSYMFAC controls the symmetrization of the follower force stiffness in SOL 106. By default, the follower force stiffness  $K_f$  is symmetrized as:

$$K_{fs} = \frac{1}{2}(K_f + K_f^T)$$

and the symmetric part  $K_{fs}$  is used for efficiency. If FKSYMFAC=0. is specified, the original follower force stiffness  $K_f$  is used. If a value of  $0. < \text{FKSYMFAC} < 1.$  is specified, the non-symmetric part of the follower force stiffness is calculated as:

$$K_{fn} = K_f - K_{fs}$$

and the ratio of unsymmetry:

$$r = \frac{\|K_{fn}\|}{\|K_f\|}$$

is compared with the user specified value of FKSYMFAC. The norm  $\|\cdot\|$  is the absolute maximum number of the matrix.

If  $r < \text{FKSYMFAC}$ , the symmetric stiffness  $K_{fs}$  is used.

If  $r > \text{FKSYMFAC}$ , the original unsymmetrical stiffness  $K_f$  is used.

For most cases, the symmetrized follower force stiffness (default) will give sufficiently accurate answers. If the influence of the non-symmetric part of the follower force stiffness is important, a value of FKSYMFAC=1.e-9 is recommended.

The parameter FKSYMFAC is applicable to SOL 106 only. All other solution sequences symmetrize the follower force stiffness. See parameter FOLLOWK for a list of solution sequences which calculate the follower force stiffness.

## 696 Parameter Descriptions

FLEXINCR Default=NO

In SOL 144, a value of YES will cause the TRIM subcases to be ignored. Instead, the TRIM Bulk Data will be used to obtain the set of Mach, Dynamic pressure and symmetry values for Unit Solutions (Flexible Increments). These data can be archived in the aeroelastic database for subsequent reuse. (Flexible Increments are always computed. This param merely avoids the TRIM subcase if these increments are all that is required.)

FLUIDMP Default = 0

In SOLs 111 and 200, under ANALYSIS=MFREQ with fluid-structure models (see “Performing a Coupled Fluid-Structural Analysis” in the *NX Nastran User’s Guide*), fluid modal participation factors are computed and output for the first n modes of the fluid defined by user parameters LFREQFL, HFREQFL, and LMODESFL, where n is specified by PARAM,FLUIDMP,n. Structural, load, and panel factors are computed and output for the first n modes of the structure defined by user parameters LFREQ, HFREQ, and LMODES, where n is specified by PARAM,STRUCTMP,n. By default, panel factors are computed for all modes specified by PARAM,STRUCTMP. PARAM,PANELMP,-1 suppresses the calculation and printout of panel participation factors. If n = -1 for STRUCTMP or FLUIDMP, then factors will be output for all modes.

By default, factors are computed for all forcing frequencies at all fluid grid points in the residual structure. If this is not desired, then the OFREQ Case Control command may be used to specify the desired forcing frequencies, and the PARTN Case Control command may be used to specify the desired fluid grid points.

FLUIDSE Default = 0

PARAM,FLUIDSE,seidf specifies a special superelement reserved for fluid elements. Frequency dependent fluid elements must still be in the residual. The newer partitioned superelements are not supported.



- FOLLOWK** Default = YES
- In SOLs 103, 105, 106, 107, 108, 109, 110, 111, 112, 115, and 116, FOLLOWK=YES (default) requests the inclusion of follower force stiffness in the differential stiffness. FOLLOWK=NO requests that the follower force stiffness not be included. For FOLLOWK=YES in SOLs 103, 107, 108, 109, 110, 111, 112, 115, and 116, a separate static subcase is required and the STATSUB command is also required in the eigenvalue subcase. In nonlinear analysis (SOL 106), the follower force is included if PARAM,LGDISP,1 is specified. FOLLOWK is ignored in SOL 106 if LGDISP is not specified.
- FRQDEPO** Default = NO
- By default, frequency-dependent elements cannot be connected to o-set degrees-of-freedom. PARAM,FRQDEPO,YES allows frequency-dependent elements to be connected to o-set degrees-of-freedom. However, results may not be reliable.
- FZERO** Default: 1.0E-4
- Tolerance for zero frequency rigid body modes. Frequencies (in Hz) below this value are considered zero. See the AUTOSPRT and WMODAL parameters.

## G – Parameters

- G,GFL** Default = 0.0
- G and GFL specify the uniform structural and fluid-damping coefficient in the formulation of dynamics problems. In coupled fluid-structure analysis, G is applied to the structural portion of the model and GFL to the fluid portion of the model. To obtain the value for the parameter G or GFL, multiply the critical damping ratio,  $C/C_o$ , by 2.0. PARAM,G and GFL are not recommended for use in hydroelastic or heat-transfer problems. If PARAM,G (or GFL) is used in transient analysis, PARAM,W3 (or W3FL) must be greater than zero or PARAM,G (or GFL) will be ignored. See “Formulation of Dynamic Equations in SubDMAP GMA” in the *NX Nastran User’s Guide*.
- GEOMU** Default = 40
- See PARAM, POST, 0.

## 698 Parameter Descriptions

GPECT Default = -1

GPECT controls the printout of all elements connected to each grid point. GPECT=+1 requests the printout. In superelement analysis, the list is printed if PARAM,CHECKOUT,YES is specified or the SEMG or SEALL Case Control command selects the superelement. GPECT=-1 suppresses the printout.

GRDPNT Default = -1

GRDPNT>-1 will cause the grid point weight generator to be executed. The default value (GRDPNT=-1) suppresses the computation and output of this data. GRDPNT specifies the identification number of the grid point to be used as a reference point. If GRDPNT=0 or is not a defined grid point, the reference point is taken as the origin of the basic coordinate system. All fluid-related masses and masses on scalar points are ignored.

The NX Nastran principal mass axes have a specific meaning and should not be confused with the principal axes discussed in text books. The principal mass axes in NX Nastran have no coupling terms between the translational masses, but most importantly, they are with respect to the basic coordinate system. See Appendix G: Grid Point Weight Generator in the *NX Nastran Basic Dynamic Analysis User's Guide* for more information.

The following weight and balance information is automatically printed following the execution of the grid point weight generator.

- Reference point.
- Rigid body mass matrix [MO] relative to the reference point in the basic coordinate system.
- Transformation matrix [S] from the basic coordinate system to principal mass axes.
- Principal masses (mass) and associated centers of gravity (X-C.G., Y-C.G., Z-C.G.).
- Inertia matrix I(S) about the center of gravity relative to the principal mass axes. Note: Change the signs of the off-diagonal terms to produce the “inertia tensor.”
- Principal inertias I(Q) about the center of gravity.

- Transformation matrix [Q] between S-axes and Q-axes. The columns of [Q] are the unit direction vectors for the corresponding principal inertias.

In superelement static or geometric nonlinear analysis, GRDPNT > -1 also specifies the grid point to be used in computing resultants, in the basic coordinate system, of external loads and single point constraint forces applied to each superelement. If GRDPNT is not a grid point (including the default value of -1), then the resultants are computed about the origin of the basic coordinate system. In superelement analysis, weights and resultants are computed for each superelement without the effects of its upstream superelements.

For the CTRIAX6, CTRIAX, and CQUADX elements, the masses and inertias are reported for the entire model of revolution but the center of gravity is reported for the cross section in the x-z plane.

GUSTAERO Default = 1

If gust loads are to be computed, for example on restart, set GUSTAERO to -1. The default is recommended if no gust loads are to be computed after the flutter analysis.

## H – Parameters

HEATSTAT Default = NO

In SOL 101, if PARAM,HEATSTAT,YES is entered, then temperatures are computed in a linear steady state heat transfer and then applied as thermal loads in a subsequent thermal stress analysis. Two subcases are required. The first defines the temperature loads, boundary conditions, and output requests for the heat transfer analysis and the second subcase defines the thermal loads, boundary conditions, and output requests for the thermal stress analysis. Thermal loads in the second subcase are requested through the command

```
TEMP(LOAD) = Heat Transfer Subcase ID
```

If this default is not acceptable, then in the heat transfer subcase add the Case Control word TSTRU=SID and in the structures subcase here

```
TEMP(LOAD) = SID
```

## 700 Parameter Descriptions

See the Case Control command, **TSTRU**. **PARAM,NESET** is no longer used. **HEATSTAT** is not supported for p-elements.

HFREQ,  
HFREQFL

Default = 1.+30

The parameters **LFREQ**, **HFREQ**, **LFREQFL**, and **HFREQFL** specify the frequency range in cycles per unit time of the modes to be used in the modal formulations. (**LFREQ** and **LFREQFL** are the lower limits and **HFREQ** and **HFREQFL** are the upper limits.) In coupled fluid-structure analysis, **HFREQ** and **LFREQ** are applied to the structural portion of the model and **HFREQFL** and **LFREQFL** are applied to the fluid portion of the model. Note that the default for **HFREQ** and **HFREQFL** will usually include all vectors computed. Related parameters are **LMODES** and **LMODESFL**.

### I – Parameters

IFP

Default = value of **PARAM,DBALL**

See **DBALL**

IFTM

Default = 0

**IFTM** specifies the method for Inverse Fourier Transformation in SOLs 111 and 146. See the *NX Nastran Aeroelastic Analysis User's Guide* for further discussion. Permissible values are 0, 1, and 2. The default value is recommended.

0: constant (default)

1: piecewise linear

2: cubic spline

INREL

Default = 0

INREL controls the calculation of inertia relief or enforced acceleration in SOLs 101, 105, and 200. INREL = -1 requests that inertia relief or enforced acceleration be performed INREL=-2 (SOL 101 only) requests automatic inertia relief, in which case no SUPORT entries are necessary.

SUPPORT or SUPORT1 entries are required on one or more grid points in the Bulk Data Section which restrain rigid body motion. The total number of degrees-of-freedom specified on SUPPORT and SUPORT1 entries must be less than or equal to six.

In SOL 105, SUPORT1, not SUPPORT, Bulk Data entries must be used to define the supported degrees-of-freedom and the SUPORT1 Case Control command may only be specified in a separate static subcase.

Loads due to unit rigid body accelerations at the point referenced by PARAM,GRDPNT are computed and then appended to the external loads. If PARAM,GRDPNT is specified in superelement analysis, then the point must be interior to the residual structure and exterior to all superelements.

Enforced accelerations, if desired, are input on the DMIG,UACCEL Bulk Data entry (not supported for the INREL=-2 option).

INREL is not supported in models which include linear contact (BCSET case control command exists). INREL is supported in models which include glue conditions when the sparse solver is used (default).

If INREL=0, a static analysis is performed.

See also:

“Data Recovery Operations in SubDMAP SEDISP” in the *NX Nastran User’s Guide*

“Buckling Analysis in SubDMAP MODERS” in the *NX Nastran User’s Guide*

“Automatic Inertia Relief” in the *NX Nastran User’s Guide*

## 702 Parameter Descriptions

INRLM Default = 0

INRLM=-1 requests that component (superelement) inertia relief shapes be appended to the generalized dynamic modes as described in the NX Nastran User's Guide, Solution Sequences chapter, Superelement Analysis section. If this feature is used, the component must have at least six independent rigid body mass degrees-of-freedom; otherwise, duplicate modes will be generated, causing a singular matrix.

IRES Default = -1

IRES=1 requests that the residual load vectors RULV and RUOV be output in all solution sequences. In superelement analysis, the parameters PRPA and PRPJ may also be used to request output of the partial load vectors  $\{P_a\}$  and  $\{P_j\}$ , respectively. In geometric nonlinear analysis, PARAM,IRES,1 will cause the printing of the residual vector as follows:

$$\{\Delta P_f\} = [K_{ff}] \left\{ u_f^{n+1} - u_f \right\} + \{F_f\} - \{P_f\}$$

ITAPE Default = -1

ITAPE specifies the output status of the DSCMR matrix in SOLs 101, 103, and 105; and the DSCMCOL table and the DSCM2 matrix in SOL 200. (See the OUTPUT2 and OUTPUT4 module descriptions in the *NX Nastran DMAP Programmer's Guide*.)

IUNIT Default = 11

IUNIT specifies the FORTRAN unit number on which the DSCMR matrix in Design Sensitivity SOLs 101, 103, and 105 and the DSCMCOL table and the DSCM2 matrix in SOL 200 will be written. (See the OUTPUT2 and OUTPUT4 module descriptions in the *NX Nastran DMAP Programmer's Guide*.)

**K – Parameters**

- KDAMP, KDAMPFL**      Default = 1
- If **KDAMP** or **KDAMPFL** is set to -1, viscous modal damping is entered into the complex stiffness matrix as structural damping. In coupled fluid-structure analysis, **KDAMP** is applied to the structural portion of the model and **KDAMPFL** to the fluid portion of the model. See “Formulation of Dynamic Equations in SubDMAP GMA” in the *NX Nastran User’s Guide*.
- KDIAG**      Default = -1.0 (SOLs 106 and 153 only)
- In nonlinear static analysis, **KDIAG** may be used to eliminate spurious mechanisms and singularities in the nonlinear stiffness matrix. The absolute value of **KDIAG** will be added to some or all of the diagonal terms in the nonlinear stiffness matrix as follows:
- If **KDIAG** < 0.0, then add the absolute value of **KDIAG** to the null diagonal terms only. (Default)
- If **KDIAG** = 0.0, then no action is taken.
- If **KDIAG** > 0.0, then add the value of **KDIAG** to all diagonal terms.
- KGGCPCH**      Default=0
- Requests the final contact stiffness matrix in DMIG format from a SOL 101 linear contact solution. The solver writes the contact stiffness matrix from the final contact iteration (not necessarily converged) into a PUNCH file in the format required for DMIG (Direct Matrix Input at Grids).
- If **KGGCPCH**=0, contact stiffness matrix is not output.  
If **KGGCPCH**=1, contact stiffness matrix is output.
- K6ROT**      Default = 100.0
- K6ROT** specifies the stiffness to be added to the normal rotation for CQUAD4 and CTRIA3 elements. This is an alternate method to suppress the grid point singularities, and is intended primarily for geometric nonlinear analysis. A value between 1.0 and 100.0 is recommended to suppress singularities. A large value may be required in nonlinear and eigenvalue analyses. This parameter is ignored for CQUADR, CTRIAR, CQUAD8, and CTRIA6 elements. **K6ROT** is forced to 0 when only membrane elements exist.

## L – Parameters

LAMLIM Default = 0.001

LAMLIM is used by the NX Response Dynamics Capability to identify rigid body modes for computing the viscous damping ratio matrix which is written to the OP2 file when RSOPT =1. The frequencies below the LAMLIM value will be considered a rigid body mode. The column and rows of the viscous damping ratio matrix associated with the rigid body will be set to zero.

LANGLE Default = 1

LANGLE specifies the method for processing large rotations in nonlinear analysis. By default, large rotations are computed with the gimbal angle method in nonlinear analyses SOLs 106, 129, 153, and 159 with geometric nonlinearity (PARAM,LGDISP,1). If PARAM,LANGLE,2 is specified, then they are computed with the Rotation Vector method. The value of LANGLE cannot be changed in a subsequent restart.

LFREQ, Default = 0.0

LFREQFL

See HFREQ, HFREQFL.

LGDISP Default = -1

If LGDISP + 1, all the nonlinear element types that have a large displacement capability in SOLs 106, 129, 153, and 159 (see “Element Summary – Small Strain Elements” in the *NX Nastran Element Library* under “Geometric Nonlinear”) will be assumed to have large displacement effects (updated element coordinates and follower forces). If LGDISP = -1, then no large displacement effects will be considered.

SOLs 601 and 701 support LGDISP = +1 or -1 only.

Deformation dependent loading in SOLs 601 and 701 is controlled by the LOADOPT parameter in the NXSTRAT Bulk Data entry.

If LGDISP = 2, then follower force effects will be ignored but large displacement effects will be considered.

If LGDISP  $\geq$  0, then the differential stiffness is computed for the linear elements and added to the differential stiffness of the nonlinear elements.



|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LGSTRN              | <p>LGSTRN is supported by SOLs 601 and 701 only.</p> <p>If LGSTRN = 0, small strains are assumed. (Default)</p> <p>If LGSTRN = 1, large strains, displacements and rotations are assumed (i.e. LGDISP is automatically set to 1). Large strain formulation is only applicable to 2D axisymmetric, plane strain, 3D solid and single layer shell elements (except 8-node shell).</p>                                                                                                                                                                                                  |
| LMFACT              | <p>Default = 1.0E+6</p> <p>Scale factor used to adjust the stiffness matrix of Lagrange rigid elements (see the case control command "RIGID" for more information). If their stiffness is too small, the results will be inaccurate. If their stiffness is too large, numerical problems can occur (fatal errors during the solution may occur). Bests results are obtained when their stiffness is similar to the rest of the model.</p>                                                                                                                                            |
| LMODES,<br>LMODESFL | <p>Default = 0</p> <p>LMODES and LMODESFL are the number of lowest modes to use in a modal formulation. In coupled fluid-structure analysis, LMODES specifies the lowest modes of the structural portion of the model and LMODESFL the modes of the fluid portion of the model. If LMODES (or LMODESFL) = 0, the retained modes are determined by the parameters LFREQ and HFREQ (or LFREQFL and HFREQFL).</p> <p>In SOL 103, LMODES may be used to reduce the number of eigenvectors to be processed in data recovery which may significantly reduce the CPU and storage costs.</p> |
| LOADU               | <p>Default = -1</p> <p>See PARAMAM, POST, 0.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| LOOPID              | <p>Default = 0</p> <p>LOOPID defines the desired loop number for initial conditions in a restart of SOLs 106, 129, 153, and 159. By default in SOLs 106 and 153 the restart proceeds from the last loop ID of the subcase defined by SUBCASID or SUBID. In SOLs 106, and 153 PARAM,SUBID or SUBCASID may also be specified.</p>                                                                                                                                                                                                                                                      |
| LSTRN               | <p>Replaced by the STRAIN Case Control command.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**M – Parameters**

**MACH** Default = 0.0

Mach number. If more than one Mach number was used to compute aerodynamic matrices, the one closest to MACH will be used in dynamic aeroelastic response analysis. The default causes the matrices computed at the lowest MACH number to be used.

**MAXLP** Default = 5

MAXLP specifies the maximum number of iterations for element relaxation and material point subincrement processes in SOLs 129 and 159. MAXLP is 10 in SOLs 106 and 153 and cannot be changed by the user.

**MAXRATIO** Default = 1.E7

Default = 1E10 if glue, linear contact or Lagrange rigid elements are present in the model.

The ratios of terms on the diagonal of the stiffness matrix to the corresponding terms on the diagonal of the triangular factor are computed. If, for any row, this ratio is greater than MAXRATIO, the matrix will be considered to be nearly singular (having mechanisms). If any diagonal terms of the factor are negative, the stiffness matrix is considered implausible (nonpositive definite). The ratios greater than MAXRATIO and less than zero and their associated external grid identities will be printed out. The program will then take appropriate action as directed by the parameter BAILOUT.

By default, in the superelement solution sequences the program will terminate processing for that superelement. A negative value for BAILOUT directs the program to continue processing the superelement. Although forcing the program to continue with near-singularities is a useful modeling checkout technique, it may lead to solutions of poor quality or fatal messages later in the run. It is recommended that the default values be used for production runs. A related parameter is ERROR.

The value -1 of BAILOUT causes the program to continue processing with near singularities and a zero value will cause the program to exit if near singularities are detected.

In SOLs 101 through 200 when PARAM,CHECKOUT,YES is specified, PARAM,MAXRATIO sets the tolerance for detecting

multipoint constraint equations with poor linear independence. (See “Superelement Analysis” in the *NX Nastran User’s Guide*.)

BAILOUT and MAXRATIO may be specified in the Case Control Section in order to provide different values between superelements but not between different boundary conditions.

MDOF See the parameter MGRID.

MECHFIL Default: 1.0E-6

Description: Criterion for discarding massless mechanism modes with small generalized mass. A smaller value will result in more marginal constrained modes being retained. This parameter is associated with the MECHFIX parameter.

MECHFIX Default=AUTO

Control for fixing the massless mechanism problem. This capability is provided automatically by default. It is executed only when the solution does not provide answers because of symptoms consistent with the presence of massless mechanisms. If MECHFIX is set to YES, the constrained modes are removed before attempting a solution. When set to NO, this capability is blocked, and the eigensolution portion uses the rule of three failed shifts and a fatal exit. See the parameter MMFIL.

MECHPRT Default=NO

For SOL 103 only. If massless mechanisms are found, the constrained modes are printed with a format similar to eigenvectors when this parameter is set to YES. They are labeled CONSTRAINED MODE, and are numbered sequentially. Grid points with only zero values in a mode are not printed. This parameter should be used when performing initial checkout of a model with the goal to remove all massless mechanisms before starting production analysis. The number of each “mode” matches the corresponding GID,C pair in the high ratio message. If there are many (thousands) of such modes, the output file will be large. There is no method to plot these shapes.

## 708 Parameter Descriptions

- MESH** Default = NO
- If MESH=YES is specified, then a summary of the shading status and the subelement mesh for each CHBDYi element referencing a VIEW Bulk Data entry is printed.
- METHCMRS** Default = 0
- In dynamic analysis (SOLs 103, 107, 108, 109, 110, 111, 112, 145, 146, and 200), METHCMRS specifies the set identification number of an EIGR or EIGRL entry to be used in the computation of the normal modes on the o-set (fixed boundary modes) or v-set (mixed boundary modes) of the residual structure depending on the b-set and/or c-set entries.
- These modes are calculated for a component mode reduction of the residual structure when q-set exists. If no q-set exists in the residual structure, a component modal reduction is not performed.
- The case control entry RSMETHOD has the same effect as the METHCMRS parameter. If both of them exist, the RSMETHOD takes precedence. If neither exists, a warning message is issued since only Guyan reduction will be executed and the results are poor. In the latter case, the residual structure fixed boundary normal modes or mixed boundary normal modes will be computed based on the METHOD Case Control command and the appropriate b-set and c-set entries.
- MGRID** The parameters MGRID and MDOF only apply to the NX solution monitor when a direct frequency response (SOL 108) or a direct transient response (SOL 109) is used. MGRID selects the grid (node) ID, and MDOF selects the DOF (123456) for plotting the solution progress within the NX user interface. By default, the first dof in the L-set is used (See Appendix C in the NX Nastran Basic Dynamic Analysis User's Guide for a definition of the L-set).
- MINIGOA** Default = No
- Allows for the reduction in the amount of disk space used when using superelements. When this parameter is set to YES, the transformation matrix GOA will contain terms only for the degrees-of-freedom in the U5 (USET, USET1, SEUSET, SEUSET1) set. This can allow for a significant reduction in the amount of disk space used by the database. The limitation of using this approach is that data recovery will be available only for the degrees-of-freedom and elements connected to them.

- MMFIL** Default = 1.0E-10  
 Filter value used to distinguish between massless mechanism modes and rigid body modes. The default value has been found to be effective; a smaller value may discard rigid body modes.
- MODACC** Default = -1  
 MODACC = 0 selects the mode acceleration method for data recovery in dynamic analysis. See “Formulation of Dynamic Equations in SubDMAP GMA” in the *NX Nastran User’s Guide* for further discussion.  
 MODACC = 1 is the same as MODACC = 0 except if SUPORTi entries are present then the displacements are corrected for rigid body motion and the local flexibility at the SUPORTi degrees-of-freedom.  
 MODACC ≥ 0 is not recommended for use in hydroelastic problems.
- MODEL** Default = 0  
 This parameter also allows several models to be stored in the same graphics database created by PARAM,POST,0.
- MODTRK** Default=2  
 This parameter is used in a rotor dynamics solution to select the mode tracking method.  
 = 1 Old method is used. Outer loop over rotor speed, inner loop over degrees of freedom. This method does not work well for the direct method (SOL 107) because there, new solutions can come in and old solutions can leave the solution space.  
 = 2 New method is used. Outer loop over degrees of freedom, inner loop over rotor speed. Process is repeated until all solutions have been tracked. The process is rather complex and some parameters are required.
- The following parameters apply to MODTRK=2:
- MTRFMAX** (Default=0.0) Maximum frequency to consider. If zero, all frequencies are used. With this parameter high frequency solutions can be filtered out

## 710 Parameter Descriptions

|         |                                                                                                                                                                                                                                                                                 |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MTRRMAX | (Default=0.0) Maximum absolute value of real part of solution to consider. If zero, all real part values are used. With this parameter solutions with high real parts can be filtered out. It can be useful to disregard numerical solutions which are not physically relevant. |
| MTREPSR | (Default=0.05) Relative tolerance for the real part (eigenfrequency). When a root has been found in the extrapolation, a check is made if the correct solution has been found. If the present value is outside of this tolerance, the solution is skipped                       |
| MTREPSI | (Default=0.01) Relative tolerance for the imaginary part (eigenfrequency). When a root has been found in the extrapolation, a check is made if the correct solution has been found. If the present value is outside of this tolerance, the solution is skipped                  |
| MTRFCTD | (Default=0.5) Threshold value for damping. This is in order to disregard the real part for solutions with low damping.                                                                                                                                                          |
| MTRSKIP | (Default=5) If roots are not found for a specific speed, this speed is skipped and the next speed is analyzed. If there are more than MTRSKIP values missing, the curve is not considered. The solution will be marked as unused and will be considered in the next loop.       |

If the tolerances MTREPSR and MTREPSI are chosen too small, the solution may be lost for some speed values. If the tolerance is too large, there may be lines crossing from one solution to another. Problems may occur for turbines with many elastic blades with equal frequencies. Then there will be clusters of lines and crossings may occur.

|      |                              |
|------|------------------------------|
| MPCX | Default = 0                  |
|      | See <a href="#">OLDSEQ</a> . |

### N – Parameters

|        |                                                                                                                                                                                                                                                                                           |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NASPRT | Default = 0                                                                                                                                                                                                                                                                               |
|        | NASPRT specifies how often data recovery is performed and printed in SOL 200. By default, SOL 200, in addition to performing an analysis and optimization, will perform full data recovery operations at the initial design cycle (cycle 0) and upon completion of the last design cycle. |

If  $NASPRT > 0$ , then data recovery operations are performed at the initial design cycle; at every design cycle that is a multiple of NASPRT; and at the last design cycle. For example, if `PARAM,NASPRT,2` and the maximum number of design

iterations requested is 5, then data recovery is obtained at the design cycles 0, 2, 4, and 5.

If  $NASPRT < 0$ , then no data recovery operations are performed.

|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NDAMP   | <p>Default = 0.01</p> <p>In SOLs 129 and 159, numerical damping may be specified for the METHOD="ADAPT" on the TSTEPNL entry (two-point integration) in order to achieve numerical stability. A value of zero requests no numerical damping. The recommended range of values is from 0.0 to 0.1.</p>                                                                                                                                                                                                                                          |
| NEWSEQ  | Renamed OLDSEQ.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| NINTPTS | <p>Default = 10</p> <p>NINTPTS requests interpolation over the NINTPTS elements closest to each grid point. NINTPTS=0 requests interpolation over all elements, which can be computationally intensive. Related parameters include BIGER, CURV, NUMOUT, OG, OUTOPT, S1G, S1M, S1AG and S1AM.</p>                                                                                                                                                                                                                                              |
| NLAYERS | <p>Default=5 (minimum=1, maximum=12) (SOLs 106, 129, 153, and 159)</p> <p>NLAYERS is used in material nonlinear analysis only and is the number of layers used to integrate through the thickness of CQUAD4 and CTRIA3 elements with isotropic material properties. Set NLAYERS=1 for efficiency if no bending is selected (MID2=0 or -1 on all PSHELL data entries). Do not specify NLAYERS=1 if MID2 is greater than zero. A larger value of NLAYERS will give greater accuracy at the cost of computing time and storage requirements.</p> |
| NLHTLS  | <p>Default=0</p> <p>See Remarks under Case Control command, <a href="#">TSTRU.</a></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## 712 Parameter Descriptions

NLMAX Default = 60

The number of suspected massless mechanisms is determined from the number of high ratio messages. If this number exceeds NLMAX, the number of trial massless mechanisms is reduced to NLMAX. This is a means to avoid an expensive run when there may be thousands of massless mechanisms due to modeling errors. The value of this parameter may be increased on initial runs where it is possible that there are many high ratio DOFs in order to see them all at once.

NLMIN Default = 10

If there are only a few high ratio DOFs there may be more mechanism modes present. More trial mechanism mode vectors are used, and those that do not indicate true problems are discarded. A smaller value could be considered on a stable mode undergoing small modeling changes.

NLTOL Default = 2 (SOL 106 only)

Default = 0 (SOL 153, nonlinear heat transfer)

NLTOL establishes defaults for the CONV, EPSU, EPSP and EPSW fields of NLPARM Bulk Data entry for nonlinear static and heat transfer analysis according to the following table.

| NLTOL | Level of Accuracy  |
|-------|--------------------|
| 0     | Very high          |
| 1     | High               |
| 2     | Engineering Design |
| 3     | Preliminary Design |

See the NLPARM entry for further details and corresponding default NLPARM field values.

NMLOOP Default = 0

In SOLs 106 and 153, nonlinear static analysis, normal modes will be computed with the updated nonlinear stiffness if PARAM,NMLOOP is not equal to zero. The nonlinear normal modes will be computed at the last iteration loop of each subcase in which a METHOD command appears.



|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NOCOMPS | <p>Default = +1</p> <p>NOCOMPS controls the computation and printout of composite element ply stresses and failure indices. If NOCOMPS = 1, composite element ply stresses and failure indices will be printed. If NOCOMPS = 0, the same quantities plus element stresses for the equivalent homogeneous element will be printed. Composite stress recovery is not available for complex stresses.</p> <p>If NOCOMPS = -1, the composite element ply stresses and failure indices output will be suppressed while the element stresses for the equivalent homogeneous element will be printed.</p> <p>Remember, homogenous stresses are based upon a smeared representation of the laminate's properties and in general will be significantly different than the more accurate lamina stresses available from PCOMP-based elements.</p> |
| NOELOF  | <p>Default = -1</p> <p>If NOELOF &gt; 0, then the grid point forces (GPFORCE Case Control command) are computed along the edges of the two-dimensional elements. The default value will suppress this output.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| NOELOP  | <p>Default = -1</p> <p>If NOELOP &gt; 0, then the sum of the grid point forces (GPFORCE Case Control command) are computed parallel to the edges of adjacent elements. The effect of CBAR element offsets is not considered in the calculation of the forces. The default value will suppress this output.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| NOFISR  | <p>Default = 0</p> <p>NOFISR controls the printout of the composite failure indices and strength ratios. If NOFISR &gt; 0, the failure indices and strength ratios will not be printed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| NOGPF   | <p>Default = 1</p> <p>NOGPF controls the printout of grid point forces (GPFORCE Case Control command). NOGPF &gt; 0 specifies that the grid point forces are to be printed. NOGPF &lt; 0 suppresses the printing of the grid point forces.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## 714 Parameter Descriptions

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NOMSGSTR                       | Default = 0<br><br>If NOMSGSTR = -1, the MSGSTRES module will be skipped even though Bulk Data entries provided for it.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| NONCUP                         | Default = -1<br><br>In SOLs 111 and 112, NONCUP selects either a coupled or noncoupled solution algorithm in modal frequency and transient response analyses. See “Frequency Response and Random Analysis in SubDMAP FREQRS” and “Transient Response in SubDMAPs SEDTRAN and SEMTRAN” in the <i>NX Nastran User’s Guide</i> . By default, the noncoupled solution algorithm is selected unless the dynamic matrices KHH, MHH, or BHH have off-diagonal terms. NONCUP = -1 requests the coupled algorithm and -2 the uncoupled algorithm regardless of the existence of off-diagonal terms in the dynamic matrices. User Information Message 5222 indicates which algorithm is used in the analysis. |
| NORM                           | Default = 0<br><br>See EIGD.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| NQSET                          | Default = 0<br><br>If NQSET > 0, and the PARAM entry is in Case Control, all part superelements that do not contain QSET entries, or are not referenced by SENQSET entries in the main Bulk Data Section, have NQSET generalized coordinates assigned to them. These QSET variables are functionally equivalent to those generated by SENQSET entries.                                                                                                                                                                                                                                                                                                                                              |
| NUMOUT,<br>NUMOUT1,<br>NUMOUT2 | See S1, S1G, S1M.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

### O – Parameters

|    |                              |
|----|------------------------------|
| OG | Default = 0<br><br>See CURV. |
|----|------------------------------|

OGEOM Default = YES

See PARAM, POST < 0.

OLDSEQ Default = -1 for non-iterative distributed parallel solutions

Default = 5 for iterative solutions using parallel methods  
(NASTRAN ITER = 1 and system (231) > 0)

Default = 6 if Super = 2

OLDSEQ selects from the following options for resequencing:

-1 : No resequencing is performed.

1: Use the active/passive option.

2: Use the band option.

3: For the active/passive and the band option select the option giving the lowest RMS value of the active columns for each group of grid points.

4: Use the wavefront (Levy) option.

5: Use the Gibbs-King option even if the CPU estimate is higher than for nonsequencing.

6: Use the automatic nested dissection option even if the CPU estimate is higher than for no resequencing. See the following SUPER=2 description.

8: Semiautomatic selection. The program will compute estimates for two options that are suitable for the decomposition method selected by the PARALLEL and SPARSE keywords on the NASTRAN statement and select the option with the lowest estimate. The following table shows the suitable options for each decomposition method.

| Decomposition Method | Suitable Options |
|----------------------|------------------|
| regular              | 1 and 4          |
| parallel             | 2 and 5          |
| sparse               | 6 and 7          |

9: The Extreme partitioning is selected to generate domains for DMP solutions.

## 716 Parameter Descriptions

10: METIS with supernodal or grid compression is selected to generate domains for DMP solutions (see restrictions below).

11: MLV with supernodal or grid compression is selected to generate domains for DMP solutions.

110: Metis with supernodal compression is selected to generate domains for DMP solutions.

111: MLV with supernodal compression is selected to generate domains for DMP solutions.

210: Metis with grid compression is selected to generate domains for DMP solutions.

211: MLV with grid compression is selected to generate domains for DMP solutions.

In the GPARTN and GPARTNS modules, if at least two processors are available and both supernodal and grid compression are requested (OLDSEQ=10 or 11), then GPARTN/GPARTNS selects the compression resulting in the smallest global boundary size. If only one processor is available, the default is supernodal compression.

The default OLDSEQ value is 11. Only the MLV is supported for multilevel RDMODES. System(294)=1 requests that diagnostic information be printed to the f06 file.

Note that the wavefront option does not support superelement resequencing or starting nodes. Also note that the automatic nested dissection option uses starting nodes only to establish the root of the initial connectivity tree.

If the value of OLDSEQ is changed in superelement analysis, a SEALL=ALL restart is required.

PARAM,FACTOR is used to generate the sequenced identification number (SEQID) on the SEQGP entry as follows:

$$SEQID=FACTOR*GRP+SEQ$$

where

SEQ = generated sequence number

and

GRP = group sequence number

If  $GRP=0$ , use  $GRP(MAX)+1$  where  $GRP(MAX)$  is the largest group sequence number in the database.

PARAM, MPCX controls whether the grid point connectivity created by the MPC, MPCADD, and MPCAX entries and/or the rigid element entries (e.g., RBAR) is considered during resequencing:

-1: Do not consider the connectivity of the MPC, MPCADD, MPCAX, or rigid element entries.

0: Consider the connectivity of the rigid element entries only. (Default).

>0: Consider the connectivity of the rigid element entries and the MPC, MPCADD, and MPCAX entries with the set identification number set to the value of this parameter.

PARAM, SEQOUT controls the output options as follows:

0: Do not generate any printed or punched output for the new sequence. (Default)

1: Print a table of the internal/external sequence in internal order.

2: Write the SEQGP entries to the PUNCH file.

3: Perform SEQOUT=1 and 2.

PARAM, START specifies the number of the grid points at the beginning of the input sequence. The input sequence will be the sorted order of the grid point numbers including the effect of any SEQGP entries input by the user. A single SEQGP entry can be input to select the starting point for the new sequence. Otherwise, the first point of lowest connectivity will be used as the starting point.

If PARAM, SUPER < 0, all grid points from the connection table that are not part of the group currently being processed are deleted. This option provides for sequencing only the interior points of a superelement. If any superelements are present, the residual structure is not resequenced. If all the grid points are in the residual structure, they are resequenced.

If PARAM, SUPER = 0 or 1, all grid points in the connection table are considered. This option provides for the recognition of passive columns.

## 718 Parameter Descriptions

If PARAM,SUPER=2, then all points that are connected to multipoint constraints (via MPC entries) or rigid elements (e.g., the RBAR entry) are placed in a special group at the end of the sequence. This option also forces OLDSEQ=6 and may not be selected with other values of OLDSEQ. This option is intended primarily for models that have many active columns due to MPCs or rigid elements; e.g., a model with disjoint structures connected only by MPCs or rigid elements.

OMAXR Default = 2\*BUFFSIZE

OMAXR specifies the maximum record length of data written by the OUTPUT2 module under PARAM,POST,<0 and PARAM,OPTEXIT,\*4. BUFFSIZE is a machine-dependent value defined in the *NX Nastran Installation and Operations Guide*. For further information, see the OMAXR parameter description under the OUTPUT2 module description in *NX Nastran DMAP Programmer's Guide*.

OMID Default = NO

To print or punch the results in the material coordinate system, set the parameter OMID to yes. Applicable to forces, strains, and stresses for CTRIA3, CQUAD4, CTRIA6, CQUAD8, CQUADR and CTRIAR elements. Other elements and outputs are not supported. This capability is not supported by pre-processors (xdb and OP2 output do not change) and grid point stress output which assume output is in the element coordinate system.

See Also

“Using the OMID Parameter to Output Shell Element Results” in the *NX Nastran Element Library*

OPGTKG Default = -1

OPGTKG > -1 prints the matrix for the interpolation between the structural and aerodynamic degrees-of-freedom.

OPPHIB Default = -1

In the flutter (SOLs 145 and 200) and aeroelastic (SOLs 146 and 200) solution sequences, OPPHIB > -1 and a DISPLACEMENT request in the Case Control Section will output the real vibration modes with the structural displacement components transformed to the basic coordinate system.

OPPHIPA Default = -1

In the flutter (SOLs 145 and 200) and the dynamic aeroelastic (SOL 146) solution sequences, OPPHIPA > -1 and a DISPLACEMENT command in the Case Control Section will output the real vibration modes at all degrees-of-freedom, including the aerodynamic degrees-of-freedom.

OPTEXIT Default = 0

In SOL 200, especially during the checkout of the analysis model and the design optimization input data (design model), it may be desirable to exit the solution sequence at certain points before proceeding with full optimization. OPTEXIT may be set to values of 1 through 7 and -4. The DSAPRT Case Control command overrides the specification of PARAM,OPTEXIT,4, -4, or 7. The description of OPTEXIT values follow.

| OPTEXIT Value | Description                                                                                                                                                                                 |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0             | Do not exit. Proceed with optimization.                                                                                                                                                     |
| 1             | Exit after the initialization of the analysis and design model but before finite element analysis begins.                                                                                   |
| 2             | Exit after finite element analysis and initial design response and shape basis vector processing.                                                                                           |
| 3             | Exit after design constraint evaluation and screening.                                                                                                                                      |
| 4             | Exit after design sensitivity analysis and print the matrix of design sensitivity coefficients (DSCM2). This is equivalent to the DSAPRT (UNFORM,END=SENS) Case Control command.            |
| -4            | Exit after design sensitivity analysis and write the data blocks related to sensitivity coefficients (DSCM2 and DSCMCOL) to an external file using the OUTPUT2 and OUTPUT4 modules. This is |

## 720 Parameter Descriptions

|   |                                                                                                                                                                                                                                       |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | equivalent to the DSAPRT (NOPRINT,EXPORT END=SENS) Case Control command. See related parameters ITAPE, IUNIT, and OMAXR.                                                                                                              |
| 5 | Exit after the first approximate optimization of the design model.                                                                                                                                                                    |
| 6 | Exit after the first update of the analysis model based on the first approximate optimization of the design model.                                                                                                                    |
| 7 | Compute and output design sensitivity coefficients at the end of normal program termination: hard convergence, soft convergence, or maximum design cycles. This is equivalent to the DSAPRT (UNFORM,START=LAST) Case Control command. |
| 8 | Exit after writing out the data blocks and matrices requested for the NX Model Update product. The documentation for this product is included in the NX Help Library.                                                                 |

OPTION Default = ABS

See SCRSPEC.

OSWELM Default=1 000 000

This is the offset for identification numbers of generated m-set constraints in CWELD elements. The numbering starts with OSWELM+1. For each CWELD element, two sets of RWELD constraints are generated if MSET=ON is specified. See MSET and the Bulk Data entry PWELD.

OSWPPT Default= 1 000 000

This is the offset for grid identification numbers of GA and GB in CWELD elements. The numbering starts with OSWPPT+1. For each CWELD element, a pair of grid points GA and GB is generated internally if the formats GRIDID or ELEMID are used and if no identification numbers for GA and GB are specified. See the Bulk Data entry CWELD.

OUGCORD See POST.



OUNIT1      Default = Value of OUNIT2  
                  See POST.

OUNIT2      Default = 12  
                  See POST.

OUTOPT      Default = 0  
                  See CURV.

## P – Parameters

PANELMP     Default = 0  
                  See FLUIDMP

PATVER      Default = 3.0  
                  See PARAM, POST, -1.

PDRMSG      Default = 1  
                  PDRMSG controls the printout of messages associated with deformed plots, including error messages. PDRMSG = 0 suppresses the printout. Contour values will not be displayed unless the default value is used.

PEDGE        Default = 0  
                  Cubic edges of p-elements can be created with the FEEDGE Bulk Data entry by defining two vertex grids and two points in between. By default, the two points on an edge are moved to the parametric 1/3 and 2/3 locations of the edge. For PEDGE = 1 the points are not moved.

PKRSP        Default = -1  
                  If PKRSP=0, the magnitude of the output quantities at the time of peak acceleration of the modal variables is output. The SRSS technique that is used for response spectra is described in “Shock and Response Spectrum Analysis” in the *NX Nastran Advanced Dynamic Analysis User’s Guide*. This option is available only for modal transient analysis.

## 722 Parameter Descriptions

PLTMSG            Default = 1

PARAM,PLTMSG,0 suppresses messages associated with undeformed plot requests, including error messages.

POST             Default = 1

**PARAM,POST,0**, then the following parameters and discussion apply:

The data blocks often used for pre- and postprocessing will be stored in the database and also converted, by the DBC module (see the *NX Nastran DMAP Programmer's Guide*) to a format suitable for processing. These data blocks include input data related to geometry, connectivity, element and material properties, and static loads; they also include output data requested through the Case Control commands OLOAD, SPCF, DISP, VELO, ACCE, THERMAL, ELSTRESS, ELFORCE, FLUX, GPSTRESS, GPFORCE, ESE, GPSDCON, and ELSDCON.

The converted data is written to logical FORTRAN units, which may be assigned to physical files in the File Management Section. The FORTRAN unit numbers are specified by the parameters GEOMU, POSTU, and LOADU. By default, all data is written to the logical FORTRAN unit indicated by GEOMU. If LOADU > 0, static load data may be diverted to another unit indicated by LOADU. If POSTU > 0, then output data requested with the Case Control commands listed above will be diverted to the logical unit indicated by POSTU. See "Database Concepts" in the *NX Nastran User's Guide* for the procedure for assigning physical files.

By default, if converted data already exists in the files indicated by GEOMU, POSTU, and LOADU, then the DBC module will overwrite the old data. If this is not desirable, then PARAM,DBCOVWRT,NO must be entered. The parameters MODEL and SOLID may be used to store more than one model and solution in the graphics database. These parameters are not supported by MSC.Patran.

PARAM,DBCDIAG > 0 requests the printing of various diagnostic messages from the DBC module (see *NX Nastran DMAP Programmer's Guide*) during data conversion. By default, no messages are printed.

**PARAM,POST,<0**, then the following parameters and discussion apply:

PARAM,POST,-1 outputs the appropriate files for the MSC.Patran NASPAT program. PARAM,POST,-2 outputs the appropriate files for the NX and I-DEAS Dataloader program. PARAM,POST,-4 outputs the files indicated below along with OPHIG for the MSC\_NF interface by LMS International. PARAM,POST,-5 outputs the files indicated in the table below along with LAMA and OPHG1 for the FemTools interface by Dynamic Design Solutions. PARAM, POST=-4 and -5 are intended for SOL 103 only.

For SOL 601,N or SOL 701, PARAM,POST,-2 must be specified to generate both geometry and results data blocks in the op2 file. PARAM,POST,-1 must be specified to generate only results data blocks. Otherwise, no op2 file is generated.

An OUTPUT2 file for FORTRAN unit 12 in binary format is automatically created in the same directory and with the same name as the input file and with the extension “.OP2”. For example, if the input file is fender.dat then the OUTPUT2 file will be called fender.OP2.

An ASSIGN statement is required in the FMS Section only if neutral file format is desired as follows:

ASSIGN OP2='filename of FORTRAN file' FORM

Geometry data blocks are output with PARAM,OGEOM,YES (except with PARAM,PATVER<3.0) and are written to a FORTRAN unit specified by PARAM,OUNIT1 (Default = OUNIT2) for PARAM, POST = -1, -2, and -4. PARAM,OUNIT2K (default = 91) specifies the unit number for KELM and KDICT with PARAM,POST,-5. PARAM,OUNIT2M (default = 92) specifies the unit number for MELM and MDICT with PARAM,POST,-5. See the following table for the specific geometry data blocks written for different values for POST.

See also the PARAM,POSTEXT description for additional data blocks written to the.OP2 file.

| POST |     |     |    | Geometry Data Block | Description                              |
|------|-----|-----|----|---------------------|------------------------------------------|
| -1   | -2  | -4  | -5 |                     |                                          |
| YES  | NO  | NO  | NO | GEOM1S,<br>GEOM1VU  | Grid Point Definitions<br>(Superelement) |
| NO   | YES | YES | NO | CSTM                | Coordinate<br>System Transformations     |
| NO   | YES | YES | NO | GPL                 | Grid Point List                          |
| NO   | YES | YES | NO | GPDT                | Grid Point Definitions                   |
| NO   | YES | YES | NO | EPT                 | Element Properties                       |
| NO   | YES | YES | NO | MPT                 | Material Properties                      |
| NO   | YES | YES | NO | GEOM2               | Element Definitions                      |
| NO   | YES | NO  | NO | GEOM3               | Load Definitions                         |
| NO   | YES | NO  | NO | GEOM4               | Constraint Definitions                   |

## 724 Parameter Descriptions

|                                         |     |     |     |                    |                                    |
|-----------------------------------------|-----|-----|-----|--------------------|------------------------------------|
| YES                                     | NO  | NO  | NO  | DIT                | Dynamic Table Input                |
| YES                                     | NO  | NO  | NO  | DYNAMICS           | Dynamic Loads Definition           |
| NO                                      | NO  | YES | YES | KDICT              | Element Stiffness Dictionary       |
| NO                                      | NO  | YES | YES | KELM               | Element Stiffness Matrices         |
| NO                                      | NO  | YES | YES | MDICT              | Element Mass Dictionary            |
| NO                                      | NO  | YES | YES | MELM               | Element Mass Matrices              |
| NO                                      | NO  | NO  | NO  | ECTS               | Element Connections                |
| YES                                     | NO  | NO  | NO  | VIEWTB             | View Element Table                 |
| YES                                     | YES | NO  | NO  | EDOM               | Design Model Input                 |
| YES                                     | NO  | NO  | NO  | GEOM2S,<br>GEOM2VU | Same as GEOM2 for<br>superelements |
| YES                                     | NO  | NO  | NO  | CSTMS              | Same as CSTM for<br>superelements  |
| YES                                     | NO  | NO  | NO  | EPTS               | Same as EPT for<br>superelements   |
| YES                                     | NO  | NO  | NO  | MPTS               | Same as MPT for<br>superelements   |
| Note: *With PARAM,PATVER,v3.0 (default) |     |     |     |                    |                                    |

PARAM,OMACHPR,NO (default) selects the pre-MS.C.Nastran Version 69 format for AXIC, BGPDT, CSTM, GEOM1, and GPDT, or the pre-MS.C.Nastran 2001 format for EPT and GEOM4. PARAM,OMACHPR,YES selects the current NX.Nastran format for AXIC, BGPDT, CSTM, EPT, GEOM1, GEOM4, and GPDT.

For PARAM,POST = -1 and -2, results data blocks are output to a FORTRAN unit specified by PARAM,OUNIT2 (Default = 12). This parameter is allowed to vary between superelements. In buckling solution sequences (SOL 105), a unique value of OUNIT2 should be specified for the buckling subcase. See also the related parameter OMAXR.

By default, under PARAM,PATVER,  $\geq 3.0$ , the displacements are output in the global coordinate system. To output in the basic coordinate system, specify PARAM,OUGCORD,BASIC. Under PARAM,PATVER,  $< 3.0$ , the opposite is true.

### PARAM,POST,-1: Results Data Blocks for MSC.Patran

By default, the following data blocks are output under PARAM,POST,-1. The following parameters may be used to disable the output of data blocks to

the OUTPUT2 file. For example, if PARAM,OQG,NO is specified, then the SPCFORCE output is not written to the OUTPUT2 file. PARAM,PATVER selects the appropriate version of MSC.Patran (Default = 3.0)

| PARAM, PATVER |      | Parameter Name | Case Control              | Data Block Name           | Description                                                                                             |
|---------------|------|----------------|---------------------------|---------------------------|---------------------------------------------------------------------------------------------------------|
| <3.0          | >3.0 |                |                           |                           |                                                                                                         |
| YES           | YES  | OQG            | SPCFORCE                  | OQG1                      | Forces of single-point constraint                                                                       |
| YES           | NO   | OUG            | DISP                      | OUGV1PAT                  | Displacements in the basic coordinate system                                                            |
| YES           | YES  | OUG            | DISP                      | OUGV1                     | Displacements in the global coordinate system                                                           |
| YES           | NO   | OES            | STRESS                    | OES1                      | Element stresses (linear elements only)                                                                 |
| YES           | NO   | OEF            | FORCE                     | OEF1                      | Element forces or heat flux (linear elements only)                                                      |
| YES           | YES  | OEE            | STRAIN                    | OSTR1                     | Element strains                                                                                         |
| YES           | YES  | OGPS           | GPSTRESS                  | OGS1                      | Grid point stresses                                                                                     |
| YES           | YES  | OESE           | ESE                       | ONRGY1                    | Element strain energy                                                                                   |
| YES           | YES  | OGPF           | GPFORCE                   | OGPFB1                    | Grid point force balance table                                                                          |
| NO            | YES  | OEFX           | FORCE                     | OEF1X                     | Element forces with intermediate (CBAR and CBEAM) station forces and forces on nonlinear elements       |
| NO            | YES  | OESX           | STRESS                    | OES1X                     | Element stresses with intermediate (CBAR and CBEAM) station stresses and stresses on nonlinear elements |
| NO            | YES  | OPG            | OLOAD                     | OPG1                      | Applied static loads                                                                                    |
| NO            | YES  | OCMP           | STRESS                    | OES1C                     | Ply stresses                                                                                            |
| NO            | YES  | OCMP           | STRAIN                    | OSTR1C                    | Ply strains                                                                                             |
| NO            | YES  | none           | DISP<br>SPCFORCE<br>FORCE | OUPV1 OQP1<br>DOEF1 DOES1 | Scaled Response Spectra                                                                                 |

## 726 Parameter Descriptions

|    |     |      |                  |                |                               |
|----|-----|------|------------------|----------------|-------------------------------|
|    |     |      | STRESS<br>STRAIN | DOSTR1         |                               |
|    |     |      | none             | LAMA           | Nonlinear Buckling            |
| NO | YES | none | DISP OLOAD       | OCRUG<br>OCRPG |                               |
| NO | YES | none | NLSTRESS         | OESNLXR        | Nonlinear static stresses     |
| NO | YES | none | BOUTPUT          | OESNLBR        | Slideline stresses            |
| NO | YES | none | NLLOAD           | OPNL1          | Nonlinear loads               |
| NO | YES | none | STRESS           | OESNLXD        | Nonlinear transient stresses  |
| NO | YES | none | none             | ERRORN         | p-element error summary table |

### PARAM,POST,-2: Results Data Blocks for NX and I-DEAS

By default, the following data blocks are output under PARAM,POST,-2. By default, the displacements are output in the basic coordinate system. To output in the global coordinate system, specify PARAM,OUGCORD,GLOBAL (SOL 601 and 701 displacements are always output in the basic coordinate system). The following parameters may be used to disable the output of data blocks to the OUTPUT2 file. For example, if PARAM,OQG,NO is specified, then the SPCFORCE output is not written to the OUTPUT2 file.

| PARAMeter Name | Case Control | Results Data Block Name       | Description                                    |
|----------------|--------------|-------------------------------|------------------------------------------------|
|                | BCRESULTS    | OBC, OSPDS                    | Contact Result Output Request                  |
|                | GKRESULTS    | OGK                           | Gasket element results                         |
|                | SHELLTHK     | OSHT                          | Shell thickness results                        |
|                | RMAXMIN      | OUGV1MX,<br>OEF1MX,<br>OES1MX | Displacement, force, and stress extreme values |
|                | OLOAD        | OPG1                          | Applied loads.                                 |
|                | THERMAL      | TOUGV1                        | Temperature output                             |
|                | NLSTRESS     | OESNLXR                       | Nonlinear stress                               |
| OGPS           | GPSTRESS     | OGS1                          | Grid point stresses                            |
| OGPF           | GPFORCE      | OGPFB1                        | Grid point forces                              |

|      |              |          |                                               |
|------|--------------|----------|-----------------------------------------------|
| OQG  | SPCFORCE     | OQG1     | Forces of single-point constraint             |
| OUG  | DISPLACEMENT | BOUGV1   | Displacements in the basic coordinate system  |
|      |              | BOPHIG   | Eigenvectors in the basic coordinate system   |
|      |              | OUGV1    | Displacements in the global coordinate system |
|      |              | TOUGV1   | Grid point temperatures                       |
| OES  | STRESS       | OES1     | Element stresses (linear elements only)       |
| OEF  | FORCE        | OEF1     | Element forces (linear elements only)         |
|      | FLUX         | HOEF1    | Element heat flux                             |
| OEE  | STRAIN       | OSTR1    | Element strains                               |
| OESE | ESE          | ONRGY1   | Element strain energy                         |
| OCMP | STRESS       | OEFIT    | Failure indices                               |
|      | STRESS       | OES1C    | Ply stresses                                  |
|      | STRAIN       | OSTR1C   | Ply strains                                   |
| OUMU | ESE          | LAMA     | Eigenvalue summary                            |
|      |              | ONRGY2   | Element kinetic energy                        |
| OEFX | FORCE        | OEF1X    | Element forces (nonlinear elements only)      |
| OESX | STRESS       | OES1X    | Element stresses (nonlinear elements only)    |
| none | none         | ODELBGPD | Shape optimization geometry changes           |

**PARAM, POST, -4: Results Data blocks for LMS International/MSC\_NF**

By default, the following data blocks are output under PARAM,POST,-4. The following parameters may be used to disable the output of data blocks to the OUTPUT2 file. For example, PARAM,OUG,NO requests that eigenvectors not be written to the OUTPUT2 file.

| PARAMeter Name | Case Control | Data Block Name | Description                                  |
|----------------|--------------|-----------------|----------------------------------------------|
| OUG            | DISPLAC      | OPHIG           | Eigenvectors in the global coordinate system |

**PARAM, POST, -5: Results Data blocks for Dynamic Design Solutions/FemTools**

By default, the following data blocks are output under PARAM,POST,-5. The following parameters may be used to disable the output of data blocks to the

## 728 Parameter Descriptions

OUTPUT2 file. For example, PARAM,OUG,NO requests that eigenvectors not be written to the OUTPUT2 file. PARAM,OUNIT2O (default=51) specifies the unit number of the OUTPUT2 file.

| PARAMeter name | Case Control | Data Block Name | Descriptions                                 |
|----------------|--------------|-----------------|----------------------------------------------|
| OUG            | DISPLAC      | OUGV1           | Eigenvectors in the global coordinate system |
|                |              | LAMA            | Eigenvalue summary                           |

POSTU           Default = -1  
                   See PARAM, POST, 0.

POSTEXT        Default=YES  
                   Under PARAM,POST,-1 and -2, the following data blocks are also written to the.OP2 file specified by PARAM,OUNIT2. If these data blocks are not required, then specify PARAM,POSTEXT,NO.

| Data Block Name | Description                                    |
|-----------------|------------------------------------------------|
| FRL             | Frequency response list                        |
| BHH             | Modal damping matrix                           |
| KHH             | Modal stiffness matrix                         |
| BGPDT*          | Basic grid point definition table              |
| PVT0            | User parameter value table                     |
| EQEXIN(S)       | Equivalence external to internal grid ID table |
| CLAMA           | Complex eigenvalue table                       |
| OEDE1           | Element energy loss output table               |
| OEKE1           | Element kinetic energy output table            |
| OUGV2           | Displacement output table in SORT2             |
| PSDF            | Power spectral density table                   |
| OGPWG           | Grid point weight generator output table       |
| TOL             | Time output list                               |



|         |                                                    |
|---------|----------------------------------------------------|
| PSDFH   | Power spectral density table for modal coordinates |
| DSCM2   | Design sensitivity coefficient matrix              |
| DSCMCOL | Design sensitivity parameters table                |
| DBCOPT  | Design optimization history table                  |
| OPHSA   | Displacement output table in SORT1                 |

\* Always written for PARAM,POST,-2 regardless of POSTEXT.

PREFDB      Default = 1.0  
               See ACOUT.

PRGPST      Default = YES.  
               Controls the printout of singularities. See AUTOSPC.

PRINT       Default = YES  
               PARAM,PRINT,NO suppresses the automatic printing of the flutter summary in flutter analysis.

PROUT       Default = -1  
               PARAM,PROUT,-1 suppresses execution and printout from the ELTPRT module. PARAM,PROUT,-1 prints a list of all elements sorted on EID and summary tables giving the range of element identification numbers for each element type.

PRPA, PRPJ   Default = 1.0E37  
               PRPA and PRPJ control the printout of intermediate load matrices for diagnostic purposes during superelement assembly. If the value of PRPA (or PRPJ) is positive, all terms larger in magnitude than the value are printed. If the value of PRPA (or PRPJ) is negative, all terms smaller in magnitude than the value are printed. The default value requests no printout. PARAM,IRES,1 must be present for these parameters to be effective. The PA matrix contains the internal loads transmitted to the downstream superelement. The PJ matrix contains external loads applied on the superelement; that is, it has the same content as the data produced by the Case Control command OLOAD. All of this data may be obtained on restart using the

## 730 Parameter Descriptions

SELR Case Control command option. A related parameter is IRES.

PRTMAXIM Default = NO

PRTMAXIM controls the printout of the maximums of applied loads, single-point forces of constraint, multipoint forces of constraint, and displacements. The printouts are titled “MAXIMUM APPLIED LOADS”, “MAXIMUM SPCFORCES”, “MAXIMUM MPCFORCES”, and “MAXIMUM DISPLACEMENTS”.

PRTRESLT Default = YES

PRTRESLT controls the printout of the resultants of applied loads, single-point forces of constraint, and multipoint forces of constraint. The printouts are titled “OLOAD RESULTANTS”, “SPCFORCE RESULTANTS”, and “MPCFORCE RESULTANTS”.

PVALINIT Default = 1

Starting p-value in a p-adaptive analysis restart.

### Q & R – Parameters

Q Default = 0.0

Q specifies the dynamic pressure. Q must be specified in aeroelastic response analysis (SOL 146), and the default value will cause a User Fatal Message.

RANCPLX Default=0

Specifies the data format for the Random module. Set to 0 for real data and 1 for complex data.

RDRESVEC Default=YES

Determines if accelerated residual vector calculation option is enabled or disabled when using the multi-level Recursive Domain Lanczos method (RDMODES). See the *NX Nastran Parallel Processing Guide* for details.

RDRESVEC=YES

The accelerated residual vector calculation option is enabled, which takes advantage of the *rdsparse* option, and is more efficient than the original one in terms of computational time and I/O usage. The residual vectors with the accelerated calculation may differ slightly from the original, which cannot be used in conjunction with *rdsparse*.

RDRESVEC=NO

The accelerated residual vector calculation option is disabled. When disabled, the *rdsparse* option will be disabled automatically and full results are computed which typically increases runtime considerably.

RDSPARSE Default=YES

Determines if the sparse eigenvector data recovery option is enabled or disabled when using the DMP, multi-level Recursive Domain Lanczos method (RDMODES). See the *NX Nastran Parallel Processing Guide* for details.

RDSPARSE=YES

The sparse eigenvector recovery option is enabled. The software automatically determines if the sparse eigenvector recovery option occurs based on the number of dof in the output request.

RDSPARSE=NO

The sparse eigenvector recovery option is disabled (reverts to the data recovery used before NX Nastran 7). When disabled, full results are computed which typically increases runtime considerably.

## 732 Parameter Descriptions

RESLTOPT Default=8

RESLTOPT's default value provides component-level force summary output for model checkout (PARAM, CHECKOUT, YES), loads generation (OLOAD output), and SPC and MPC forces. Setting RESLTOPT to a value of 1 produces abbreviated output formats only.

RESVALT Default=NO

RESVALT determines if residual vector modes contribution to the dynamic physical response is taken into consideration or not.

RESVALT= YES

Residual vector modes contribution to the dynamic physical response is not taken into consideration.

RESVALT=NO (Default)

Residual vector modes contribution to the dynamic physical response is taken into consideration.

RESVALT is considered only if RESVEC=YES is selected.

RESVEC Default = NO

By default, residual vectors are not computed. If you want residual vectors due to:

1. applied loads (LOAD or LOADSET Case Control commands) then specify PARAM,RESVEC,YES.
2. inertial loads (unit acceleration of mass) then specify PARAM,RESVINER,YES.
3. unit loads, then specify USETi,U6 entries at the desired dofs and PARAM,RESVEC,YES.

If the model is unrestrained, you will need to supply SUPORTi entries.

Related parameters are:

| PARAM name | Default Value | Description                                 |
|------------|---------------|---------------------------------------------|
| RESVEC     | NO            | Augment static shapes due to applied loads. |

|          |     |                                                                                                             |
|----------|-----|-------------------------------------------------------------------------------------------------------------|
| RESVINER | NO  | Augment static shapes due to inertial loads (unit acceleration of mass).                                    |
| RESVSO   | YES | Reorthogonalize static shapes with mode shapes. If the stiffness is well-conditioned, this is not required. |
| RESVSE   | NO  | Print strain energy of the static shapes.                                                                   |
| RESVSLI  | YES | Remove linearly dependent shapes.                                                                           |

COUPMASS needs to be > 0 for mass residual vectors to be generated during SOL 111 & 112.

RESVINER Default = NO

See related parameter RESVEC.

RESVPGF Default = 1.E-6

This parameter is used to filter out small terms in the residual vectors. The default is 1.E-6, meaning that terms in the residual vectors whose absolute values are smaller than 1.E-6 will get filtered out before they are used. To eliminate filtering of residual vectors, you can set RESVPGF to 0.0.

RESVSE Default = NO

See related parameter RESVEC.

RESVSLI Default = YES

RESVSO Default = YES

See related parameter RESVEC.

## 734 Parameter Descriptions

**RMSINT** Default = LINEAR for the trapezoidal approximation.

RMSINT specifies the interpolation method for numerical integration when computing both RMS (Root Mean Square) and NO (Number of Zero Crossings or Mean Frequency) from PSDF (Power Spectral Density Function).

RMSINT = LINEAR requests the trapezoidal approximation, which is the existing NX Nastran approach.

RMSINT = LOGLOG requests the Log-Log interpolation.

**RMXTRAN** Default = NO

This parameter is used in conjunction with the RMAXMIN case control to allow the user to specify whether transient results are output along with the computed RMAXMIN results. If RMXTRAN=NO (the default value), transient results are not output if RMAXMIN is activated. IF RMXTRAN=YES, transient results will be output according to the DISPLACEMENT, STRESS, and FORCE case control entries.

**ROTCSV** No default.

Defines the unit number of a the comma-separated Excel file to which Campbell's diagram results from a rotor dynamics solution will be written. Requires:

```
ASSIGN OUTPUT4 = 'filename,CSV', Unit=unit_number, FORM=FORMATTED.
```

**ROTGPF** No default.

Defines the unit number of a GAROS post-processing file to which Campbell's diagram results from a rotor dynamics solution will be written. Requires:

```
ASSIGN OUTPUT4 = 'filename.gpf', UNIT = unit_number, FORM = FORMATTED
```

|         |              |                                                                                                                                                                                                                                                                                                          |
|---------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ROTSYNC | Default=YES  | When ROTSYNC=NO, the synchronous analysis in a rotor dynamics solution is skipped in the case where there are no solutions because there is no intersection with the 0-P line. This applies to Modal Complex Eigenvalue Analysis (Sol 110).                                                              |
| RPOSTS1 | Default = 0  | Specifies the output format for random results. Set to 0 for SORT2 and 1 for SORT1.                                                                                                                                                                                                                      |
| RSATT   | Default = NO | PARAM,RSATT,YES specifies that if static loads or U3 USET bulk entries are present, SOL 103 will compute attachment modes. RSATT is only used by I-DEAS Response Analysis and NX Response Simulation. The attachment modes are written to the OP2 file when PARAM,RSOPT,1 and PARAM,POST,-2 are defined. |
| RSCON   | Default = NO | PARAM,RSCON,YES specifies that if U2 USET bulk entries are present, SOL 103 will compute constraint modes. RSCON is only used by I-DEAS Response Analysis and NX Response Simulation. The constraint modes are written to the OP2 file when PARAM,RSOPT,1 and PARAM,POST,-2 are defined.                 |
| RSOPT   | Default = 0  | PARAM,RSOPT,1 and PARAM,POST,-2 specifies that extra data blocks associated with I-DEAS Response Analysis and NX Response Simulation are written to the OP2 file.                                                                                                                                        |

## 736 Parameter Descriptions

RSPECTRA Default = -1

RSPECTRA = 0 requests that response spectra be calculated for transient analysis. See “User Interface for Response Spectra Generation” in the *NX Nastran Advanced Dynamic Analysis User’s Guide*. Response spectra will be calculated for any superelements or the residual structure for which other output requests are present in the same run. Any punch data produced is sent to the standard NX Nastran PUNCH file. Related parameters are TABID and RSPRINT.

RSPRINT Default = 0

RSPRINT controls the printout of tabulated values of response spectra. RSPRINT = -1 suppresses the printout. The related parameter is RSPECTRA.

### S – Parameters

S1, S1G, S1M Default = -1

PARAM,S1i,+1 requests the sorting and/or filtering of the element stresses selected on the DTI,INDTA entry. Stresses in the element coordinate systems (S1), at grid points (S1G), and/or in material coordinate systems (S1M) based on the parameters BIGER, NUMOUT, SRTOPT, and SRTELTYP may be requested. The S1G and S1M options also require the presence of PARAM,CURV,1.

| Parameter | Quantity | Coordinate System | Location             | Elements                                |
|-----------|----------|-------------------|----------------------|-----------------------------------------|
| S1≥0      | Stresses | Element           | Element centers      | CQUAD4,<br>CQUAD8,<br>CTRIA3,<br>CTRIA6 |
| S1M≥0     | Stresses | Material          | Element centers      | CQUAD4,<br>CTRIA3                       |
| S1G≥0     | Stresses | Material          | Grid points to which | CQUAD4,                                 |



|  |  |  |                     |        |
|--|--|--|---------------------|--------|
|  |  |  | elements<br>connect | CTRIA3 |
|--|--|--|---------------------|--------|

NUMOUT, in conjunction with BIGER, controls the amount of stress output.

1. NUMOUT = +N requests that N element stresses be printed (or punched) for each element type.
2. NUMOUT=0 outputs all elements in a group when one or more exceeds BIGER. Some of the elements will have stresses smaller than BIGER. This is conceptually the same as describing an element set in case control, and limiting output in this manner. Stress files obtained with element group filtering may be used for xy plotting and other postprocessor options with DMAP alters. By contrast, the stress file when NUMOUT = -2 is more discontinuous, and may not be used for xy plotting.
3. NUMOUT = 0 does not sort but filters according to BIGER by element group. In static analysis, an element group is defined as all case control selected elements for a given load case for SORT1 output. For SORT2 output, an element group is defined as the data for a given element type for all load cases. In transient analysis, an element group is defined as all case control selected elements at a given time for SORT1 output. For SORT2 output an element group is defined as the data for a given element at all time steps. The element group option applies only to output types described above for PARAM,S1. This option is not available with output types selected by PARAMs S1G and S1M.
4. NUMOUT = -1 requests that stresses be sorted and only those stresses with an absolute value that is greater than BIGER will be output.
5. NUMOUT = -2 (the default) does not sort but filters according to BIGER. Related parameters include BIGER, NOELOF, NOELOP, and NOGPF.

BIGER controls the elements for which stresses will be printed. Elements with stresses that are smaller in absolute value than BIGER will not be output. The quantity tested is element type dependent. Related parameters include CURV, NUMOUT, S1,

## 738 Parameter Descriptions

S1G, and S1M. SRTOPT controls the scanning option to be performed.

| SRTOPT Value | Description                             |
|--------------|-----------------------------------------|
| 0            | Filter/sort on maximum magnitude.       |
| 1            | Filter/sort on minimum magnitude.       |
| 2            | Filter/sort on maximum algebraic value. |
| 3            | Filter/sort on minimum algebraic value. |

SRTELTYP controls the element type to be processed, as described in the following table.

| SRTELTYP Value | Description                                   |
|----------------|-----------------------------------------------|
| 0              | All element types will be processed.          |
| > 0            | Only element type SRTELTYP will be processed. |

NUMOUT1 and BIGER1 serve the same function as NUMOUT and BIGER except that they apply only to composite element stresses and do not require PARAM,S1i,=1.

NUMOUT2 and BIGER2 serve the same function as NUMOUT and BIGER except that they apply only to composite element failure indices and do not require PARAM,S1i,=1.

S1AG, S1AM Default = -1

See CURV.

SCRSPEC

Default = -1 (SOLs 103 and 115 only)

SCRSPEC=0 requests that structural response be calculated for response spectra input in normal modes analysis. See “Response Spectrum Application” in the *NX Nastran Advanced Dynamic Analysis User’s Guide* for a discussion of this capability. The scaled response calculations are made for elements and grid points of the residual structure only. The responses are summed with the ABS, SRSS, NRL, or NRLO convention, depending on the value of PARAM,OPTION. If the SRSS, NRL, or NRLO options are used, close natural frequencies will be summed by the ABS convention, where close natural frequencies meet the inequality

$$f_{i+1} < \text{CLOSE} \cdot f_i$$

Both PARAM,OPTION and PARAM,CLOSE may be set in any subcase, allowing summation by several conventions in a single run.

In MSC.Nastran Version 70, the NRL option was modified slightly to correspond to the NAVSEA-0908-LP-000-3010 specification. NRLO provides the V69 NRL.

SDRPOPT

Default = SDRP

SDPROPT controls the storage of the principal stresses and strains in the stress and strain tables (OES1 and OSTR1 data blocks) in p-version analysis. By default, the principal stresses and strains are stored in the stress and strain tables to support postprocessing. PARAM,SDRPOPT,OFP requests that the principal stresses and strains are not stored in the tables. This can result in a significant reduction in disk space usage.

## 740 Parameter Descriptions

SECOMB Default = NO

By default, the results from superelements will not be combined for a superelement analysis. By specifying PARAM,SECOMB,YES, the results from superelements will be combined for a superelement analysis with the following conditions/restrictions:

- Instead of outputting results by subcase, the output results for all subcases will be unioned and output with the residual subcase. Results that are excluded are: (1) any XY results, (2) MPF (i.e. modal participation factors), (3) modal energies, (4) SDISPLACEMENT/SVELOCITY/SACCELERATION, and (5) any results associated with the ACMS capability.
- Output for each superelement is still defined based off of the output request specified in the superelement subcase. If the constraint mode method of enforced motion is being used and relative displacement/velocity/acceleration results are requested, the requests specified for the residual will take precedence when SECOMB is set to YES.
- This applies to both internal and external superelements defined in both the main bulk data and as a partitioned superelement.
- If partitioned superelements have grid or element labeling conflicts, PARAM,SECOMB,YES is not valid and results combination will not be allowed.
- PARAM,OMID,YES is not valid if PARAM,SECOMB,YES is valid.
- If the OMODES case control command is used, OMODES must be the same for all superelements.

SEMAP Default = SEMAP

SEMAPOPT Default = 42

SEMAPPRT Default = 3

The superelement map (SEMAP table) contains several lists useful for determining how the program has partitioned superelement models. It is printed automatically each time this table is generated. It consists of three major parts:

- GPM                    The Grid Point Map contains a list of each grid point, its interior superelement placement, and the SEID of all grid points connected directly to it by elements. Three tables follow that summarize the connectivity between superelements sorted on grid point sequence, SEID, and the number of connections.
- ISM                    The Individual Superelement Map lists the interior grid points, exterior grid and scalar points, elements, and time and storage space estimates for each superelement.
- SDT                    The Superelement Definition Table contains the SEID of every superelement in the model, the processing order, and a pictorial representation of the superelement tree.

SEMAP, SEMAPOPT, and SEMAPPRT are used to control the amount of output that is printed and other special features. The possible values for SEMAP are shown in the following table.

| SEMAP Value     | Output and Application                                                                                                                          |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| SEMAP (Default) | ISM, SDT. The lengthy GPM is suppressed. This is the appropriate value for use after the model is stable and only minor changes are to be made. |
| SEMAPALL        | GPM, ISM, SDT. All tables are printed. This value is useful on the initial debug run of a model and when making extensive modeling changes.     |
| SEMAPCON        | Only the summary tables of the GPM and the estimation data is output. This                                                                      |

## 742 Parameter Descriptions

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | is a useful value when iterating to an economic partitioning scheme for large, complex models.                                                                                                                                                                                                                                                                                                                                              |
| SEMAPEST | Only the estimation data is printed. This is useful when evaluating several alternative partitioning schemes.                                                                                                                                                                                                                                                                                                                               |
| SEMAPPUN | No output is printed. The exterior grid points of the superelement with a SEID that is input on SEMAPOPT are placed on a CSUPER entry image on the PUNCH file, allowing the superelement to be used as an external superelement. If SEMAPOPT > 0, the superelement entry is given an SSID of SEMAPOPT. If SEMAPOPT < 0, the exterior points listed are those of the residual structure, but the CSUPER entry is given an SSID of  SEMAOPT . |

Other special features are available with parameters SEMAPOPT and SEMAPPRT. They are fully described under parameters OPT1 and OPT2 in the description of the TABPRT module in the *NX Nastran DMAP Programmer's Guide*.

If the default value of SEMAP is used, the other two parameters may be used to further refine this output, as described in the *NX Nastran DMAP Programmer's Guide* under the TABPRT module description. The printing of the SEMAP table can be avoided by the use of PARAM,SEMAPPRT,-1.

SENSUOO

Default = NO

By default, in dynamic sensitivity analysis in SOL 200, displacements at the o-set due to pseudo-loads do not include any effect due to inertia and damping. If PARAM,SENSUOO,YES is specified then these effects will be computed in a quasi-static manner and included in the sensitivity analysis.

SEP1XOVR Default = 0

The old and new location of moved shell grid points are printed if SEP1XOVR = 16 when the RSSCON shell-to-solid element connector is used. By default, the moved shell grid points are not printed, SEP1XOVR = 0. See the description of PARAM,TOLRSC for more details.

SEQOUT Default = 0

See [OLDSEQ](#).

SERST Default = AUTO (structured solutions only)

By default, in the structured solutions, all restarts are considered automatic (see “Restarts” in the *NX Nastran User’s Guide*). If none of the following Case Control commands are entered, then SEALL=ALL is the default action: SEMG, SELG, SEKR, SELR, SELA, SEMA, SEMR, and SEALL.

The user may wish to partition the analysis into several runs, in which case the above commands may be used in the same manner they are used in the unstructured solutions. By default, the restart will proceed in automatic fashion for each command, regenerating only that data that is affected by modifications in the Bulk Data and Case Control or changes in upstream superelements. If the user wishes to overwrite the data, even if it is not affected by modifications to the data, then PARAM,SERST,MANUAL must be entered.

With PARAM,SERST,AUTO or MANUAL, all superelements will be processed through Phase 0 (see “Superelement Analysis” in the *NX Nastran User’s Guide*). This phase includes execution of the sequencer module (SEQP), initial superelement processing (SEP1), and initial geometry processing (GP1 and GP2) modules, which can result in significant CPU overhead. If this overhead is not desired, then PARAM,SERST,SEMI will limit Phase 0 and Phase 1 to only those superelements specified on the SEMG, SELG, SEKR, SELR, SELA, SEMA, SEMR, and SEALL Case Control commands. If none of these commands is entered, then execution will skip Phase 0 and 1.

In the modal solution sequences (SOLs 110, 111, 112, 145, 146, and 200), the modes of the residual structure are automatically computed in Phase 2 if any SE-type command

(e.g., SEMG=*n*) is requested for the residual structure. If PARAM,SERST,SEMI and no SE-type command is specified for the residual structure, then, by default, its modes will not be recomputed. This logic is intended for restarts from SOL 103 into one of the modal solutions. If, however, the modes have not already been computed or need to be recomputed, then PARAM,SERST,RSMDS must be specified to force the calculation of the residual structure modes.

If PARAM,SERST,SEDR is specified, then Phases 0, 1, and 2 will be skipped. This option is intended for data recovery (Phase 3) runs only.

The options of SEMI, RSMDS, and SEDR are intended for models that are defined on more than one database; i.e., superelements are defined on separate databases (multiple MASTER DBsets) and processed in separate runs. Also, with this technique, databases are attached with the DBLOCATE File Management statement rather than the RESTART File Management statement. In general, these options are not recommended because they disable the automatic restart capability, which compromises the database integrity to the same degree as in the unstructured solution sequences.

SESDAMP      Default = NO

Modal damping is calculated for superelements if PARAM,SESDAMP,YES is specified. An SDAMPING Case Control command that selects a TABDMP1 Bulk Data entry must also be specified in the desired superelement's subcase. By default, modal damping is added to viscous damping (B). If you insert PARAM,KDAMP,-1 (or PARAM,KDAMPFL,-1 for fluid superelements) then modal damping will be added to structural damping (K4).



|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SESEF   | <p>Default = -1 (SOLs 103 and 115 only)</p> <p>If SESEF = 0 in superelement normal modes analysis, the fraction of total strain energy for a superelement in each of the system's modes is output in the vector SESEFA for tip superelements and in SESEFG for nontip superelements. If SESEF = 1, strain energy fractions are output, and expansion of the eigenvectors from a-set size to g-set is branched over for tip superelements. If SESEF = -1 (the default value), no strain energy fractions are computed.</p> <p>Output requests must be present in order for strain energy fractions to be calculated. If SESEF = 1, there will be no other output results for tip superelements.</p> |
| SHIFT1  | <p>Default=-1.234</p> <p>This sets the negative shift used when computing massless mechanism constraint modes. For a very stiff model (1000. hz for the first flexible mode), consider using a larger value.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SHLDAMP | <p>Default=SAME</p> <p>Determines if the structural damping coefficient (GE) defined on the PSHELL MIDi materials are used.</p> <p>SAME: The structural damping coefficient (GE) defined on a PSHELL MID1 material will be used by all MIDi for that PSHELL.</p> <p>DIFF: The structural damping coefficient (GE) defined on each PSHELL MIDi will be used. When each PSHELL MIDi is used as described, any structural damping coefficient (GE) values which are blank default to zero.</p>                                                                                                                                                                                                        |

## 746 Parameter Descriptions

SIGMA Default = 0.0

The radiant heat flux is proportional to  $\text{SIGMA} \cdot (T_{grid} + T_{ABS})^4$ , where SIGMA is the Stefan-Boltzmann constant,  $T_{grid}$  is the temperature at a grid point, and  $T_{ABS}$  is the scale factor for absolute temperature and may be specified by PARAM,TABS. These parameters must be given in units consistent with the rest of the data in the model. The value for SIGMA in SI units is  $5.67 \times 10^{-8}$  watts/m<sup>2</sup>K<sup>4</sup>. The default value causes radiant heat effects to be discarded.

SKPAMP Default = 0

For SOLs 145, 146, and 200, SKPAMP = -1 suppresses all unsteady aerodynamic calculations. The automatic restart of the structured solution sequences performs a similar function without this parameter. Specifying it ensures suppression of the calculations, regardless of the determination of the automatic restart.

SLOOPID Default = 0 (SOL 129 and 159 only)

In a nonlinear transient analysis (SOLs 129 and 159) restart, SLOOPID identifies the initial conditioning previous nonlinear analysis run (SOLs 106 and 153 respectively). Setting SLOOPID greater than 0 will cause SOLs 129 and 159 to start from the static deformed position.

SMALLQ Default = 1.0E-10

By default, NX Nastran does not remove unused q-set degrees-of-freedom from the solution set. If you are performing residual structure qms you should set this parameter to 0.0 so that the unused q-set degrees-of-freedom are removed.

SNORM Default = 20.0

SNORM > 0.0 requests the generation of unique grid point normals for adjacent shell elements (see Figure 7-1). Unique grid point normals are generated for the CQUAD4, CTRIA3, CQUADR, and CTRIA8 elements. The grid point normal is the average of the local normals from all adjacent shell elements including CQUAD8 and CTRIA6 elements. If grid point normals are present, they are used in all element calculations of the CQUAD4, CTRIA3, CQUADR, and CTRIA8 elements.

| SNORM | Tolerance in Degrees                                                                                                                                                                                                  |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| > 0.0 | Unique grid point normals are generated if each angle between the grid point normal and each local normal of the adjacent shell elements is smaller than SNORM. SNORM Bulk Data entries overwrite a generated normal. |
| = 0.0 | The generation of grid point normals is turned off. The user can define normals with the SNORM Bulk Data entry.                                                                                                       |
| < 0.0 | Grid point normals are not generated. SNORM Bulk Data entries are ignored.                                                                                                                                            |

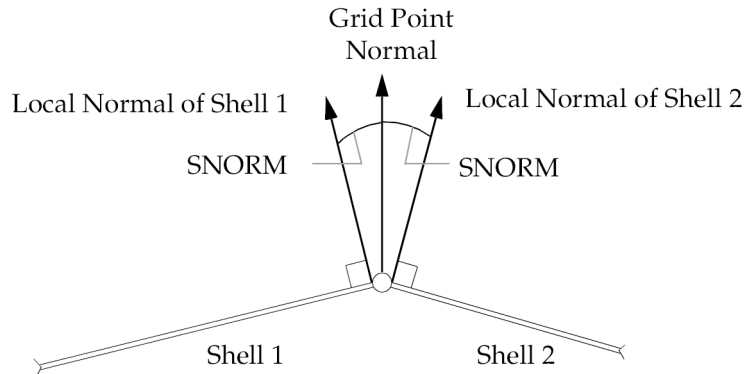


Figure 7-1. Unique Grid Point Normal for Adjacent Shell Elements

## 748 Parameter Descriptions

SNORMPRT Default = -1

PARAM,SNORMPRT,>0 writes the grid point normals of the model in the basic coordinate system to the.f06 and/or.pch files.

| SNORMPRT | Switch to Print Out Normals                          |
|----------|------------------------------------------------------|
| $\leq 0$ | No output.                                           |
| 1        | Print out to the punch file (.pch).                  |
| 2        | Print out to the print file (.f06).                  |
| 3        | Print out to the punch (.pch) and print file (.f06). |

SOFTEXIT Default = NO

In SOL 200, if soft convergence is achieved during optimization, before completing the maximum number of design iterations, the user may request an exit with PARAM,SOFTEXIT,YES.

SOLID Default = 0

SOLID also allows several models to be stored in the same graphics database created by PARAM,POST,0.

SOLVSUB Default: 1

Valid only when PARAM,CORROPT,YES exists.

0: Skip eigenvalue solution.

1: Perform eigenvalue solution.

SPCGEN Default = 0

SPCGEN requests the creation of SPCi Bulk Data entries from the identified singularities. See AUTOSPC.

SRCOMPS Default = NO

SRCOMPS controls the computation and printout of ply strength ratios. If SRCOMPS = YES, ply strength ratios are output for composite elements that have failure indices requested.

|          |                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SRTELTYP | Default = 0<br>See S1, S1G, S1M.                                                                                                                                                                                                                                                                                                                                                                  |
| SRTOPT   | Default = 0<br>See S1, S1G, S1M.                                                                                                                                                                                                                                                                                                                                                                  |
| START    | Default = 0<br>See <a href="#">OLDSEQ</a> .                                                                                                                                                                                                                                                                                                                                                       |
| STIME    | Default = 0.0 (SOLs 129 and 159 only)<br><br>In SOLs 129 and 159 restarts from previous SOLs 129 and 159 runs, the user provides $t_N$ , where $t_N$ is the last time step of the subcase to be continued with a new or changed subcase in the new run. Thus, the loading and printout will start from $t_N$ as though the original run contained the new subcase data.                           |
| STRUCTMP | Default = 0<br>See FLUIDMP.                                                                                                                                                                                                                                                                                                                                                                       |
| SUBCASID | Default = 0<br><br>PARAM,SUBCASID,n where n is greater than zero, specifies that the restart proceeds from SUBCASE n in nonlinear static analysis, SOL 106. SUBCASID is an alternative to SUBID and is recommended over SUBID which indicates the subcase sequence number.                                                                                                                        |
| SUBID    | Default = 1 (SOLs 106 and 153)<br><br>In SOL 106, by default, the restart proceeds from the last LOOPID in the last subcase. SUBID may be used to specify an earlier subcase by specifying the sequential number (for SEID = 0) of the subcase. In SOLs 106 and 153, PARAM,LOOPID may also be specified for an earlier LOOPID. SUBCASID is an alternative to SUBID and is recommended over SUBID. |

## 750 Parameter Descriptions

**SUPER**            Default = 0 (nonsuperelement sequences)  
                           Default = -1 (superelement sequences)  
                           See [OLDSEQ](#) .

### T – Parameters

**TABID**            Default = 2  
  
                           TABID controls the punch output for response spectra. A related parameter is RSPECTRA.

**TABS**             Default = 0.0  
  
                           TABS is used to convert units of the temperature input (°F or °C) to the absolute temperature (°R or °K). Specify:

|                   |                         |
|-------------------|-------------------------|
| PARAM,TABS,273.16 | When Celsius is used    |
| PARAM,TABS,459.69 | When Fahrenheit is used |

For SOL 601,153 and 601,159, the value of TABS must be 0.0 (absolute temperature), 273.15 (Celsius) or 459.67 (Fahrenheit).

Refer to the Bulk Data entry, “[CREEP](#)” for a creep analysis with SOLs 106 or 153. Refer to PARAM,SIGMA for heat transfer analysis.

**TESTNEG**        Default = -2 for Newton’s method in SOLs 106 and 153  
  
                           Default = 1 for Arc-length method in SOLs 106 and 153

In nonlinear static analysis, this parameter specifies the action to take when negative terms are encountered on the factor diagonal of matrix decomposition. Negative terms indicate that the differential stiffness has introduced a structural instability. The instability may be real (structural buckling) or mathematical (the current iteration appears unstable, but a stable solution exists).

| TESTNEG | Results                       |
|---------|-------------------------------|
| -1      | Stop if negative terms occur. |

|        |                                                             |
|--------|-------------------------------------------------------------|
| 1 or 0 | Continue if negative terms occur.                           |
| -2     | If negative terms exist, do not use differential stiffness. |
| 2      | Do not use differential stiffness.                          |

TINY Default = 1.E-3

Any elements with strain energy that is less than a TINY percentage of the total strain energy for any superelement will not be printed or made available for postprocessing. TINY may also be used to suppress the printing of small numbers in the constraint check matrix  $[E_{mh}]$  described in “Geometry Processing in SubDMAP PHASEO” in the *NX Nastran User’s Guide*.

TOLRSC Default = 0.05

When the RSSCON shell-to-solid element connector is used, the connecting grid points of the shell element are moved on to the solid face if the grid points are close enough. The tolerable distance of the shell grid point to the solid edge or face is  $\epsilon \cdot h$  where  $h$  is the height of the solid edge; see the sample figure below. The relative tolerance is user modifiable using the parameter.

PARAM, TOLRSC,  $\epsilon$

The default for the relative tolerance is  $\epsilon = 0.05$ . Rigid body invariance is satisfied with double-precision accuracy if the shell grid points are adjusted.

TORSIN Determines if the torsional mass moment of inertia is included on the CROD and CBAR mass matrices.

0: No torsional mass moment of inertia for CROD and CBAR (default).

1: Include torsional mass moment of inertia for CROD and CBAR.

2: Include torsional mass moment of inertia for CBAR.

3: Include torsional mass for CROD.

TSTATIC Default = -1 (SOLs 129 and 159 only)

If TSTATIC = 1, a static solution may be obtained while ignoring inertial and damping forces. This option is available only with the adaptive time-stepping method (see METHOD = “ADAPT” on the Bulk Data entry, [TSTEPNL](#)).

## 752 Parameter Descriptions

### U – Parameters

UNITSYS Character-default=" "

UNITSYS is used by NX to store the units system. It has no impact on the NX Nastran solution sequence.

Example: PARAM,UNITSYS,LBF-IN

Time units are always in seconds. All other units are defined in the table below.

| NX System  | PARAM, UNITSYS | Length | Mass                     | Force             | °T | Thermal Energy      |
|------------|----------------|--------|--------------------------|-------------------|----|---------------------|
| N-m        | N-M            | meter  | kilogram (kg)            | newton (N)        | °C | N-m (joule)         |
| lbf-ft     | LBF-FT         | foot   | lbf-sec <sup>2</sup> /ft | pound (lbf)       | °F | lbf-ft              |
| kg-m       | KGF-M          | meter  | kgf-sec <sup>2</sup> /m  | kilogram (kgf)    | °C | kgf-m               |
| Poundal-ft | PDL-FT         | foot   | pound (lbm)              | poundal (pdl)     | °F | pdl-ft              |
| mN-mm      | MN-MM          | mm     | kilogram (kg)            | milli-newton (mN) | °C | mN-mm (micro-joule) |
| cN-cm      | CN-CM          | cm     | kilogram (kg)            | centi-newton (cN) | °C | cN-cm               |
| lbf-in     | LBF-IN         | inch   | lbf-sec <sup>2</sup> /in | pound (lbf)       | °F | lbf-in              |
| kg-mm      | KGF-MM         | mm     | kgf-sec <sup>2</sup> /mm | kilogram (kgf)    | °C | kgf-mm              |
| N-mm       | N-MM           | mm     | ton (t)                  | newton (N)        | °C | N-mm (milli-joule)  |

UNSYMF Default = No

In SOL 106, nonlinear statics, PARAM,UNSYMF,YES is required to include damping effects in the calculation of complex eigenvalues. See PARAM,NMLOOP.

UPDTBSH Default = NO

UPDTBSH controls the update of boundary shapes generated by auxiliary boundary model analysis in SOL 200. By default, the auxiliary boundary models and shapes are generated only once at the initial design cycle and will not be updated in subsequent cycles even if the shape of the primary model is changing. PARAM,UPDTBSH,YES requests that the auxiliary models and shapes are updated and reanalyzed at every cycle.

USETPRT Default = -1



USETSEL Default = 0

USETPRT controls the tabular printout of the degree-of-freedom sets. See “Degree-of-Freedom Sets”.

| Sequence | Print               | USETPRT |
|----------|---------------------|---------|
| None     | None(default)       | -1      |
| Internal | Row sort only       | 0       |
|          | Column sort only    | 1       |
|          | Row and Column sort | 2       |
| External | Row sort only       | 10      |
|          | Column sort only    | 11      |
|          | Row and Column sort | 12      |

The degrees-of-freedom can be listed in ascending order according to their internal or external sequence number, but not both. The external sequence number is the grid, scalar, or extra point identification number. The internal sequence number is the number assigned after resequencing (see PARAM,OLDSEQ).

The row sort is not recommended in p-version analysis because large integers are generated for hierarchical grid point identification numbers and they will be truncated.

For a given sequence there are two types of tables that may be printed: row sort and column sort. For row sort, a table is printed for each set selected by USETSEL. Here is an example of row sort (USETPRT=0 or 10):

```

      USET DEFINITION TABLE (INTERNAL SEQUENCE, ROW SORT)
              A DISPLACEMENT SET
      -1-    -2-    -3-    -4-    -5-    -6-    -7-    -8-    -9-    -10-
1-      2-1    2-2
    
```

For column sort, a single table is printed for the following sets: SB, SG, L, A, F, N, G, R, O, S, M, E. Here is an example of column sort (USETPRT = 1 or 11):

```

      USET DEFINITION TABLE (INTERNAL SEQUENCE, COLUMN SORT)
      EXT GP. DOF INT DOF INT GP.  SB  SG  L  A  F  N  G  R  O  S  M  E
      -----
      1 - 1    1-    1 G    1          1  1          1
      - 2    2-          2          2  2          2
      - 3    3-          1          3  3          3
      - 4    4-          2          4  4          4
      - 5    5-          3          5  5          5
      - 6    6-          4          6  6          6
    
```

USETSEL specifies the sets which will be printed in the row sort (USETPRT = 0 or 10). In order to select specific sets to be printed, you must sum their corresponding decimal equivalent numbers. For example, sets A, L, and R are

## 754 Parameter Descriptions

selected with  $USETSEL = 128 + 256 + 8 = 392$ . For column sort, a single table is printed for the following sets: SB, SG, L, A, F, N, G, R, O, S, M, E. Here is an example of column sort ( $USETPRT = 1$  or 11):

| USETSEL | Sets Printed                                                                 |
|---------|------------------------------------------------------------------------------|
| -1      | All sets as defined in “ <a href="#">Degree-of-Freedom Sets</a> ”.           |
| 0       | Mutually exclusive sets only; i.e., sets M, SB, SG, O, Q, R, C, B, E, and A. |

USETSTRi     Input-character-default=' ‘

USETSTR1 through USETSTR4 specifies the sets that will be printed by the specification of parameters USETPRT and USETSEL. Any set in Degree-of-Freedom Sets may be specified. A “.” is used as a separator. In the following example, the m-set (degrees-of-freedom eliminated by multipoint constraints) and s-set (degrees-of-freedom eliminated by single point constraints) are specified.

Example: PARAM,USETSTR1,M:S

## V – Parameters

VMOPT             Default = 0

VMOPT=0 (default) The modes of the structure only are first computed without virtual mass effects to obtain Ritz vectors to use in a generalized coordinate solution, similar in concept to the older Generalized Dynamic Reduction method. The modes are re-computed in the generalized basis after the VM effects are added. When an o-set exists (usually because of the presence of ASETi-type entries, or for super element reduction), the VM effects are added to the component modes (o-set level). When there is not an o-set the VM effects are added in the residual structure Phase II operations (a-set level), after the structure-mass-only eigensolution. The rigid body mass of the VM is output automatically, computed about the location of the grid point listed on PARAM, GRDPNT.

VMOPT=1, The virtual fluid mass will be included in the mass matrix at the same time as all other mass elements. In other words, the component modes will reflect the virtual mass. By default, virtual mass is included after the component modes are computed. This is the most expensive option in terms of computer resource requirements and computation time. It is practical for

only relatively small-size models, or when the VM is in one super element only, with most elements in the super element wetted.

VMOPT=2, This is the more efficient method and is summarized in the following steps:

Step 1: Compute the normal modes of the structure without the fluid mass: the ‘dry’ modes.

Step 2: Generate reduced virtual mass using the reduced, modal basis from the dry modes.

Step 3: Compute the normal modes of the reduced virtual mass problem from step two to produce the ‘wet’ modes.

Distributed memory parallel (DMP) execution is available for both the dry modes calculation (step 1) and the virtual mass generation (step 2) to reduce overall solution time.

The following DMP methods can be used to compute dry modes: RDMODES and FDMODES, GDMODES and HDMODES with GPART=1. The DMP global iterative solver is also enabled for virtual mass generation by specifying ITER=YES on the NASTRAN card.

**Note**

The VMOPT=2 option should not be used with MAX normalization specified on the EIGRL card. VMOPT=2 will only yield correct results with MASS normalization.

VREF Default = 1.0  
 In modal flutter analysis, the velocities are divided by VREF to convert units or to compute flutter indices.

VUELJUMP Default = 1000

VUGJUMP Default = 1000

This specifies the separation in identification numbers for display elements and grid points generated in p-version analysis. The defaults are sufficient for a 9 9 9 display element mesh.

Identification numbers for display elements and grid points start with 10001001 and 201001001, respectively. For example, by default the identification numbers for the display elements of the first p-element will be numbered 100001001 through 100002000 and the second p-element 100002001 through 100003000, etc.

## 756 Parameter Descriptions

|         |                   |
|---------|-------------------|
| VUBEAM  | Default = VUBEAM  |
| VUHEXA  | Default = VUHEXA  |
| VUPENTA | Default = VUPENTA |
| VUQUAD4 | Default = VUQUAD4 |
| VUTETRA | Default = VUTETRA |
| VUTRIA3 | Default = VUTRIA3 |

These parameters are used in a p-version analysis to specify the names of the display elements in the data recovery output tables such as those created by the VUGRID Case Control command and PARAM,POST. They should be used if your postprocessor does not recognize display elements. For example, PARAM,VUHEXA,CHEXA renames the display element VUHEXA to “CHEXA” in the output files.

### W & X – Parameters

|        |              |
|--------|--------------|
| WMODAL | Default = NO |
|--------|--------------|

WMODAL specifies a structural-to-viscous damping conversion method that uses the solved modal frequencies as conversion factors. WMODAL is only applicable to modal transient analysis (SOL 112). When one or both of the W3 and W4 parameters are specified (see the W3, W4, W3FL, W4FL parameter) in conjunction with WMODAL, the structural-to-viscous damping conversion is calculated using:

$$[B_{qv}] = [\Phi_{dq}^T] \left( [B_{dd}^1] + [B_{dd}^2] + \frac{G}{W3} [K_{dd}^1] + \frac{1}{W4} [K_{dd}^4] \right) [\Phi_{dq}]$$

$$+ \begin{bmatrix} 1/\omega_1 & 0 & \dots & 0 \\ 0 & 1/\omega_2 & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & 1/\omega_q \end{bmatrix} [\Phi_{dq}^T] (G[K_{dd}^1] + [K_{dd}^4]) [\Phi_{dq}] \begin{bmatrix} 1/\omega_1 & 0 & \dots & 0 \\ 0 & 1/\omega_2 & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & 1/\omega_q \end{bmatrix}$$

where  $\omega_i$  are the modal frequencies in rad/sec.

For rigid body modes, the diagonal entries,  $1/\omega_i$ , are partitioned out of the calculation. The FZERO parameter is used to identify rigid body modes (see the FZERO parameter).

WRTMAT Default: 2

PARAM, WRTMAT is valid only for when PARAM,CORROPT,YES is defined.

1: Write reduced A-SET mass (MXX) and stiffness (KXX) matrices to OP2 file.

2: In addition to MXX and KXX, write back expansion matrix (GOA) from A-SET to Display Set to OP2 file.

WTMASS Default = 1.0

The terms of the structural mass matrix are multiplied by the value of WTMASS when they are generated. In coupled fluid-structure analysis WTMASS is applied to the structural portion of the model only. WTMASS applies to MFLUID entries but it is not recommended for use in hydroelastic problems.

W3, W4, W3FL, W4FL Default = 0.0

The damping matrix for transient analysis is assembled from the equation:

$$[B_{dd}] = [B_{dd}^1] + [B_{dd}^2] + \frac{G}{W3}[K_{dd}^1] + \frac{1}{W4}[K_{dd}^4]$$

In coupled fluid-structure analysis, W3 and W4 are applied to the structural portion of the model and W3FL and W4FL to the fluid portion of the model. The default values of 0.0 for W3, W4, W3FL, and W4FL cause the  $[K_{dd}^1]$  and  $[K_{dd}^4]$  terms to be ignored in the damping matrix, regardless of the presence of the PARAM, G or GFL or  $[K_{dd}^4]$ .  $[K_{dd}^1]$  is the stiffness.  $[K_{dd}^4]$  is the structural damping and is created when GE is specified on the MATi entries.  $[K_{dd}^1]$  is the stiffness. The units of W3, W4, W3FL, and W4FL are rad/sec.

In SOLs 129 and 159, W4 may vary between subcases. However, the linear portion of the model uses only the W4 value from the first subcase and the values in the subsequent subcases are applied to the nonlinear portion of the model.

## 758 Parameter Descriptions

XFLAG Default = 0

By default (XFLAG = 0), when temperature loads and element deformations are present, the element strain energy for the linear elements is calculated using the following equation:

$$E = \frac{1}{2} u^T K_e u - u^T P_{et}$$

where  $u$  is the deformation,  $K_e$  is the element stiffness and  $P_{et}$  is the element load vector for temperature differences and element deformations. If XFLAG is set to 2, the element strain energy for linear elements is calculated using the following equation:

$$E = \frac{1}{2} u^T K_e u - \frac{1}{2} u^T P_{et}$$

The latter formula is the same strain energy calculation used for nonlinear elements.

## 7.2 Parameter Applicability Tables

Table 7-1 lists parameter applicability to the solution sequences (SOLs 101 through 112). The following nomenclature is used

|       |                                                                       |
|-------|-----------------------------------------------------------------------|
| B     | Must be specified in the Bulk Data Section only.                      |
| E     | May be specified in either the Bulk Data and/or Case Control Section. |
| blank | Is not supported for that solution number.                            |

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| ACOUT         | B                                  |     |     |     | E   | E   | E   | E   | E   | E   |
| ACSYM         |                                    |     |     |     |     | B   |     |     | B   |     |
| ADPCON        |                                    |     |     | E   |     |     |     |     |     |     |
| ADSTAT        |                                    |     |     |     |     |     | B   |     |     | B   |
| AESDISC       |                                    |     |     |     |     |     |     |     |     |     |
| AESMAXIT      |                                    |     |     |     |     |     |     |     |     |     |
| AESMETH       |                                    |     |     |     |     |     |     |     |     |     |
| AESRNDM       |                                    |     |     |     |     |     |     |     |     |     |
| AESTOL        |                                    |     |     |     |     |     |     |     |     |     |
| ALPHA1        |                                    |     |     |     | B   | B   | B   | B   | B   | B   |
| ALPHA2        |                                    |     |     |     | B   | B   | B   | B   | B   | B   |
| ALTRED        | B                                  |     | B   |     |     |     |     |     |     |     |
| ALTSHAPE      | B                                  | B   |     |     | B   | B   | B   | B   | B   | B   |
| ASCOUNP       | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| ASING         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| AUNITS        |                                    |     |     |     |     |     |     |     |     |     |
| AUTOADJ       |                                    |     |     |     |     |     |     |     |     |     |

## 760 Parameter Applicability Tables

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| AUTOMPC       | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| AUTOSEEL      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| AUTOSPC       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| AUTOSPCR      |                                    |     |     | E   |     |     |     |     |     |     |
| AUTOSPRT      |                                    | E   |     |     |     | E   | E   | E   | E   | E   |
| BAILOUT       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| BETA          |                                    |     |     |     |     |     |     |     |     |     |
| BIGER         | E                                  | E   | E   |     |     |     |     |     |     |     |
| BIGER1        | E                                  | E   | E   |     |     |     |     |     |     |     |
| BIGER2        | E                                  | E   | E   |     |     |     |     |     |     |     |
| BOLTFAC       | B                                  | B   | B   |     | B   | B   | B   | B   | B   | B   |
| BUCKLE        |                                    |     |     | E   |     |     |     |     |     |     |
| CA1, CA2      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| CB1, CB2      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| CDIF          |                                    |     |     |     |     |     |     |     |     |     |
| CHECKOUT      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| CK1, CK2, CK3 | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| CK41, CK42    | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| CLOSE         |                                    | B   |     |     |     |     |     |     |     |     |
| CM1, CM2      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| COMPMATT      |                                    |     |     | B   |     |     |     |     |     |     |
| CONFAC        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| COUPMASS      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| CP1, CP2      | E                                  |     | E   | E   |     | E   | E   |     | E   | E   |



**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| CURV          | E                                  | E   | E   |     |     |     |     |     |     |     |
| CURVPLOT      | E                                  | E   | E   | E   |     |     |     |     |     |     |
| DBALL         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| DBCCONV       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| DBC DIAG      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| DBCOWRT       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| DBDICT        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| DBDRPRJ       | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| DBDRVER       | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| DBUP          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| DBDN          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| DBRCV         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| DDRMM         |                                    |     |     |     |     |     |     |     | B   | B   |
| DESPCH        |                                    |     |     |     |     |     |     |     |     |     |
| DESPCH1       |                                    |     |     |     |     |     |     |     |     |     |
| DFREQ         |                                    |     |     |     |     | B   |     |     | B   |     |
| DOPT          | E                                  | E   | E   |     |     |     |     |     |     |     |
| DPEPS         |                                    |     |     |     |     |     |     |     |     |     |
| DSNOKD        |                                    |     | B   |     |     |     |     |     |     |     |
| DSZERO        | B                                  | B   | B   |     |     |     |     |     |     |     |
| DYNPCF        |                                    | E   |     |     | E   | E   | E   | E   | E   | E   |
| EIGD          |                                    |     | B   |     |     |     |     |     |     |     |
| EPPT          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| EPZERO        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |

## 762 Parameter Applicability Tables

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| ERROR         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| EST           | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| EXTDR         | B                                  | B   |     |     | B   | B   | B   | B   | B   | B   |
| EXTDROUT      | B                                  | B   |     |     | B   | B   | B   | B   | B   | B   |
| EXTDRUNT      | B                                  | B   |     |     | B   | B   | B   | B   | B   | B   |
| EXTOUT        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| EXTRCV        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| EXTUNIT       | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| FACTOR        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| FIXEDB        | E                                  | E   |     |     |     |     |     |     |     |     |
| FKSYMFAC      |                                    |     |     | E   |     |     |     |     |     |     |
| FLUIDMP       |                                    |     |     |     |     |     |     |     | E   |     |
| FLUIDSE       |                                    | B   |     |     | B   | B   | B   | B   | B   | B   |
| FOLLOWK       |                                    | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| FRQDEPO       |                                    |     |     |     |     | B   |     |     | B   |     |
| FZERO         |                                    | E   |     |     |     | E   | E   | E   | E   | E   |
| G             |                                    |     |     |     | B   | B   | B   | B   | B   | B   |
| GEOMU         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| GFL           |                                    |     |     |     | B   | B   | B   | B   | B   | B   |
| GPECT         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| GRDPNT        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| GUSTAERO      |                                    |     |     |     |     |     |     |     |     |     |
| HEATSTAT      | B                                  |     |     |     |     |     |     |     |     |     |
| HFREQ         |                                    |     |     |     |     |     |     | B   | B   | B   |

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| HFREQFL       |                                    |     |     |     |     |     |     | B   | B   | B   |
| IFP           | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| IFTM          |                                    |     |     |     |     |     |     |     | B   |     |
| INREL = -1    | E                                  |     | E   |     |     |     |     |     |     |     |
| INREL = -2    | E                                  |     |     |     |     |     |     |     |     |     |
| IRES          | E                                  |     | E   | E   |     | E   | E   |     | E   | E   |
| ITAPE         | B                                  | B   | B   |     |     |     |     |     |     |     |
| IUNIT         | B                                  | B   | B   |     |     |     |     |     |     |     |
| KDAMP         |                                    |     |     |     |     |     |     | B   | B   | B   |
| KDAMPFL       |                                    |     |     |     |     |     |     | B   | B   | B   |
| KDIAG         |                                    |     |     | E   |     |     |     |     |     |     |
| K6ROT         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| LANGLE        |                                    |     |     | B   |     |     |     |     |     |     |
| LFREQ         |                                    |     |     |     |     |     |     | B   | B   | B   |
| LFREQFL       |                                    |     |     |     |     |     |     | B   | B   | B   |
| LGDISP        |                                    |     |     | E   |     |     |     |     |     |     |
| LMODES        |                                    | E   |     |     |     |     |     | B   | B   | B   |
| LMODESFL      |                                    |     |     |     |     |     |     | B   | B   | B   |
| LOADU         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| LOOPID        |                                    |     |     | E   |     |     |     |     |     |     |
| MACH          |                                    |     |     |     |     |     |     |     |     |     |
| MAXLP         |                                    |     |     |     |     |     |     |     |     |     |
| MAXRATIO      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| MECHFIL       |                                    | E   |     |     |     |     |     | E   | E   | E   |

## 764 Parameter Applicability Tables

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| MECHFIX       |                                    | E   |     |     |     |     |     | E   | E   | E   |
| MECHPRT       |                                    | E   |     |     |     |     |     |     |     |     |
| MESH          | B                                  |     |     |     |     |     |     |     |     |     |
| MINIGOA       | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| MMFIL         |                                    |     |     |     |     | E   | E   |     |     |     |
| MODACC        |                                    |     |     |     |     |     |     |     | B   | B   |
| MODEL         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| MPCX          | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| NASPRT        |                                    |     |     |     |     |     |     |     |     |     |
| NDAMP         |                                    |     |     |     |     |     |     |     |     |     |
| NEWSET        | B                                  |     |     |     |     |     |     |     |     |     |
| NINTPTS       | E                                  | E   | E   |     |     |     |     |     |     |     |
| NLAYERS       |                                    |     |     | E   |     |     |     |     |     |     |
| NLHTLS        |                                    |     |     | E   |     |     |     |     |     |     |
| NLMAX         |                                    |     |     |     |     | E   | E   |     |     |     |
| NLMIN         |                                    |     |     |     |     | E   | E   |     |     |     |
| NMLOOP        |                                    |     |     | E   | E   | E   | E   | E   | E   | E   |
| NOCOMPS       | E                                  | E   | E   | E   |     |     |     |     |     |     |
| NOELOF        | E                                  | E   | E   |     |     |     |     |     |     |     |
| NOELOP        | E                                  | E   | E   |     |     |     |     |     |     |     |
| NOFISR        | E                                  | E   | E   | E   |     |     |     |     |     |     |
| NOGPF         | E                                  | E   | E   |     |     |     |     |     |     |     |
| NOMSGSTR      | E                                  | E   | E   |     |     |     |     |     |     |     |
| NONCUP        |                                    |     |     |     |     |     |     |     |     | B   |

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| NQSET         |                                    | E   |     |     | E   | E   | E   | E   | E   | E   |
| NLTOL         |                                    |     |     | E   |     |     |     |     |     |     |
| NUMOUT        | E                                  | E   | E   |     |     |     |     |     |     |     |
| NUMOUT1       | E                                  | E   | E   |     |     |     |     |     |     |     |
| NUMOUT2       | E                                  | E   | E   |     |     |     |     |     |     |     |
| OCMP          | E                                  | E   | E   | E   |     |     |     |     |     |     |
| OEE           | E                                  | E   | E   | E   |     |     |     |     |     |     |
| OEF           | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OEFX          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OES           | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OESE          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OESX          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OG            | E                                  | E   | E   | E   |     |     |     |     |     |     |
| OGEOM         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OGPF          | E                                  | E   | E   | E   |     |     |     |     |     |     |
| OGPS          | E                                  | E   | E   |     |     |     | E   |     |     | E   |
| OLDSEQ        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| OMAXR         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OPG           | E                                  |     | E   | E   |     | E   | E   |     | E   | E   |
| OPGEOM        |                                    |     |     |     |     |     |     |     |     |     |
| OPGTKG        |                                    |     |     |     |     |     |     |     |     |     |
| OPPHIB        |                                    |     |     |     |     |     |     |     |     |     |
| OPPHIPA       |                                    |     |     |     |     |     |     |     |     |     |
| OPTEXIT       |                                    |     |     |     |     |     |     |     |     |     |

## 766 Parameter Applicability Tables

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| OPTION        |                                    | B   |     |     |     |     |     |     |     |     |
| OQG           | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| ORBEPS        |                                    |     |     |     |     |     |     | B   |     |     |
| OSWELM        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| OSWPPT        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| OUG           | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OUGCORD       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OUMU          |                                    | E   |     |     |     |     |     |     |     |     |
| OUNIT1        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OUNIT2        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| OUTOPT        | E                                  | E   | E   | E   |     |     |     |     |     |     |
| PANELMP       |                                    |     |     |     |     |     |     |     | E   |     |
| PATVER        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PDRMSG        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PEDGEF        | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| PLTMSG        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| POST          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| POSTEXT       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| POSTU         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PREFDB        |                                    |     |     |     |     |     | E   | E   | E   | E   |
| PRGPST        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRINT         |                                    |     |     |     |     |     |     |     |     |     |
| PROUT         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRPA          | E                                  |     | E   |     |     |     |     |     |     |     |

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| PRPJ          | E                                  |     | E   |     |     | E   | E   |     | E   | E   |
| PRTCSTM       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRTEQXIN      | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRTGPDY       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRTGPL        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRTGPTT       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRTMAXIM      | E                                  | E   | E   |     | E   | E   | E   | E   | E   | E   |
| PRTMGG        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRTPG         | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| PRTRESLT      | E                                  | E   | E   |     | E   | E   | E   | E   | E   | E   |
| PVALINIT      | B                                  | B   |     |     | B   | B   | B   | B   | B   | B   |
| Q             |                                    |     |     |     |     |     |     |     |     |     |
| RANCPDX       |                                    |     |     |     |     | B   |     |     | B   |     |
| RESLTOP       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| RESVALT       |                                    |     |     |     |     |     |     |     | B   | B   |
| RESVEC        |                                    | E   |     | E   | E   | E   | E   | E   | E   | E   |
| RESVINER      |                                    | E   |     | E   | E   | E   | E   | E   | E   | E   |
| RESVPGF       |                                    | E   |     | E   | E   | E   | E   | E   | E   | E   |
| RESVSE        |                                    | E   |     | E   | E   | E   | E   | E   | E   | E   |
| RESVSLI       |                                    | E   |     | E   | E   | E   | E   | E   | E   | E   |
| RESVSO        |                                    | E   |     | E   | E   | E   | E   | E   | E   | E   |
| RMSINT        |                                    |     |     |     |     | B   |     |     | B   |     |
| RMXTRAN       |                                    |     |     |     |     |     |     |     |     | B   |
| ROTCSV        |                                    |     |     |     |     |     |     | B   |     |     |

## 768 Parameter Applicability Tables

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| ROTGPF        |                                    |     |     |     |     |     |     | B   |     |     |
| RPOSTS1       |                                    |     |     |     |     | B   |     |     | B   |     |
| RSPECTRA      |                                    |     |     |     |     |     | E   |     |     | E   |
| RSPRINT       |                                    |     |     |     |     |     | E   |     |     | E   |
| S1            | E                                  | E   | E   | E   |     |     | E   |     |     | E   |
| S1A           | E                                  | E   | E   | E   |     |     |     |     |     |     |
| S1AG          | E                                  | E   | E   | E   |     |     |     |     |     |     |
| S1AM          | E                                  | E   | E   | E   |     |     |     |     |     |     |
| S1G           | E                                  | E   | E   | E   |     |     |     |     |     |     |
| S1M           | E                                  | E   | E   | E   |     |     |     |     |     |     |
| SCRSPEC       |                                    | B   |     |     |     |     |     |     |     |     |
| SCRSPEC       |                                    | B   |     |     |     |     |     |     |     |     |
| SECOMB        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SEMAP         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SEMAPOPT      | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SEMAPPRT      | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SENSUOO       |                                    |     |     |     |     |     |     |     |     |     |
| SEP1XOVR      | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SEQOUT        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SERST         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SESDAMP       |                                    | E   |     |     | E   | E   | E   | E   | E   | E   |
| SESEF         |                                    | E   |     |     |     |     |     |     |     |     |
| SIGMA         |                                    |     |     |     |     |     |     |     |     |     |
| SKPAMP        |                                    |     |     |     |     |     |     |     |     |     |



**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| SLOOPID       |                                    |     |     |     |     |     |     |     |     |     |
| SMALLQ        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SNORM         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SNORMPRT      | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SOFTEXIT      |                                    |     |     |     |     |     |     |     |     |     |
| SOLID         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| SPCGEN        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| SRTELTYP      | E                                  | E   | E   |     |     |     |     |     |     |     |
| SRTOPT        | E                                  | E   | E   |     |     |     |     |     |     |     |
| START         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| STIME         |                                    |     |     |     |     |     |     |     |     |     |
| STRUCTMP      |                                    |     |     |     |     |     |     |     | E   |     |
| SUBCASID      |                                    |     |     | E   |     |     |     |     |     |     |
| SUBID         |                                    |     |     | E   |     |     |     |     |     |     |
| SUPER         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| TABID         |                                    |     |     |     |     |     | E   |     |     | E   |
| TABS          |                                    |     |     |     |     |     |     |     |     |     |
| TESTNEG       |                                    |     |     | E   |     |     |     |     |     |     |
| TINY          | E                                  | E   | E   |     |     |     |     |     |     |     |
| TOLRSC        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| TSTATIC       |                                    |     |     |     |     |     |     |     |     |     |
| UNITSYS       | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   |
| UNSYMF        |                                    |     |     | B   |     |     |     |     |     |     |
| UPDTBSH       |                                    |     |     |     |     |     |     |     |     |     |

## 770 Parameter Applicability Tables

**Table 7-1. PARAMeter Names in the SOLs**

| PARAMeterName | Solution Numbers (101 through 112) |     |     |     |     |     |     |     |     |     |
|---------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|               | 101                                | 103 | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 |
| USETPRT       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| USETSEL       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| VMOPT         |                                    | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| VREF          |                                    |     |     |     |     |     |     |     |     |     |
| VUBEAM        | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| VUELJUMP      | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| VUGJUMP       | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| VUHEXA        | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| VUPENTA       | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| VUQUAD4       | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| VUTETRA       | E                                  | E   |     |     | E   | E   | E   | E   | E   | E   |
| WMODAL        |                                    |     |     |     |     |     |     |     |     | E   |
| WTMASS        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   |
| W3            |                                    |     |     |     |     |     | E   |     |     | E   |
| W3FL          |                                    |     |     |     |     |     | E   |     |     | E   |
| W4            |                                    |     |     |     |     |     | E   |     |     | E   |
| W4FL          |                                    |     |     |     |     |     | E   |     |     | E   |
| XFLAG         | E                                  |     | E   |     |     |     |     |     |     |     |

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| ACOUT          |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| ACSYM          |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| ADPCON         |                                    |     |     |     | E   |     |     |     | E   | E   |     |     |           |
| ADSTAT         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| AESDISC        |                                    |     |     |     |     | B   |     |     |     |     |     | B   |           |
| AESMAXIT       |                                    |     |     |     |     | B   |     |     |     |     |     | B   |           |
| AESMETH        |                                    |     |     |     |     | B   |     |     |     |     |     | B   |           |
| AESRNDM        |                                    |     |     |     |     | B   |     |     |     |     |     | B   |           |
| AESTOL         |                                    |     |     |     |     | B   |     |     |     |     |     | B   |           |
| ALPHA1         |                                    |     |     | B   | B   |     | B   | B   | B   | B   |     | B   | B         |
| ALPHA2         |                                    |     |     | B   | B   |     | B   | B   | B   | B   |     | B   | B         |
| ALTRED         | B                                  |     |     |     |     |     |     |     |     |     |     |     |           |
| ALTSHAPE       |                                    |     |     |     |     |     |     |     |     |     | B   |     |           |
| ASCOPUP        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| ASING          | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| AUNITS         |                                    |     |     |     |     | B   |     |     |     |     |     | B   |           |
| AUTOADJ        |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| AUTOMPC        | B                                  | B   | B   | B   | B   |     |     |     | B   | B   | B   |     |           |
| AUTOSEEL       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| AUTOSPC        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| AUTOSPCR       |                                    |     |     |     |     |     |     |     | E   |     |     |     |           |
| AUTOSPRT       |                                    |     |     |     |     |     | E   | E   |     |     |     |     |           |
| BAILOUT        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| BETA           |                                    |     |     |     | E   |     |     |     |     | E   |     |     |           |
| BIGER          | E                                  | E   | E   |     |     | E   |     |     | E   |     | E   | E   |           |
| BIGER1         | E                                  | E   | E   |     |     | E   |     |     | E   |     | E   | E   |           |
| BIGER2         | E                                  | E   | E   |     |     | E   |     |     | E   |     | E   | E   |           |

## 772 Parameter Applicability Tables

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| BOLTFACT       |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| BUCKLE         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| CA1, CA2       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| CB1, CB2       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| CDIF           |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| CHECKOUT       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| CK1, CK2, CK3  | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| CK41, CK42     | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| CLOSE          |                                    | B   |     |     |     |     |     |     |     |     | B   |     |           |
| CM1, CM2       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| COMPMATT       |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| CONFAC         | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| COUPMASS       | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| CP1, CP2       | E                                  |     | E   | E   | E   | E   |     | E   | E   | E   | E   | E   |           |
| CURV           | E                                  | E   | E   |     |     | E   |     |     | E   |     | E   | E   |           |
| CURVPLOT       | E                                  | E   | E   |     |     | E   |     |     |     |     | E   | E   |           |
| DBALL          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| DBC CONV       | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| DBC DIAG       | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| DBC OVWRT      | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| DB DICT        | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| DB DRPRJ       | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| DB DRVER       | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| DBUP           | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| DBDN           | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| DBRCV          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| DDRMM          |                                    |     |     |     |     |     |     | B   |     |     |     | E   |           |

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| DESPCH         |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| DESPCH1        |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| DFREQ          |                                    |     |     | B   |     |     |     | B   |     |     |     | B   |           |
| DOPT           | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| DPEPS          |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| DPREONLY       |                                    |     |     |     |     |     |     |     |     |     | B   |     |           |
| DSNOKD         |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| DSZERO         |                                    |     |     |     |     |     |     |     |     |     | B   |     |           |
| DYNSPCF        |                                    | E   |     | E   |     |     | E   | E   |     |     | E   | E   |           |
| EIGD           |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| EPPT           | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| EPZERO         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| ERROR          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| EST            | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| EXTDR          |                                    |     |     |     |     |     |     |     |     |     | B   |     |           |
| EXTDROUT       |                                    |     |     |     |     |     |     |     |     |     | B   |     |           |
| EXTDRUNT       |                                    |     |     |     |     |     |     |     |     |     | B   |     |           |
| EXTOUT         | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| EXTRCV         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| EXTUNIT        | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| FACTOR         | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| FIXEDB         |                                    |     |     |     |     |     |     |     |     |     | E   | E   |           |
| FKSYMFAC       |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| FLUIDMP        |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| FLUIDSE        |                                    |     |     |     |     |     |     |     |     |     | B   | B   |           |
| FOLLOWK        |                                    | E   | E   |     |     |     |     |     |     |     | E   | E   |           |
| FRQDEPO        |                                    |     |     |     |     |     |     | B   |     |     |     | B   |           |

## 774 Parameter Applicability Tables

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| FZERO          |                                    |     |     |     |     |     | E   | E   |     |     |     |     |           |
| G              |                                    |     |     | B   | E   |     | B   | B   |     | B   |     | B   |           |
| GEOMU          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| GFL            |                                    |     |     |     |     |     |     | B   |     |     |     | B   |           |
| GPECT          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| GRDPNT         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| GUSTAERO       |                                    |     |     |     |     |     | B   | B   |     |     |     | B   |           |
| HEATSTAT       |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| HFREQ          |                                    |     |     |     |     |     | B   | B   |     |     |     | B   |           |
| HFREQFL        |                                    |     |     |     |     |     |     | B   |     |     |     | B   |           |
| IFP            | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| IFTM           |                                    |     |     |     |     |     |     | B   |     |     |     |     |           |
| INREL = -1     |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| INREL = -2     |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| IRES           | E                                  |     |     | E   | E   | E   | E   | E   | E   | E   |     | E   |           |
| ITAPE          |                                    |     |     |     |     |     |     |     |     |     | B   | B   |           |
| IUNIT          |                                    |     |     |     |     |     |     |     |     |     | B   | B   |           |
| KDAMP          |                                    |     |     |     |     |     | B   |     |     |     |     | B   |           |
| KDAMPFL        |                                    |     |     |     |     |     |     | B   |     |     |     | B   |           |
| KDIAG          |                                    |     |     |     |     |     |     |     | E   |     |     |     |           |
| K6ROT          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| LANGLE         |                                    |     |     |     | B   |     |     |     | B   | B   |     |     |           |
| LFREQ          |                                    |     |     |     |     |     | B   | B   |     |     |     | B   |           |
| LFREQFL        |                                    |     |     |     |     |     |     | B   |     |     |     | B   |           |
| LGDISP         |                                    |     |     |     | E   |     |     |     | E   | E   |     |     | B         |
| LGSTRN         |                                    |     |     |     |     |     |     |     |     |     |     |     | B         |
| LMODES         |                                    |     |     |     |     |     | B   | B   |     |     | E   | B   |           |

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| LMODESFL       |                                    |     |     |     |     |     |     | B   |     |     |     | B   |           |
| LOADU          | E                                  | E   |     | E   | E   |     |     |     | E   | E   | E   | E   |           |
| LOOPID         |                                    |     |     |     | E   |     |     |     | E   | E   |     |     |           |
| MACH           |                                    |     |     |     |     |     | B   | B   |     |     |     | B   |           |
| MAXLP          |                                    |     |     |     | E   |     |     |     |     | E   |     |     |           |
| MAXRATIO       | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| MECHFIL        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| MECHFIX        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| MECHPRT        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| MESH           |                                    |     |     |     |     |     |     |     | B   | B   |     | B   |           |
| MINIGOA        | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| MMFIL          |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| MODACC         |                                    |     |     |     |     |     |     | B   |     |     |     | B   |           |
| MODEL          | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| MPCX           | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| NASPRT         |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| NDAMP          |                                    |     |     |     | E   |     |     |     |     | E   |     |     |           |
| NEWSET         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| NINTPTS        | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NLAYERS        |                                    |     |     |     | E   |     |     |     |     |     |     |     |           |
| NLHTLS         |                                    |     |     |     |     |     |     |     | E   |     |     |     |           |
| NLMAX          |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| NLMIN          |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| NMLOOP         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| NOCOMPS        | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NOELOF         | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NOELOP         | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |

## 776 Parameter Applicability Tables

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| NOFISR         | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NOGPF          | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NOMSGSTR       | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NONCUP         |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| NQSET          |                                    | E   |     | E   | E   | E   | E   | E   |     | E   | E   |     |           |
| NLTOL          |                                    |     |     |     |     |     |     |     |     | E   |     |     |           |
| NUMOUT         | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NUMOUT1        | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| NUMOUT2        | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| OCMP           | E                                  | E   |     |     |     |     |     |     |     |     | E   | E   |           |
| OEE            | E                                  | E   |     |     |     |     |     |     |     |     | E   | E   |           |
| OEF            | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OEFX           | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OES            | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OESE           | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OESX           | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OG             | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| OGEOM          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OGPF           | E                                  | E   |     |     |     | E   |     |     |     |     | E   | E   |           |
| OGPS           | E                                  | E   |     |     |     | E   |     |     |     |     | E   | E   |           |
| OLDSEQ         | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| OMAXR          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OPG            | E                                  |     |     | E   | E   |     | E   | E   |     | E   |     | E   |           |
| OPGEOM         |                                    |     |     |     |     | B   | B   | B   |     |     |     | B   |           |
| OPGTKG         |                                    |     |     |     |     | B   | B   | B   |     |     |     | B   |           |
| OPPHIB         |                                    |     |     |     |     |     | B   | B   |     |     |     | B   |           |
| OPPHIPA        |                                    |     |     |     |     |     | B   | B   |     |     |     | B   |           |



**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| OPTEXIT        |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| OPTION         |                                    | B   |     |     |     |     |     |     |     |     | B   |     |           |
| OQG            | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| ORBEPS         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| OSWELM         | B                                  | B   | B   | B   | B   | B   | B   | B   |     |     | B   | B   |           |
| OSWPPT         | B                                  | B   | B   | B   | B   | B   | B   | B   |     |     | B   | B   |           |
| OUG            | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OUGCORD        | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OUMU           |                                    | E   |     |     |     |     |     |     |     |     | E   | E   |           |
| OUNIT1         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OUNIT2         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| OUTOPT         | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| PANELMP        |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| PATVER         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PDRMSG         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PEDGEPE        |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| PLTMSG         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| POST           | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   | B         |
| POSTEXT        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| POSTU          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PREFDB         |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| PRGPST         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRINT          |                                    |     |     |     |     |     | B   |     |     |     |     | B   |           |
| PROUT          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRPA           |                                    |     |     |     |     | E   |     |     | E   |     |     | E   |           |
| PRPJ           | E                                  |     |     | E   |     | E   |     | E   | E   | E   |     | E   |           |
| PRTCSTM        | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |

## 778 Parameter Applicability Tables

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| PRTEQXIN       | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRTGPDT        | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRTGPL         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRTGPPT        | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRTMAXIM       | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRTMGG         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRTPG          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PRTRESLT       | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| PVALINIT       |                                    |     |     |     |     |     |     |     |     |     | B   | B   |           |
| Q              |                                    |     |     |     |     | B   | B   | B   |     |     |     | B   |           |
| RANCPXL        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| RESLTOP        | E                                  | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| RESVALT        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| RESVEC         |                                    |     |     |     |     |     | E   | E   |     |     | E   | E   |           |
| RESVNER        |                                    |     |     |     |     |     | E   | E   |     |     | E   | E   |           |
| RESVPGF        |                                    |     |     |     |     |     | E   | E   |     |     | E   | E   |           |
| RESVSE         |                                    |     |     |     |     |     | E   | E   |     |     | E   | E   |           |
| RESVSLI        |                                    |     |     |     |     |     | E   | E   |     |     | E   | E   |           |
| RESVSO         |                                    |     |     |     |     |     | E   | E   |     |     | E   | E   |           |
| RMSINT         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| RMXTRAN        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| ROTCSV         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| ROTGPF         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| RPOSTS1        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| RSPECTRA       |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| RSPRINT        |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| S1             | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| S1A            | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| S1AG           | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| S1AM           | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| S1G            | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| S1M            | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| SCRSPEC        |                                    | B   |     |     |     |     |     |     |     |     | B   |     |           |
| SECOMB         |                                    |     |     |     | B   | B   |     | B   | B   | B   |     | B   |           |
| SEMAPOPT       | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SEMAPPRT       | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SENSUOO        |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| SEP1XOVR       | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SEQOUT         | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SERST          | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SESDAMP        |                                    | E   | E   | E   | E   |     | E   |     |     |     | E   |     |           |
| SESEF          |                                    | E   |     |     |     |     |     |     |     |     | E   |     |           |
| SIGMA          |                                    |     |     |     |     |     |     |     |     | B   |     |     |           |
| SKPAMP         |                                    |     |     |     |     |     | B   | B   |     |     | B   | B   |           |
| SLOOPID        |                                    |     |     |     | E   |     |     |     |     |     |     |     |           |
| SMALLQ         | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SNORM          | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SNORMPRT       | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SOFTEXIT       |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| SOLID          | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| SPCGEN         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| SRTELTYP       | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| SRTOPT         | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| START          | B                                  | B   |     | B   |     | B   | B   | B   | B   | B   | B   | B   |           |

## 780 Parameter Applicability Tables

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| STIME          |                                    |     |     |     | E   |     |     |     |     | E   |     |     |           |
| STRUCTMP       |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| SUBCASID       |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| SUBID          |                                    |     |     |     |     |     |     |     | E   |     |     |     |           |
| SUPER          | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| TABID          |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| TABS           |                                    |     |     |     |     |     |     |     | E   | E   |     | E   |           |
| TESTNEG        |                                    |     |     |     |     |     |     |     | E   |     |     |     |           |
| TINY           | E                                  | E   |     |     |     | E   |     |     | E   |     | E   | E   |           |
| TOLRSC         | B                                  | B   |     | B   | B   | B   | B   | B   | B   | B   | B   | B   |           |
| TSTATIC        |                                    |     |     |     | E   |     |     |     |     | E   |     |     |           |
| UNITSYS        | B                                  | B   | B   | B   | B   | B   | B   | B   | B   | B   | B   | B   | B         |
| UNSYMF         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| UPDTBSH        |                                    |     |     |     |     |     |     |     |     |     |     | E   |           |
| USETPRT        | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| USETSEL        | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| VMOPT          | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |
| VREF           |                                    |     |     |     |     |     | B   |     |     |     |     | B   |           |
| VUBEAM         |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| VUELJUMP       |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| VUGJUMP        |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| VUHEXA         |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| VUPENTA        |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| VUQUAD4        |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| VUTETRA        |                                    |     |     |     |     |     |     |     |     |     | E   |     |           |
| WMODAL         |                                    |     |     |     |     |     |     |     |     |     |     |     |           |
| WTMASS         | E                                  | E   |     | E   | E   | E   | E   | E   | E   | E   | E   | E   |           |

**Table 7-2. PARAMeter Names in the SOLs**

| PARAMeter Name | Solution Numbers (114 through 601) |     |     |     |     |     |     |     |     |     |     |     |           |
|----------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------|
|                | 114                                | 115 | 116 | 118 | 129 | 144 | 145 | 146 | 153 | 159 | 187 | 200 | 601 & 701 |
| W3             |                                    |     |     |     | B   |     |     |     |     | E   |     | B   |           |
| W3FL           |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| W4             |                                    |     |     |     | B   |     |     |     |     | E   |     | B   |           |
| W4FL           |                                    |     |     |     |     |     |     |     |     |     |     | B   |           |
| XFLAG          | E                                  |     |     |     |     | E   |     |     |     |     |     | E   |           |

## 782 Parameter Applicability Tables

## Chapter

# 8 Item Codes

- *Element Stress (or Strain) Item Codes*
- *Element Force Item Codes*
- *Fluid Virtual Mass Pressure Item Codes*
- *Slideline Contact Item Codes*
- *Element Strain Energy Item Codes*

Item codes are integer numbers assigned to specific output quantities such as the third translational component of displacement, the major principal stress at Z1 in a CQUAD4 element, or the torque in a CBAR element. Item codes are specified on the following input statements:

- DRESP1 entry for Design Sensitivity and Optimization (SOL 200).
- X-Y Plotting commands. See “Plotting” in the *NX Nastran User’s Guide*.
- DSCONS entry for Original Design Sensitivity (DSA).
- DTI,INDTA entry for stress sorting.

The following tables provide item codes for:

- Element Stress or Strain.
- Element Force.
- Fluid Virtual Mass Pressure.
- Heat Transfer Flux.
- Slideline Contact Output.
- Element Strain Energy.

The following superscripts appear in the tables and indicate:

1. Data for components marked with the superscript (1) are included in the datablock MES output from module DRMS1. See the *NX Nastran DMAP Programmer’s Guide*.
2. Composite Element Stresses and Failure Indices. See “Overview of Laminated Composite Materials” in the *NX Nastran User’s Guide*.

### Shell element item code remarks

1. The CENTER and CORNER options on the STRESS, STRAIN, and FORCE case control commands determine the CQUAD4, CQUADR, and CTRIAR item code tables. If CENTER is requested (default), the item code tables labeled as "Center Only" should be used. If CORNER is requested, the item code tables labeled as "Center and Corners" should be used.

For example, when CENTER is requested for a CQUAD4 element, the CQUAD(33) item code format should be used. When CORNER is requested for a CQUAD4 element, the CQUAD(144) item code format should be used.



The CENTER and CORNER options on the STRESS, STRAIN, and FORCE case control commands are ignored by the CTRIA3, CTRIA6, and CQUAD8 elements. The CTRIA3 element item code table is "Center Only". The CTRIA6 and CQUAD8 item code tables are "Center and Corner".

When including shell element item codes on a DRESP1 bulk entry for Design Sensitivity and Optimization (SOL 200), do not mix elements which will produce a different item code table on the same DRESP1 stress, strain or force response.

2. Linear format shell element item codes are output in the element coordinate system. One exception; when PARAM,CURV,1 is defined, stress for the CQUAD4 and CTRIA3 elements is output in the material coordinate system.
3. Composite item codes are output in the material coordinate system defined on the element, and not the material coordinate system of the individual plies.
4. Nonlinear format shell element item codes are output in the element coordinate system.
5. Hyperelastic shell element item codes are output in the CID defined on the PLPLANE.

#### **Solid element item code remarks**

1. Linear format solid element item codes are output in the material system.
2. Nonlinear format solid element item codes are output in the element coordinate system. One exception; when ELRESCS is set to "1" on the NXSTRAT bulk entry in solutions 601 or 701, nonlinear format solid element item codes are output in the material coordinate system.
3. Hyperelastic solid element item codes are output in the basic coordinate system.

## 8.1 Element Stress (or Strain) Item Codes

All item codes refer to stresses (or strains) unless otherwise denoted.

If output is magnitude/phase, the magnitude replaces the real part, and the phase replaces the imaginary part. Strain item codes are equivalent to stress item codes. However, strain is computed for only some elements. See “Element Summary – Small Strain Elements” in the *NX Nastran Element Library*.

| Element Name<br>(Code) | Real Stresses or Strains |                         | Complex Stresses or Strains |                         |                              |
|------------------------|--------------------------|-------------------------|-----------------------------|-------------------------|------------------------------|
|                        | Item Code                | Item                    | Item Code                   | Item                    | Real/Mag. or<br>Imag./ Phase |
| CAXIF2<br><br>(47)     | 2 <sup>1</sup>           | Radial axis             | 2 <sup>1</sup>              | Radial axis             | RM                           |
|                        | 3 <sup>1</sup>           | Axial axis              | 3 <sup>1</sup>              | Axial axis              | RM                           |
|                        | 4 <sup>1</sup>           | Tangential edge         | 4 <sup>1</sup>              | Tangential edge         | RM                           |
|                        | 5 <sup>1</sup>           | Circumferential<br>edge | 5 <sup>1</sup>              | Circumferential<br>edge | RM                           |
|                        |                          |                         | 6 <sup>1</sup>              | Radial axis             | IP                           |
|                        |                          |                         | 7 <sup>1</sup>              | Axial axis              | IP                           |
|                        |                          |                         | 8 <sup>1</sup>              | Tangential edge         | IP                           |
|                        |                          |                         | 9 <sup>1</sup>              | Circumferential<br>edge | IP                           |

| Element Name<br>(Code) | Real Stresses or Strains |                          | Complex Stresses or Strains |                          |                              |
|------------------------|--------------------------|--------------------------|-----------------------------|--------------------------|------------------------------|
|                        | Item Code                | Item                     | Item Code                   | Item                     | Real/Mag. or<br>Imag./ Phase |
| CAXIF3<br><br>(48)     | 2 <sup>1</sup>           | Radial centroid          | 2 <sup>1</sup>              | Radial centroid          | RM                           |
|                        | 3 <sup>1</sup>           | Circumferential centroid | 3 <sup>1</sup>              | Circumferential centroid | RM                           |
|                        | 4 <sup>1</sup>           | Axial centroid           | 4 <sup>1</sup>              | Axial centroid           | RM                           |
|                        | 5 <sup>1</sup>           | Tangential edge 1        | 5 <sup>1</sup>              | Tangential edge 1        | RM                           |
|                        | 6 <sup>1</sup>           | Circumferential edge 1   | 6 <sup>1</sup>              | Circumferential edge 1   | RM                           |
|                        | 7 <sup>1</sup>           | Tangential edge 2        | 7 <sup>1</sup>              | Tangential edge 2        | RM                           |
|                        | 8 <sup>1</sup>           | Circumferential edge 2   | 8 <sup>1</sup>              | Circumferential edge 2   | RM                           |
|                        | 9 <sup>1</sup>           | Tangential edge 3        | 9 <sup>1</sup>              | Tangential edge 3        | RM                           |
|                        | 10 <sup>1</sup>          | Circumferential edge 3   | 10 <sup>1</sup>             | Circumferential edge 3   | RM                           |
|                        |                          |                          | 11 <sup>1</sup>             | Radial centroid          | IP                           |
|                        |                          |                          | 12 <sup>1</sup>             | Circumferential centroid | IP                           |
|                        |                          |                          | 13 <sup>1</sup>             | Axial centroid           | IP                           |
|                        |                          |                          | 14 <sup>1</sup>             | Tangential edge 1        | IP                           |
|                        |                          |                          | 15 <sup>1</sup>             | Circumferential edge 1   | IP                           |
|                        |                          |                          | 16 <sup>1</sup>             | Tangential edge 2        | IP                           |
|                        |                          |                          | 17 <sup>1</sup>             | Circumferential edge 2   | IP                           |
|                        |                          |                          | 18 <sup>1</sup>             | Tangential edge 3        | IP                           |
|                        |                          |                          | 19 <sup>1</sup>             | Circumferential edge 3   | IP                           |

## 788 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                          | Complex Stresses or Strains |                          |                              |
|------------------------|--------------------------|--------------------------|-----------------------------|--------------------------|------------------------------|
|                        | Item Code                | Item                     | Item Code                   | Item                     | Real/Mag. or<br>Imag./ Phase |
| CAXIF4<br>(49)         | 2 <sup>1</sup>           | Radial centroid          | 2 <sup>1</sup>              | Radial centroid          | RM                           |
|                        | 3 <sup>1</sup>           | Circumferential centroid | 3 <sup>1</sup>              | Circumferential centroid | RM                           |
|                        | 4 <sup>1</sup>           | Axial centroid           | 4 <sup>1</sup>              | Axial centroid           | RM                           |
|                        | 5 <sup>1</sup>           | Tangential edge 1        | 5 <sup>1</sup>              | Tangential edge 1        | RM                           |
|                        | 6 <sup>1</sup>           | Circumferential edge 1   | 6 <sup>1</sup>              | Circumferential edge 1   | RM                           |
|                        | 7 <sup>1</sup>           | Tangential edge 2        | 7 <sup>1</sup>              | Tangential edge 2        | RM                           |
|                        | 8 <sup>1</sup>           | Circumferential edge 2   | 8 <sup>1</sup>              | Circumferential edge 2   | RM                           |
|                        | 9 <sup>1</sup>           | Tangential edge 3        | 9 <sup>1</sup>              | Tangential edge 3        | RM                           |
|                        | 10 <sup>1</sup>          | Circumferential edge 3   | 10 <sup>1</sup>             | Circumferential edge 3   | RM                           |
|                        | 11 <sup>1</sup>          | Tangential edge 4        | 11 <sup>1</sup>             | Tangential edge 4        | RM                           |
|                        | 12 <sup>1</sup>          | Circumferential edge 4   | 12 <sup>1</sup>             | Circumferential edge 4   | RM                           |
|                        |                          |                          | 13                          | Radial centroid          | IP                           |
|                        |                          |                          | 14                          | Circumferential centroid | IP                           |
|                        |                          |                          | 15                          | Axial centroid           | IP                           |
|                        |                          |                          | 16                          | Tangential edge 1        | IP                           |
|                        |                          |                          | 17                          | Circumferential edge 1   | IP                           |
|                        |                          |                          | 18                          | Tangential edge 2        | IP                           |
|                        |                          |                          | 19                          | Circumferential edge 2   | IP                           |
|                        |                          |                          | 20                          | Tangential edge 3        | IP                           |
|                        |                          |                          | 21                          | Circumferential edge 3   | IP                           |
|                        |                          |                          | 22                          | Tangential edge 4        | IP                           |
|                        |                          |                          | 23                          | Circumferential edge 4   | IP                           |

| Element Name<br>(Code) | Real Stresses or Strains |                                 | Complex Stresses or Strains |               |                              |
|------------------------|--------------------------|---------------------------------|-----------------------------|---------------|------------------------------|
|                        | Item Code                | Item                            | Item Code                   | Item          | Real/Mag. or<br>Imag./ Phase |
| CBAR<br>(34)           | 2 <sup>1</sup>           | End A-Point C                   | 2 <sup>1</sup>              | End A-Point C | RM                           |
|                        | 3 <sup>1</sup>           | End A-Point D                   | 3 <sup>1</sup>              | End A-Point D | RM                           |
|                        | 4 <sup>1</sup>           | End A-Point E                   | 4 <sup>1</sup>              | End A-Point E | RM                           |
|                        | 5 <sup>1</sup>           | End A-Point F                   | 5 <sup>1</sup>              | End A-Point F | RM                           |
|                        | 6 <sup>1</sup>           | Axial                           | 6 <sup>1</sup>              | Axial         | RM                           |
|                        | 7                        | End A maximum                   | 7 <sup>1</sup>              | End A-Point C | IP                           |
|                        | 8                        | End A minimum                   | 8 <sup>1</sup>              | End A-Point D | IP                           |
|                        | 9                        | Safety margin in<br>tension     | 9 <sup>1</sup>              | End A-Point E | IP                           |
|                        | 10 <sup>1</sup>          | End B-Point C                   | 10 <sup>1</sup>             | End A-Point F | IP                           |
|                        | 11 <sup>1</sup>          | End B-Point D                   | 11 <sup>1</sup>             | Axial         | IP                           |
|                        | 12 <sup>1</sup>          | End B-Point E                   | 12 <sup>1</sup>             | End B-Point C | RM                           |
|                        | 13 <sup>1</sup>          | End B-Point F                   | 13 <sup>1</sup>             | End B-Point D | RM                           |
|                        | 14                       | End B maximum                   | 14 <sup>1</sup>             | End B-Point E | RM                           |
|                        | 15                       | End B minimum                   | 15 <sup>1</sup>             | End B-Point F | RM                           |
|                        | 16                       | Safety margin in<br>compression | 16 <sup>1</sup>             | End B-Point C | IP                           |
|                        |                          |                                 | 17 <sup>1</sup>             | End B-Point D | IP                           |
|                        |                          |                                 | 18 <sup>1</sup>             | End B-Point E | IP                           |
|                        |                          |                                 | 19 <sup>1</sup>             | End B-Point F | IP                           |

## 790 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                            | Real Stresses or Strains                                                                                                                                                                                                 |                            | Complex Stresses or Strains |                            |                                                                                                                                                                                                                          |    |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
|                                                   | Item Code                                                                                                                                                                                                                | Item                       | Item Code                   | Item                       | Real/Mag. or<br>Imag./ Phase                                                                                                                                                                                             |    |
| CBAR<br><br>(100)<br><br>Intermediate<br>Stations | 2                                                                                                                                                                                                                        | Station<br>Distance/Length | 2                           | Station<br>Distance/Length | RM                                                                                                                                                                                                                       |    |
|                                                   | 3                                                                                                                                                                                                                        | Point C                    | 3                           | Point C                    | RM                                                                                                                                                                                                                       |    |
|                                                   | 4                                                                                                                                                                                                                        | Point D                    | 4                           | Point D                    | RM                                                                                                                                                                                                                       |    |
|                                                   | 5                                                                                                                                                                                                                        | Point E                    | 5                           | Point E                    | RM                                                                                                                                                                                                                       |    |
|                                                   | 6                                                                                                                                                                                                                        | Point F                    | 6                           | Point F                    | RM                                                                                                                                                                                                                       |    |
|                                                   | 7                                                                                                                                                                                                                        | Axial                      | 7                           | Axial                      | RM                                                                                                                                                                                                                       |    |
|                                                   | 8                                                                                                                                                                                                                        | Maximum                    | 8                           | Maximum                    | RM                                                                                                                                                                                                                       |    |
|                                                   | 9                                                                                                                                                                                                                        | Minimum                    | 9                           | Minimum                    | RM                                                                                                                                                                                                                       |    |
|                                                   | 10                                                                                                                                                                                                                       | Margin of Safety           | 10                          | Point C                    | IP                                                                                                                                                                                                                       |    |
|                                                   | (Item codes above<br>are given for End<br>A. For codes 2<br>through 10 at<br>intermediate<br>stations add<br>(K-1)*9 where<br>K is the station<br>number, and for<br>codes at End B,<br>K=number of<br>stations plus 1.) |                            |                             | 11                         | Point D                                                                                                                                                                                                                  | IP |
|                                                   |                                                                                                                                                                                                                          |                            |                             | 12                         | Point E                                                                                                                                                                                                                  | IP |
|                                                   |                                                                                                                                                                                                                          |                            |                             | 13                         | Point F                                                                                                                                                                                                                  | IP |
|                                                   |                                                                                                                                                                                                                          |                            |                             | 14                         | Axial                                                                                                                                                                                                                    | IP |
|                                                   |                                                                                                                                                                                                                          |                            |                             | 15                         | Maximum                                                                                                                                                                                                                  | IP |
|                                                   |                                                                                                                                                                                                                          |                            |                             | 16                         | Minimum                                                                                                                                                                                                                  |    |
|                                                   |                                                                                                                                                                                                                          |                            |                             |                            | (Item codes above<br>are given for End<br>A. For codes 2<br>through 16 at<br>intermediate<br>stations add<br>(K-1)*9 where<br>K is the station<br>number, and for<br>codes at End B,<br>K=number of<br>stations plus 1.) |    |

## Element Stress (or Strain) Item Codes 791

**8**  
CODES

| Element Name<br>(Code)                | Real Stresses or Strains |                                                                                                                                                                                                                                                                          | Complex Stresses or Strains |                                                                                                                                                                                                                                                                 |                              |
|---------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
|                                       | Item Code                | Item                                                                                                                                                                                                                                                                     | Item Code                   | Item                                                                                                                                                                                                                                                            | Real/Mag. or<br>Imag./ Phase |
| CBEAM<br><br>(2)<br><br>Linear Format | 2                        | External grid point ID                                                                                                                                                                                                                                                   | 2                           | External grid point ID                                                                                                                                                                                                                                          |                              |
|                                       | 3                        | Station distance/length                                                                                                                                                                                                                                                  | 3                           | Station distance/length                                                                                                                                                                                                                                         |                              |
|                                       | 4 <sup>1</sup>           | Long. Stress at Point C                                                                                                                                                                                                                                                  | 4 <sup>1</sup>              | Long. Stress at Point C                                                                                                                                                                                                                                         | RM                           |
|                                       | 5 <sup>1</sup>           | Long. Stress at Point D                                                                                                                                                                                                                                                  | 5 <sup>1</sup>              | Long. Stress at Point D                                                                                                                                                                                                                                         | RM                           |
|                                       | 6 <sup>1</sup>           | Long. Stress at Point E                                                                                                                                                                                                                                                  | 6 <sup>1</sup>              | Long. Stress at Point E                                                                                                                                                                                                                                         | RM                           |
|                                       | 7 <sup>1</sup>           | Long. Stress at Point D                                                                                                                                                                                                                                                  | 7 <sup>1</sup>              | Long. Stress at Point F                                                                                                                                                                                                                                         | RM                           |
|                                       | 8                        | Maximum stress                                                                                                                                                                                                                                                           | 8 <sup>1</sup>              | Long. Stress at Point C                                                                                                                                                                                                                                         | IP                           |
|                                       | 9                        | Minimum stress                                                                                                                                                                                                                                                           | 9 <sup>1</sup>              | Long. Stress at Point D                                                                                                                                                                                                                                         | IP                           |
|                                       | 10                       | Safety margin in tension                                                                                                                                                                                                                                                 | 10 <sup>1</sup>             | Long. Stress at Point E                                                                                                                                                                                                                                         | IP                           |
|                                       | 11                       | Safety margin in compression<br><br>(Item codes are given for End AEnd A. Addition of the quantity (K-1)10 to the item code points to the same information for other stations, where K is the station number. K=11 for End B and 2 through10 for intermediate stations.) | 11 <sup>1</sup>             | Long. Stress at Point F<br><br>(Item codes are given for End A. Addition of the quantity (K-1)10 to the item code points to the same information for other stations, where K is the station number. K=11 for End B and 2 through 10 for intermediate stations.) | IP                           |

## 792 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)               | Real Stresses or Strains |                                                                                                                                                                                                    | Complex Stresses or Strains |                |                              |
|--------------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                      | Item Code                | Item                                                                                                                                                                                               | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CBEAM<br>(94)<br>Nonlinear<br>Format | 2                        | External grid<br>point ID                                                                                                                                                                          |                             | Not applicable |                              |
|                                      | 3                        | C (Character)                                                                                                                                                                                      |                             |                |                              |
|                                      | 4                        | Long. Stress at<br>point C                                                                                                                                                                         |                             |                |                              |
|                                      | 5                        | Equivalent stress                                                                                                                                                                                  |                             |                |                              |
|                                      | 6                        | Total strain                                                                                                                                                                                       |                             |                |                              |
|                                      | 7                        | Effective plastic<br>strain                                                                                                                                                                        |                             |                |                              |
|                                      | 8                        | Effective creep<br>strain (Item<br>codes 3 through<br>8 are repeated<br>for points D, E,<br>and F. Then the<br>entire record<br>(from 2 through<br>N) is repeated<br>for End B of the<br>element.) |                             |                |                              |



| Element Name<br>(Code) | Real Stresses or Strains |                                                                                                                                         | Complex Stresses or Strains |                                                                                                                                    |                              |
|------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
|                        | Item Code                | Item                                                                                                                                    | Item Code                   | Item                                                                                                                               | Real/Mag. or<br>Imag./ Phase |
| CBEND<br>(69)          | 2                        | External grid point ID                                                                                                                  | 2                           | External grid point ID                                                                                                             |                              |
|                        | 3                        | Circumferential angle                                                                                                                   | 3                           | Circumferential angle                                                                                                              |                              |
|                        | 4 <sup>1</sup>           | Long. Stress at Point C                                                                                                                 | 4 <sup>1</sup>              | Long. Stress at Point C                                                                                                            | RM                           |
|                        | 5 <sup>1</sup>           | Long. Stress at Point D                                                                                                                 | 5 <sup>1</sup>              | Long. Stress at Point D                                                                                                            | RM                           |
|                        | 6 <sup>1</sup>           | Long. Stress at Point E                                                                                                                 | 6 <sup>1</sup>              | Long. Stress at Point E                                                                                                            | RM                           |
|                        | 7 <sup>1</sup>           | Long. Stress at Point F                                                                                                                 | 7 <sup>1</sup>              | Long. Stress at Point F                                                                                                            | RM                           |
|                        | 8                        | Maximum stress                                                                                                                          | 8 <sup>1</sup>              | Long. Stress at Point C                                                                                                            | IP                           |
|                        | 9                        | Minimum stress                                                                                                                          | 9 <sup>1</sup>              | Long. Stress at Point D                                                                                                            | IP                           |
|                        | 10                       | Safety margin in tension                                                                                                                | 10 <sup>1</sup>             | Long. Stress at Point E                                                                                                            | IP                           |
|                        | 11                       | Safety margin in compression<br><br>(Item codes are given for End A. Item codes 12 through 21 point to the same information for end B.) | 11 <sup>1</sup>             | Long. Stress at Point F<br><br>(Item codes are given for End A. Item codes 12 through 21 point to the same information for End B.) | IP                           |

## 794 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)          | Real Stresses or Strains |               | Complex Stresses or Strains |               |                              |
|---------------------------------|--------------------------|---------------|-----------------------------|---------------|------------------------------|
|                                 | Item Code                | Item          | Item Code                   | Item          | Real/Mag. or<br>Imag./ Phase |
| CBUSH<br>(102)<br>Linear Format | 2                        | Translation-x | 2                           | Translation-x | R                            |
|                                 | 3                        | Translation-y | 3                           | Translation-y | R                            |
|                                 | 4                        | Translation-z | 4                           | Translation-z | R                            |
|                                 | 5                        | Rotation-x    | 5                           | Rotation-x    | R                            |
|                                 | 6                        | Rotation-y    | 6                           | Rotation-y    | R                            |
|                                 | 7                        | Rotation-z    | 7                           | Rotation-z    | R                            |
|                                 |                          |               | 8                           | Translation-x | I                            |
|                                 |                          |               | 9                           | Translation-y | I                            |
|                                 |                          |               | 10                          | Translation-z | I                            |
|                                 |                          |               | 11                          | Rotation-x    | I                            |
|                                 |                          |               | 12                          | Rotation-y    | I                            |
|                                 |                          |               | 13                          | Rotation-z    | I                            |

| Element Name (Code)                | Real Stresses or Strains |                        |
|------------------------------------|--------------------------|------------------------|
|                                    | Item Code                | Item                   |
| CBUSH<br>(226)<br>Nonlinear Format | 5                        | Stress Translational X |
|                                    | 6                        | Stress Translational Y |
|                                    | 7                        | Stress Translational Z |
|                                    | 8                        | Strain Translational X |
|                                    | 9                        | Strain Translational Y |
|                                    | 10                       | Strain Translational Z |
|                                    | 14                       | Stress Rotational X    |
|                                    | 15                       | Stress Rotational Y    |
|                                    | 16                       | Stress Rotational Z    |
|                                    | 17                       | Strain Rotational X    |
|                                    | 18                       | Strain Rotational Y    |
|                                    | 19                       | Strain Rotational Z    |

## 796 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                       | Complex Stresses or Strains |                |                              |
|------------------------|--------------------------|-----------------------|-----------------------------|----------------|------------------------------|
|                        | Item Code                | Item                  | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CBUSH1D<br><br>(40)    | 1                        | Element ID            |                             | Not applicable |                              |
|                        | 2                        | Axial force           |                             |                |                              |
|                        | 3                        | Axial<br>displacement |                             |                |                              |
|                        | 4                        | Axial velocity        |                             |                |                              |
|                        | 5                        | Axial stress          |                             |                |                              |
|                        | 6                        | Axial strain          |                             |                |                              |
|                        | 7                        |                       |                             |                |                              |
|                        | 8                        |                       |                             |                |                              |

| Element Name<br>(Code) | Real Stresses or Strains |                            | Complex Stresses or Strains |                |                              |
|------------------------|--------------------------|----------------------------|-----------------------------|----------------|------------------------------|
|                        | Item Code                | Item                       | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CCONEAX<br><br>(35)    | 2                        | Harmonic or<br>point angle |                             | Not applicable |                              |
|                        | 3                        | Z1=Fiber<br>Distance 1     |                             |                |                              |
|                        | 4 <sup>1</sup>           | Normal v at Z1             |                             |                |                              |
|                        | 5 <sup>1</sup>           | Normal u at Z1             |                             |                |                              |
|                        | 6 <sup>1</sup>           | Shear uv at Z1             |                             |                |                              |
|                        | 7                        | Shear angle at Z1          |                             |                |                              |
|                        | 8                        | Major principal<br>at Z1   |                             |                |                              |
|                        | 9                        | Minor principal<br>at Z1   |                             |                |                              |
|                        | 10                       | Maximum shear<br>at Z1     |                             |                |                              |
|                        | 11                       | Z2= Fiber<br>Distance 2    |                             |                |                              |
|                        | 12 <sup>1</sup>          | Normal v at Z2             |                             |                |                              |
|                        | 13 <sup>1</sup>          | Normal u at Z2             |                             |                |                              |
|                        | 14 <sup>1</sup>          | Shear uv at Z2             |                             |                |                              |
|                        | 15                       | Shear angle at Z2          |                             |                |                              |
|                        | 16                       | Major principal<br>at Z2   |                             |                |                              |
|                        | 17                       | Minor principal<br>at Z2   |                             |                |                              |
|                        | 18                       | Maximum shear<br>at Z2     |                             |                |                              |

## 798 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |      | Complex Stresses or Strains |      |                              |
|------------------------|--------------------------|------|-----------------------------|------|------------------------------|
|                        | Item Code                | Item | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CDUM3                  | 2 <sup>1</sup>           | S1   | 2 <sup>1</sup>              | S1   | RM                           |
| thru                   | 3 <sup>1</sup>           | S2   | 3 <sup>1</sup>              | S2   | RM                           |
| CDUM9                  | 4 <sup>1</sup>           | S3   | 4 <sup>1</sup>              | S3   | RM                           |
| (55-61)                | 5 <sup>1</sup>           | S4   | 5 <sup>1</sup>              | S4   | RM                           |
|                        | 6 <sup>1</sup>           | S5   | 6 <sup>1</sup>              | S5   | RM                           |
|                        | 7 <sup>1</sup>           | S6   | 7 <sup>1</sup>              | S6   | RM                           |
|                        | 8 <sup>1</sup>           | S7   | 8 <sup>1</sup>              | S7   | RM                           |

## Element Stress (or Strain) Item Codes 799

| Element Name<br>(Code) | Real Stresses or Strains |        | Complex Stresses or Strains |        |                              |
|------------------------|--------------------------|--------|-----------------------------|--------|------------------------------|
|                        | Item Code                | Item   | Item Code                   | Item   | Real/Mag. or<br>Imag./ Phase |
| CELAS1<br>(11)         | 2 <sup>1</sup>           | Stress | 2 <sup>1</sup>              | Stress | RM                           |
|                        |                          |        | 3 <sup>1</sup>              | Stress | IP                           |
| CELAS2<br>(12)         | 2 <sup>1</sup>           | Stress | 2 <sup>1</sup>              | Stress | RM                           |
|                        |                          |        | 3 <sup>1</sup>              | Stress | IP                           |
| CELAS3<br>(13)         | 2 <sup>1</sup>           | Stress | 2 <sup>1</sup>              | Stress | RM                           |
|                        |                          |        | 3 <sup>1</sup>              | Stress | IP                           |

8

CODES

## 800 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |          | Complex Stresses or Strains |                |                              |
|------------------------|--------------------------|----------|-----------------------------|----------------|------------------------------|
|                        | Item Code                | Item     | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CGAP<br>(86)           | 2                        | Normal x |                             | Not applicable |                              |
|                        | 3                        | Shear y  |                             |                |                              |
|                        | 4                        | Shear z  |                             |                |                              |
|                        | 5                        | Axial u  |                             |                |                              |
|                        | 6                        | Shear v  |                             |                |                              |
|                        | 7                        | Shear w  |                             |                |                              |
|                        | 8                        | Slip v   |                             |                |                              |
|                        | 9                        | Slip w   |                             |                |                              |



## Element Stress (or Strain) Item Codes 801

**8**  
CODES

| Element Name<br>(Code)                 | Real Stresses or Strains |                                      | Complex Stresses or Strains |                                         |                              |
|----------------------------------------|--------------------------|--------------------------------------|-----------------------------|-----------------------------------------|------------------------------|
|                                        | Item Code                | Item                                 | Item Code                   | Item                                    | Real/Mag. or<br>Imag./ Phase |
| CHEXA<br><br>(67)<br><br>Linear Format | 2                        | Stress coordinate system             | 2                           | Stress coordinate system                |                              |
|                                        | 3                        | Coordinate type (Character)          | 3                           | Coordinate type (Character)             |                              |
|                                        | 4                        | Number of active points              | 4                           | Number of active points                 |                              |
|                                        | 5                        | External grid ID (0=center)          | 5                           | External grid ID (0=center)             |                              |
|                                        | 6 <sup>1</sup>           | Normal x                             | 6 <sup>1</sup>              | Normal x                                | RM                           |
|                                        | 7 <sup>1</sup>           | Shear xy                             | 7 <sup>1</sup>              | Normal y                                | RM                           |
|                                        | 8                        | First principal                      | 8 <sup>1</sup>              | Normal z                                | RM                           |
|                                        | 9                        | First principal x cosine             | 9 <sup>1</sup>              | Shear xy                                | RM                           |
|                                        | 10                       | Second principal x cosine            | 10 <sup>1</sup>             | Shear yz                                | RM                           |
|                                        | 11                       | Third principal x cosine             | 11 <sup>1</sup>             | Shear zx                                | RM                           |
|                                        | 12                       | Mean pressure                        | 12 <sup>1</sup>             | Normal x                                | IP                           |
|                                        | 13                       | von Mises or octahedral shear stress | 13 <sup>1</sup>             | Normal y                                | IP                           |
|                                        | 14 <sup>1</sup>          | Normal y                             | 14 <sup>1</sup>             | Normal z                                | IP                           |
|                                        | 15 <sup>1</sup>          | Shear yz                             | 15 <sup>1</sup>             | Shear xy                                | IP                           |
|                                        | 16                       | Second principal                     | 16 <sup>1</sup>             | Shear yz                                | IP                           |
|                                        | 17                       | First principal y cosine             | 17 <sup>1</sup>             | Shear zx                                | IP                           |
|                                        | 18                       | Second principal y cosine            | 18-121                      | Repeat items 5 through 17 for 8 corners |                              |
|                                        | 19                       | Third principal y cosine             |                             |                                         |                              |
|                                        | 20 <sup>1</sup>          | Normal z                             |                             |                                         |                              |
|                                        | 21 <sup>1</sup>          | Shear zx                             |                             |                                         |                              |
|                                        | 22                       | Third principal                      |                             |                                         |                              |
|                                        | 23                       | First principal z cosine             |                             |                                         |                              |
|                                        | 24                       | Second principal z cosine            |                             |                                         |                              |
|                                        | 25                       | Third principal z cosine             |                             |                                         |                              |

## 802 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |      |                              |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|------|------------------------------|
|                        | Item Code                | Item                                          | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
|                        | 26-193                   | repeat items 5<br>through 25 for 8<br>corners |                             |      |                              |

**Element Stress (or Strain) Item Codes 803**

**8  
CODES**

| Element Name<br>(Code)     | Real Stresses or Strains |                                               | Complex Stresses or Strains |                |                              |
|----------------------------|--------------------------|-----------------------------------------------|-----------------------------|----------------|------------------------------|
|                            | Item Code                | Item                                          | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CHEXA<br>(93)<br>Nonlinear | 2                        | Grid/Gauss                                    |                             | Not applicable |                              |
|                            | 3                        | External grid ID<br>(0=center)                |                             |                |                              |
|                            | 4                        | Stress-X                                      |                             |                |                              |
|                            | 5                        | Stress-Y                                      |                             |                |                              |
|                            | 6                        | Stress-Z                                      |                             |                |                              |
|                            | 7                        | Stress-XY                                     |                             |                |                              |
|                            | 8                        | Stress-YZ                                     |                             |                |                              |
|                            | 9                        | Stress-ZX                                     |                             |                |                              |
|                            | 10                       | Equivalent stress                             |                             |                |                              |
|                            | 11                       | Effective plastic<br>strain                   |                             |                |                              |
|                            | 12                       | Effective creep<br>strain                     |                             |                |                              |
|                            | 13                       | Strain-X                                      |                             |                |                              |
|                            | 14                       | Strain-Y                                      |                             |                |                              |
|                            | 15                       | Strain-Z                                      |                             |                |                              |
|                            | 16                       | Strain-XY                                     |                             |                |                              |
|                            | 17                       | Strain-YZ                                     |                             |                |                              |
|                            | 18                       | Strain-ZX                                     |                             |                |                              |
|                            | 19-146                   | Repeat items 3<br>through 18 for 8<br>corners |                             |                |                              |

## 804 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                     | Real Stresses or Strains                                |                                                               | Complex Stresses or Strains |                |                              |
|------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                            | Item Code                                               | Item                                                          | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CHEXAFD<br>(202)<br>Hyperelastic<br>with 8 grid points     | 2                                                       | Grid/Gauss                                                    |                             | Not applicable |                              |
|                                                            | 3                                                       | Grid/Gauss ID<br>(0=center)                                   |                             |                |                              |
|                                                            | 4                                                       | Cauchy stress-X                                               |                             |                |                              |
|                                                            | 5                                                       | Cauchy stress-Y                                               |                             |                |                              |
|                                                            | 6                                                       | Cauchy stress-Z                                               |                             |                |                              |
|                                                            | 7                                                       | Cauchy stress-XY                                              |                             |                |                              |
|                                                            | 8                                                       | Cauchy stress-YZ                                              |                             |                |                              |
|                                                            | 9                                                       | Cauchy stress-ZX                                              |                             |                |                              |
|                                                            | 10                                                      | Pressure<br>$p = \frac{1}{3}(\sigma_x + \sigma_y + \sigma_z)$ |                             |                |                              |
|                                                            | 11                                                      | Volumetric strain<br>J-1                                      |                             |                |                              |
|                                                            | 12                                                      | Logarithmic strain-X                                          |                             |                |                              |
|                                                            | 13                                                      | Logarithmic strain-Y                                          |                             |                |                              |
|                                                            | 14                                                      | Logarithmic strain-Z                                          |                             |                |                              |
|                                                            | 15                                                      | Logarithmic<br>strain-XY                                      |                             |                |                              |
|                                                            | 16                                                      | Logarithmic<br>strain-YZ                                      |                             |                |                              |
|                                                            | 17                                                      | Logarithmic<br>strain-ZX                                      |                             |                |                              |
| 18-122                                                     | Repeat items 3<br>through 17 for 7<br>Gauss/grid points |                                                               |                             |                |                              |
| CHEXAFD<br>(207)<br>Hyperelastic<br>with 20 grid<br>points | 2-17                                                    | Same as CHEXAFD<br>(202)                                      |                             | Not applicable |                              |
|                                                            | 18-407                                                  | Repeat items 3<br>through 17 for 26<br>Gauss points           |                             |                |                              |

**Element Stress (or Strain) Item Codes 805**

**8**  
**CODES**

| Element Name<br>(Code)                | Real Stresses or Strains |                          | Complex Stresses or Strains |                  |                              |
|---------------------------------------|--------------------------|--------------------------|-----------------------------|------------------|------------------------------|
|                                       | Item Code                | Item                     | Item Code                   | Item             | Real/Mag. or<br>Imag./ Phase |
| CONROD<br>(10)<br>Linear Format       | 2 <sup>1</sup>           | Axial stress             | 2 <sup>1</sup>              | Axial stress     | RM                           |
|                                       | 3                        | Axial safety margin      | 3 <sup>1</sup>              | Axial stress     | IP                           |
|                                       | 4 <sup>1</sup>           | Torsional stress         | 4 <sup>1</sup>              | Torsional stress | RM                           |
|                                       | 5                        | Torsional safety margin  | 5 <sup>1</sup>              | Torsional stress | IP                           |
| CONROD<br>(92)<br>Nonlinear<br>Format | 2                        | Axial stress             |                             | Not applicable   |                              |
|                                       | 3                        | Equivalent stress        |                             |                  |                              |
|                                       | 4                        | Total strain             |                             |                  |                              |
|                                       | 5                        | Effective plastic strain |                             |                  |                              |
|                                       | 6                        | Effective creep strain   |                             |                  |                              |
|                                       | 7                        | Linear torsional stress  |                             |                  |                              |

## 806 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)          | Real Stresses or Strains |                                      | Complex Stresses or Strains |                                         |                              |
|---------------------------------|--------------------------|--------------------------------------|-----------------------------|-----------------------------------------|------------------------------|
|                                 | Item Code                | Item                                 | Item Code                   | Item                                    | Real/Mag. or<br>Imag./ Phase |
| CPENTA<br>(68)<br>Linear Format | 2                        | Stress coordinate system             | 2                           | Stress coordinate system                |                              |
|                                 | 3                        | Coordinate type (Character)          | 3                           | Coordinate type (Character)             |                              |
|                                 | 4                        | Number of active points              | 4                           | Number of active points                 |                              |
|                                 | 5                        | External grid ID                     | 5                           | External grid ID                        |                              |
|                                 |                          | (0=center)                           |                             | (0=center)                              |                              |
|                                 | 6 <sup>1</sup>           | Normal x                             | 6 <sup>1</sup>              | Normal x                                | RM                           |
|                                 | 7 <sup>1</sup>           | Shear xy                             | 7 <sup>1</sup>              | Normal y                                | RM                           |
|                                 | 8                        | First principal                      | 8 <sup>1</sup>              | Normal z                                | RM                           |
|                                 | 9                        | First principal x cosine             | 9 <sup>1</sup>              | Shear xy                                | RM                           |
|                                 | 10                       | Second principal x cosine            | 10 <sup>1</sup>             | Shear yz                                | RM                           |
|                                 | 11                       | Third principal x cosine             | 11 <sup>1</sup>             | Shear zx                                | RM                           |
|                                 | 12                       | Mean pressure                        | 12 <sup>1</sup>             | Normal x                                | IP                           |
|                                 | 13                       | von Mises or Octahedral shear stress | 13 <sup>1</sup>             | Normal y                                | IP                           |
|                                 | 14 <sup>1</sup>          | Normal y                             | 14 <sup>1</sup>             | Normal z                                | IP                           |
|                                 | 15 <sup>1</sup>          | Shear yz                             | 15 <sup>1</sup>             | Shear xy                                | IP                           |
|                                 | 16                       | Second principal                     | 16 <sup>1</sup>             | Shear yz                                | IP                           |
|                                 | 17                       | First principal y cosine             | 17 <sup>1</sup>             | Shear zx                                | IP                           |
|                                 | 18                       | Second principal y cosine            | 18-95                       | Repeat items 5 through 17 for 6 corners |                              |
|                                 | 19                       | Third principal y cosine             |                             |                                         |                              |
|                                 | 20 <sup>1</sup>          | Normal z                             |                             |                                         |                              |
|                                 | 21 <sup>1</sup>          | Shear zx                             |                             |                                         |                              |
|                                 | 22                       | Third principal                      |                             |                                         |                              |
|                                 | 23                       | First principal z cosine             |                             |                                         |                              |
|                                 | 24                       | Second principal z cosine            |                             |                                         |                              |

## Element Stress (or Strain) Item Codes 807

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |      |                              |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|------|------------------------------|
|                        | Item Code                | Item                                          | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
|                        | 25                       | Third principal z<br>cosine                   |                             |      |                              |
|                        | 26-151                   | Repeat items 5<br>through 25 for 6<br>corners |                             |      |                              |

8

CODES

## 808 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                | Real Stresses or Strains |                                               | Complex Stresses or Strains |                |                              |
|---------------------------------------|--------------------------|-----------------------------------------------|-----------------------------|----------------|------------------------------|
|                                       | Item Code                | Item                                          | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CPENTA<br>(91)<br>Nonlinear<br>Format | 2                        | Grid/Gauss                                    |                             | Not applicable |                              |
|                                       | 3                        | External grid ID<br>(0=center)                |                             |                |                              |
|                                       | 4                        | Normal x stress                               |                             |                |                              |
|                                       | 5                        | Normal y stress                               |                             |                |                              |
|                                       | 6                        | Normal z stress                               |                             |                |                              |
|                                       | 7                        | Shear xy stress                               |                             |                |                              |
|                                       | 8                        | Shear yz stress                               |                             |                |                              |
|                                       | 9                        | Shear zx stress                               |                             |                |                              |
|                                       | 10                       | Equivalent stress                             |                             |                |                              |
|                                       | 11                       | Effective plastic<br>strain                   |                             |                |                              |
|                                       | 12                       | Effective creep<br>strain                     |                             |                |                              |
|                                       | 13                       | Normal x strain                               |                             |                |                              |
|                                       | 14                       | Normal y strain                               |                             |                |                              |
|                                       | 15                       | Normal z strain                               |                             |                |                              |
|                                       | 16                       | Shear xy strain                               |                             |                |                              |
|                                       | 17                       | Shear yz strain                               |                             |                |                              |
|                                       | 18                       | Shear zx strain                               |                             |                |                              |
|                                       | 19-114                   | Repeat items 3<br>through 18 for 6<br>corners |                             |                |                              |



| Element Name<br>(Code)                                    | Real Stresses or Strains |                                                     | Complex Stresses or Strains |                |                              |
|-----------------------------------------------------------|--------------------------|-----------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                           | Item Code                | Item                                                | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CPENTA<br>(204)<br>Hyperelastic<br>with 6 grid points     | 2-17                     | Same as<br>CHEXAFD (201)                            |                             |                |                              |
|                                                           | 18-92                    | Repeat items 3<br>through 17 for 5<br>Gauss points  |                             | Not applicable |                              |
| CPENTA<br>(209)<br>Hyperelastic<br>with 15 grid<br>points | 2-17                     | Same as<br>CHEXAFD (201)                            |                             |                |                              |
|                                                           | 18-317                   | Repeat items 3<br>through 17 for 20<br>Gauss points |                             | Not applicable |                              |

| Element Name<br>(Code)                                                         | Real Stresses or Strains |                       | Complex Stresses or Strains |      |                              |
|--------------------------------------------------------------------------------|--------------------------|-----------------------|-----------------------------|------|------------------------------|
|                                                                                | Item Code                | Item                  | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTN3<br>(271)<br>Triangle plane<br>strain<br>Linear Format<br>(Center Only) | 2                        | Normal stress in<br>x | Not applicable              |      |                              |
|                                                                                | 3                        | Normal stress in<br>y |                             |      |                              |
|                                                                                | 4                        | Normal stress in<br>z |                             |      |                              |
|                                                                                | 5                        | Shear stress in xz    |                             |      |                              |
|                                                                                | 6                        | Von Mises stress      |                             |      |                              |

| Element Name<br>(Code)                                                                        | Real Stresses or Strains                                  |                            | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------|-----------------------------|------|------------------------------|
|                                                                                               | Item Code                                                 | Item                       | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTN4<br>(272)<br>Quadrilateral<br>plane strain<br>Linear Format<br>(Center and<br>Corners) | 3                                                         | Grid ID, 0 for<br>centroid | Not applicable              |      |                              |
|                                                                                               | 4                                                         | Normal stress in<br>x      |                             |      |                              |
|                                                                                               | 5                                                         | Normal stress in<br>y      |                             |      |                              |
|                                                                                               | 6                                                         | Normal stress in<br>z      |                             |      |                              |
|                                                                                               | 7                                                         | Shear stress in xz         |                             |      |                              |
|                                                                                               | 8                                                         | Von Mises stress           |                             |      |                              |
|                                                                                               | Words 3 through 8 repeat 4 times<br>for corner locations. |                            |                             |      |                              |

## 810 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                   | Real Stresses or Strains                                  |                            | Complex Stresses or Strains |      |                              |
|------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------|-----------------------------|------|------------------------------|
|                                                                                          | Item Code                                                 | Item                       | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTN6<br>(273)<br>Triangle plane<br>strain<br>Linear Format<br>(Center and<br>Corners) | 3                                                         | Grid ID, 0 for<br>centroid | Not applicable              |      |                              |
|                                                                                          | 4                                                         | Normal stress in<br>x      |                             |      |                              |
|                                                                                          | 5                                                         | Normal stress in<br>y      |                             |      |                              |
|                                                                                          | 6                                                         | Normal stress in<br>z      |                             |      |                              |
|                                                                                          | 7                                                         | Shear stress in xz         |                             |      |                              |
|                                                                                          | 8                                                         | Von Mises stress           |                             |      |                              |
|                                                                                          | Words 3 through 8 repeat 3 times<br>for corner locations. |                            |                             |      |                              |

| Element Name<br>(Code)                                                                        | Real Stresses or Strains                                  |                            | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------|-----------------------------|------|------------------------------|
|                                                                                               | Item Code                                                 | Item                       | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTN8<br>(274)<br>Quadrilateral<br>plane strain<br>Linear Format<br>(Center and<br>Corners) | 3                                                         | Grid ID, 0 for<br>centroid | Not applicable              |      |                              |
|                                                                                               | 4                                                         | Normal stress in<br>x      |                             |      |                              |
|                                                                                               | 5                                                         | Normal stress in<br>y      |                             |      |                              |
|                                                                                               | 6                                                         | Normal stress in<br>z      |                             |      |                              |
|                                                                                               | 7                                                         | Shear stress in xz         |                             |      |                              |
|                                                                                               | 8                                                         | Von Mises stress           |                             |      |                              |
|                                                                                               | Words 3 through 8 repeat 4 times<br>for corner locations. |                            |                             |      |                              |

| Element Name<br>(Code)                                                         | Real Stresses or Strains |                       | Complex Stresses or Strains |      |                              |
|--------------------------------------------------------------------------------|--------------------------|-----------------------|-----------------------------|------|------------------------------|
|                                                                                | Item Code                | Item                  | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTS3<br>(275)<br>Triangle plane<br>stress<br>Linear Format<br>(Center Only) | 2                        | Normal stress in<br>x | Not applicable              |      |                              |
|                                                                                | 3                        | Normal stress in<br>y |                             |      |                              |
|                                                                                | 4                        | Normal stress in<br>z |                             |      |                              |
|                                                                                | 5                        | Shear stress in xz    |                             |      |                              |
|                                                                                | 6                        | Von Mises stress      |                             |      |                              |

| Element Name<br>(Code)                                                                                        | Real Stresses or Strains                                  |                            | Complex Stresses or Strains |      |                              |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------|-----------------------------|------|------------------------------|
|                                                                                                               | Item Code                                                 | Item                       | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTS4<br><br>(276)<br><br>Quadrilateral<br>plane stress<br><br>Linear Format<br><br>(Center and<br>Corners) | 3                                                         | Grid ID, 0 for<br>centroid | Not applicable              |      |                              |
|                                                                                                               | 4                                                         | Normal stress in<br>x      |                             |      |                              |
|                                                                                                               | 5                                                         | Normal stress in<br>y      |                             |      |                              |
|                                                                                                               | 6                                                         | Normal stress in<br>z      |                             |      |                              |
|                                                                                                               | 7                                                         | Shear stress in xz         |                             |      |                              |
|                                                                                                               | 8                                                         | Von Mises stress           |                             |      |                              |
|                                                                                                               | Words 3 through 8 repeat 4 times<br>for corner locations. |                            |                             |      |                              |

| Element Name<br>(Code)                                                                                   | Real Stresses or Strains                                  |                            | Complex Stresses or Strains |      |                              |
|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------|-----------------------------|------|------------------------------|
|                                                                                                          | Item Code                                                 | Item                       | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTS6<br><br>(277)<br><br>Triangle plane<br>stress<br><br>Linear Format<br><br>(Center and<br>Corners) | 3                                                         | Grid ID, 0 for<br>centroid | Not applicable              |      |                              |
|                                                                                                          | 4                                                         | Normal stress in<br>x      |                             |      |                              |
|                                                                                                          | 5                                                         | Normal stress in<br>y      |                             |      |                              |
|                                                                                                          | 6                                                         | Normal stress in<br>z      |                             |      |                              |
|                                                                                                          | 7                                                         | Shear stress in xz         |                             |      |                              |
|                                                                                                          | 8                                                         | Von Mises stress           |                             |      |                              |
|                                                                                                          | Words 3 through 8 repeat 3 times<br>for corner locations. |                            |                             |      |                              |

| Element Name<br>(Code)                                                                            | Real Stresses or Strains |                            | Complex Stresses or Strains |      |                              |
|---------------------------------------------------------------------------------------------------|--------------------------|----------------------------|-----------------------------|------|------------------------------|
|                                                                                                   | Item Code                | Item                       | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTS8<br><br>(278)<br><br>Quadrilateral<br>plane stress<br><br>Linear Format<br><br>(Center and | 3                        | Grid ID, 0 for<br>centroid | Not applicable              |      |                              |
|                                                                                                   | 4                        | Normal stress in<br>x      |                             |      |                              |
|                                                                                                   | 5                        | Normal stress in<br>y      |                             |      |                              |
|                                                                                                   | 6                        | Normal stress in<br>z      |                             |      |                              |

## 812 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains                                  |                    | Complex Stresses or Strains |      |                              |
|------------------------|-----------------------------------------------------------|--------------------|-----------------------------|------|------------------------------|
|                        | Item Code                                                 | Item               | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| Corners)               | 7                                                         | Shear stress in xz |                             |      |                              |
|                        | 8                                                         | Von Mises stress   |                             |      |                              |
|                        | Words 3 through 8 repeat 4 times<br>for corner locations. |                    |                             |      |                              |

| Element Name<br>(Code)                                                            | Real Stresses or Strains |                                          | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------------------------------------|--------------------------|------------------------------------------|-----------------------------|------|------------------------------|
|                                                                                   | Item Code                | Item                                     | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTN3<br>(281)<br>Triangle plane<br>strain<br>Nonlinear format<br>(Center Only) | 2                        | Normal stress in<br>x                    | Not applicable              |      |                              |
|                                                                                   | 3                        | Normal stress in<br>y                    |                             |      |                              |
|                                                                                   | 4                        | Normal stress in<br>z                    |                             |      |                              |
|                                                                                   | 5                        | Shear stress in xz                       |                             |      |                              |
|                                                                                   | 6                        | Equivalent stress                        |                             |      |                              |
|                                                                                   | 7                        | Effective<br>plastic/inelastic<br>strain |                             |      |                              |
|                                                                                   | 8                        | Effective creep<br>strain                |                             |      |                              |
|                                                                                   | 9                        | Strain in x                              |                             |      |                              |
|                                                                                   | 10                       | Strain in y                              |                             |      |                              |
|                                                                                   | 11                       | Strain in z                              |                             |      |                              |
|                                                                                   | 12                       | Shear strain in<br>xz                    |                             |      |                              |

| Element<br>Name (Code)                                              | Real Stresses or Strains |                            | Complex Stresses or Strains |      |                              |
|---------------------------------------------------------------------|--------------------------|----------------------------|-----------------------------|------|------------------------------|
|                                                                     | Item Code                | Item                       | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTN6<br>(283)<br>Triangle plane<br>strain<br>Nonlinear<br>format | 3                        | Grid ID, 0 for<br>centroid | Not applicable              |      |                              |
|                                                                     | 4                        | Normal stress<br>in x      |                             |      |                              |
|                                                                     | 5                        | Normal stress<br>in y      |                             |      |                              |

| Element Name (Code)  | Real Stresses or Strains                                |                                    | Complex Stresses or Strains |      |                           |
|----------------------|---------------------------------------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                      | Item Code                                               | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| (Center and Corners) | 6                                                       | Normal stress in z                 |                             |      |                           |
|                      | 7                                                       | Shear stress in xz                 |                             |      |                           |
|                      | 8                                                       | Equivalent stress                  |                             |      |                           |
|                      | 9                                                       | Effective plastic/inelastic strain |                             |      |                           |
|                      | 10                                                      | Effective creep strain             |                             |      |                           |
|                      | 11                                                      | Strain in x                        |                             |      |                           |
|                      | 12                                                      | Strain in y                        |                             |      |                           |
|                      | 13                                                      | Strain in z                        |                             |      |                           |
|                      | 14                                                      | Shear strain in xz                 |                             |      |                           |
|                      | Words 3 through 14 repeat 3 times for corner locations. |                                    |                             |      |                           |

| Element Name (Code)                                                                        | Real Stresses or Strains |                         | Complex Stresses or Strains |      |                           |
|--------------------------------------------------------------------------------------------|--------------------------|-------------------------|-----------------------------|------|---------------------------|
|                                                                                            | Item Code                | Item                    | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTN8<br>(284)<br>Quadrilateral plane strain<br>Nonlinear format<br>(Center and Corners) | 3                        | Grid ID, 0 for centroid | Not applicable              |      |                           |
|                                                                                            | 4                        | Normal stress in x      |                             |      |                           |
|                                                                                            | 5                        | Normal stress in y      |                             |      |                           |
|                                                                                            | 6                        | Normal stress in z      |                             |      |                           |

## 814 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name (Code) | Real Stresses or Strains                                |                                    | Complex Stresses or Strains |      |                           |
|---------------------|---------------------------------------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                     | Item Code                                               | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
|                     | 7                                                       | Shear stress in xz                 |                             |      |                           |
|                     | 8                                                       | Equivalent stress                  |                             |      |                           |
|                     | 9                                                       | Effective plastic/inelastic strain |                             |      |                           |
|                     | 10                                                      | Effective creep strain             |                             |      |                           |
|                     | 11                                                      | Strain in x                        |                             |      |                           |
|                     | 12                                                      | Strain in y                        |                             |      |                           |
|                     | 13                                                      | Strain in z                        |                             |      |                           |
|                     | 14                                                      | Shear strain in xz                 |                             |      |                           |
|                     | Words 3 through 14 repeat 4 times for corner locations. |                                    |                             |      |                           |

| Element Name (Code)                                                            | Real Stresses or Strains |                                    | Complex Stresses or Strains |                |                           |
|--------------------------------------------------------------------------------|--------------------------|------------------------------------|-----------------------------|----------------|---------------------------|
|                                                                                | Item Code                | Item                               | Item Code                   | Item           | Real/Mag. or Imag./ Phase |
| CPLSTS3<br>(285)<br>Triangle plane stress<br>Nonlinear format<br>(Center Only) | 2                        | Normal stress in x                 |                             | Not applicable |                           |
|                                                                                | 3                        | Normal stress in y                 |                             |                |                           |
|                                                                                | 4                        | Normal stress in z                 |                             |                |                           |
|                                                                                | 5                        | Shear stress in xz                 |                             |                |                           |
|                                                                                | 6                        | Equivalent stress                  |                             |                |                           |
|                                                                                | 7                        | Effective plastic/inelastic strain |                             |                |                           |
|                                                                                | 8                        | Effective creep strain             |                             |                |                           |

| Element Name<br>(Code) | Real Stresses or Strains |                       | Complex Stresses or Strains |      |                              |
|------------------------|--------------------------|-----------------------|-----------------------------|------|------------------------------|
|                        | Item Code                | Item                  | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
|                        | 9                        | Strain in x           |                             |      |                              |
|                        | 10                       | Strain in y           |                             |      |                              |
|                        | 11                       | Strain in z           |                             |      |                              |
|                        | 12                       | Shear strain in<br>xz |                             |      |                              |

| Element<br>Name (Code)                                                                         | Real Stresses or Strains |                                          | Complex Stresses or Strains |      |                              |
|------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------|-----------------------------|------|------------------------------|
|                                                                                                | Item Code                | Item                                     | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPLSTS6<br>(287)<br>Triangle plane<br>stress<br>Nonlinear<br>format<br>(Center and<br>Corners) | 3                        | Grid ID, 0 for<br>centroid               | Not applicable              |      |                              |
|                                                                                                | 4                        | Normal stress<br>in x                    |                             |      |                              |
|                                                                                                | 5                        | Normal stress<br>in y                    |                             |      |                              |
|                                                                                                | 6                        | Normal stress<br>in z                    |                             |      |                              |
|                                                                                                | 7                        | Shear stress in<br>xz                    |                             |      |                              |
|                                                                                                | 8                        | Equivalent<br>stress                     |                             |      |                              |
|                                                                                                | 9                        | Effective<br>plastic/inelastic<br>strain |                             |      |                              |
|                                                                                                | 10                       | Effective creep<br>strain                |                             |      |                              |
|                                                                                                | 11                       | Strain in x                              |                             |      |                              |
|                                                                                                | 12                       | Strain in y                              |                             |      |                              |
|                                                                                                | 13                       | Strain in z                              |                             |      |                              |
|                                                                                                | 14                       | Shear strain in<br>xz                    |                             |      |                              |

## 816 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name (Code) | Real Stresses or Strains                                |      | Complex Stresses or Strains |      |                           |
|---------------------|---------------------------------------------------------|------|-----------------------------|------|---------------------------|
|                     | Item Code                                               | Item | Item Code                   | Item | Real/Mag. or Imag./ Phase |
|                     | Words 3 through 14 repeat 3 times for corner locations. |      |                             |      |                           |

| Element Name (Code)                                                                                 | Real Stresses or Strains                                |                                    | Complex Stresses or Strains |      |                           |
|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                                                                                                     | Item Code                                               | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTS8<br>(288)<br>Quadrilateral<br>plane stress<br>Nonlinear<br>format<br>(Center and<br>Corners) | 3                                                       | Grid ID, 0 for centroid            | Not applicable              |      |                           |
|                                                                                                     | 4                                                       | Normal stress in x                 |                             |      |                           |
|                                                                                                     | 5                                                       | Normal stress in y                 |                             |      |                           |
|                                                                                                     | 6                                                       | Normal stress in z                 |                             |      |                           |
|                                                                                                     | 7                                                       | Shear stress in xz                 |                             |      |                           |
|                                                                                                     | 8                                                       | Equivalent stress                  |                             |      |                           |
|                                                                                                     | 9                                                       | Effective plastic/inelastic strain |                             |      |                           |
|                                                                                                     | 10                                                      | Effective creep strain             |                             |      |                           |
|                                                                                                     | 11                                                      | Strain in x                        |                             |      |                           |
|                                                                                                     | 12                                                      | Strain in y                        |                             |      |                           |
|                                                                                                     | 13                                                      | Strain in z                        |                             |      |                           |
|                                                                                                     | 14                                                      | Shear strain in xz                 |                             |      |                           |
|                                                                                                     | Words 3 through 14 repeat 4 times for corner locations. |                                    |                             |      |                           |



| Element Name (Code)                                                                                 | Real Stresses or Strains                                |                                    | Complex Stresses or Strains |      |                           |
|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                                                                                                     | Item Code                                               | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTN4<br>(289)<br>Quadrilateral<br>plane strain<br>Nonlinear<br>format<br>(Center and<br>Corners) | 3                                                       | Grid ID, 0 for centroid            | Not applicable              |      |                           |
|                                                                                                     | 4                                                       | Normal stress in x                 |                             |      |                           |
|                                                                                                     | 5                                                       | Normal stress in y                 |                             |      |                           |
|                                                                                                     | 6                                                       | Normal stress in z                 |                             |      |                           |
|                                                                                                     | 7                                                       | Shear stress in xz                 |                             |      |                           |
|                                                                                                     | 8                                                       | Equivalent stress                  |                             |      |                           |
|                                                                                                     | 9                                                       | Effective plastic/inelastic strain |                             |      |                           |
|                                                                                                     | 10                                                      | Effective creep strain             |                             |      |                           |
|                                                                                                     | 11                                                      | Strain in x                        |                             |      |                           |
|                                                                                                     | 12                                                      | Strain in y                        |                             |      |                           |
|                                                                                                     | 13                                                      | Strain in z                        |                             |      |                           |
|                                                                                                     | 14                                                      | Shear strain in xz                 |                             |      |                           |
|                                                                                                     | Words 3 through 14 repeat 4 times for corner locations. |                                    |                             |      |                           |

## 818 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name (Code)                                                                                         | Real Stresses or Strains                                   |                                          | Complex Stresses or Strains |      |                           |
|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------|-----------------------------|------|---------------------------|
|                                                                                                             | Item Code                                                  | Item                                     | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTS4<br>(290)<br>Quadrilateral<br>plane stress<br><br>Nonlinear<br>format<br><br>(Center and<br>Corners) | 3                                                          | Grid ID, 0 for<br>centroid               | Not applicable              |      |                           |
|                                                                                                             | 4                                                          | Normal stress<br>in x                    |                             |      |                           |
|                                                                                                             | 5                                                          | Normal stress<br>in y                    |                             |      |                           |
|                                                                                                             | 6                                                          | Normal stress<br>in z                    |                             |      |                           |
|                                                                                                             | 7                                                          | Shear stress in<br>xz                    |                             |      |                           |
|                                                                                                             | 8                                                          | Equivalent<br>stress                     |                             |      |                           |
|                                                                                                             | 9                                                          | Effective<br>plastic/inelastic<br>strain |                             |      |                           |
|                                                                                                             | 10                                                         | Effective creep<br>strain                |                             |      |                           |
|                                                                                                             | 11                                                         | Strain in x                              |                             |      |                           |
|                                                                                                             | 12                                                         | Strain in y                              |                             |      |                           |
|                                                                                                             | 13                                                         | Strain in z                              |                             |      |                           |
|                                                                                                             | 14                                                         | Shear strain in<br>xz                    |                             |      |                           |
|                                                                                                             | Words 3 through 14 repeat 4<br>times for corner locations. |                                          |                             |      |                           |

| Element Name (Code)                                                 | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                           |
|---------------------------------------------------------------------|--------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                                                                     | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTN3<br>(291)<br>Triangle plane strain<br>Hyperelastic<br>(Grid) | 3                        | Grid ID                            | Not applicable              |      |                           |
|                                                                     | 4                        | Normal stress in x                 |                             |      |                           |
|                                                                     | 5                        | Normal stress in y                 |                             |      |                           |
|                                                                     | 6                        | Normal stress in z                 |                             |      |                           |
|                                                                     | 7                        | Shear stress in xz                 |                             |      |                           |
|                                                                     | 8                        | Pressure                           |                             |      |                           |
|                                                                     | 9                        | Volume strain                      |                             |      |                           |
|                                                                     | 10                       | Strain in x                        |                             |      |                           |
|                                                                     | 11                       | Strain in y                        |                             |      |                           |
|                                                                     | 12                       | Strain in z                        |                             |      |                           |
|                                                                     | 13                       | Shear strain in xz                 |                             |      |                           |
|                                                                     | 14-35                    | Words 3 through 13 repeat 2 times. |                             |      |                           |

| Element Name (Code)                                            | Real Stresses or Strains |                    | Complex Stresses or Strains |      |                           |
|----------------------------------------------------------------|--------------------------|--------------------|-----------------------------|------|---------------------------|
|                                                                | Item Code                | Item               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTN4<br>(292)<br>Quadrilateral plane strain<br>Hyperelastic | 3                        | Grid ID            | Not applicable              |      |                           |
|                                                                | 4                        | Normal stress in x |                             |      |                           |
|                                                                | 5                        | Normal stress in y |                             |      |                           |

## 820 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name (Code) | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                           |
|---------------------|--------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                     | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| (Grid)              | 6                        | Normal stress in z                 |                             |      |                           |
|                     | 7                        | Shear stress in xz                 |                             |      |                           |
|                     | 8                        | Pressure                           |                             |      |                           |
|                     | 9                        | Volume strain                      |                             |      |                           |
|                     | 10                       | Strain in x                        |                             |      |                           |
|                     | 11                       | Strain in y                        |                             |      |                           |
|                     | 12                       | Strain in z                        |                             |      |                           |
|                     | 13                       | Shear strain in xz                 |                             |      |                           |
|                     | 14-46                    | Words 3 through 13 repeat 3 times. |                             |      |                           |

| Element Name (Code)   | Real Stresses or Strains |                    | Complex Stresses or Strains |      |                           |
|-----------------------|--------------------------|--------------------|-----------------------------|------|---------------------------|
|                       | Item Code                | Item               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTN6               | 3                        | Grid ID            | Not applicable              |      |                           |
| (293)                 | 4                        | Normal stress in x |                             |      |                           |
| Triangle plane strain | 5                        | Normal stress in y |                             |      |                           |
| Hyperelastic          | 6                        | Normal stress in z |                             |      |                           |
| (Grid)                | 7                        | Shear stress in xz |                             |      |                           |
|                       | 8                        | Pressure           |                             |      |                           |

Element Stress (or Strain) Item Codes 821

8  
CODES

| Element Name (Code) | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                           |
|---------------------|--------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                     | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
|                     | 9                        | Volume strain                      |                             |      |                           |
|                     | 10                       | Strain in x                        |                             |      |                           |
|                     | 11                       | Strain in y                        |                             |      |                           |
|                     | 12                       | Strain in z                        |                             |      |                           |
|                     | 13                       | Shear strain in xz                 |                             |      |                           |
|                     | 14-35                    | Words 3 through 13 repeat 2 times. |                             |      |                           |

| Element Name (Code)                                                      | Real Stresses or Strains |                    | Complex Stresses or Strains |      |                           |
|--------------------------------------------------------------------------|--------------------------|--------------------|-----------------------------|------|---------------------------|
|                                                                          | Item Code                | Item               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTN8<br>(294)<br>Quadrilateral plane strain<br>Hyperelastic<br>(Grid) | 3                        | Grid ID            | Not applicable              |      |                           |
|                                                                          | 4                        | Normal stress in x |                             |      |                           |
|                                                                          | 5                        | Normal stress in y |                             |      |                           |
|                                                                          | 6                        | Normal stress in z |                             |      |                           |
|                                                                          | 7                        | Shear stress in xz |                             |      |                           |
|                                                                          | 8                        | Pressure           |                             |      |                           |
|                                                                          | 9                        | Volume strain      |                             |      |                           |
|                                                                          | 10                       | Strain in x        |                             |      |                           |
|                                                                          | 11                       | Strain in y        |                             |      |                           |

## 822 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name (Code) | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                           |
|---------------------|--------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                     | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
|                     | 12                       | Strain in z                        |                             |      |                           |
|                     | 13                       | Shear strain in xz                 |                             |      |                           |
|                     | 14-46                    | Words 3 through 13 repeat 3 times. |                             |      |                           |

| Element Name (Code)                                                 | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                           |
|---------------------------------------------------------------------|--------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                                                                     | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTS3<br>(295)<br>Triangle plane stress<br>Hyperelastic<br>(Grid) | 3                        | Grid ID                            | Not applicable              |      |                           |
|                                                                     | 4                        | Normal stress in x                 |                             |      |                           |
|                                                                     | 5                        | Normal stress in y                 |                             |      |                           |
|                                                                     | 6                        | Normal stress in z                 |                             |      |                           |
|                                                                     | 7                        | Shear stress in xz                 |                             |      |                           |
|                                                                     | 8                        | Pressure                           |                             |      |                           |
|                                                                     | 9                        | Volume strain                      |                             |      |                           |
|                                                                     | 10                       | Strain in x                        |                             |      |                           |
|                                                                     | 11                       | Strain in y                        |                             |      |                           |
|                                                                     | 12                       | Strain in z                        |                             |      |                           |
|                                                                     | 13                       | Shear strain in xz                 |                             |      |                           |
|                                                                     | 14-35                    | Words 3 through 13 repeat 2 times. |                             |      |                           |

| Element Name (Code)                                                      | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                           |
|--------------------------------------------------------------------------|--------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                                                                          | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTS4<br>(296)<br>Quadrilateral plane stress<br>Hyperelastic<br>(Grid) | 3                        | Grid ID                            | Not applicable              |      |                           |
|                                                                          | 4                        | Normal stress in x                 |                             |      |                           |
|                                                                          | 5                        | Normal stress in y                 |                             |      |                           |
|                                                                          | 6                        | Normal stress in z                 |                             |      |                           |
|                                                                          | 7                        | Shear stress in xz                 |                             |      |                           |
|                                                                          | 8                        | Pressure                           |                             |      |                           |
|                                                                          | 9                        | Volume strain                      |                             |      |                           |
|                                                                          | 10                       | Strain in x                        |                             |      |                           |
|                                                                          | 11                       | Strain in y                        |                             |      |                           |
|                                                                          | 12                       | Strain in z                        |                             |      |                           |
|                                                                          | 13                       | Shear strain in xz                 |                             |      |                           |
|                                                                          | 14-46                    | Words 3 through 13 repeat 3 times. |                             |      |                           |

| Element Name (Code)                                       | Real Stresses or Strains |                    | Complex Stresses or Strains |      |                           |
|-----------------------------------------------------------|--------------------------|--------------------|-----------------------------|------|---------------------------|
|                                                           | Item Code                | Item               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTS6<br>(297)<br>Triangle plane stress<br>Hyperelastic | 3                        | Grid ID            | Not applicable              |      |                           |
|                                                           | 4                        | Normal stress in x |                             |      |                           |
|                                                           | 5                        | Normal stress in y |                             |      |                           |

## 824 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name (Code) | Real Stresses or Strains           |                    | Complex Stresses or Strains |      |                           |
|---------------------|------------------------------------|--------------------|-----------------------------|------|---------------------------|
|                     | Item Code                          | Item               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| (Grid)              | 6                                  | Normal stress in z |                             |      |                           |
|                     | 7                                  | Shear stress in xz |                             |      |                           |
|                     | 8                                  | Pressure           |                             |      |                           |
|                     | 9                                  | Volume strain      |                             |      |                           |
|                     | 10                                 | Strain in x        |                             |      |                           |
|                     | 11                                 | Strain in y        |                             |      |                           |
|                     | 12                                 | Strain in z        |                             |      |                           |
|                     | 13                                 | Shear strain in xz |                             |      |                           |
| 14-35               | Words 3 through 13 repeat 2 times. |                    |                             |      |                           |

| Element Name (Code)        | Real Stresses or Strains |                    | Complex Stresses or Strains |      |                           |
|----------------------------|--------------------------|--------------------|-----------------------------|------|---------------------------|
|                            | Item Code                | Item               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
| CPLSTS8                    | 3                        | Grid ID            | Not applicable              |      |                           |
| (298)                      | 4                        | Normal stress in x |                             |      |                           |
| Quadrilateral plane stress | 5                        | Normal stress in y |                             |      |                           |
| Hyperelastic               | 6                        | Normal stress in z |                             |      |                           |
| (Grid)                     | 7                        | Shear stress in xz |                             |      |                           |
|                            | 8                        | Pressure           |                             |      |                           |



**Element Stress (or Strain) Item Codes 825**

**8  
CODES**

| Element Name (Code) | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                           |
|---------------------|--------------------------|------------------------------------|-----------------------------|------|---------------------------|
|                     | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or Imag./ Phase |
|                     | 9                        | Volume strain                      |                             |      |                           |
|                     | 10                       | Strain in x                        |                             |      |                           |
|                     | 11                       | Strain in y                        |                             |      |                           |
|                     | 12                       | Strain in z                        |                             |      |                           |
|                     | 13                       | Shear strain in xz                 |                             |      |                           |
|                     | 14-46                    | Words 3 through 13 repeat 3 times. |                             |      |                           |

## 826 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)               | Real Stresses or Strains |                                      | Complex Stresses or Strains |                                            |                              |
|--------------------------------------|--------------------------|--------------------------------------|-----------------------------|--------------------------------------------|------------------------------|
|                                      | Item Code                | Item                                 | Item Code                   | Item                                       | Real/Mag. or<br>Imag./ Phase |
| CPYRAM<br>(255)<br><br>Linear Format | 2                        | Stress/Strain coordinate system      | 2                           | Stress coordinate system                   |                              |
|                                      | 3                        | Coordinate type (Character)          | 3                           | Coordinate type (Character)                |                              |
|                                      | 4                        | Number of active points              | 4                           | Number of active points                    |                              |
|                                      | 5                        | External grid ID                     | 5                           | External grid ID                           |                              |
|                                      |                          | (0=center)                           |                             | (0=center)                                 |                              |
|                                      | 6                        | Normal x                             | 6                           | Normal x                                   | RM                           |
|                                      | 7                        | Shear xy                             | 7                           | Normal y                                   | RM                           |
|                                      | 8                        | First principal                      | 8                           | Normal z                                   | RM                           |
|                                      | 9                        | First principal x cosine             | 9                           | Shear xy                                   | RM                           |
|                                      | 10                       | Second principal x cosine            | 10                          | Shear yz                                   | RM                           |
|                                      | 11                       | Third principal x cosine             | 11                          | Shear zx                                   | RM                           |
|                                      | 12                       | Mean pressure                        | 12                          | Normal x                                   | IP                           |
|                                      | 13                       | von Mises or octahedral shear stress | 13                          | Normal y                                   | IP                           |
|                                      | 14                       | Normal y                             | 14                          | Normal z                                   | IP                           |
|                                      | 15                       | Shear yz                             | 15                          | Shear xy                                   | IP                           |
|                                      | 16                       | Second principal                     | 16                          | Shear yz                                   | IP                           |
|                                      | 17                       | First principal y cosine             | 17                          | Shear zx                                   | IP                           |
|                                      | 18                       | Second principal y cosine            | 18-82                       | Repeat items 5 through 17 for five corners |                              |
|                                      | 19                       | Third principal y cosine             |                             |                                            |                              |
|                                      | 20                       | Normal z                             |                             |                                            |                              |
|                                      | 21                       | Shear zx                             |                             |                                            |                              |
|                                      | 22                       | Third principal                      |                             |                                            |                              |
|                                      | 23                       | First principal z cosine             |                             |                                            |                              |
|                                      | 24                       | Second principal z cosine            |                             |                                            |                              |

## Element Stress (or Strain) Item Codes 827

| Element Name<br>(Code) | Real Stresses or Strains |                                                  | Complex Stresses or Strains |      |                              |
|------------------------|--------------------------|--------------------------------------------------|-----------------------------|------|------------------------------|
|                        | Item Code                | Item                                             | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
|                        | 25                       | Third principal z<br>cosine                      |                             |      |                              |
|                        | 26-130                   | Repeat items 5<br>through 25 for<br>five corners |                             |      |                              |

8

CODES

## 828 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                 | Real Stresses or Strains        |                                 | Complex Stresses or Strains |      |                              |
|----------------------------------------|---------------------------------|---------------------------------|-----------------------------|------|------------------------------|
|                                        | Item Code                       | Item                            | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CPYRAM<br>(256)<br>Nonlinear<br>Format | 3                               | 0 (Result at Center)            | Not applicable              |      |                              |
|                                        | 4                               | Stress in X                     |                             |      |                              |
|                                        | 5                               | Stress in Y                     |                             |      |                              |
|                                        | 6                               | Stress in Z                     |                             |      |                              |
|                                        | 7                               | Stress in XY                    |                             |      |                              |
|                                        | 8                               | Stress in YZ                    |                             |      |                              |
|                                        | 9                               | Stress in ZX                    |                             |      |                              |
|                                        | 10                              | Equivalent stress               |                             |      |                              |
|                                        | 11                              | Equivalent plastic strain       |                             |      |                              |
|                                        | 12                              | Effective creep strain          |                             |      |                              |
|                                        | 13                              | Strain in X                     |                             |      |                              |
|                                        | 14                              | Strain in Y                     |                             |      |                              |
|                                        | 15                              | Strain in Z                     |                             |      |                              |
|                                        | 16                              | Strain in XY                    |                             |      |                              |
|                                        | 17                              | Strain in YZ                    |                             |      |                              |
|                                        | 18                              | Strain in ZX                    |                             |      |                              |
|                                        | 19                              | Grid 1 ID                       |                             |      |                              |
|                                        | 20–34                           | Same as items 4–18 for corner 1 |                             |      |                              |
|                                        | 35                              | Grid 2 ID                       |                             |      |                              |
|                                        | 36–50                           | Same as items 4–18 for corner 2 |                             |      |                              |
|                                        | 51                              | Grid 3 ID                       |                             |      |                              |
|                                        | 52–66                           | Same as items 4–18 for corner 3 |                             |      |                              |
|                                        | 67                              | Grid 4 ID                       |                             |      |                              |
|                                        | 68–82                           | Same as items 4–18 for corner 4 |                             |      |                              |
| 83                                     | Grid 5 ID                       |                                 |                             |      |                              |
| 84–98                                  | Same as items 4–18 for corner 5 |                                 |                             |      |                              |

| Element Name<br>(Code)                                                                                  | Real Stresses or Strains |                                                               | Complex Stresses or Strains |                |                              |
|---------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                                                                         | Item Code                | Item                                                          | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CPYRAMFD<br><br>(257) Pyramid<br>with 5-grids<br><br>(258) Pyramid<br>with 13-grids<br><br>Hyperelastic | 2                        | Grid                                                          |                             | Not applicable |                              |
|                                                                                                         | 3                        | Grid ID                                                       |                             |                |                              |
|                                                                                                         | 4                        | Stress in X                                                   |                             |                |                              |
|                                                                                                         | 5                        | Stress in Y                                                   |                             |                |                              |
|                                                                                                         | 6                        | Stress in Z                                                   |                             |                |                              |
|                                                                                                         | 7                        | Stress in XY                                                  |                             |                |                              |
|                                                                                                         | 8                        | Stress in YZ                                                  |                             |                |                              |
|                                                                                                         | 9                        | Stress in ZX                                                  |                             |                |                              |
|                                                                                                         | 10                       | Pressure<br>$p = \frac{1}{3}(\sigma_x + \sigma_y + \sigma_z)$ |                             |                |                              |
|                                                                                                         | 11                       | Volumetric strain                                             |                             |                |                              |
|                                                                                                         | 12                       | Strain in X                                                   |                             |                |                              |
|                                                                                                         | 13                       | Strain in Y                                                   |                             |                |                              |
|                                                                                                         | 14                       | Strain in Z                                                   |                             |                |                              |
|                                                                                                         | 15                       | Strain in XY                                                  |                             |                |                              |
|                                                                                                         | 16                       | Strain in YZ                                                  |                             |                |                              |
|                                                                                                         | 17                       | Strain in ZX                                                  |                             |                |                              |
|                                                                                                         | 18-77                    | Repeat items 3 through<br>17 for 5 grid points                |                             |                |                              |

## 830 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                                        | Complex Stresses or Strains |                        |                              |
|------------------------|--------------------------|----------------------------------------|-----------------------------|------------------------|------------------------------|
|                        | Item Code                | Item                                   | Item Code                   | Item                   | Real/Mag. or<br>Imag./ Phase |
| CQUAD4<br>(33)         | 2                        | Z1=Fiber<br>Distance 1                 | 2                           | Z1=Fiber<br>Distance 1 |                              |
| Linear Format          | 3 <sup>1</sup>           | Normal x at Z1                         | 3 <sup>1</sup>              | Normal x at Z1         | RM                           |
| Center Only            | 4 <sup>1</sup>           | Normal y at Z1                         | 4 <sup>1</sup>              | Normal x at Z1         | IP                           |
|                        | 5 <sup>1</sup>           | Shear xy at Z1                         | 5 <sup>1</sup>              | Normal y at Z1         | RM                           |
|                        | 6                        | Shear angle at Z1                      | 6 <sup>1</sup>              | Normal y at Z1         | IP                           |
|                        | 7                        | Major principal<br>at Z1               | 7 <sup>1</sup>              | Shear xy at Z1         | RM                           |
|                        | 8                        | Minor principal<br>at Z1               | 8 <sup>1</sup>              | Shear xy at Z1         | IP                           |
|                        | 9                        | von Mises or<br>maximum shear<br>at Z1 | 9                           | Z2=Fiber<br>distance 2 |                              |
|                        | 10                       | Z2=Fiber<br>distance 2                 | 10 <sup>1</sup>             | Normal x at Z2         | RM                           |
|                        | 11 <sup>1</sup>          | Normal x at Z2                         | 11 <sup>1</sup>             | Normal x at Z2         | IP                           |
|                        | 12 <sup>1</sup>          | Normal y at Z2                         | 12 <sup>1</sup>             | Normal y at Z2         | RM                           |
|                        | 13 <sup>1</sup>          | Shear xy at Z2                         | 13 <sup>1</sup>             | Normal y at Z2         | IP                           |
|                        | 14                       | Shear angle at Z2                      | 14                          | Shear xy at Z2         | RM                           |
|                        | 15                       | Major principal<br>at Z2               | 15                          | Shear xy at Z2         | IP                           |
|                        | 16                       | Minor principal<br>at Z2               |                             |                        |                              |
|                        | 17                       | von Mises or<br>maximum shear<br>at Z2 |                             |                        |                              |

| Element Name<br>(Code)                                    | Real Stresses or Strains                      |                                        | Complex Stresses or Strains                   |                                         |                              |
|-----------------------------------------------------------|-----------------------------------------------|----------------------------------------|-----------------------------------------------|-----------------------------------------|------------------------------|
|                                                           | Item Code                                     | Item                                   | Item Code                                     | Item                                    | Real/Mag. or<br>Imag./ Phase |
| CQUAD4<br>(144)<br>Linear Format<br>Center and<br>Corners | 1                                             | EID                                    | 1                                             | EID                                     |                              |
|                                                           | 2                                             | CEN/                                   | 2                                             | CEN/                                    |                              |
|                                                           | 3                                             | 4                                      | 3                                             | 4                                       |                              |
|                                                           | 4                                             | Z1-Fiber distance                      | 4                                             | Z1-Fiber distance                       |                              |
|                                                           | 5                                             | Normal x at Z1                         | 5                                             | Normal x at Z1                          | RM                           |
|                                                           | 6                                             | Normal y at Z1                         | 6                                             | Normal x at Z1                          | IP                           |
|                                                           | 7                                             | Shear xy at Z1                         | 7                                             | Normal y at Z1                          | RM                           |
|                                                           | 8                                             | Shear angle at Z1                      | 8                                             | Normal y at Z1                          | IP                           |
|                                                           | 9                                             | Major principal<br>at Z1               | 9                                             | Shear xy at Z1                          | RM                           |
|                                                           | 10                                            | Minor principal<br>at Z1               | 10                                            | Shear xy at Z1                          | IP                           |
|                                                           | 11                                            | von Mises or<br>maximum shear<br>at Z1 | 11                                            | Z2-Fiber distance                       |                              |
|                                                           | 12                                            | Z2-Fiber distance                      | 12                                            | Normal x at Z2                          | RM                           |
|                                                           | 13                                            | Normal x at Z2                         | 13                                            | Normal x at Z2                          | IP                           |
|                                                           | 14                                            | Normal y at Z2                         | 14                                            | Normal y at Z2                          | RM                           |
|                                                           | 15                                            | Shear xy at Z2                         | 15                                            | Normal y at Z2                          | IP                           |
|                                                           | 16                                            | Shear angle at Z2                      | 16                                            | Shear xy at Z2                          | RM                           |
|                                                           | 17                                            | Major principal<br>at Z2               | 17                                            | Shear xy at Z2                          | IP                           |
|                                                           | 18                                            | Minor principal<br>at Z2               | 18                                            | Grid 1                                  |                              |
|                                                           | 19                                            | von Mises or<br>maximum shear<br>at Z2 | 19-32                                         | Same as 4<br>through 17 for<br>corner 1 |                              |
|                                                           | 20                                            | Grid 1                                 | 33                                            | Grid 2                                  |                              |
| 21-36                                                     | Same as items<br>4 through 19 for<br>corner 1 | 34-47                                  | Same as items<br>4 through 17 for<br>corner 2 |                                         |                              |
| 37                                                        | Grid 2                                        | 48                                     | Grid 3                                        |                                         |                              |
| 38-53                                                     | Same as items<br>4 through 19 for<br>corner 2 | 49-62                                  | Same as items<br>4 through 17 for<br>corner 3 |                                         |                              |

## 832 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                        | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
|                        | 54                       | Grid 3                                        | 63                          | Grid 4                                        |                              |
|                        | 55-70                    | Same as items<br>4 through 19 for<br>corner 3 | 64-77                       | Same as items<br>4 through 17 for<br>corner 4 |                              |
|                        | 71                       | Grid 4                                        |                             |                                               |                              |
|                        | 72-87                    | Same as items<br>4 through 19 for<br>corner 4 |                             |                                               |                              |



**Element Stress (or Strain) Item Codes 833**

**8  
CODES**

| Element Name<br>(Code)                                  | Real Stresses or Strains |                 | Complex Stresses or Strains |                |                              |
|---------------------------------------------------------|--------------------------|-----------------|-----------------------------|----------------|------------------------------|
|                                                         | Item Code                | Item            | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CQUAD4 <sup>2</sup><br>(95)<br>Composite<br>Center Only | 2                        | Lamina Number   |                             | Not applicable |                              |
|                                                         | 3                        | Normal-1        |                             |                |                              |
|                                                         | 4                        | Normal-2        |                             |                |                              |
|                                                         | 5                        | Shear-12        |                             |                |                              |
|                                                         | 6                        | Shear-1Z        |                             |                |                              |
|                                                         | 7                        | Shear-2Z        |                             |                |                              |
|                                                         | 8                        | Shear angle     |                             |                |                              |
|                                                         | 9                        | Major principal |                             |                |                              |
|                                                         | 10                       | Minor principal |                             |                |                              |
|                                                         | 11                       | Maximum shear   |                             |                |                              |

## 834 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                               | Real Stresses or Strains |                                                                                   | Complex Stresses or Strains |                |                              |
|------------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                      | Item Code                | Item                                                                              | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CQUAD4<br>(90)<br>Nonlinear<br>Format<br>Center Only | 2                        | Z1=Fiber<br>Distance 1 (Plane<br>stress only)                                     |                             | Not applicable |                              |
|                                                      | 3                        | Stress-X (at Z1, if<br>plane stress)                                              |                             |                |                              |
|                                                      | 4                        | Stress-Y (at Z1, if<br>plane stress)                                              |                             |                |                              |
|                                                      | 5                        | Stress-Z (Plane<br>strain only)                                                   |                             |                |                              |
|                                                      | 6                        | Stress-XY (at Z1,<br>if plane stress)                                             |                             |                |                              |
|                                                      | 7                        | Equivalent stress<br>(at Z1, if plane<br>stress)                                  |                             |                |                              |
|                                                      | 8                        | Plastic strain<br>(at Z1, if plane<br>stress)                                     |                             |                |                              |
|                                                      | 9                        | Creep strain<br>(at Z1, if plane<br>stress)                                       |                             |                |                              |
|                                                      | 10                       | Strain-X (at Z1,<br>if plane stress)                                              |                             |                |                              |
|                                                      | 11                       | Strain-Y (at Z1,<br>if plane stress)                                              |                             |                |                              |
|                                                      | 12                       | Strain-Z (plane<br>strain only)                                                   |                             |                |                              |
|                                                      | 13                       | Strain-XY (at Z1,<br>if plane stress)                                             |                             |                |                              |
|                                                      | 14-25                    | Items 2 through<br>13 repeated for<br>fiber distance<br>Z2 (plane stress<br>only) |                             |                |                              |

| Element Name<br>(Code)                                          | Real Stresses or Strains        |                                                 | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------------------|---------------------------------|-------------------------------------------------|-----------------------------|------|------------------------------|
|                                                                 | Item Code                       | Item                                            | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CQUAD4<br>(254)<br>Nonlinear<br>Format<br>Center and<br>Corners | 3                               | 0 (Result at Center)                            | Not applicable              |      |                              |
|                                                                 | 4                               | Z1=Fiber Distance                               |                             |      |                              |
|                                                                 | 5                               | Stress in X at Z1                               |                             |      |                              |
|                                                                 | 6                               | Stress in Y at Z1                               |                             |      |                              |
|                                                                 | 7                               | Stress in Z at Z1                               |                             |      |                              |
|                                                                 | 8                               | Stress in XY at Z1                              |                             |      |                              |
|                                                                 | 9                               | Equivalent stress at Z1                         |                             |      |                              |
|                                                                 | 10                              | Effective plastic/nelastic strain at Z1         |                             |      |                              |
|                                                                 | 11                              | Effective creep strain at Z1                    |                             |      |                              |
|                                                                 | 12                              | Strain in X at Z1                               |                             |      |                              |
|                                                                 | 13                              | Strain in Y at Z1                               |                             |      |                              |
|                                                                 | 14                              | Strain in Z at Z1                               |                             |      |                              |
|                                                                 | 15                              | Strain in XY at Z1                              |                             |      |                              |
|                                                                 | 16                              | Z2=Fiber Distance                               |                             |      |                              |
|                                                                 | 17-27                           | Items 5 through 15 repeat for fiber distance Z2 |                             |      |                              |
|                                                                 | 28                              | Grid 1 ID                                       |                             |      |                              |
|                                                                 | 29-52                           | Same as items 4-27 for corner 1                 |                             |      |                              |
|                                                                 | 53                              | Grid 2 ID                                       |                             |      |                              |
|                                                                 | 54-77                           | Same as items 4-27 for corner 2                 |                             |      |                              |
|                                                                 | 78                              | Grid 3 ID                                       |                             |      |                              |
| 79-102                                                          | Same as items 4-27 for corner 3 |                                                 |                             |      |                              |
| 103                                                             | Grid 4 ID                       |                                                 |                             |      |                              |
| 104-127                                                         | Same as items 4-27 for corner 4 |                                                 |                             |      |                              |

## 836 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                          | Real Stresses or Strains |                        | Complex Stresses or Strains |                        |                              |
|-----------------------------------------------------------------|--------------------------|------------------------|-----------------------------|------------------------|------------------------------|
|                                                                 | Item Code                | Item                   | Item Code                   | Item                   | Real/Mag. or<br>Imag./ Phase |
| CQUAD8<br>(64)<br>Linear Format<br>Center and<br>Corners        |                          | Same as<br>CQUAD4(144) |                             | Same as<br>CQUAD4(144) |                              |
| CQUAD8 <sup>2</sup><br>(96)<br>Composite<br>Center Only         |                          | Same as<br>CQUAD4(95)  | Not applicable              |                        |                              |
| CQUAD8<br>(241)<br>Nonlinear<br>Format<br>Center and<br>Corners |                          | Same as<br>CQUAD4(254) | Not applicable              |                        |                              |

| Element Name<br>(Code)                                                               | Real Stresses or Strains |                                                               | Complex Stresses or Strains |      |                              |
|--------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------|-----------------------------|------|------------------------------|
|                                                                                      | Item Code                | Item                                                          | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CQUADFD<br>(201)<br>Hyperelastic<br>with 4 grid points<br>Center and<br>Corners      | 2                        | Grid/Gauss                                                    | Not applicable              |      |                              |
|                                                                                      | 3                        | Grid/Gauss ID<br>(0=center)                                   |                             |      |                              |
|                                                                                      | 4                        | Cauchy stress-X                                               |                             |      |                              |
|                                                                                      | 5                        | Cauchy stress-Y                                               |                             |      |                              |
|                                                                                      | 6                        | Cauchy stress-Z                                               |                             |      |                              |
|                                                                                      | 7                        | Cauchy stress-XY                                              |                             |      |                              |
|                                                                                      | 8                        | Pressure<br>$p = \frac{1}{3}(\sigma_x + \sigma_y + \sigma_z)$ |                             |      |                              |
|                                                                                      | 9                        | Volumetric strain J-1                                         |                             |      |                              |
|                                                                                      | 10                       | Logarithmic strain-X                                          |                             |      |                              |
|                                                                                      | 11                       | Logarithmic strain-Y                                          |                             |      |                              |
|                                                                                      | 13                       | Logarithmic<br>strain-XY                                      |                             |      |                              |
|                                                                                      | 14-46                    | Items 3 through 13<br>repeated for 3 Gauss<br>points          |                             |      |                              |
| CQUADFD<br>(208)<br>Hyperelastic<br>with 5-9 grid<br>points<br>Center and<br>Corners | 2-13                     | Same as CQUADFD<br>(201)                                      | Not applicable              |      |                              |
|                                                                                      | 14-101                   | Repeat items 3<br>through 13 for 8<br>Gauss points            |                             |      |                              |

## 838 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                            | Real Stresses or Strains |                        | Complex Stresses or Strains |                        |                              |
|---------------------------------------------------------------------------------------------------|--------------------------|------------------------|-----------------------------|------------------------|------------------------------|
|                                                                                                   | Item Code                | Item                   | Item Code                   | Item                   | Real/Mag. or<br>Imag./ Phase |
| CQUADR<br>(82)<br>Center and<br>Corners                                                           |                          | Same as<br>CQUAD4(144) |                             | Same as<br>CQUAD4(144) |                              |
| CQUADR<br>(228)<br>Center only<br>(not supported by<br>old formulation)                           |                          | Same as<br>CQUAD4(33)  |                             | Same as<br>CQUAD4(33)  |                              |
| CQUADR <sup>2</sup><br>(232)<br>Composite<br>Center Only<br>(not supported by<br>old formulation) |                          | Same as<br>CQUAD4(95)  | Not applicable              |                        |                              |

| Element Name<br>(Code)                                                       | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|------------------------------------------------------------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                                                                              | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
| CQUADX4<br>(243)<br>Linear Format<br>Center and<br>Corners<br>Grid and Gauss | 3                        | 0 (Result at<br>Center)                       | 3                           | 0 (Result at<br>Center)                       |                              |
|                                                                              | 4                        | Radial                                        | 4                           | Radial                                        | RM                           |
|                                                                              | 5                        | Azimuthal                                     | 5                           | Radial                                        | IP                           |
|                                                                              | 6                        | Axial                                         | 6                           | Azimuthal                                     | RM                           |
|                                                                              | 7                        | Shear stress                                  | 7                           | Azimuthal                                     | IP                           |
|                                                                              | 8                        | Maximum<br>principal                          | 8                           | Axial                                         | RM                           |
|                                                                              | 9                        | Maximum shear                                 | 9                           | Axial                                         | IP                           |
|                                                                              | 10                       | von Mises or<br>octahedral                    | 10                          | Shear                                         | RM                           |
|                                                                              | 11                       | Grid 1 ID                                     | 11                          | Shear                                         | IP                           |
|                                                                              | 12-18                    | Same as items<br>4 through 10 for<br>corner 1 | 12                          | Grid 1 ID                                     |                              |
|                                                                              | 19                       | Grid 2 ID                                     | 13-20                       | Same as items<br>4 through 11 for<br>corner 1 |                              |
|                                                                              | 20-26                    | Same as items<br>4 through 10 for<br>corner 2 | 21                          | Grid 2 ID                                     |                              |
|                                                                              | 27                       | Grid 3 ID                                     | 22-29                       | Same as items<br>4 through 11 for<br>corner 2 |                              |
|                                                                              | 28-34                    | Same as items<br>4 through 10 for<br>corner 3 | 30                          | Grid 3 ID                                     |                              |
|                                                                              | 35                       | Grid 4 ID                                     | 31-38                       | Same as items<br>4 through 11 for<br>corner 3 |                              |
|                                                                              | 36-42                    | Same as items<br>4 through 10 for<br>corner 4 | 39                          | Grid 4 ID                                     |                              |
|                                                                              |                          |                                               | 40-47                       | Same as items<br>4 through 11 for<br>corner 4 |                              |

## 840 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                           | Real Stresses or Strains           |                                    | Complex Stresses or Strains |      |                              |
|------------------------------------------------------------------|------------------------------------|------------------------------------|-----------------------------|------|------------------------------|
|                                                                  | Item Code                          | Item                               | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CQUADX4<br>(247)<br>Nonlinear<br>Format<br>Center and<br>Corners | 3                                  | 0 (Result at Center)               | Not applicable              |      |                              |
|                                                                  | 4                                  | Radial Stress                      |                             |      |                              |
|                                                                  | 5                                  | Azimuthal Stress                   |                             |      |                              |
|                                                                  | 6                                  | Axial Stress                       |                             |      |                              |
|                                                                  | 7                                  | Shear Stress                       |                             |      |                              |
|                                                                  | 8                                  | Equivalent Stress                  |                             |      |                              |
|                                                                  | 9                                  | Effective Plastic Strain           |                             |      |                              |
|                                                                  | 10                                 | Effective Creep Strain             |                             |      |                              |
|                                                                  | 11                                 | Radial Strain                      |                             |      |                              |
|                                                                  | 12                                 | Azimuthal Strain                   |                             |      |                              |
|                                                                  | 13                                 | Axial Strain                       |                             |      |                              |
|                                                                  | 14                                 | Shear Strain                       |                             |      |                              |
|                                                                  | 15                                 | Grid 1 ID                          |                             |      |                              |
|                                                                  | 16–26                              | Same as items 4–14 for<br>corner 1 |                             |      |                              |
|                                                                  | 27                                 | Grid 2 ID                          |                             |      |                              |
|                                                                  | 28–38                              | Same as items 4–14 for<br>corner 2 |                             |      |                              |
|                                                                  | 39                                 | Grid 3 ID                          |                             |      |                              |
|                                                                  | 40–50                              | Same as items 4–14 for<br>corner 3 |                             |      |                              |
|                                                                  | 51                                 | Grid 4 ID                          |                             |      |                              |
| 52–62                                                            | Same as items 4–14 for<br>corner 4 |                                    |                             |      |                              |



## Element Stress (or Strain) Item Codes 841

**8**  
CODES

| Element Name<br>(Code)                                                                       | Real Stresses or Strains |                                                              | Complex Stresses or Strains |      |                              |
|----------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------|-----------------------------|------|------------------------------|
|                                                                                              | Item Code                | Item                                                         | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CQUADX4FD<br><br>(262)<br><br>Hyperelastic<br><br>Grid or Gauss<br><br>Center and<br>Corners | 2                        | Cord Type (GRID<br>or GAUS)                                  |                             |      |                              |
|                                                                                              | 3                        | Grid ID                                                      |                             |      |                              |
|                                                                                              | 4                        | Radial Stress                                                |                             |      |                              |
|                                                                                              | 5                        | Azimuthal Stress                                             |                             |      |                              |
|                                                                                              | 6                        | Axial Stress                                                 |                             |      |                              |
|                                                                                              | 7                        | Shear Stress                                                 |                             |      |                              |
|                                                                                              | 8                        | Pressure                                                     |                             |      |                              |
|                                                                                              | 9                        | Volumetric<br>Strain                                         |                             |      |                              |
|                                                                                              | 10                       | Radial Strain                                                |                             |      |                              |
|                                                                                              | 11                       | Azimuthal Strain                                             |                             |      |                              |
|                                                                                              | 12                       | Axial Strain                                                 |                             |      |                              |
|                                                                                              | 13                       | Shear Strain                                                 |                             |      |                              |
|                                                                                              | 14-46                    | Items 3 through<br>13 repeated for<br>4 Grid/Gauss<br>Points |                             |      |                              |

## 842 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                       | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|------------------------------------------------------------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                                                                              | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
| CQUADX8<br>(245)<br>Linear Format<br>Grid and Gauss<br>Center and<br>Corners | 3                        | 0 (Result at<br>Center)                       | 3                           | 0 (Result at<br>Center)                       |                              |
|                                                                              | 4                        | Radial                                        | 4                           | Radial                                        | RM                           |
|                                                                              | 5                        | Azimuthal                                     | 5                           | Radial                                        | IP                           |
|                                                                              | 6                        | Axial                                         | 6                           | Azimuthal                                     | RM                           |
|                                                                              | 7                        | Shear stress                                  | 7                           | Azimuthal                                     | IP                           |
|                                                                              | 8                        | Maximum<br>principal                          | 8                           | Axial                                         | RM                           |
|                                                                              | 9                        | Maximum shear                                 | 9                           | Axial                                         | IP                           |
|                                                                              | 10                       | von Mises or<br>octahedral                    | 10                          | Shear                                         | RM                           |
|                                                                              | 11                       | Grid 1 ID                                     | 11                          | Shear                                         | IP                           |
|                                                                              | 12-18                    | Same as items<br>4 through 10 for<br>corner 1 | 12                          | Grid 1 ID                                     |                              |
|                                                                              | 19                       | Grid 2 ID                                     | 13-20                       | Same as items<br>4 through 11 for<br>corner 1 |                              |
|                                                                              | 20-26                    | Same as items<br>4 through 10 for<br>corner 2 | 21                          | Grid 2 ID                                     |                              |
|                                                                              | 27                       | Grid 3 ID                                     | 22-29                       | Same as items<br>4 through 11 for<br>corner 2 |                              |
|                                                                              | 28-34                    | Same as items<br>4 through 10 for<br>corner 3 | 30                          | Grid 3 ID                                     |                              |
|                                                                              | 35                       | Grid 4 ID                                     | 31-38                       | Same as items<br>4 through 11 for<br>corner 3 |                              |
|                                                                              | 36-42                    | Same as items<br>4 through 10 for<br>corner 4 | 39                          | Grid 4 ID                                     |                              |
|                                                                              |                          |                                               | 40-47                       | Same as items<br>4 through 11 for<br>corner 4 |                              |

| Element Name<br>(Code)                          | Real Stresses or Strains |                                    | Complex Stresses or Strains |      |                              |
|-------------------------------------------------|--------------------------|------------------------------------|-----------------------------|------|------------------------------|
|                                                 | Item Code                | Item                               | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CQUADX8<br><br>(249)<br><br>Nonlinear<br>Format | 3                        | 0 (Result at Center)               | Not applicable              |      |                              |
|                                                 | 4                        | Radial Stress                      |                             |      |                              |
|                                                 | 5                        | Azimuthal Stress                   |                             |      |                              |
|                                                 | 6                        | Axial Stress                       |                             |      |                              |
|                                                 | 7                        | Shear Stress                       |                             |      |                              |
|                                                 | 8                        | Equivalent Stress                  |                             |      |                              |
|                                                 | 9                        | Effective Plastic Strain           |                             |      |                              |
|                                                 | 10                       | Effective Creep Strain             |                             |      |                              |
|                                                 | 11                       | Radial Strain                      |                             |      |                              |
|                                                 | 12                       | Azimuthal Strain                   |                             |      |                              |
|                                                 | 13                       | Axial Strain                       |                             |      |                              |
|                                                 | 14                       | Shear Strain                       |                             |      |                              |
|                                                 | 15                       | Grid 1 ID                          |                             |      |                              |
|                                                 | 16–26                    | Same as items 4–14 for<br>corner 1 |                             |      |                              |
|                                                 | 27                       | Grid 2 ID                          |                             |      |                              |
|                                                 | 28–38                    | Same as items 4–14 for<br>corner 2 |                             |      |                              |
|                                                 | 39                       | Grid 3 ID                          |                             |      |                              |
|                                                 | 40–50                    | Same as items 4–14 for<br>corner 3 |                             |      |                              |
|                                                 | 51                       | Grid 4 ID                          |                             |      |                              |
|                                                 | 52–62                    | Same as items 4–14 for<br>corner 4 |                             |      |                              |

## 844 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                      | Real Stresses or Strains |                                                                  | Complex Stresses or Strains |      |                              |
|-------------------------------------------------------------|--------------------------|------------------------------------------------------------------|-----------------------------|------|------------------------------|
|                                                             | Item Code                | Item                                                             | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CQUADX8FD<br>Hyperelastic<br>Center and<br>Corners<br>(264) | 3                        | Grid ID                                                          |                             |      |                              |
|                                                             | 4                        | Radial Stress                                                    |                             |      |                              |
|                                                             | 5                        | Azimuthal Stress                                                 |                             |      |                              |
|                                                             | 6                        | Axial Stress                                                     |                             |      |                              |
|                                                             | 7                        | Shear Stress                                                     |                             |      |                              |
|                                                             | 8                        | Pressure                                                         |                             |      |                              |
|                                                             | 9                        | Volumetric<br>Strain                                             |                             |      |                              |
|                                                             | 10                       | Radial Strain                                                    |                             |      |                              |
|                                                             | 11                       | Azimuthal Strain                                                 |                             |      |                              |
|                                                             | 12                       | Axial Strain                                                     |                             |      |                              |
|                                                             | 13                       | Shear Strain                                                     |                             |      |                              |
|                                                             | 14-46                    | Items 3 through<br>13 repeated for<br>4 corner Grid<br>Locations |                             |      |                              |

**Element Stress (or Strain) Item Codes 845**

**8  
CODES**

| Element Name<br>(Code)                                   | Real Stresses or Strains |                                                                                  | Complex Stresses or Strains |      |                              |
|----------------------------------------------------------|--------------------------|----------------------------------------------------------------------------------|-----------------------------|------|------------------------------|
|                                                          | Item Code                | Item                                                                             | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CQUADX8FD<br>Hyperelastic<br>GAUSS<br>Locations<br>(266) | 3                        | Grid ID                                                                          |                             |      |                              |
|                                                          | 4                        | Radial Stress                                                                    |                             |      |                              |
|                                                          | 5                        | Azimuthal Stress                                                                 |                             |      |                              |
|                                                          | 6                        | Axial Stress                                                                     |                             |      |                              |
|                                                          | 7                        | Shear Stress                                                                     |                             |      |                              |
|                                                          | 8                        | Pressure                                                                         |                             |      |                              |
|                                                          | 9                        | Volumetric<br>Strain                                                             |                             |      |                              |
|                                                          | 10                       | Radial Strain                                                                    |                             |      |                              |
|                                                          | 11                       | Azimuthal Strain                                                                 |                             |      |                              |
|                                                          | 12                       | Axial Strain                                                                     |                             |      |                              |
|                                                          | 13                       | Shear Strain                                                                     |                             |      |                              |
|                                                          | 14-101                   | Items 3 through<br>13 repeated<br>8 times for a<br>total of 9 Gauss<br>locations |                             |      |                              |

## 846 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                           | Real Stresses or Strains |                                                                 | Complex Stresses or Strains |                |                              |
|----------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                                                  | Item Code                | Item                                                            | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CQUADXFD<br>(214)<br>Hyperelastic<br>with 4 grid points<br>Center and<br>Corners | 2                        | Grid/Gauss                                                      |                             | Not applicable |                              |
|                                                                                  | 3                        | Gauss ID                                                        |                             |                |                              |
|                                                                                  | 4                        | Cauchy stress-X<br>(radial)                                     |                             |                |                              |
|                                                                                  | 5                        | Cauchy stress-Y<br>(axial)                                      |                             |                |                              |
|                                                                                  | 6                        | Cauchy stress-Z<br>(circumferential)                            |                             |                |                              |
|                                                                                  | 7                        | Cauchy stress-XY                                                |                             |                |                              |
|                                                                                  | 8                        | Pressure<br>$p = \frac{1}{3}(\sigma_x + \sigma_y + \sigma_z)$   |                             |                |                              |
|                                                                                  | 9                        | Volumetric strain J-1                                           |                             |                |                              |
|                                                                                  | 10                       | Logarithmic strain-X<br>(radial)                                |                             |                |                              |
|                                                                                  | 11                       | Logarithmic strain-Y<br>(axial)                                 |                             |                |                              |
|                                                                                  | 12                       | Logarithmic strain-Z<br>(circumferential)                       |                             |                |                              |
|                                                                                  | 13                       | Logarithmic<br>strain-XY                                        |                             |                |                              |
|                                                                                  | 14-46                    | Repeat items 3<br>through 13 for<br>remaining 3 Gauss<br>points |                             |                |                              |

## Element Stress (or Strain) Item Codes 847

| Element Name<br>(Code)                                                  | Real Stresses or Strains |                                                                                                 | Complex Stresses or Strains |                |                              |
|-------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                                         | Item Code                | Item                                                                                            | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CQUADXFD<br><br>(215)<br><br>Hyperelastic<br>with 8 or 9 grid<br>points | 2-13<br><br>14-101       | Same as QUADXFD<br>(214)<br><br>Repeat items 3<br>through 13 for<br>remaining 8 Gauss<br>points |                             | Not applicable |                              |

8  
CODES

## 848 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)              | Real Stresses or Strains |                       | Complex Stresses or Strains |                       |                              |
|-------------------------------------|--------------------------|-----------------------|-----------------------------|-----------------------|------------------------------|
|                                     | Item Code                | Item                  | Item Code                   | Item                  | Real/Mag. or<br>Imag./ Phase |
| CROD<br>(1)<br>Linear Format        |                          | Same as<br>CONROD(10) |                             | Same as<br>CONROD(10) |                              |
| CROD<br>(89)<br>Nonlinear<br>Format |                          | Same as<br>CONROD(92) |                             | Not applicable        |                              |



**Element Stress (or Strain) Item Codes 849**

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |               | Complex Stresses or Strains |               |                              |
|------------------------|--------------------------|---------------|-----------------------------|---------------|------------------------------|
|                        | Item Code                | Item          | Item Code                   | Item          | Real/Mag. or<br>Imag./ Phase |
| CSHEAR<br><br>(4)      | 2                        | Maximum shear | 2                           | Maximum shear | RM                           |
|                        | 3 <sup>1</sup>           | Average shear | 3                           | Maximum shear | IP                           |
|                        | 4                        | Safety margin | 4 <sup>1</sup>              | Average shear | RM                           |
|                        |                          |               | 5 <sup>1</sup>              | Average shear | IP                           |

## 850 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                      | Complex Stresses or Strains |                      |                              |
|------------------------|--------------------------|----------------------|-----------------------------|----------------------|------------------------------|
|                        | Item Code                | Item                 | Item Code                   | Item                 | Real/Mag. or<br>Imag./ Phase |
| CSLOT3<br>(50)         | 2                        | Radial centroid      | 2                           | Radial centroid      | RM                           |
|                        | 3                        | Axial centroid       | 3                           | Axial centroid       | RM                           |
|                        | 4                        | Tangential edge<br>1 | 4                           | Tangential edge<br>1 | RM                           |
|                        | 5                        | Tangential edge<br>2 | 5                           | Tangential edge<br>2 | RM                           |
|                        | 6                        | Tangential edge<br>3 | 6                           | Tangential edge<br>3 | RM                           |
|                        |                          |                      | 7                           | Radial centroid      | IP                           |
|                        |                          |                      | 8                           | Axial centroid       | IP                           |
|                        |                          |                      | 9                           | Tangential edge<br>1 | IP                           |
|                        |                          |                      | 10                          | Tangential edge<br>2 | IP                           |
|                        |                          |                      | 11                          | Tangential edge<br>3 | IP                           |
|                        |                          |                      |                             |                      |                              |
| CSLOT4<br>(51)         | 2                        | Radial centroid      | 2                           | Radial centroid      | RM                           |
|                        | 3                        | Axial centroid       | 3                           | Axial centroid       | RM                           |
|                        | 4                        | Tangential edge<br>1 | 4                           | Tangential edge<br>1 | RM                           |
|                        | 5                        | Tangential edge<br>2 | 5                           | Tangential edge<br>2 | RM                           |
|                        | 6                        | Tangential edge<br>3 | 6                           | Tangential edge<br>3 | RM                           |
|                        | 7                        | Tangential edge<br>4 | 7                           | Tangential edge<br>4 | RM                           |
|                        |                          |                      | 8                           | Radial centroid      | IP                           |
|                        |                          |                      | 9                           | Axial centroid       | IP                           |
|                        |                          |                      | 10                          | Tangential edge<br>1 | IP                           |
|                        |                          |                      | 11                          | Tangential edge<br>2 | IP                           |
|                        |                          |                      | 12                          | Tangential edge<br>3 | IP                           |
|                        |                          |                      | 13                          | Tangential edge<br>4 | IP                           |
|                        |                          |                      |                             |                      |                              |

| Element Name<br>(Code)          | Real Stresses or Strains |                                      | Complex Stresses or Strains |                                            |                              |
|---------------------------------|--------------------------|--------------------------------------|-----------------------------|--------------------------------------------|------------------------------|
|                                 | Item Code                | Item                                 | Item Code                   | Item                                       | Real/Mag. or<br>Imag./ Phase |
| CTETRA<br>(39)<br>Linear Format | 2                        | Stress coordinate system             | 2                           | Stress coordinate system                   |                              |
|                                 | 3                        | Coordinate type (Character)          | 3                           | Coordinate type (Character)                |                              |
|                                 | 4                        | Number of active points              | 4                           | Number of active points                    |                              |
|                                 | 5                        | External grid ID                     | 5                           | External grid ID                           |                              |
|                                 |                          | (0=center)                           |                             | (0=center)                                 |                              |
|                                 | 6 <sup>1</sup>           | Normal x                             | 6 <sup>1</sup>              | Normal x                                   | RM                           |
|                                 | 7 <sup>1</sup>           | Shear xy                             | 7 <sup>1</sup>              | Normal y                                   | RM                           |
|                                 | 8                        | First principal                      | 8 <sup>1</sup>              | Normal z                                   | RM                           |
|                                 | 9                        | First principal x cosine             | 9 <sup>1</sup>              | Shear xy                                   | RM                           |
|                                 | 10                       | Second principal x cosine            | 10 <sup>1</sup>             | Shear yz                                   | RM                           |
|                                 | 11                       | Third principal x cosine             | 11 <sup>1</sup>             | Shear zx                                   | RM                           |
|                                 | 12                       | Mean pressure                        | 12 <sup>1</sup>             | Normal x                                   | IP                           |
|                                 | 13                       | von Mises or octahedral shear stress | 13 <sup>1</sup>             | Normal y                                   | IP                           |
|                                 | 14 <sup>1</sup>          | Normal y                             | 14 <sup>1</sup>             | Normal z                                   | IP                           |
|                                 | 15 <sup>1</sup>          | Shear yz                             | 15 <sup>1</sup>             | Shear xy                                   | IP                           |
|                                 | 16                       | Second principal                     | 16 <sup>1</sup>             | Shear yz                                   | IP                           |
|                                 | 17                       | First principal y cosine             | 17 <sup>1</sup>             | Shear zx                                   | IP                           |
|                                 | 18                       | Second principal y cosine            | 18-69                       | Repeat items 5 through 17 for four corners |                              |
|                                 | 19                       | Third principal y cosine             |                             |                                            |                              |
|                                 | 20 <sup>1</sup>          | Normal z                             |                             |                                            |                              |
|                                 | 21 <sup>1</sup>          | Shear zx                             |                             |                                            |                              |
|                                 | 22                       | Third principal                      |                             |                                            |                              |
|                                 | 23                       | First principal z cosine             |                             |                                            |                              |
|                                 | 24                       | Second principal z cosine            |                             |                                            |                              |

## 852 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                                                  | Complex Stresses or Strains |      |                              |
|------------------------|--------------------------|--------------------------------------------------|-----------------------------|------|------------------------------|
|                        | Item Code                | Item                                             | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
|                        | 25                       | Third principal z<br>cosine                      |                             |      |                              |
|                        | 26-109                   | Repeat items 5<br>through 25 for<br>four corners |                             |      |                              |

| Element Name<br>(Code)                        | Real Stresses or Strains |                                                  | Complex Stresses or Strains |                |                              |
|-----------------------------------------------|--------------------------|--------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                               | Item Code                | Item                                             | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CTETRA<br><br>(85)<br><br>Nonlinear<br>Format | 2                        | Grid/Gauss                                       |                             | Not applicable |                              |
|                                               | 3                        | External grid ID<br>(0=center)                   |                             |                |                              |
|                                               | 4                        | Stress-X                                         |                             |                |                              |
|                                               | 5                        | Stress-Y                                         |                             |                |                              |
|                                               | 6                        | Stress-Z                                         |                             |                |                              |
|                                               | 7                        | Stress-XY                                        |                             |                |                              |
|                                               | 8                        | Stress-YZ                                        |                             |                |                              |
|                                               | 9                        | Stress-ZX                                        |                             |                |                              |
|                                               | 10                       | Equivalent stress                                |                             |                |                              |
|                                               | 11                       | Effective plastic<br>strain                      |                             |                |                              |
|                                               | 12                       | Effective creep<br>strain                        |                             |                |                              |
|                                               | 13                       | Strain-X                                         |                             |                |                              |
|                                               | 14                       | Strain-Y                                         |                             |                |                              |
|                                               | 15                       | Strain-Z                                         |                             |                |                              |
|                                               | 16                       | Strain-XY                                        |                             |                |                              |
|                                               | 17                       | Strain-YZ                                        |                             |                |                              |
|                                               | 18                       | Strain-ZX                                        |                             |                |                              |
|                                               | 19-82                    | Repeat items 3<br>through 18 for<br>four corners |                             |                |                              |

## 854 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                      | Real Stresses or Strains |                                                    | Complex Stresses or Strains |                |                              |
|-------------------------------------------------------------|--------------------------|----------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                             | Item Code                | Item                                               | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CTETRAFD<br>(205)<br>Hyperelastic<br>with 4 grid points     | 2-17                     | Same as<br>CHEXAFD (202)                           |                             | Not applicable |                              |
| CTETRAFD<br>(210)<br>Hyperelastic<br>with 10 grid<br>points | 2-17                     | Same as<br>CHEXAFD (202)                           |                             | Not applicable |                              |
|                                                             | 18-77                    | Repeat items 3<br>through 17 for 4<br>Gauss points |                             |                |                              |

| Element Name<br>(Code)                                                     | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|----------------------------------------------------------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                                                                            | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
| CTRAX3<br>(242)<br>Linear Format<br>Center and<br>Corners<br>Grid or Gauss | 3                        | 0 (Result at<br>Center)                       | 3                           | 0 (Result at<br>Center)                       |                              |
|                                                                            | 4                        | Radial                                        | 4                           | Radial                                        | RM                           |
|                                                                            | 5                        | Azimuthal                                     | 5                           | Radial                                        | IP                           |
|                                                                            | 6                        | Axial                                         | 6                           | Azimuthal                                     | RM                           |
|                                                                            | 7                        | Shear stress                                  | 7                           | Azimuthal                                     | IP                           |
|                                                                            | 8                        | Maximum<br>principal                          | 8                           | Axial                                         | RM                           |
|                                                                            | 9                        | Maximum shear                                 | 9                           | Axial                                         | IP                           |
|                                                                            | 10                       | von Mises or<br>octahedral                    | 10                          | Shear                                         | RM                           |
|                                                                            | 11                       | Grid 1 ID                                     | 11                          | Shear                                         | IP                           |
|                                                                            | 12-18                    | Same as items<br>4 through 10 for<br>corner 1 | 12                          | Grid 1 ID                                     |                              |
|                                                                            | 19                       | Grid 2 ID                                     | 13-20                       | Same as items<br>4 through 11 for<br>corner 1 |                              |
|                                                                            | 20-26                    | Same as items<br>4 through 10 for<br>corner 2 | 21                          | Grid 2 ID                                     |                              |
|                                                                            | 27                       | Grid 3 ID                                     | 22-29                       | Same as items<br>4 through 11 for<br>corner 2 |                              |
|                                                                            | 28-34                    | Same as items<br>4 through 10 for<br>corner 3 | 30                          | Grid 3 ID                                     |                              |
|                                                                            |                          |                                               | 31-38                       | Same as items<br>4 through 11 for<br>corner 3 |                              |

## 856 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                          | Real Stresses or Strains           |                                    | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------------------|------------------------------------|------------------------------------|-----------------------------|------|------------------------------|
|                                                                 | Item Code                          | Item                               | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CTRAX3<br>(246)<br>Nonlinear<br>Format<br>Center and<br>Corners | 3                                  | 0 (Result at Center)               | Not applicable              |      |                              |
|                                                                 | 4                                  | Radial Stress                      |                             |      |                              |
|                                                                 | 5                                  | Azimuthal Stress                   |                             |      |                              |
|                                                                 | 6                                  | Axial Stress                       |                             |      |                              |
|                                                                 | 7                                  | Shear Stress                       |                             |      |                              |
|                                                                 | 8                                  | Equivalent Stress                  |                             |      |                              |
|                                                                 | 9                                  | Effective Plastic Strain           |                             |      |                              |
|                                                                 | 10                                 | Effective Creep Strain             |                             |      |                              |
|                                                                 | 11                                 | Radial Strain                      |                             |      |                              |
|                                                                 | 12                                 | Azimuthal Strain                   |                             |      |                              |
|                                                                 | 13                                 | Axial Strain                       |                             |      |                              |
|                                                                 | 14                                 | Shear Strain                       |                             |      |                              |
|                                                                 | 15                                 | Grid 1 ID                          |                             |      |                              |
|                                                                 | 16–26                              | Same as items 4–14 for<br>corner 1 |                             |      |                              |
|                                                                 | 27                                 | Grid 2 ID                          |                             |      |                              |
|                                                                 | 28–38                              | Same as items 4–14 for<br>corner 2 |                             |      |                              |
|                                                                 | 39                                 | Grid 3 ID                          |                             |      |                              |
| 40–50                                                           | Same as items 4–14 for<br>corner 3 |                                    |                             |      |                              |



**Element Stress (or Strain) Item Codes 857**

**8  
CODES**

| Element Name<br>(Code)                              | Real Stresses or Strains |                                                                           | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------|--------------------------|---------------------------------------------------------------------------|-----------------------------|------|------------------------------|
|                                                     | Item Code                | Item                                                                      | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CTRAX3FD<br>Hyperelastic<br>(261)<br>Grid and Gauss | 3                        | Grid ID                                                                   |                             |      |                              |
|                                                     | 4                        | Radial Stress                                                             |                             |      |                              |
|                                                     | 5                        | Azimuthal Stress                                                          |                             |      |                              |
|                                                     | 6                        | Axial Stress                                                              |                             |      |                              |
|                                                     | 7                        | Shear Stress                                                              |                             |      |                              |
|                                                     | 8                        | Pressure                                                                  |                             |      |                              |
|                                                     | 9                        | Volumetric<br>Strain                                                      |                             |      |                              |
|                                                     | 10                       | Radial Strain                                                             |                             |      |                              |
|                                                     | 11                       | Azimuthal Strain                                                          |                             |      |                              |
|                                                     | 12                       | Axial Strain                                                              |                             |      |                              |
|                                                     | 13                       | Shear Strain                                                              |                             |      |                              |
|                                                     | 14-35                    | Items 3 through<br>13 repeated<br>for 3 corner<br>Grid/Gauss<br>Locations |                             |      |                              |

## 858 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                      | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|-----------------------------------------------------------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                                                                             | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
| CTRAX6<br>(244)<br>Linear Format<br>Grid and Gauss<br>Center and<br>Corners | 3                        | 0 (Result at<br>Center)                       | 3                           | 0 (Result at<br>Center)                       |                              |
|                                                                             | 4                        | Radial                                        | 4                           | Radial                                        | RM                           |
|                                                                             | 5                        | Azimuthal                                     | 5                           | Radial                                        | IP                           |
|                                                                             | 6                        | Axial                                         | 6                           | Azimuthal                                     | RM                           |
|                                                                             | 7                        | Shear stress                                  | 7                           | Azimuthal                                     | IP                           |
|                                                                             | 8                        | Maximum<br>principal                          | 8                           | Axial                                         | RM                           |
|                                                                             | 9                        | Maximum shear                                 | 9                           | Axial                                         | IP                           |
|                                                                             | 10                       | von Mises or<br>octahedral                    | 10                          | Shear                                         | RM                           |
|                                                                             | 11                       | Grid 1 ID                                     | 11                          | Shear                                         | IP                           |
|                                                                             | 12-18                    | Same as items<br>4 through 10 for<br>corner 1 | 12                          | Grid 1 ID                                     |                              |
|                                                                             | 19                       | Grid 2 ID                                     | 13-20                       | Same as items<br>4 through 11 for<br>corner 1 |                              |
|                                                                             | 20-26                    | Same as items<br>4 through 10 for<br>corner 2 | 21                          | Grid 2 ID                                     |                              |
|                                                                             | 27                       | Grid 3 ID                                     | 22-29                       | Same as items<br>4 through 11 for<br>corner 2 |                              |
|                                                                             | 28-34                    | Same as items<br>4 through 10 for<br>corner 3 | 30                          | Grid 3 ID                                     |                              |
|                                                                             |                          |                                               | 31-38                       | Same as items<br>4 through 11 for<br>corner 3 |                              |

| Element Name<br>(Code)                                          | Real Stresses or Strains           |                                    | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------------------|------------------------------------|------------------------------------|-----------------------------|------|------------------------------|
|                                                                 | Item Code                          | Item                               | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CTRAX6<br>(248)<br>Nonlinear<br>Format<br>Center and<br>Corners | 3                                  | 0 (Result at Center)               | Not applicable              |      |                              |
|                                                                 | 4                                  | Radial Stress                      |                             |      |                              |
|                                                                 | 5                                  | Azimuthal Stress                   |                             |      |                              |
|                                                                 | 6                                  | Axial Stress                       |                             |      |                              |
|                                                                 | 7                                  | Shear Stress                       |                             |      |                              |
|                                                                 | 8                                  | Equivalent Stress                  |                             |      |                              |
|                                                                 | 9                                  | Effective Plastic Strain           |                             |      |                              |
|                                                                 | 10                                 | Effective Creep Strain             |                             |      |                              |
|                                                                 | 11                                 | Radial Strain                      |                             |      |                              |
|                                                                 | 12                                 | Azimuthal Strain                   |                             |      |                              |
|                                                                 | 13                                 | Axial Strain                       |                             |      |                              |
|                                                                 | 14                                 | Shear Strain                       |                             |      |                              |
|                                                                 | 15                                 | Grid 1 ID                          |                             |      |                              |
|                                                                 | 16–26                              | Same as items 4–14 for<br>corner 1 |                             |      |                              |
|                                                                 | 27                                 | Grid 2 ID                          |                             |      |                              |
|                                                                 | 28–38                              | Same as items 4–14 for<br>corner 2 |                             |      |                              |
|                                                                 | 39                                 | Grid 3 ID                          |                             |      |                              |
| 40–50                                                           | Same as items 4–14 for<br>corner 3 |                                    |                             |      |                              |

## 860 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                      | Real Stresses or Strains |                                                              | Complex Stresses or Strains |      |                              |
|-----------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------|-----------------------------|------|------------------------------|
|                                                                             | Item Code                | Item                                                         | Item Code                   | Item | Real/Mag. or<br>Imag./ Phase |
| CTRAX6FD<br>(263)<br>Center and<br>Corners<br>Grid or Gauss<br>Hyperelastic | 2                        | Cord Type (GRID<br>or GAUS)                                  |                             |      |                              |
|                                                                             | 3                        | Grid ID                                                      |                             |      |                              |
|                                                                             | 4                        | Radial Stress                                                |                             |      |                              |
|                                                                             | 5                        | Azimuthal Stress                                             |                             |      |                              |
|                                                                             | 6                        | Axial Stress                                                 |                             |      |                              |
|                                                                             | 7                        | Shear Stress                                                 |                             |      |                              |
|                                                                             | 8                        | Pressure                                                     |                             |      |                              |
|                                                                             | 9                        | Volumetric<br>Strain                                         |                             |      |                              |
|                                                                             | 10                       | Radial Strain                                                |                             |      |                              |
|                                                                             | 11                       | Azimuthal Strain                                             |                             |      |                              |
|                                                                             | 12                       | Axial Strain                                                 |                             |      |                              |
|                                                                             | 13                       | Shear Strain                                                 |                             |      |                              |
|                                                                             | 14-35                    | Items 3 through<br>13 repeated for<br>3 Grid/Gauss<br>Points |                             |      |                              |

## Element Stress (or Strain) Item Codes 861

**8**  
CODES

| Element Name<br>(Code)                                          | Real Stresses or Strains |                       | Complex Stresses or Strains |                       |                              |
|-----------------------------------------------------------------|--------------------------|-----------------------|-----------------------------|-----------------------|------------------------------|
|                                                                 | Item Code                | Item                  | Item Code                   | Item                  | Real/Mag. or<br>Imag./ Phase |
| CTRIA3<br>(74)<br><br>Linear Format<br><br>Center Only          | 2-17                     | Same as<br>CQUAD4(33) | 2-15                        | Same as<br>CQUAD4(33) |                              |
| CTRIA3 <sup>2</sup><br>(97)<br><br>Composite<br><br>Center Only | 2-11                     | Same as<br>CQUAD4(95) |                             | Not applicable        |                              |
| CTRIA3<br>(88)<br><br>Nonlinear<br>Format<br><br>Center Only    | 2-25                     | Same as<br>CQUAD4(90) |                             | Not applicable        |                              |

## 862 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                          | Real Stresses or Strains |                        | Complex Stresses or Strains |                        |                              |
|-----------------------------------------------------------------|--------------------------|------------------------|-----------------------------|------------------------|------------------------------|
|                                                                 | Item Code                | Item                   | Item Code                   | Item                   | Real/Mag. or<br>Imag./ Phase |
| CTRIA6<br>(75)<br>Linear Format<br>Center and<br>Corners        | 2-70                     | Same as<br>CQUAD4(144) | 2-62                        | Same as<br>CQUAD4(144) |                              |
| CTRIA6 <sup>2</sup><br>(98)<br>Composite<br>Center Only         | 2-11                     | Same as<br>CQUAD4(95)  | Not applicable              |                        |                              |
| CTRIA6<br>(240)<br>Nonlinear<br>Format<br>Center and<br>Corners | 3-102                    | Same as<br>CQUAD4(254) | Not applicable              |                        |                              |

**Element Stress (or Strain) Item Codes 863**

**8  
CODES**

| Element Name<br>(Code)                                 | Real Stresses or Strains |                                                      | Complex Stresses or Strains |                |                              |
|--------------------------------------------------------|--------------------------|------------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                        | Item Code                | Item                                                 | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CTRIAFD<br>(206)<br>Hyperelastic<br>with 3 grid points | 2-13                     | Same as<br>CQUADFD(201)                              |                             | Not applicable |                              |
| CTRIAFD<br>(211)<br>Hyperelastic<br>with 6 grid points | 2-13                     | Same as<br>CQUADFD(201)                              |                             | Not applicable |                              |
|                                                        | 14-35                    | Items 3 through<br>12 repeated for 2<br>Gauss points |                             |                |                              |

## 864 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                            | Real Stresses or Strains |                        | Complex Stresses or Strains |                        |                              |
|---------------------------------------------------------------------------------------------------|--------------------------|------------------------|-----------------------------|------------------------|------------------------------|
|                                                                                                   | Item Code                | Item                   | Item Code                   | Item                   | Real/Mag. or<br>Imag./ Phase |
| CTRIAR<br>(70)<br>Center and<br>Corners                                                           | 1-70                     | Same as<br>CQUAD4(144) | 2-62                        | Same as<br>CQUAD4(144) |                              |
| CTRIAR<br>(227)<br>Center Only<br>(not supported by<br>old formulation)                           | 2-17                     | Same as<br>CQUAD4(33)  | 2-15                        | Same as<br>CQUAD4(33)  |                              |
| CTRIAR <sup>2</sup><br>(233)<br>Composite<br>Center Only<br>(not supported by<br>old formulation) | 2-11                     | Same as<br>CQUAD4(95)  | Not applicable              |                        |                              |



| Element Name<br>(Code)                   | Real Stresses or Strains |                                              | Complex Stresses or Strains                  |                                               |                                               |
|------------------------------------------|--------------------------|----------------------------------------------|----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|                                          | Item Code                | Item                                         | Item Code                                    | Item                                          | Real/Mag. or<br>Imag./ Phase                  |
| CTRIAX6<br>(53)<br>Center and<br>Corners | 3 <sup>1</sup>           | Radial                                       | 3 <sup>1</sup>                               | Radial                                        | RM                                            |
|                                          | 4 <sup>1</sup>           | Azimuthal                                    | 4 <sup>1</sup>                               | Radial                                        | IP                                            |
|                                          | 5 <sup>1</sup>           | Axial                                        | 5 <sup>1</sup>                               | Azimuthal                                     | RM                                            |
|                                          | 6 <sup>1</sup>           | Shear stress                                 | 6 <sup>1</sup>                               | Azimuthal                                     | IP                                            |
|                                          | 7                        | Maximum<br>principal                         | 7                                            | Axial                                         | RM                                            |
|                                          | 8                        | Maximum shear                                | 8                                            | Axial                                         | IP                                            |
|                                          | 9                        | von Mises or<br>octahedral                   | 9                                            | Shear                                         | RM                                            |
|                                          | 11-17                    | Same as items<br>3 through 9 for<br>corner 1 | 10                                           | Shear                                         | IP                                            |
|                                          |                          |                                              | 12-19                                        | Same as items<br>3 through 10 for<br>corner 1 |                                               |
|                                          | 19-25                    | Same as Items<br>3 through 9 for<br>corner 2 | 21-28                                        |                                               | Same as items<br>3 through 10 for<br>corner 2 |
|                                          | 27-33                    |                                              | Same as items<br>3 through 9 for<br>corner 3 | 30-37                                         |                                               |

## 866 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                  | Real Stresses or Strains |                                                    | Complex Stresses or Strains |                |                              |
|---------------------------------------------------------|--------------------------|----------------------------------------------------|-----------------------------|----------------|------------------------------|
|                                                         | Item Code                | Item                                               | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| CTRIAXFD<br>(212)<br>Hyperelastic<br>with 3 grid points | 2-13                     | Same as<br>CQUADXFD<br>(214)                       |                             | Not applicable |                              |
| CTRIAXFD<br>(213)<br>Hyperelastic<br>with 6 grid points | 2-13                     | Same as<br>CQUADXFD<br>(214)                       | Not applicable              |                |                              |
|                                                         | 14-35                    | Repeat items 3<br>through 13 for 2<br>Gauss points |                             |                |                              |

## Element Stress (or Strain) Item Codes 867

8  
CODES

| Element Name<br>(Code)                   | Real Stresses or Strains |                        | Complex Stresses or Strains |                       |                              |
|------------------------------------------|--------------------------|------------------------|-----------------------------|-----------------------|------------------------------|
|                                          | Item Code                | Item                   | Item Code                   | Item                  | Real/Mag. or<br>Imag./ Phase |
| CTUBE<br>(3)<br><br>Linear Format        |                          | Same as<br>CONROD (10) |                             | Same as<br>CONROD(10) |                              |
| CTUBE<br>(87)<br><br>Nonlinear<br>Format |                          | Same as<br>CONROD(92)  |                             | Not applicable        |                              |

## 868 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                  | Real Stresses or Strains                      |                                                           | Complex Stresses or Strains                   |                                                           |                              |
|-------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------|------------------------------|
|                                                                         | Item Code                                     | Item                                                      | Item Code                                     | Item                                                      | Real/Mag. or<br>Imag./ Phase |
| VUHEXA<br>(145)                                                         | 1                                             | VU element ID *<br>10 + device code                       |                                               |                                                           |                              |
|                                                                         | 2                                             | Parent p-element<br>ID                                    |                                               |                                                           |                              |
| VUPENTA<br>(146)                                                        | 3                                             | VU grid ID for<br>corner 1                                |                                               |                                                           |                              |
|                                                                         | 4                                             | Normal x                                                  | 4                                             | Normal x                                                  | RM                           |
| VUTETRA<br>(147)                                                        | 5                                             | Normal y                                                  | 5                                             | Normal y                                                  | RM                           |
|                                                                         | 6                                             | Normal z                                                  | 6                                             | Normal z                                                  | RM                           |
| for HEXAp,<br>PENTAp,<br>TETRAp if<br>SDRPOPT=SDRP<br>(with principals) | 7                                             | Shear xy                                                  | 7                                             | Shear xy                                                  | RM                           |
|                                                                         | 8                                             | Shear yz                                                  | 8                                             | Shear yz                                                  | RM                           |
|                                                                         | 9                                             | Shear zx                                                  | 9                                             | Shear zx                                                  | RM                           |
|                                                                         | 10                                            | First principal                                           | 10                                            | Normal x                                                  | IP                           |
|                                                                         | 11                                            | Second principal                                          | 11                                            | Normal y                                                  | IP                           |
|                                                                         | 12                                            | Third principal                                           | 12                                            | Normal z                                                  | IP                           |
|                                                                         | 13                                            | Mean pressure                                             | 13                                            | Shear xy                                                  | IP                           |
|                                                                         | 14                                            | von Mises/<br>Octahedral                                  | 14                                            | Shear yz                                                  | IP                           |
|                                                                         |                                               |                                                           | 15                                            | Shear zx                                                  | IP                           |
|                                                                         | 15-26                                         | Repeat items<br>3-14 for corner 2                         | 16-28                                         | Repeat items<br>3-15 for corner 2                         |                              |
|                                                                         | 27-38                                         | Repeat items<br>3-14 for corner 3                         | 29-41                                         | Repeat items<br>3-15 for corner 3                         |                              |
|                                                                         | 39-50                                         | Repeat items<br>3-14 for corner 4                         | 42-54                                         | Repeat items<br>3-15 for corner 4                         |                              |
|                                                                         | 51-62                                         | Repeat items<br>3-14 for corner<br>5 (VUPENTA,<br>VUHEXA) | 55-67                                         | Repeat items<br>3-15 for corner<br>5 (VUPENTA,<br>VUHEXA) |                              |
|                                                                         | 63-74                                         | Repeat items<br>3-14 for corner<br>6 (VUPENTA,<br>VUHEXA) | 68-80                                         | Repeat items<br>3-15 for corner<br>6 (VUPENTA,<br>VUHEXA) |                              |
| 75-86                                                                   | Repeat items<br>3-14 for corner 7<br>(VUHEXA) | 81-93                                                     | Repeat items<br>3-15 for corner 7<br>(VUHEXA) |                                                           |                              |
| 87-98                                                                   | Repeat items<br>3-14 for corner 8<br>(VUHEXA) | 94-106                                                    | Repeat items<br>3-15 for corner 8<br>(VUHEXA) |                                                           |                              |

| Element Name<br>(Code)                                                                                                          | Real Stresses or Strains                                 |                                     | Complex Stresses or Strains                               |          |                              |
|---------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------|-----------------------------------------------------------|----------|------------------------------|
|                                                                                                                                 | Item Code                                                | Item                                | Item Code                                                 | Item     | Real/Mag. or<br>Imag./ Phase |
| VUHEXA<br>(145)<br>VUPENTA<br>(146)<br>VUTETRA<br>(147)<br>for HEXAp,<br>PENTAp,<br>TETRAp if<br>SDRPOPT=OFP<br>(no principals) | 1                                                        | VU element ID *<br>10 + device code |                                                           |          |                              |
|                                                                                                                                 | 2                                                        | Parent p-element<br>ID              |                                                           |          |                              |
|                                                                                                                                 | 3                                                        | VU grid ID for<br>corner 1          |                                                           |          |                              |
|                                                                                                                                 | 4                                                        | Normal x                            | 4                                                         | Normal x | RM                           |
|                                                                                                                                 | 5                                                        | Normal y                            | 5                                                         | Normal y | RM                           |
|                                                                                                                                 | 6                                                        | Normal z                            | 6                                                         | Normal z | RM                           |
|                                                                                                                                 | 7                                                        | Shear xy                            | 7                                                         | Shear xy | RM                           |
|                                                                                                                                 | 8                                                        | Shear yz                            | 8                                                         | Shear yz | RM                           |
|                                                                                                                                 | 9                                                        | Shear zx                            | 9                                                         | Shear zx | RM                           |
|                                                                                                                                 |                                                          |                                     | 10                                                        | Normal x | IP                           |
|                                                                                                                                 |                                                          |                                     | 11                                                        | Normal y | IP                           |
|                                                                                                                                 |                                                          |                                     | 12                                                        | Normal z | IP                           |
|                                                                                                                                 |                                                          |                                     | 13                                                        | Shear xy | IP                           |
|                                                                                                                                 |                                                          |                                     | 14                                                        | Shear yz | IP                           |
|                                                                                                                                 |                                                          |                                     | 15                                                        | Shear zx | IP                           |
| 10-16                                                                                                                           | Repeat items 3-9<br>for corner 2                         | 16-28                               | Repeat items<br>3-15 for corner 2                         |          |                              |
| 17-23                                                                                                                           | Repeat items 3-9<br>for corner 3                         | 29-41                               | Repeat items<br>3-15 for corner 3                         |          |                              |
| 24-30                                                                                                                           | Repeat items 3-9<br>for corner 4                         | 42-54                               | Repeat items<br>3-15 for corner 4                         |          |                              |
| 31-37                                                                                                                           | Repeat items<br>3-9 for corner<br>5 (VUPENTA,<br>VUHEXA) | 55-67                               | Repeat items<br>3-15 for corner<br>5 (VUPENTA,<br>VUHEXA) |          |                              |
| 38-44                                                                                                                           | Repeat items<br>3-9 for corner<br>6 (VUPENTA,<br>VUHEXA) | 68-80                               | Repeat items<br>3-15 for corner<br>6 (VUPENTA,<br>VUHEXA) |          |                              |
| 45-51                                                                                                                           | Repeat items<br>3-9 for corner 7<br>(VUHEXA)             | 81-93                               | Repeat items<br>3-15 for corner 7<br>(VUHEXA)             |          |                              |
| 52-58                                                                                                                           | Repeat items<br>3-9 for corner 8<br>(VUHEXA)             | 94-106                              | Repeat items<br>3-15 for corner 8<br>(VUHEXA)             |          |                              |

## 870 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                                                                                                                               | Real Stresses or Strains |                                     | Complex Stresses or Strains |                |                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------|-----------------------------|----------------|------------------------------|
|                                                                                                                                                                                                      | Item Code                | Item                                | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| VUQUAD<br>(189)<br><br>VUTRIA<br>(190)<br><br>for QUADpand<br>TRIAp if STRAIN<br>= FIBER; 4th char.<br>of ICORD = X Y, Z<br>(local coordinate<br>system); and<br>SDRPORT = SDRP<br>(with principals) | 1                        | VU element ID *<br>10 + device code |                             |                |                              |
|                                                                                                                                                                                                      | 2                        | Parent<br>p-element ID              |                             |                |                              |
|                                                                                                                                                                                                      | 3                        | CID coordinate<br>system ID         |                             |                |                              |
|                                                                                                                                                                                                      | 4                        | ICORD<br>flat/curved etc.           |                             |                |                              |
|                                                                                                                                                                                                      | 5                        | THETA material<br>angle             |                             |                |                              |
|                                                                                                                                                                                                      | 6                        | ITYPE strcur=0,<br>fiber=1          |                             |                |                              |
|                                                                                                                                                                                                      | 7                        | VU grid ID for<br>corner 1          |                             |                |                              |
|                                                                                                                                                                                                      | 8                        | Z1 fiber distance                   |                             |                |                              |
|                                                                                                                                                                                                      | 9                        | Z2 fiber distance                   |                             |                |                              |
|                                                                                                                                                                                                      | 10                       | Normal x at Z1                      | 10                          | Normal x at Z1 | RM                           |
|                                                                                                                                                                                                      | 11                       | Normal y at Z1                      | 11                          | Normal y at Z1 | RM                           |
|                                                                                                                                                                                                      | 12                       | Shear xy at Z1                      | 12                          | Shear xy at Z1 | RM                           |
|                                                                                                                                                                                                      | 13                       | Shear Angle at<br>Z1                | 13                          | 0.0            | RM                           |
|                                                                                                                                                                                                      | 14                       | Major principal<br>at Z1            | 14                          | 0.0            | RM                           |
|                                                                                                                                                                                                      | 15                       | Minor principal<br>at Z1            | 15                          | 0.0            | RM                           |
|                                                                                                                                                                                                      | 16                       | von Mises/Max.<br>Shear at Z1       | 16                          | Normal x at Z2 | RM                           |
|                                                                                                                                                                                                      | 17                       | Normal x at Z2                      | 17                          | Normal y at Z2 | RM                           |
|                                                                                                                                                                                                      | 18                       | Normal y at Z2                      | 18                          | Shear xy at Z2 | RM                           |
|                                                                                                                                                                                                      | 19                       | Shear xy at Z2                      | 19                          | 0.0            | RM                           |
|                                                                                                                                                                                                      | 20                       | Shear Angle at<br>Z2                | 20                          | 0.0            | RM                           |
|                                                                                                                                                                                                      | 21                       | Major principal<br>at Z2            | 21                          | 0.0            | RM                           |
|                                                                                                                                                                                                      | 22                       | Minor principal<br>at Z2            | 22                          | Normal x at Z1 | IP                           |
|                                                                                                                                                                                                      | 23                       | von Mises/Max.<br>Shear at Z2       | 23                          | Normal y at Z1 | IP                           |
| 24                                                                                                                                                                                                   |                          |                                     | Shear xy at Z1              | IP             |                              |

## Element Stress (or Strain) Item Codes 871

8  
CODES

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                        | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
|                        |                          |                                               | 25                          | 0.0                                           | IP                           |
|                        |                          |                                               | 26                          | 0.0                                           | IP                           |
|                        |                          |                                               | 27                          | 0.0                                           | IP                           |
|                        |                          |                                               | 28                          | Normal x at Z2                                | IP                           |
|                        |                          |                                               | 29                          | Normal y at Z2                                | IP                           |
|                        |                          |                                               | 30                          | Shear xy at Z2                                | IP                           |
|                        |                          |                                               | 31                          | 0.0                                           | IP                           |
|                        |                          |                                               | 32                          | 0.0                                           | IP                           |
|                        |                          |                                               | 33                          | 0.0                                           | IP                           |
|                        | 24-40                    | Repeat items<br>7-23 for corner 2             | 34-60                       | Repeat items<br>7-33 for corner 2             |                              |
|                        | 41-57                    | Repeat items<br>7-23 for corner 3             | 61-87                       | Repeat items<br>7-33 for corner 3             |                              |
|                        | 58-74                    | Repeat items<br>7-23 for corner 4<br>(VUQUAD) | 88-104                      | Repeat items<br>7-33 for corner 4<br>(VUQUAD) |                              |

## 872 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                                                                                                                                            | Real Stresses or Strains |                                     | Complex Stresses or Strains |                |                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------|-----------------------------|----------------|------------------------------|
|                                                                                                                                                                                                                   | Item Code                | Item                                | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| VUQUAD<br>(189)<br>VUTRIA<br>(190)<br><br>for QUADp and<br>TRIAp if STRAIN<br>= FIBER; if 4th<br>char. of ICORD<br>= X Y, Z ( <b>local</b><br>coordinate system);<br>and SDRPOPT =<br>OFP ( <b>no</b> principals) | 1                        | VU element ID *<br>10 + device code |                             |                |                              |
|                                                                                                                                                                                                                   | 2                        | Parent<br>p-element ID              |                             |                |                              |
|                                                                                                                                                                                                                   | 3                        | CID coordinate<br>system ID         |                             |                |                              |
|                                                                                                                                                                                                                   | 4                        | ICORD<br>flat/curved etc.           |                             |                |                              |
|                                                                                                                                                                                                                   | 5                        | THETA material<br>angle             |                             |                |                              |
|                                                                                                                                                                                                                   | 6                        | ITYPE strcur=0,<br>fiber=1          |                             |                |                              |
|                                                                                                                                                                                                                   | 7                        | VU grid ID for<br>corner 1          |                             |                |                              |
|                                                                                                                                                                                                                   | 8                        | Z1 fiber distance                   |                             |                |                              |
|                                                                                                                                                                                                                   | 9                        | Z2 fiber distance                   |                             |                |                              |
|                                                                                                                                                                                                                   | 10                       | Normal x at Z1                      | 10                          | Normal x at Z1 | RM                           |
|                                                                                                                                                                                                                   | 11                       | Normal y at Z1                      | 11                          | Normal y at Z1 | RM                           |
|                                                                                                                                                                                                                   | 12                       | Shear xy at Z1                      | 12                          | Shear xy at Z1 | RM                           |
|                                                                                                                                                                                                                   | 13                       | 0.0                                 | 13                          | 0.0            | RM                           |
|                                                                                                                                                                                                                   | 14                       | 0.0                                 | 14                          | 0.0            | RM                           |
|                                                                                                                                                                                                                   | 15                       | 0.0                                 | 15                          | 0.0            | RM                           |
|                                                                                                                                                                                                                   | 16                       | 0.0                                 | 16                          | Normal x at Z2 | RM                           |
|                                                                                                                                                                                                                   | 17                       | Normal x at Z2                      | 17                          | Normal y at Z2 | RM                           |
|                                                                                                                                                                                                                   | 18                       | Normal y at Z2                      | 18                          | Shear xy at Z2 | RM                           |
|                                                                                                                                                                                                                   | 19                       | Shear xy at Z2                      | 19                          | 0.0            | RM                           |
|                                                                                                                                                                                                                   | 20                       | 0.0                                 | 20                          | 0.0            | RM                           |
|                                                                                                                                                                                                                   | 21                       | 0.0                                 | 21                          | 0.0            | RM                           |
|                                                                                                                                                                                                                   | 22                       | 0.0                                 | 22                          | Normal x at Z1 | IP                           |
|                                                                                                                                                                                                                   | 23                       | 0.0                                 | 23                          | Normal y at Z1 | IP                           |
|                                                                                                                                                                                                                   |                          | 24                                  | Shear xy at Z1              | IP             |                              |
|                                                                                                                                                                                                                   |                          | 25                                  | 0.0                         | IP             |                              |
|                                                                                                                                                                                                                   |                          | 26                                  | 0.0                         | IP             |                              |
|                                                                                                                                                                                                                   |                          | 27                                  | 0.0                         | IP             |                              |
|                                                                                                                                                                                                                   |                          | 28                                  | Normal x at Z2              | IP             |                              |



## Element Stress (or Strain) Item Codes 873

**8**  
CODES

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                        | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
|                        |                          |                                               | 29                          | Normal y at Z2                                | IP                           |
|                        |                          |                                               | 30                          | Shear xy at Z2                                | IP                           |
|                        |                          |                                               | 31                          | 0.0                                           | IP                           |
|                        |                          |                                               | 32                          | 0.0                                           | IP                           |
|                        |                          |                                               | 33                          | 0.0                                           | IP                           |
|                        | 24-40                    | Repeat items<br>7-23 for corner 2             | 34-60                       | Repeat items<br>7-33 for corner 2             |                              |
|                        | 41-57                    | Repeat items<br>7-23 for corner 3             | 61-87                       | Repeat items<br>7-33 for corner 3             |                              |
|                        | 58-74                    | Repeat items<br>7-23 for corner 4<br>(VUQUAD) | 88-104                      | Repeat items<br>7-33 for corner 4<br>(VUQUAD) |                              |

## 874 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                                                                                | Real Stresses or Strains |                                     | Complex Stresses or Strains |                |                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------|-----------------------------|----------------|------------------------------|
|                                                                                                                                                       | Item Code                | Item                                | Item Code                   | Item           | Real/Mag. or<br>Imag./ Phase |
| VUQUAD<br>(189)<br>VUTRIA<br>(190)<br><br>for QUADp and<br>TRIAp if STRAIN<br>= FIBER and<br>4th char. of<br>ICORD = F(fixed<br>coordinate<br>system) | 1                        | VU element ID *<br>10 + device code |                             |                |                              |
|                                                                                                                                                       | 2                        | Parent p-element<br>ID              |                             |                |                              |
|                                                                                                                                                       | 3                        | CID coordinate<br>system ID         |                             |                |                              |
|                                                                                                                                                       | 4                        | ICORD<br>flat/curved etc.           |                             |                |                              |
|                                                                                                                                                       | 5                        | THETA material<br>angle             |                             |                |                              |
|                                                                                                                                                       | 6                        | ITYPE strcur=0,<br>fiber=1          |                             |                |                              |
|                                                                                                                                                       | 7                        | VU grid ID for<br>corner 1          |                             |                |                              |
|                                                                                                                                                       | 8                        | Z1 fiber distance                   |                             |                |                              |
|                                                                                                                                                       | 9                        | Z2 fiber distance                   |                             |                |                              |
|                                                                                                                                                       | 10                       | Normal x at Z1                      | 10                          | Normal x at Z1 | RM                           |
|                                                                                                                                                       | 11                       | Normal y at Z1                      | 11                          | Normal y at Z1 | RM                           |
|                                                                                                                                                       | 12                       | Shear xy at Z1                      | 12                          | Shear xy at Z1 | RM                           |
|                                                                                                                                                       | 13                       | Shear yz at Z1                      | 13                          | Shear yz at Z1 | RM                           |
|                                                                                                                                                       | 14                       | Shear zx at Z1                      | 14                          | Shear zx at Z1 | RM                           |
|                                                                                                                                                       | 15                       | Normal z at Z1                      | 15                          | Normal z at Z1 | RM                           |
|                                                                                                                                                       | 16                       | Normal x at Z2                      | 16                          | Normal x at Z2 | RM                           |
|                                                                                                                                                       | 17                       | Normal y at Z2                      | 17                          | Normal y at Z2 | RM                           |
|                                                                                                                                                       | 18                       | Shear xy at Z2                      | 18                          | Shear xy at Z2 | RM                           |
|                                                                                                                                                       | 19                       | Shear yz at Z2                      | 19                          | Shear yz at Z2 | RM                           |
|                                                                                                                                                       | 20                       | Shear zx at Z2                      | 20                          | Shear zx at Z2 | RM                           |
|                                                                                                                                                       | 21                       | Normal z at Z2                      | 21                          | Normal z at Z2 | RM                           |
|                                                                                                                                                       | 22                       | 0.0                                 | 22                          | Normal x at Z1 | IP                           |
|                                                                                                                                                       | 23                       | 0.0                                 | 23                          | Normal y at Z1 | IP                           |
|                                                                                                                                                       |                          | 24                                  | Shear xy at Z1              | IP             |                              |
|                                                                                                                                                       |                          | 25                                  | Shear yz at Z1              | IP             |                              |
|                                                                                                                                                       |                          | 26                                  | Shear zx at Z1              | IP             |                              |
|                                                                                                                                                       |                          | 27                                  | Normal z at Z1              | IP             |                              |
|                                                                                                                                                       |                          | 28                                  | Normal x at Z2              | IP             |                              |

Element Stress (or Strain) Item Codes 875

**8**  
**CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                        | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
|                        |                          |                                               | 29                          | Normal y at Z2                                | IP                           |
|                        |                          |                                               | 30                          | Shear xy at Z2                                | IP                           |
|                        |                          |                                               | 31                          | Shear yz at Z2                                | IP                           |
|                        |                          |                                               | 32                          | Shear zx at Z2                                | IP                           |
|                        |                          |                                               | 33                          | Normal z at Z2                                | IP                           |
|                        | 24-40                    | Repeat items<br>7-23 for corner 2             | 34-60                       | Repeat items<br>7-33 for corner 2             |                              |
|                        | 41-57                    | Repeat items<br>7-23 for corner 3             | 61-87                       | Repeat items<br>7-33 for corner 3             |                              |
|                        | 58-74                    | Repeat items<br>7-23 for corner 4<br>(VUQUAD) | 88-104                      | Repeat items<br>7-33 for corner 4<br>(VUQUAD) |                              |

## 876 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                                                                                       | Real Stresses or Strains |                                     | Complex Stresses or Strains |                         |                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------|-----------------------------|-------------------------|------------------------------|
|                                                                                                                                                              | Item Code                | Item                                | Item Code                   | Item                    | Real/Mag. or<br>Imag./ Phase |
| VUQUAD<br>(189)<br>VUTRIA<br>(190)<br><br>for QUADp and<br>TRIAp if STRAIN<br>= STRCUR and<br>4th char. of<br>ICORD = X Y, Z<br>(local coordinate<br>system) | 1                        | VU element ID *<br>10 + device code |                             |                         |                              |
|                                                                                                                                                              | 2                        | Parent p-element<br>ID              |                             |                         |                              |
|                                                                                                                                                              | 3                        | CID coordinate<br>system ID         |                             |                         |                              |
|                                                                                                                                                              | 4                        | ICORD<br>flat/curved etc.           |                             |                         |                              |
|                                                                                                                                                              | 5                        | THETA material<br>angle             |                             |                         |                              |
|                                                                                                                                                              | 6                        | ITYPE strcur=0,<br>fiber=1          |                             |                         |                              |
|                                                                                                                                                              | 7                        | VU grid ID for<br>corner 1          |                             |                         |                              |
|                                                                                                                                                              | 8                        | 0.0                                 |                             |                         |                              |
|                                                                                                                                                              | 9                        | 0.0                                 |                             |                         |                              |
|                                                                                                                                                              | 10                       | Membrane<br>Strain x                | 10                          | Membrane<br>Strain x    | RM                           |
|                                                                                                                                                              | 11                       | Membrane<br>Strain y                | 11                          | Membrane<br>Strain y    | RM                           |
|                                                                                                                                                              | 12                       | Membrane<br>Strain xy               | 12                          | Membrane<br>Strain xy   | RM                           |
|                                                                                                                                                              | 13                       | 0.0                                 | 13                          | 0.0                     | RM                           |
|                                                                                                                                                              | 14                       | 0.0                                 | 14                          | 0.0                     | RM                           |
|                                                                                                                                                              | 15                       | 0.0                                 | 15                          | 0.0                     | RM                           |
|                                                                                                                                                              | 16                       | Bending<br>Curvature x              | 16                          | Bending<br>Curvature x  | RM                           |
|                                                                                                                                                              | 17                       | Bending<br>Curvature y              | 17                          | Bending<br>Curvature y  | RM                           |
|                                                                                                                                                              | 18                       | Bending<br>Curvature xy             | 18                          | Bending<br>Curvature xy | RM                           |
|                                                                                                                                                              | 19                       | Shear yz                            | 19                          | Shear yz                | RM                           |
|                                                                                                                                                              | 20                       | Shear zx                            | 20                          | Shear zx                | RM                           |
|                                                                                                                                                              | 21                       | 0.0                                 | 21                          | 0.0                     | RM                           |
|                                                                                                                                                              | 22                       | 0.0                                 | 22                          | Membrane<br>Strain x    | IP                           |
|                                                                                                                                                              | 23                       | 0.0                                 | 23                          | Membrane<br>Strain y    | IP                           |
|                                                                                                                                                              |                          | 24                                  | Membrane<br>Strain xy       | IP                      |                              |

**Element Stress (or Strain) Item Codes 877**

**8  
CODES**

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|
|                        | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |
|                        |                          |                                               | 25                          | 0.0                                           | IP                           |
|                        |                          |                                               | 26                          | 0.0                                           | IP                           |
|                        |                          |                                               | 27                          | 0.0                                           | IP                           |
|                        |                          |                                               | 28                          | Bending<br>Curvature x                        | IP                           |
|                        |                          |                                               | 29                          | Bending<br>Curvature y                        | IP                           |
|                        |                          |                                               | 30                          | Bending<br>Curvature xy                       | IP                           |
|                        |                          |                                               | 31                          | Shear yz                                      | IP                           |
|                        |                          |                                               | 32                          | Shear zx                                      | IP                           |
|                        |                          |                                               | 33                          | 0.0                                           | IP                           |
|                        | 24-40                    | Repeat items<br>7-23 for corner 2             | 34-60                       | Repeat items<br>7-33 for corner 2             |                              |
|                        | 41-57                    | Repeat items<br>7-23 for corner 3             | 61-87                       | Repeat items<br>7-33 for corner 3             |                              |
|                        | 58-74                    | Repeat items<br>7-23 for corner 4<br>(VUQUAD) | 88-104                      | Repeat items<br>7-33 for corner 4<br>(VUQUAD) |                              |

## 878 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)                                                                                                                                  | Real Stresses or Strains |                                    | Complex Stresses or Strains |                         |                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------|-----------------------------|-------------------------|------------------------------|
|                                                                                                                                                         | Item Code                | Item                               | Item Code                   | Item                    | Real/Mag. or<br>Imag./ Phase |
| VUQUAD<br>(189)<br>VUTRIA<br>(190)<br><br>for QUADp and<br>TRIAp if STRAIN<br>= STRCUR and<br>4th char. of<br>ICORD = F<br>(fixed coordinate<br>system) | 1                        | VU element ID<br>*10 + device code |                             |                         |                              |
|                                                                                                                                                         | 2                        | Parent p-element<br>ID             |                             |                         |                              |
|                                                                                                                                                         | 3                        | CID coordinate<br>system ID        |                             |                         |                              |
|                                                                                                                                                         | 4                        | ICORD<br>flat/curved etc.          |                             |                         |                              |
|                                                                                                                                                         | 5                        | THETA material<br>angle            |                             |                         |                              |
|                                                                                                                                                         | 6                        | ITYPE strcur=0,<br>fiber=1         |                             |                         |                              |
|                                                                                                                                                         | 7                        | VU grid ID for<br>corner 1         |                             |                         |                              |
|                                                                                                                                                         | 8                        | 0.0                                |                             |                         |                              |
|                                                                                                                                                         | 9                        | 0.0                                |                             |                         |                              |
|                                                                                                                                                         | 10                       | Membrane<br>Strain x               | 10                          | Membrane<br>Strain x    | RM                           |
|                                                                                                                                                         | 11                       | Membrane<br>Strain y               | 11                          | Membrane<br>Strain y    | RM                           |
|                                                                                                                                                         | 12                       | Membrane<br>Strain xy              | 12                          | Membrane<br>Strain xy   | RM                           |
|                                                                                                                                                         | 13                       | Membrane<br>Strain yz              | 13                          | Membrane<br>Strain yz   | RM                           |
|                                                                                                                                                         | 14                       | Membrane<br>Strain zx              | 14                          | Membrane<br>Strain zx   | RM                           |
|                                                                                                                                                         | 15                       | Membrane<br>Strain z               | 15                          | Membrane<br>Strain z    | RM                           |
|                                                                                                                                                         | 16                       | Bending<br>Curvature x             | 16                          | Bending<br>Curvature x  | RM                           |
|                                                                                                                                                         | 17                       | Bending<br>Curvature y             | 17                          | Bending<br>Curvature y  | RM                           |
|                                                                                                                                                         | 18                       | Bending<br>Curvature xy            | 18                          | Bending<br>Curvature xy | RM                           |
|                                                                                                                                                         | 19                       | Bending<br>Curvature yz            | 19                          | Bending<br>Curvature yz | RM                           |
|                                                                                                                                                         | 20                       | Bending<br>Curvature zx            | 20                          | Bending<br>Curvature zx | RM                           |
|                                                                                                                                                         | 21                       | Bending<br>Curvature z             | 21                          | Bending<br>Curvature z  | RM                           |
|                                                                                                                                                         | 22                       | 0.0                                | 22                          | Membrane<br>Strain x    | IP                           |

## Element Stress (or Strain) Item Codes 879

8  
CODES

| Element Name<br>(Code) | Real Stresses or Strains |                                               | Complex Stresses or Strains |                                               |                              |    |
|------------------------|--------------------------|-----------------------------------------------|-----------------------------|-----------------------------------------------|------------------------------|----|
|                        | Item Code                | Item                                          | Item Code                   | Item                                          | Real/Mag. or<br>Imag./ Phase |    |
|                        | 23                       | 0.0                                           | 23                          | Membrane<br>Strain y                          | IP                           |    |
|                        |                          |                                               |                             | 24                                            | Membrane<br>Strain xy        | IP |
|                        |                          |                                               |                             | 25                                            | Membrane<br>Strain yz        | IP |
|                        |                          |                                               |                             | 26                                            | Membrane<br>Strain zx        | IP |
|                        |                          |                                               |                             | 27                                            | Membrane<br>Strain z         | IP |
|                        |                          |                                               |                             | 28                                            | Bending<br>Curvature x       | IP |
|                        |                          |                                               |                             | 29                                            | Bending<br>Curvature y       | IP |
|                        |                          |                                               |                             | 30                                            | Bending<br>Curvature xy      | IP |
|                        |                          |                                               |                             | 31                                            | Bending<br>Curvature yz      | IP |
|                        |                          |                                               |                             | 32                                            | Bending<br>Curvature zx      | IP |
|                        |                          |                                               |                             | 33                                            | Bending<br>Curvature z       | IP |
|                        | 24-40                    | Repeat items<br>7-23 for corner 2             | 34-60                       | Repeat items<br>7-33 for corner 2             |                              |    |
|                        | 41-57                    | Repeat items<br>7-23 for corner 3             | 61-87                       | Repeat items<br>7-33 for corner 3             |                              |    |
|                        | 58-74                    | Repeat items<br>7-23 for corner 4<br>(VUQUAD) | 88-104                      | Repeat items<br>7-33 for corner 4<br>(VUQUAD) |                              |    |

## 880 Element Stress (or Strain) Item Codes

**8**  
**CODES**

| Element Name<br>(Code)       | Real Stresses or Strains       |                                            | Complex Stresses or Strains    |                                            |                              |
|------------------------------|--------------------------------|--------------------------------------------|--------------------------------|--------------------------------------------|------------------------------|
|                              | Item Code                      | Item                                       | Item Code                      | Item                                       | Real/Mag. or<br>Imag./ Phase |
| VUBEAM<br>(191)<br>for BEAMp | 1                              | VU element ID *<br>10 + device code        |                                |                                            |                              |
|                              | 2                              | Parent p-element<br>ID                     |                                |                                            |                              |
|                              | 3                              | CID coordinate<br>system ID                |                                |                                            |                              |
|                              | 4                              | ICORD (not<br>used)                        |                                |                                            |                              |
|                              | 5                              | VU grid ID for<br>end 1                    |                                |                                            |                              |
|                              | 6                              | x/L position                               |                                |                                            |                              |
|                              | 7                              | Y-coordinate of<br>output point C          |                                |                                            |                              |
|                              | 8                              | Z-coordinate of<br>output point C          |                                |                                            |                              |
|                              | 9                              | W-coordinate of<br>output point C          |                                |                                            |                              |
|                              | 10                             | Normal x at C                              | 10                             | Normal x at C                              | RM                           |
|                              | 11                             | Shear xy at C                              | 11                             | Shear xy at C                              | RM                           |
|                              | 12                             | Shear zx at C                              | 12                             | Shear zx at C                              | RM                           |
|                              |                                |                                            | 13                             | Normal x at C                              | IP                           |
|                              | 14                             | Shear xy at C                              | IP                             |                                            |                              |
|                              |                                |                                            | 15                             | Shear zx at C                              | IP                           |
|                              | 13-18                          | Repeat items<br>7-12 for output<br>point D | 16-24                          | Repeat items<br>7-15 for output<br>point D |                              |
|                              | 19-24                          | Repeat items<br>7-12 for output<br>point E | 25-33                          | Repeat items<br>7-15 for output<br>point E |                              |
|                              | 25-30                          | Repeat items<br>7-12 for output<br>point F | 34-42                          | Repeat items<br>7-15 for output<br>point F |                              |
|                              | 31                             | Max longitudinal                           |                                |                                            |                              |
|                              | 32                             | Min longitudinal                           |                                |                                            |                              |
| 33-60                        | Repeat items<br>5-32 for end 2 | 43-80                                      | Repeat items<br>5-42 for end 2 |                                            |                              |



## 8.2 Element Force Item Codes

All items are element forces (or moments) unless otherwise indicated.

| Element Name Code | Real Element Forces |                       | Complex Element Forces |                       |                          |
|-------------------|---------------------|-----------------------|------------------------|-----------------------|--------------------------|
|                   | Item Code           | Item                  | Item Code              | Item                  | Real/Mag. or Imag/ Phase |
| CBAR<br>(34)      | 2 <sup>1</sup>      | Bending End A plane 1 | 2 <sup>1</sup>         | Bending End A plane 1 | RM                       |
|                   | 3 <sup>1</sup>      | Bending End A plane 2 | 3 <sup>1</sup>         | Bending End A plane 2 | RM                       |
|                   | 4 <sup>1</sup>      | Bending End B plane 1 | 4 <sup>1</sup>         | Bending End B plane 1 | RM                       |
|                   | 5 <sup>1</sup>      | Bending End B plane 2 | 5 <sup>1</sup>         | Bending End B plane 2 | RM                       |
|                   | 6 <sup>1</sup>      | Shear plane 1         | 6 <sup>1</sup>         | Shear plane 1         | RM                       |
|                   | 7 <sup>1</sup>      | Shear plane 2         | 7 <sup>1</sup>         | Shear plane 2         | RM                       |
|                   | 8 <sup>1</sup>      | Axial force           | 8 <sup>1</sup>         | Axial force           | RM                       |
|                   | 9 <sup>1</sup>      | Torque                | 9 <sup>1</sup>         | Torque                | RM                       |
|                   |                     |                       | 10 <sup>1</sup>        | Bending End A plane 1 | IP                       |
|                   |                     |                       | 11 <sup>1</sup>        | Bending End A plane 2 | IP                       |
|                   |                     |                       | 12 <sup>1</sup>        | Bending End B plane 1 | IP                       |
|                   |                     |                       | 13 <sup>1</sup>        | Bending End B plane 2 | IP                       |
|                   |                     |                       | 14 <sup>1</sup>        | Shear plane 1         | IP                       |
|                   |                     |                       | 15 <sup>1</sup>        | Shear plane 2         | IP                       |
|                   |                     |                       | 16 <sup>1</sup>        | Axial force           | IP                       |
|                   |                     |                       | 17 <sup>1</sup>        | Torque                | IP                       |

## 882 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code | Real Element Forces |                                                                                                                                                                                                                                  | Complex Element Forces |                                                                                                                                                                                            |                             |
|----------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
|                      | Item<br>Code        | Item                                                                                                                                                                                                                             | Item<br>Code           | Item                                                                                                                                                                                       | Real/Mag. or<br>Imag/ Phase |
| CBAR<br><br>(100)    | 2                   | Station Distance/ Length                                                                                                                                                                                                         | 2                      | Station Distance/ Length                                                                                                                                                                   |                             |
|                      | 3                   | Bending Moment Plane 1                                                                                                                                                                                                           | 3                      | Bending Moment Plane 1                                                                                                                                                                     |                             |
|                      | 4                   | Bending Moment Plane 2                                                                                                                                                                                                           | 4                      | Bending Moment Plane 2                                                                                                                                                                     |                             |
|                      | 5                   | Shear Force Plane 1                                                                                                                                                                                                              | 5                      | Shear Force Plane 1                                                                                                                                                                        |                             |
|                      | 6                   | Shear Force Plane 2                                                                                                                                                                                                              | 6                      | Shear Force Plane 2                                                                                                                                                                        |                             |
|                      | 7                   | Axial                                                                                                                                                                                                                            | 7                      | Axial                                                                                                                                                                                      |                             |
|                      | 8                   | Item codes are given for End A. Addition of the quantity $(K-1) * 7$ to the item code points to the same information for other stations, where K is the station number. K=8 for End B and 2 through 7 for intermediate stations. | 8                      | Torque                                                                                                                                                                                     |                             |
|                      |                     |                                                                                                                                                                                                                                  | 9                      | Bending Moment Plane 1                                                                                                                                                                     |                             |
|                      |                     |                                                                                                                                                                                                                                  | 10                     | Bending Moment Plane 2                                                                                                                                                                     |                             |
|                      |                     |                                                                                                                                                                                                                                  | 11                     | Shear Force Plane 1                                                                                                                                                                        |                             |
|                      |                     |                                                                                                                                                                                                                                  | 12                     | Shear Force Plane 2                                                                                                                                                                        |                             |
|                      |                     |                                                                                                                                                                                                                                  | 13                     | Axial                                                                                                                                                                                      |                             |
|                      |                     |                                                                                                                                                                                                                                  | 14                     | Torque                                                                                                                                                                                     |                             |
|                      |                     |                                                                                                                                                                                                                                  |                        | (Item codes above are given for End A. For codes 2 through 14 at intermediate stations add $(K-1) * 13$ and K is the station number, and for codes at End B, K+number of stations plus 1.) |                             |

| Element Name Code | Real Element Forces |                                                                                                                                                                                                                                  | Complex Element Forces |                                                                                                                                                                                                                                   |                          |
|-------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
|                   | Item Code           | Item                                                                                                                                                                                                                             | Item Code              | Item                                                                                                                                                                                                                              | Real/Mag. or Imag/ Phase |
| CBEAM<br>(2)      | 2                   | External grid point ID                                                                                                                                                                                                           | 2                      | External grid point ID                                                                                                                                                                                                            |                          |
|                   | 3                   | Station distance/length                                                                                                                                                                                                          | 3                      | Station distance/length                                                                                                                                                                                                           |                          |
|                   | 4 <sup>1</sup>      | Bending moment plane 1                                                                                                                                                                                                           | 4 <sup>1</sup>         | Bending moment plane 1                                                                                                                                                                                                            | RM                       |
|                   | 5 <sup>1</sup>      | Bending moment plane 2                                                                                                                                                                                                           | 5 <sup>1</sup>         | Bending moment plane 2                                                                                                                                                                                                            | RM                       |
|                   | 6 <sup>1</sup>      | Web shear plane 1                                                                                                                                                                                                                | 6 <sup>1</sup>         | Web shear plane 1                                                                                                                                                                                                                 | RM                       |
|                   | 7 <sup>1</sup>      | Web shear plane 2                                                                                                                                                                                                                | 7 <sup>1</sup>         | Web shear plane 2                                                                                                                                                                                                                 | RM                       |
|                   | 8 <sup>1</sup>      | Axial force                                                                                                                                                                                                                      | 8 <sup>1</sup>         | Axial force                                                                                                                                                                                                                       | RM                       |
|                   | 9 <sup>1</sup>      | Total torque                                                                                                                                                                                                                     | 9 <sup>1</sup>         | Total torque                                                                                                                                                                                                                      | RM                       |
|                   | 10 <sup>1</sup>     | Warping torque                                                                                                                                                                                                                   | 10 <sup>1</sup>        | Warping torque                                                                                                                                                                                                                    | RM                       |
|                   |                     | (Item codes are given for End A. Addition of the quantity (K-1) 9 to the item code points to the same information for other stations, where K is the station number. K=11 for End B and 2 through 10 for intermediate stations.) | 11 <sup>1</sup>        | Bending moment plane 1                                                                                                                                                                                                            | IP                       |
|                   |                     |                                                                                                                                                                                                                                  | 12 <sup>1</sup>        | Bending moment plane 2                                                                                                                                                                                                            | IP                       |
|                   |                     |                                                                                                                                                                                                                                  | 13 <sup>1</sup>        | Web shear plane 1                                                                                                                                                                                                                 | IP                       |
|                   |                     |                                                                                                                                                                                                                                  | 14 <sup>1</sup>        | Web shear plane 2                                                                                                                                                                                                                 | IP                       |
|                   |                     |                                                                                                                                                                                                                                  | 15 <sup>1</sup>        | Axial force                                                                                                                                                                                                                       | IP                       |
|                   |                     |                                                                                                                                                                                                                                  | 16 <sup>1</sup>        | Total torque                                                                                                                                                                                                                      | IP                       |
|                   |                     |                                                                                                                                                                                                                                  | 17 <sup>1</sup>        | Warping torque                                                                                                                                                                                                                    | IP                       |
|                   |                     |                                                                                                                                                                                                                                  |                        | (Item codes are given for End A. Addition of the quantity (K-1) 16 to the item code points to the same information for other stations, where K is the station number. K=11 for End B and 2 through 10 for intermediate stations.) |                          |

## 884 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code | Real Element Forces |                                                                                                                | Complex Element Forces |                        |                                                                                                                 |
|----------------------|---------------------|----------------------------------------------------------------------------------------------------------------|------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------|
|                      | Item<br>Code        | Item                                                                                                           | Item<br>Code           | Item                   | Real/Mag. or<br>Imag/ Phase                                                                                     |
| CBEND<br><br>(69)    | 2                   | External grid point ID                                                                                         | 2                      | External grid point ID |                                                                                                                 |
|                      | 3 <sup>1</sup>      | Bending moment plane 1                                                                                         | 3 <sup>1</sup>         | Bending moment plane 1 | RM                                                                                                              |
|                      | 4 <sup>1</sup>      | Bending moment plane 2                                                                                         | 4 <sup>1</sup>         | Bending moment plane 2 | RM                                                                                                              |
|                      | 5 <sup>1</sup>      | Shear plane 1                                                                                                  | 5 <sup>1</sup>         | Shear plane 1          | RM                                                                                                              |
|                      | 6 <sup>1</sup>      | Shear plane 2                                                                                                  | 6 <sup>1</sup>         | Shear plane 2          | RM                                                                                                              |
|                      | 7 <sup>1</sup>      | Axial force                                                                                                    | 7 <sup>1</sup>         | Axial force            | RM                                                                                                              |
|                      | 8 <sup>1</sup>      | Torque                                                                                                         | 8 <sup>1</sup>         | Torque                 | RM                                                                                                              |
|                      |                     | (Item codes are given<br>for End A. Item codes 9<br>through 15 point to the<br>same information for End<br>B.) | 9 <sup>1</sup>         | Bending moment plane 1 | IP                                                                                                              |
|                      |                     |                                                                                                                | 10 <sup>1</sup>        | Bending moment plane 2 | IP                                                                                                              |
|                      |                     |                                                                                                                | 11 <sup>1</sup>        | Shear plane 1          | IP                                                                                                              |
|                      |                     |                                                                                                                | 12 <sup>1</sup>        | Shear plane 2          | IP                                                                                                              |
|                      |                     |                                                                                                                | 13 <sup>1</sup>        | Axial force            | IP                                                                                                              |
|                      |                     |                                                                                                                | 14 <sup>1</sup>        | Torque                 | IP                                                                                                              |
|                      |                     |                                                                                                                |                        |                        | (Item codes are given for<br>End A. Item codes 15<br>through 27 point to the<br>same information for End<br>B.) |

| Element Name Code               | Real Element Forces |          | Complex Element Forces |          |                          |
|---------------------------------|---------------------|----------|------------------------|----------|--------------------------|
|                                 | Item Code           | Item     | Item Code              | Item     | Real/Mag. or Imag/ Phase |
| CBUSH<br>(102)<br>Linear Format | 2                   | Force-x  | 2                      | Force-x  | RM                       |
|                                 | 3                   | Force-y  | 3                      | Force-y  | RM                       |
|                                 | 4                   | Force-z  | 4                      | Force-z  | RM                       |
|                                 | 5                   | Moment-x | 5                      | Moment-x | RM                       |
|                                 | 6                   | Moment-y | 6                      | Moment-y | RM                       |
|                                 | 7                   | Moment-z | 7                      | Moment-z | RM                       |
|                                 |                     |          | 8                      | Force-x  | IP                       |
|                                 |                     |          | 9                      | Force-y  | IP                       |
|                                 |                     |          | 10                     | Force-z  | IP                       |
|                                 |                     |          | 11                     | Moment-x | IP                       |
|                                 |                     |          | 12                     | Moment-y | IP                       |
|                                 |                     |          | 13                     | Moment-z | IP                       |

| Element Name (Code)                | Real Element Forces |          |
|------------------------------------|---------------------|----------|
|                                    | Item Code           | Item     |
| CBUSH<br>(226)<br>Nonlinear Format | 2                   | Force-x  |
|                                    | 3                   | Force-y  |
|                                    | 4                   | Force-z  |
|                                    | 11                  | Moment-x |
|                                    | 12                  | Moment-y |
|                                    | 13                  | Moment-z |

**886 Element Force Item Codes**

**8  
CODES**

| Element Name<br>Code | Real Element Forces |                | Complex Element Forces |                |                             |
|----------------------|---------------------|----------------|------------------------|----------------|-----------------------------|
|                      | Item<br>Code        | Item           | Item<br>Code           | Item           | Real/Mag. or<br>Imag/ Phase |
| CDAMP1<br>(20)       |                     | Same as CELAS1 |                        | Same as CELAS1 |                             |
| CDAMP2<br>(21)       |                     | Same as CELAS1 |                        | Same as CELAS1 |                             |
| CDAMP3<br>(22)       |                     | Same as CELAS1 |                        | Same as CELAS1 |                             |
| CDAMP4<br>(23)       |                     | Same as CELAS1 |                        | Same as CELAS1 |                             |

Element Force Item Codes 887

**8**  
CODES

| Element Name Code                 | Real Element Forces |      | Complex Element Forces |      |                          |
|-----------------------------------|---------------------|------|------------------------|------|--------------------------|
|                                   | Item Code           | Item | Item Code              | Item | Real/Mag. or Imag/ Phase |
| CDUM3<br>thru<br>CDUM9<br>(55-61) | 2 <sup>1</sup>      | F1   | 2 <sup>1</sup>         | F1   | RM                       |
|                                   | 3 <sup>1</sup>      | F2   | 3 <sup>1</sup>         | F2   | RM                       |
|                                   | 4 <sup>1</sup>      | F3   | 4 <sup>1</sup>         | F3   | RM                       |
|                                   | 5 <sup>1</sup>      | F4   | 5 <sup>1</sup>         | F4   | RM                       |
|                                   | 6 <sup>1</sup>      | F5   | 6 <sup>1</sup>         | F5   | RM                       |
|                                   | 7 <sup>1</sup>      | F6   | 7 <sup>1</sup>         | F6   | RM                       |
|                                   | 8 <sup>1</sup>      | F7   | 8 <sup>1</sup>         | F7   | RM                       |
|                                   | 9 <sup>1</sup>      | F8   | 9 <sup>1</sup>         | F8   | RM                       |
|                                   | 10 <sup>1</sup>     | F9   | 10 <sup>1</sup>        | F9   | RM                       |
|                                   |                     |      | 11 <sup>1</sup>        | F1   | IP                       |
|                                   |                     |      | 12 <sup>1</sup>        | F2   | IP                       |
|                                   |                     |      | 13 <sup>1</sup>        | F3   | IP                       |
|                                   |                     |      | 14 <sup>1</sup>        | F4   | IP                       |
|                                   |                     |      | 15 <sup>1</sup>        | F5   | IP                       |
|                                   |                     |      | 16 <sup>1</sup>        | F6   | IP                       |
|                                   |                     |      | 17 <sup>1</sup>        | F7   | IP                       |
|                                   |                     |      | 18 <sup>1</sup>        | F8   | IP                       |
|                                   |                     |      | 19 <sup>1</sup>        | F9   | IP                       |

# 888 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code | Real Element Forces |                | Complex Element Forces |                |                             |
|----------------------|---------------------|----------------|------------------------|----------------|-----------------------------|
|                      | Item<br>Code        | Item           | Item<br>Code           | Item           | Real/Mag. or<br>Imag/ Phase |
| CELAS1               | 2 <sup>1</sup>      | Force          | 2 <sup>1</sup>         | Force          | RM                          |
| (11)                 |                     |                | 3 <sup>1</sup>         | Force          | IP                          |
| CELAS2               |                     | Same as CELAS1 |                        | Same as CELAS1 |                             |
| (12)                 |                     |                |                        |                |                             |
| CELAS3               |                     | Same as CELAS1 |                        | Same as CELAS1 |                             |
| (13)                 |                     |                |                        |                |                             |
| CELAS4               |                     | Same as CELAS1 |                        | Same as CELAS1 |                             |
| (14)                 |                     |                |                        |                |                             |



| Element Name Code | Real Element Forces |                          | Complex Element Forces |                          |                          |
|-------------------|---------------------|--------------------------|------------------------|--------------------------|--------------------------|
|                   | Item Code           | Item                     | Item Code              | Item                     | Real/Mag. or Imag/ Phase |
| CFAST<br>(119)    | 2                   | mz bending End A plane 1 | 2                      | mz bending End A plane 1 | RM                       |
|                   | 3                   | my bending End A plane 2 | 3                      | my bending End A plane 2 | RM                       |
|                   | 4                   | mz bending End B plane 1 | 4                      | mz bending End B plane 1 | RM                       |
|                   | 5                   | my bending End B plane 2 | 5                      | my bending End B plane 2 | RM                       |
|                   | 6                   | fy shear force plane 1   | 6                      | fy shear force plane 1   | RM                       |
|                   | 7                   | fz shear force plane 2   | 7                      | fz shear force plane 2   | RM                       |
|                   | 8                   | fx axial force           | 8                      | fx axial force           | RM                       |
|                   | 9                   | mx torque                | 9                      | mx torque                | RM                       |
|                   |                     |                          | 10                     | mz bending End A plane 1 | IP                       |
|                   |                     |                          | 11                     | my bending End A plane 2 | IP                       |
|                   |                     |                          | 12                     | mz bending End B plane 1 | IP                       |
|                   |                     |                          | 13                     | my bending End B plane 2 | IP                       |
|                   |                     |                          | 14                     | fy shear force plane 1   | IP                       |
|                   |                     |                          | 15                     | fz shear force plane 2   | IP                       |
|                   |                     |                          | 16                     | fx axial force           | IP                       |
|                   |                     |                          | 17                     | mx torque                | IP                       |

## 890 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code | Real Element Forces |             | Complex Element Forces |             |                             |
|----------------------|---------------------|-------------|------------------------|-------------|-----------------------------|
|                      | Item<br>Code        | Item        | Item<br>Code           | Item        | Real/Mag. or<br>Imag/ Phase |
| CONROD<br>(10)       | 2 <sup>1</sup>      | Axial force | 2 <sup>1</sup>         | Axial force | RM                          |
|                      | 3 <sup>1</sup>      | Torque      | 3 <sup>1</sup>         | Axial force | IP                          |
|                      |                     |             | 4 <sup>1</sup>         | Torque      | RM                          |
|                      |                     |             | 5 <sup>1</sup>         | Torque      | IP                          |

| Element Name<br>Code          | Real Element Forces |                   | Complex Element Forces |                   |                             |
|-------------------------------|---------------------|-------------------|------------------------|-------------------|-----------------------------|
|                               | Item<br>Code        | Item              | Item<br>Code           | Item              | Real/Mag. or<br>Imag/ Phase |
| CQUAD4<br>(33)<br>Center Only | 2 <sup>1</sup>      | Membrane force x  | 2 <sup>1</sup>         | Membrane force x  | RM                          |
|                               | 3 <sup>1</sup>      | Membrane force y  | 3 <sup>1</sup>         | Membrane force y  | RM                          |
|                               | 4 <sup>1</sup>      | Membrane force xy | 4 <sup>1</sup>         | Membrane force xy | RM                          |
|                               | 5 <sup>1</sup>      | Bending moment x  | 5 <sup>1</sup>         | Bending moment x  | RM                          |
|                               | 6 <sup>1</sup>      | Bending moment y  | 6 <sup>1</sup>         | Bending moment y  | RM                          |
|                               | 7 <sup>1</sup>      | Bending moment xy | 7 <sup>1</sup>         | Bending moment xy | RM                          |
|                               | 8 <sup>1</sup>      | Shear x           | 8 <sup>1</sup>         | Shear x           | RM                          |
|                               | 9 <sup>1</sup>      | Shear y           | 9 <sup>1</sup>         | Shear y           | RM                          |
|                               |                     |                   | 10 <sup>1</sup>        | Membrane force x  | IP                          |
|                               |                     |                   | 11 <sup>1</sup>        | Membrane force y  | IP                          |
|                               |                     |                   | 12 <sup>1</sup>        | Membrane force xy | IP                          |
|                               |                     |                   | 13 <sup>1</sup>        | Bending moment x  | IP                          |
|                               |                     |                   | 14 <sup>1</sup>        | Bending moment y  | IP                          |
|                               |                     |                   | 15 <sup>1</sup>        | Bending moment xy | IP                          |
|                               |                     |                   | 16 <sup>1</sup>        | Shear x           | IP                          |
|                               |                     | 17 <sup>1</sup>   | Shear y                | IP                |                             |


## 892 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code                                    | Real Element Forces |                                                        | Complex Element Forces |                |                             |
|---------------------------------------------------------|---------------------|--------------------------------------------------------|------------------------|----------------|-----------------------------|
|                                                         | Item<br>Code        | Item                                                   | Item<br>Code           | Item           | Real/Mag. or<br>Imag/ Phase |
| CQUAD4 <sup>2</sup><br>(95)<br>Composite<br>Center Only | 2-3                 | Theory or blank                                        |                        | Not applicable |                             |
|                                                         | 4                   | Lamina number                                          |                        |                |                             |
|                                                         | 5                   | FP (failure index for direct stresses)                 |                        |                |                             |
|                                                         | 6                   | Failure mode for                                       |                        |                |                             |
|                                                         |                     | Maximum strain theory                                  |                        |                |                             |
|                                                         | 7                   | FB or -1 (failure index for interlaminar shear-stress) |                        |                |                             |
|                                                         | 8                   | MAX of FP, FB or -1                                    |                        |                |                             |
|                                                         | 9                   | Failure flag                                           |                        |                |                             |

| Element Name Code                     | Real Element Forces |                                   | Complex Element Forces |                                   |                          |
|---------------------------------------|---------------------|-----------------------------------|------------------------|-----------------------------------|--------------------------|
|                                       | Item Code           | Item                              | Item Code              | Item                              | Real/Mag. or Imag/ Phase |
| CQUAD4<br>(144)<br>Center and Corners | 1                   | EID                               | 1                      | EID                               |                          |
|                                       | 2                   | CEN/                              | 2                      | CEN/                              |                          |
|                                       | 3                   | 4                                 | 3                      | 4                                 |                          |
|                                       | 4                   | Membrane x                        | 4                      | Membrane x                        | RM                       |
|                                       | 5                   | Membrane y                        | 5                      | Membrane y                        | RM                       |
|                                       | 6                   | Membrane xy                       | 6                      | Membrane xy                       | RM                       |
|                                       | 7                   | Bending x                         | 7                      | Bending x                         | RM                       |
|                                       | 8                   | Bending y                         | 8                      | Bending y                         | RM                       |
|                                       | 9                   | Bending xy                        | 9                      | Bending xy                        | RM                       |
|                                       | 10                  | Shear x                           | 10                     | Shear x                           | RM                       |
|                                       | 11                  | Shear y                           | 11                     | Shear y                           | RM                       |
|                                       | 12                  | Grid 1                            | 12                     | Membrane x                        | IP                       |
|                                       | 13-20               | Same as 4 through 11 for corner 1 | 13                     | Membrane y                        | IP                       |
|                                       |                     |                                   | 14                     | Membrane xy                       | IP                       |
|                                       | 21                  | Grid 2                            | 15                     | Bending x                         | IP                       |
|                                       | 22-29               | Same as 4 through 11 for corner 2 | 16                     | Bending y                         | IP                       |
|                                       |                     |                                   | 17                     | Bending xy                        | IP                       |
|                                       | 30                  | Grid 3                            | 18                     | Shear x                           | IP                       |
|                                       | 31-38               | Same as 4 through 11 for corner 3 | 19                     | Shear y                           | IP                       |
|                                       |                     |                                   | 20                     | Grid 1                            |                          |
|                                       | 39                  | Grid 4                            | 21-36                  | Same as 4 through 19 for corner 1 |                          |
|                                       | 40-47               | Same as 4 through 11 for corner 4 | 37                     | Grid 2                            |                          |
|                                       |                     |                                   | 38-53                  | Same as 4 through 19 for corner 2 |                          |
|                                       |                     |                                   | 54                     | Grid 3                            |                          |
|                                       |                     |                                   | 55-70                  | Same as 4 through 19 for corner 3 |                          |
|                                       |                     |                                   | 71                     | Grid 4                            |                          |
|                                       |                     |                                   | 71-87                  | Same as 4 through 19 for corner 4 |                          |

# 894 Element Force Item Codes



| Element Name<br>Code                                    | Real Element Forces |                     | Complex Element Forces |                     |                             |
|---------------------------------------------------------|---------------------|---------------------|------------------------|---------------------|-----------------------------|
|                                                         | Item<br>Code        | Item                | Item<br>Code           | Item                | Real/Mag. or<br>Imag/ Phase |
| CQUAD8<br>(64)<br>Center and<br>Corners                 |                     | Same as CQUAD4(144) |                        | Same as CQUAD4(144) |                             |
| CQUAD8 <sup>2</sup><br>(96)<br>Composite<br>Center Only |                     | Same as CQUAD4(95)  |                        | Same as CQUAD4(95)  |                             |

| Element Name<br>Code                                                                              | Real Element Forces |                     | Complex Element Forces |                     |                             |
|---------------------------------------------------------------------------------------------------|---------------------|---------------------|------------------------|---------------------|-----------------------------|
|                                                                                                   | Item<br>Code        | Item                | Item<br>Code           | Item                | Real/Mag. or<br>Imag/ Phase |
| CQUADR<br>(82)<br>Center and<br>Corners                                                           |                     | Same as CQUAD4(144) |                        | Same as CQUAD4(144) |                             |
| CQUADR<br>(228)<br>Center Only<br>(not supported by<br>old formulation)                           |                     | Same as CQUAD4(33)  |                        | Same as CQUAD4(33)  |                             |
| CQUADR <sup>2</sup><br>(232)<br>Composite<br>Center Only<br>(not supported by<br>old formulation) |                     | Same as CQUAD4(95)  |                        | Same as CQUAD4(95)  |                             |

## 896 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code | Real Element Forces |                    | Complex Element Forces |                    |                             |
|----------------------|---------------------|--------------------|------------------------|--------------------|-----------------------------|
|                      | Item<br>Code        | Item               | Item<br>Code           | Item               | Real/Mag. or<br>Imag/ Phase |
| CROD<br>(1)          |                     | Same as CONROD(10) |                        | Same as CONROD(10) |                             |



| Element Name<br>Code | Real Element Forces |                 | Complex Element Forces |                 |                             |
|----------------------|---------------------|-----------------|------------------------|-----------------|-----------------------------|
|                      | Item<br>Code        | Item            | Item<br>Code           | Item            | Real/Mag. or<br>Imag/ Phase |
| CSHEAR<br><br>(4)    | 2 <sup>1</sup>      | Force 4 to 1    | 2 <sup>1</sup>         | Force 4 to 1    | RM                          |
|                      | 3 <sup>1</sup>      | Force 2 to 1    | 3 <sup>1</sup>         | Force 2 to 1    | RM                          |
|                      | 4 <sup>1</sup>      | Force 1 to 2    | 4 <sup>1</sup>         | Force 1 to 2    | RM                          |
|                      | 5 <sup>1</sup>      | Force 3 to 2    | 5 <sup>1</sup>         | Force 3 to 2    | RM                          |
|                      | 6 <sup>1</sup>      | Force 2 to 3    | 6 <sup>1</sup>         | Force 2 to 3    | RM                          |
|                      | 7 <sup>1</sup>      | Force 4 to 3    | 7 <sup>1</sup>         | Force 4 to 3    | RM                          |
|                      | 8 <sup>1</sup>      | Force 3 to 4    | 8 <sup>1</sup>         | Force 3 to 4    | RM                          |
|                      | 9 <sup>1</sup>      | Force 1 to 4    | 9 <sup>1</sup>         | Force 1 to 4    | RM                          |
|                      | 10 <sup>1</sup>     | Kick force on 1 | 10 <sup>1</sup>        | Force 4 to 1    | IP                          |
|                      | 11 <sup>1</sup>     | Shear 12        | 11 <sup>1</sup>        | Force 2 to 1    | IP                          |
|                      | 12 <sup>1</sup>     | Kick force on 2 | 12 <sup>1</sup>        | Force 1 to 2    | IP                          |
|                      | 13 <sup>1</sup>     | Shear 23        | 13 <sup>1</sup>        | Force 3 to 2    | IP                          |
|                      | 14 <sup>1</sup>     | Kick force on 3 | 14 <sup>1</sup>        | Force 2 to 3    | IP                          |
|                      | 15 <sup>1</sup>     | Shear 34        | 15 <sup>1</sup>        | Force 4 to 3    | IP                          |
|                      | 16 <sup>1</sup>     | Kick force on 4 | 16 <sup>1</sup>        | Force 3 to 4    | IP                          |
|                      | 17 <sup>1</sup>     | Shear 41        | 17 <sup>1</sup>        | Force 1 to 4    | IP                          |
|                      |                     |                 | 18 <sup>1</sup>        | Kick force on 1 | RM                          |
|                      |                     |                 | 19 <sup>1</sup>        | Shear 12        | RM                          |
|                      |                     |                 | 20 <sup>1</sup>        | Kick force on 2 | RM                          |
|                      |                     |                 | 21 <sup>1</sup>        | Shear 23        | RM                          |
|                      |                     | 22 <sup>1</sup> | Kick force on 3        | RM              |                             |
|                      |                     | 23 <sup>1</sup> | Shear 34               | RM              |                             |
|                      |                     | 24 <sup>1</sup> | Kick force on 4        | RM              |                             |
|                      |                     | 25 <sup>1</sup> | Shear 41               | RM              |                             |
|                      |                     | 26 <sup>1</sup> | Kick force on 1        | IP              |                             |
|                      |                     | 27 <sup>1</sup> | Shear 12               | IP              |                             |
|                      |                     | 28 <sup>1</sup> | Kick force on 2        | IP              |                             |
|                      |                     | 29 <sup>1</sup> | Shear 23               | IP              |                             |
|                      |                     | 30 <sup>1</sup> | Kick force on 3        | IP              |                             |
|                      |                     | 31 <sup>1</sup> | Shear 34               | IP              |                             |
|                      |                     | 32 <sup>1</sup> | Kick force on 4        | IP              |                             |
|                      |                     | 33 <sup>1</sup> | Shear 41               | IP              |                             |

# 898 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code                                    | Real Element Forces |                     | Complex Element Forces |                     |                             |
|---------------------------------------------------------|---------------------|---------------------|------------------------|---------------------|-----------------------------|
|                                                         | Item<br>Code        | Item                | Item<br>Code           | Item                | Real/Mag. or<br>Imag/ Phase |
| CTRIA3<br>(74)<br>Center Only                           |                     | Same as CQUAD4(33)  |                        | Same as CQUAD4(33)  |                             |
| CTRIA3 <sup>2</sup><br>(97)<br>Composite<br>Center Only |                     | Same as CQUAD4(95)  |                        | Same as CQUAD4(95)  |                             |
| CTRIA6<br>(75)<br>Center and<br>Corners                 | 1-38                | Same as CQUAD4(144) | 1-70                   | Same as CQUAD4(144) |                             |
| CTRIA6 <sup>2</sup><br>(98)<br>Composite<br>Center Only |                     | Same as CQUAD4(95)  |                        | Same as CQUAD4(95)  |                             |


| Element Name<br>Code                                                                              | Real Element Forces |                     | Complex Element Forces |                     |                             |
|---------------------------------------------------------------------------------------------------|---------------------|---------------------|------------------------|---------------------|-----------------------------|
|                                                                                                   | Item<br>Code        | Item                | Item<br>Code           | Item                | Real/Mag. or<br>Imag/ Phase |
| CTRIAR<br>(70)<br>Center and<br>Corners                                                           | 1-38                | Same as CQUAD4(144) | 1-70                   | Same as CQUAD4(144) |                             |
| CTRIAR<br>(227)<br>Center Only<br>(not supported by<br>old formulation)                           | 2-9                 | Same as CQUAD4(33)  | 2-17                   | Same as CQUAD4(33)  |                             |
| CTRIAR <sup>2</sup><br>(233)<br>Composite<br>Center Only<br>(not supported by<br>old formulation) | 2-9                 | Same as CQUAD4(95)  |                        | Not applicable      |                             |

## 900 Element Force Item Codes

**8**  
**CODES**

| Element Name Code                                                                                                                                         | Real Element Forces |                          | Complex Element Forces |                          |                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------|------------------------|--------------------------|--------------------------|
|                                                                                                                                                           | Item Code           | Item                     | Item Code              | Item                     | Real/Mag. or Imag/ Phase |
| CTUBE<br>(3)                                                                                                                                              |                     | Same as CONROD(10)       |                        | Same as CONROD(10)       |                          |
| CVISC<br>(24)                                                                                                                                             |                     | Not applicable           |                        | Same as CONROD(10)       |                          |
| CWELDP (118)<br>ELPAT or<br>PARTPAT<br><br>CWELDC (117)<br>ELIMID or<br>GRIDID with<br>MSET=OFF<br><br>CWELD (200)<br>ELIMID or<br>GRIDID with<br>MSET=ON | 2                   | mz bending End A plane 1 | 2                      | mz bending End A plane 1 | RM                       |
|                                                                                                                                                           | 3                   | my bending End A plane 2 | 3                      | my bending End A plane 2 | RM                       |
|                                                                                                                                                           | 4                   | mz bending End B plane 1 | 4                      | mz bending End B plane 1 | RM                       |
|                                                                                                                                                           | 5                   | my bending End B plane 2 | 5                      | my bending End B plane 2 | RM                       |
|                                                                                                                                                           | 6                   | fy shear force plane 1   | 6                      | fy shear force plane 1   | RM                       |
|                                                                                                                                                           | 7                   | fz shear force plane 2   | 7                      | fz shear force plane 2   | RM                       |
|                                                                                                                                                           | 8                   | fx axial force           | 8                      | fx axial force           | RM                       |
|                                                                                                                                                           | 9                   | mx torque                | 9                      | mx torque                | RM                       |
|                                                                                                                                                           |                     |                          | 10                     | mz bending End A plane 1 | IP                       |
|                                                                                                                                                           |                     |                          | 11                     | my bending End A plane 2 | IP                       |
|                                                                                                                                                           |                     |                          | 12                     | mz bending End B plane 1 | IP                       |
|                                                                                                                                                           |                     |                          | 13                     | my bending End B plane 2 | IP                       |
|                                                                                                                                                           |                     |                          | 14                     | fy shear force plane 1   | IP                       |
|                                                                                                                                                           |                     |                          | 15                     | fz shear force plane 2   | IP                       |
|                                                                                                                                                           |                     |                          | 16                     | fx axial force           | IP                       |
|                                                                                                                                                           |                     |                          | 17                     | mx torque                | IP                       |

Element Force Item Codes 901



| Element Name Code                                                                                                      | Real Element Forces            |                                  | Complex Element Forces         |                   |                          |
|------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------------------------|--------------------------------|-------------------|--------------------------|
|                                                                                                                        | Item Code                      | Item                             | Item Code                      | Item              | Real/Mag. or Imag/ Phase |
| VUQUAD<br>(189)<br>VUTRIA<br>(190)<br><br>for QUADp and TRIAp if 4th char. of ICORD = X Y, Z (local coordinate system) | 1                              | VU element ID * 10 + device code |                                |                   |                          |
|                                                                                                                        | 2                              | Parent p-element ID              |                                |                   |                          |
|                                                                                                                        | 3                              | CID coordinate system ID         |                                |                   |                          |
|                                                                                                                        | 4                              | ICORD flat/curved etc.           |                                |                   |                          |
|                                                                                                                        | 5                              | THETA material angle             |                                |                   |                          |
|                                                                                                                        | 6                              | 0.0                              |                                |                   |                          |
|                                                                                                                        | 7                              | VU grid ID for corner 1          |                                |                   |                          |
|                                                                                                                        | 8                              | Membrane Force x                 | 8                              | Membrane Force x  | RM                       |
|                                                                                                                        | 9                              | Membrane Force y                 | 9                              | Membrane Force y  | RM                       |
|                                                                                                                        | 10                             | Membrane Force xy                | 10                             | Membrane Force xy | RM                       |
|                                                                                                                        | 11                             | 0.0                              | 11                             | 0.0               | RM                       |
|                                                                                                                        | 12                             | 0.0                              | 12                             | 0.0               | RM                       |
|                                                                                                                        | 13                             | 0.0                              | 13                             | 0.0               | RM                       |
|                                                                                                                        | 14                             | Bending Moment x                 | 14                             | Bending Moment x  | RM                       |
|                                                                                                                        | 15                             | Bending Moment y                 | 15                             | Bending Moment y  | RM                       |
|                                                                                                                        | 16                             | Bending Moment xy                | 16                             | Bending Moment xy | RM                       |
|                                                                                                                        | 17                             | Shear zx                         | 17                             | Shear zx          | RM                       |
|                                                                                                                        | 18                             | Shear yz                         | 18                             | Shear yz          | RM                       |
|                                                                                                                        | 19                             | 0.0                              | 19                             | 0.0               | RM                       |
|                                                                                                                        |                                |                                  | 20                             | Membrane Force x  | IP                       |
|                                                                                                                        |                                | 21                               | Membrane Force y               | IP                |                          |
|                                                                                                                        |                                | 22                               | Membrane Force xy              | IP                |                          |
|                                                                                                                        |                                | 23                               | 0.0                            | IP                |                          |
|                                                                                                                        |                                | 24                               | 0.0                            | IP                |                          |
|                                                                                                                        |                                | 25                               | 0.0                            | IP                |                          |
|                                                                                                                        |                                | 26                               | Bending Moment x               | IP                |                          |
|                                                                                                                        |                                | 27                               | Bending Moment y               | IP                |                          |
|                                                                                                                        |                                | 28                               | Bending Moment xy              | IP                |                          |
|                                                                                                                        |                                | 29                               | Shear zx                       | IP                |                          |
|                                                                                                                        |                                | 30                               | Shear yz                       | IP                |                          |
|                                                                                                                        |                                | 31                               | 0.0                            | IP                |                          |
| 20-32                                                                                                                  | Repeat items 7-19 for corner 2 | 32-56                            | Repeat items 7-31 for corner 2 |                   |                          |

## 902 Element Force Item Codes

**8**  
**CODES**

| Element Name<br>Code | Real Element Forces |                                            | Complex Element Forces |                                            |                             |
|----------------------|---------------------|--------------------------------------------|------------------------|--------------------------------------------|-----------------------------|
|                      | Item<br>Code        | Item                                       | Item<br>Code           | Item                                       | Real/Mag. or<br>Imag/ Phase |
|                      | 33-45               | Repeat items 7-19 for<br>corner 3          | 57-81                  | Repeat items 7-31 for<br>corner 3          |                             |
|                      | 46-58               | Repeat items 7-19 for<br>corner 4 (VUQUAD) | 82-106                 | Repeat items 7-31 for<br>corner 4 (VUQUAD) |                             |

| Element Name Code                                                                                                 | Real Element Forces            |                                 | Complex Element Forces |                                |                          |
|-------------------------------------------------------------------------------------------------------------------|--------------------------------|---------------------------------|------------------------|--------------------------------|--------------------------|
|                                                                                                                   | Item Code                      | Item                            | Item Code              | Item                           | Real/Mag. or Imag/ Phase |
| VUQUAD<br>(189)<br>VUTRIA<br>(190)<br><br>for QUADp and TRIAp if 4th char. of ICORD = F (fixed coordinate system) | 1                              | VU element ID *10 + device code |                        |                                |                          |
|                                                                                                                   | 2                              | Parent p-element ID             |                        |                                |                          |
|                                                                                                                   | 3                              | CID coordinate system ID        |                        |                                |                          |
|                                                                                                                   | 4                              | ICORD flat/curved etc.          |                        |                                |                          |
|                                                                                                                   | 5                              | THETA material angle            |                        |                                |                          |
|                                                                                                                   | 6                              | 0.0                             |                        |                                |                          |
|                                                                                                                   | 7                              | VU grid ID for corner 1         |                        |                                |                          |
|                                                                                                                   | 8                              | Membrane Force x                | 8                      | Membrane Force x               | RM                       |
|                                                                                                                   | 9                              | Membrane Force y                | 9                      | Membrane Force y               | RM                       |
|                                                                                                                   | 10                             | Membrane Force xy               | 10                     | Membrane Force xy              | RM                       |
|                                                                                                                   | 11                             | Membrane Force yz               | 11                     | Membrane Force yz              | RM                       |
|                                                                                                                   | 12                             | Membrane Force zx               | 12                     | Membrane Force zx              | RM                       |
|                                                                                                                   | 13                             | Membrane Force z                | 13                     | Membrane Force z               | RM                       |
|                                                                                                                   | 14                             | Bending Moment x                | 14                     | Bending Moment x               | RM                       |
|                                                                                                                   | 15                             | Bending Moment y                | 15                     | Bending Moment y               | RM                       |
|                                                                                                                   | 16                             | Bending Moment xy               | 16                     | Bending Moment xy              | RM                       |
|                                                                                                                   | 17                             | Bending Moment yz               | 17                     | Bending Moment yz              | RM                       |
|                                                                                                                   | 18                             | Bending Moment zx               | 18                     | Bending Moment zx              | RM                       |
|                                                                                                                   | 19                             | Bending Moment z                | 19                     | Bending Moment z               | RM                       |
|                                                                                                                   |                                |                                 |                        | 20                             | Membrane Force x         |
|                                                                                                                   |                                |                                 | 21                     | Membrane Force y               | IP                       |
|                                                                                                                   |                                |                                 | 22                     | Membrane Force xy              | IP                       |
|                                                                                                                   |                                |                                 | 23                     | Membrane Force yz              | IP                       |
|                                                                                                                   |                                |                                 | 24                     | Membrane Force zx              | IP                       |
|                                                                                                                   |                                |                                 | 25                     | Membrane Force z               | IP                       |
|                                                                                                                   |                                |                                 | 26                     | Bending Moment x               | IP                       |
|                                                                                                                   |                                |                                 | 27                     | Bending Moment y               | IP                       |
|                                                                                                                   |                                |                                 | 28                     | Bending Moment xy              | IP                       |
|                                                                                                                   |                                |                                 | 29                     | Bending Moment yz              | IP                       |
|                                                                                                                   |                                |                                 | 30                     | Bending Moment zx              | IP                       |
|                                                                                                                   |                                |                                 | 31                     | Bending Moment z               | IP                       |
| 20-32                                                                                                             | Repeat items 7-19 for corner 2 |                                 | 32-56                  | Repeat items 7-31 for corner 2 |                          |

## 904 Element Force Item Codes


**8**  
**CODES**

| Element Name<br>Code | Real Element Forces |                                            | Complex Element Forces |                                            |                             |
|----------------------|---------------------|--------------------------------------------|------------------------|--------------------------------------------|-----------------------------|
|                      | Item<br>Code        | Item                                       | Item<br>Code           | Item                                       | Real/Mag. or<br>Imag/ Phase |
|                      | 33-45               | Repeat items 7-19 for<br>corner 3          | 57-81                  | Repeat items 7-31 for<br>corner 3          |                             |
|                      | 46-58               | Repeat items 7-19 for<br>corner 4 (VUQUAD) | 82-106                 | Repeat items 7-31 for<br>corner 4 (VUQUAD) |                             |



| Element Name Code            | Real Element Forces |                                  | Complex Element Forces |                             |                          |
|------------------------------|---------------------|----------------------------------|------------------------|-----------------------------|--------------------------|
|                              | Item Code           | Item                             | Item Code              | Item                        | Real/Mag. or Imag/ Phase |
| VUBEAM<br>(191)<br>for BEAMP | 1                   | VU element ID * 10 + device code |                        |                             |                          |
|                              | 2                   | Parent p-element ID              |                        |                             |                          |
|                              | 3                   | CID coordinate system ID         |                        |                             |                          |
|                              | 4                   | ICORD (not used)                 |                        |                             |                          |
|                              | 5                   | VU grid ID for end 1             |                        |                             |                          |
|                              | 6                   | x/L position                     |                        |                             |                          |
|                              | 7                   | Force x                          | 7                      | Force x                     | RM                       |
|                              | 8                   | Shear Force y                    | 8                      | Shear Force y               | RM                       |
|                              | 9                   | Shear Force z                    | 9                      | Shear Force z               | RM                       |
|                              | 10                  | Torsional Moment x               | 10                     | Torsional Moment x          | RM                       |
|                              | 11                  | Bending Moment y                 | 11                     | Bending Moment y            | RM                       |
|                              | 12                  | Bending Moment z                 | 12                     | Bending Moment z            | RM                       |
|                              |                     |                                  | 13                     | Force x                     | IP                       |
|                              |                     |                                  | 14                     | Shear Force y               | IP                       |
|                              |                     |                                  | 15                     | Shear Force z               | IP                       |
|                              |                     |                                  | 16                     | Torsional Moment x          | IP                       |
|                              |                     |                                  | 17                     | Bending Moment y            | IP                       |
|                              |                     |                                  | 18                     | Bending Moment z            | IP                       |
|                              | 13-20               | Repeat items 5-12 for end 2      | 19-32                  | Repeat items 5-18 for end 2 |                          |

906 Fluid Virtual Mass Pressure Item Codes



8.3 Fluid Virtual Mass Pressure Item Codes

| Element Name | Real Fluid Pressure |                | Complex Fluid Pressure |          |                          |
|--------------|---------------------|----------------|------------------------|----------|--------------------------|
|              | Code                | Item           | Code                   | Item     | Real/Mag. or Imag./Phase |
| Plate        | 2                   | Fluid pressure | 2                      | Pressure | RM                       |
| Family       |                     |                | 3                      | Pressure | IP                       |

| Element Name (Code)    | Code            | Item              |
|------------------------|-----------------|-------------------|
| Heat Transfer Elements | 2               | Element type      |
|                        | 3               |                   |
|                        | 4               | x gradient        |
|                        | 5               | y gradient        |
|                        | 6               | z gradient        |
|                        | 7               | x flux            |
|                        | 8               | y flux            |
|                        | 9               | z flux            |
|                        | CHBDYE<br>(107) | 4                 |
| 5                      |                 | Free convection   |
| 6                      |                 | Forced convection |
| 7                      |                 | Radiation         |
| 8                      |                 | Total             |
| CHBDYG<br>(108)        | Same as         | Same as CHBDYE    |
|                        | CHBDYE          |                   |
| CHBDYP<br>(109)        | Same as         | Same as CHBDYE    |
|                        | CHBDYE          |                   |

## 8.4 Slideline Contact Item Codes

| Element Name<br>(Code) | Real Element Data |                                         |
|------------------------|-------------------|-----------------------------------------|
|                        | Item Code         | Item                                    |
| CSLIFID<br><br>(116)   | 1                 | Slave grid point                        |
|                        | 2                 | Contact region identification number    |
|                        | 3                 | Master grid 1                           |
|                        | 4                 | Master grid 2                           |
|                        | 5                 | Surface coordinate                      |
|                        | 6                 | Normal force                            |
|                        | 7                 | Shear force                             |
|                        | 8                 | Normal stress                           |
|                        | 9                 | Shear stress                            |
|                        | 10                | Normal gap                              |
|                        | 11                | Slip                                    |
|                        | 12                | Slip ratio (Shear force/u*normal force) |
|                        | 13-14             | Slip code (Character)                   |

## 908 Element Strain Energy Item Codes

**8**  
CODES

### 8.5 Element Strain Energy Item Codes

| Element Name           | Real Element Data |                               |
|------------------------|-------------------|-------------------------------|
|                        | Item Code         | Item                          |
| Element groups A and B | 2                 | Element strain energy         |
| Element groups A and B | 3                 | Percent of total energy       |
| Element group A        | 4                 | Element strain energy density |

#### Remarks

Element group A includes elements CBAR, CBEAM, CBEND, CHEXA, CONROD, CPENTA, CQUAD4, CQUADR, CQUADX4, CQUADX8, CROD, CSHEAR, CTETRA, CTRAX3, CTRAX6, CTRIA3, CTRIA6, CTRIAR, and CTUBE. Element group B includes elements of CELAS1, CELAS2, CELAS3, and CGAP.

Chapter

# 9 Degree-of-Freedom Sets

9  
DOF  
SETS

- *Degree-of-Freedom Set Definitions*
- *Degree-of-Freedom Set Bulk Data Entries*

## 9.1 Degree-of-Freedom Set Definitions


Each degree-of-freedom is a member of one mutually exclusive set. Set names have the following definitions.

### 9 DOF SETS

| Set Name | Definition                                                                                                                           |
|----------|--------------------------------------------------------------------------------------------------------------------------------------|
| m        | degrees-of-freedom eliminated by multipoint constraints                                                                              |
| sb*      | degrees-of-freedom eliminated by single-point constraints that are included in boundary condition changes and by the AUTOSPC feature |
| sg*      | degrees-of-freedom eliminated by single-point constraints that are specified on the PS field on GRID Bulk Data entries               |
| o        | degrees-of-freedom omitted by structural matrix partitioning                                                                         |
| q        | generalized degrees-of-freedom for dynamic reduction or component mode synthesis                                                     |
| r        | reference degrees-of-freedom used to determine free body motion                                                                      |
| c        | degrees-of-freedom that are free during component mode synthesis or dynamic reduction                                                |
| b        | degrees-of-freedom fixed during component mode analysis or dynamic reduction                                                         |
| e        | extra degrees-of-freedom introduced in dynamic analysis                                                                              |
| sa       | permanently constrained aerodynamic degrees-of-freedom                                                                               |
| k        | aerodynamic degrees-of-freedom                                                                                                       |
| u1 – u9  | user defined degrees-of-freedom                                                                                                      |

\* Strictly speaking, sb and sg are not exclusive with respect to one another. Degrees-of-freedom may exist in both sets simultaneously. Since these sets are not used explicitly in the solution sequences, this need not concern the user. However, those who use these sets in their own DMAPs should avoid redundant specifications when using these sets for partitioning or merging operations. That is, a degree-of-freedom should not be specified on both a PS field of a GRID entry (sg set) and on a selected SPC entry (sb set). Redundant specifications will cause UFM 2120 in the VEC module and behavior listed in the *NX Nastran DMAP Programmer's Guide* for the UPARTN module. These sets are exclusive, however, from the other mutually exclusive sets.

Each degree-of-freedom is also a member of one or more combined sets called “supersets.” Supersets have the following definitions:

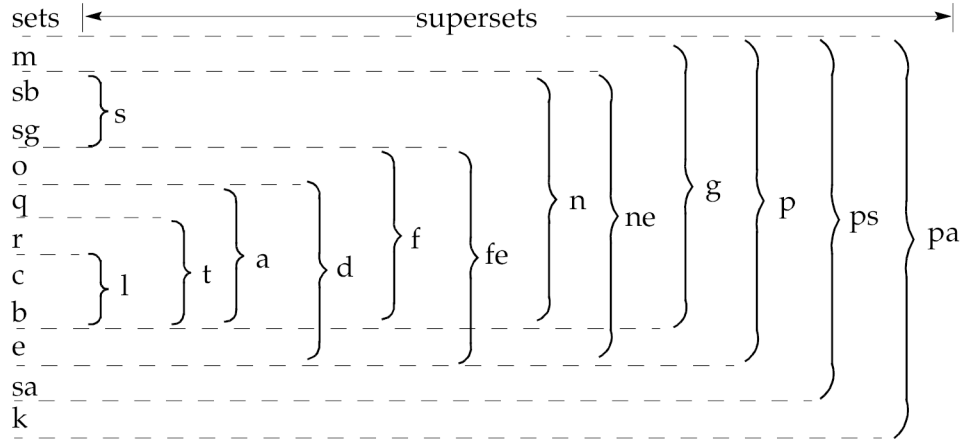

**9**  
DOF  
SETS

| Set Name                               | Meaning                                                                                                                       |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>(+ indicates union of two sets)</b> |                                                                                                                               |
| $s = sb + sg$                          | all degrees-of-freedom eliminated by single point constraints                                                                 |
| $l = b + c$                            | the structural degrees-of-freedom remaining after the reference degrees-of-freedom are removed (degrees-of-freedom left over) |
| $t = l + r$                            | the total set of physical boundary degrees-of-freedom for superelements                                                       |
| $a = t + q$                            | the set assembled in superelement analysis                                                                                    |
| $d = a + e$                            | the set used in dynamic analysis by the direct method                                                                         |
| $f = a + o$                            | unconstrained (free) structural degrees-of-freedom                                                                            |
| $fe = f + s$                           | free structural degrees-of-freedom plus extra degrees-of-freedom                                                              |
| $n = f + e$                            | all structural degrees-of-freedom not constrained by multipoint constraints                                                   |

| Set Name                               | Meaning                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>(+ indicates union of two sets)</b> |                                                                                                           |
| $ne = n + e$                           | all structural degrees-of-freedom not constrained by multipoint constraints plus extra degrees-of-freedom |
| $g = n + m$                            | all structural (grid) degrees-of-freedom including scalar degrees-of-freedom                              |
| $p = g + e$                            | all physical degrees-of-freedom                                                                           |
| $ps = p + sa$                          | physical and constrained (SPCi) aerodynamic degrees-of-freedom                                            |
| $pa = ps + k$                          | physical set for aerodynamics                                                                             |
| $(fr = o) + l$                         | statically independent set minus the statically determinate supports ( $fr = f - q - r$ )                 |
| $v = o + c + r$                        | the set free to vibrate in dynamic reduction and component mode synthesis                                 |

The a-set and o-set are created in the following ways:

1. If only OMIT<sub>i</sub> entries are present, then the o-set consists of degrees-of-freedom listed explicitly on OMIT<sub>i</sub> entries. The remaining f-set degrees-of-freedom are placed in the b-set, which is a subset of the a-set.
2. If ASET<sub>i</sub> or QSET<sub>i</sub> entries are present, then the a-set consists of all degrees-of-freedom listed on ASET<sub>i</sub> entries and any entries listing its subsets, such as QSET<sub>i</sub>, SUPORT<sub>i</sub>, CSET<sub>i</sub>, and BSET<sub>i</sub> entries. Any OMIT<sub>i</sub> entries are redundant. The remaining f-set degrees-of-freedom are placed in the o-set.
3. If there are no ASET<sub>i</sub>, QSET<sub>i</sub>, or OMIT<sub>i</sub> entries present but there are SUPORT<sub>i</sub>, BSET<sub>i</sub>, or CSET<sub>i</sub> entries present, then the entire f-set is placed in the a-set and the o-set is not created.
4. There must be at least one explicit ASET<sub>i</sub>, QSET<sub>i</sub>, or OMIT<sub>i</sub> entry for the o-set to exist, even if the ASET<sub>i</sub>, QSET<sub>i</sub>, or OMIT<sub>i</sub> entry is redundant.

In dynamic analysis, additional vector sets are obtained by a modal transformation derived from real eigenvalue analysis of the a-set. These sets are as follows:



$x_o$  = rigid body (zero frequency) modal degrees-of-freedom

$x_f$  = finite frequency modal degrees-of-freedom

$x_i$  =  $x_o + x_f$ , the set of all modal degrees-of-freedom

One vector set is defined that combines physical and modal degrees-of-freedom:

$u_h$  =  $x_i + u_e$ , the set of all modal degrees-of-freedom

The membership of each degree-of-freedom can be printed by use of the Bulk Data entries PARAM,USETPRT and PARAM,USETSEL.

## 9.2 Degree-of-Freedom Set Bulk Data Entries

Degrees-of-freedom are placed in sets as specified by the user on the following Bulk Data entries:

### 9 DOF SETS

| Name       | Bulk Data Entry Name                                                                     |
|------------|------------------------------------------------------------------------------------------|
| m          | MPC, MPCADD, MPCAX, POINTAX, RBAR, RBE1, RBE2, RBE3, RROD, RSPLINE, RTRPLT, GMBC, GMSPC* |
| sb         | SPC, SPC1, SPCADD, SPCAX, FLSYM, GMSPC*, BNDGRID, (PARAM,AUTOSPC,YES)                    |
| sg         | GRID, GRIDB, GRDSET (PS field)                                                           |
| o          | OMIT, OMIT1, OMITAX, GRID (SEID field), SESET                                            |
| q          | QSET, QSET1                                                                              |
| r          | SUPPORT, SUPPORT1, SUPAX                                                                 |
| c          | CSET, CSET1                                                                              |
| b          | BSET, BSET1                                                                              |
| e          | EPOINT                                                                                   |
| sa         | CAEROi                                                                                   |
| k          | CAEROi                                                                                   |
| a          | ASET, ASET1, Superelement exterior degrees-of-freedom, CSUPEXT                           |
| u0 –<br>u9 | USET, USET1                                                                              |

\* Placed in set only if constraints are not specified in the basic coordinate system.

In superelement analysis, the appropriate entry names are preceded by the letters SE, and have a field reserved for the superelement identification number. This identification is used because a boundary (exterior) grid point may be in one mutually exclusive set in one superelement and in a different set in the adjoining superelement. The SE-type entries are internally translated to the following types for the referenced superelement.

| Entry Type | Equivalent Type |
|------------|-----------------|
| SEQSETi    | QSETi           |
| SESUP      | SUPPORT         |
| SECSETi    | CSETi           |
| SEBSETi    | BSETi           |

### 9.3 User Defined Degree-of-Freedom Sets

The user defined degree-of-freedom sets U1 – U9 are created with the USET and USET1 bulk entries. They are typically used with DMAP alters.

Be aware that the user defined sets U2 - U8 are used by NX Nastran in some special cases. You may use U2 – U8 as long as it doesn't conflict with these cases.

## 9 DOF SETS

| Set       | Special case description                                                                                                                                            | Solution Sequences               |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| U1        | No conflict exists. You may use in all situations.                                                                                                                  |                                  |
| U2        | Used with the RSCON parameter to select dof for SOL 103 constraint mode creation. See the RSCON parameter.                                                          | 103                              |
|           | Used by the NX Model Update product (SOL 200, ANALYSIS=MODES) when the parameter PARAM, OPTEXIT, 8 exists.                                                          | 200                              |
| U3        | Used with the RSATT parameter to select dof for SOL 103 attachment mode creation. See the RSATT parameter.                                                          | 103                              |
| U4 and U5 | Optionally used with the AUTOMPC parameter to add and remove dof to the m-set, respectively. See the AUTOMPC parameter.                                             | 101–129, 153–187                 |
| U5        | Used with the MINIGOA parameter to optionally reduce disk usage when using superelements. See the MINIGOA parameter.                                                | 101–115, 118–200                 |
| U6        | Optionally used with the RESVEC parameter to apply a unit load for residual vector creation. See the RESVEC parameter.                                              | 103, 106–112, 145, 146, 187, 200 |
| U7 and U8 | Used with the MBDEXPORT case control command to define the input/output dof when exporting a control system interface file. See the MBDEXPORT case control command. | 103, 115                         |
| U9        | No conflict exists. You may use in all situations.                                                                                                                  |                                  |

Chapter

# 10 Bulk Data Entries

- *Key to Descriptions*
- *Bulk Data Entry Descriptions*
- *Format of Bulk Data Entries*

**10**  
BULK

## 10.1 Key to Descriptions

10  
BULK

The name of the entry. Must be entered as shown.

The field names in fields 2 through 9 are for reference only. Names enclosed in quotation marks represent character constants; e.g., "THRU" on ASET1 entry.

A brief sentence about the function of the entry is given.

If a box in fields 2 through 9 is shaded, then the field must be left blank.

Defines modeling parameters for the interface between the fluid and the structure.

**Format:**

|        |       |       |      |      |       |   |   |   |    |
|--------|-------|-------|------|------|-------|---|---|---|----|
| 1      | 2     | 3     | 4    | 5    | 6     | 7 | 8 | 9 | 10 |
| ACMODL | INTER | INFOR | FSET | SSET | FSTOL |   |   |   |    |

**Example:**

|        |  |  |  |  |       |  |  |  |  |
|--------|--|--|--|--|-------|--|--|--|--|
| ACMODL |  |  |  |  | 0.002 |  |  |  |  |
|--------|--|--|--|--|-------|--|--|--|--|

If the box in field 10 is shaded, then no continuation entries may follow.

**Field Contents**

|       |                                                                                                                            |
|-------|----------------------------------------------------------------------------------------------------------------------------|
| INTER | Type of interface between the fluid and the structure. (Character="IDENT" or "DIFF"; Default="DIFF").                      |
| INFOR | Indicates whether FSET and SSET are checked at only those grid points referenced by FSET and SSET. (Integer > 0 or blank). |
| FSET  | Structural grid points referenced by FSET. (Integer > 0 or blank).                                                         |
| SSET  | Structural grid points referenced by SSET. (Integer > 0 or blank).                                                         |
| FSTOL | Tolerance, in units of length, used in determining the fluid-structure interface. (Real > 0.0; Default=0.001).             |

Character constants are enclosed in quotation marks to distinguish them from field names. Do not input these quotation marks.

Each of the fields is briefly described. Further details may be discussed under Remarks.

Under contents, "blank" usually means that this feature can be optionally selected by the user. It may also mean the default action or value is described under Remarks.

**Remarks:**

- Only one ACMODL entry is allowed. If more than one is entered, the program will assume INTER="DIFF" and FSTOL=.001.
- If INFOR="ALL", then both FSET and SSET are checked at only those grid points referenced by FSET and SSET.
- See the NX Nastran Reference Manual for more information on determining the fluid-structure interface.
- The points referenced by FSET and SSET must lie exactly on the fluid-structure interface. A fatal message is issued if: (a) INTER="IDENT" and a point in SSET or FSET does not lie on the fluid-structure interface; (b) a point in FSET or SSET, or FSET does not lie on the fluid-structure interface.
- If FSET and SSET are not referenced by FSET or SSET, then INTER="DIFF" is assumed.

The field's type (Integer, Real, or Character), allowable range, and default value are enclosed in parentheses. If no default value is given, then a value must be specified by the user.

The remarks are generally arranged in order of importance and indicate such things as the entry's relationship to other entries or commands, restrictions, and recommendations on usage, or further details regarding the fields.

## The Bulk Data Section

The Bulk Data Section contains entries that specify model geometry, element connectivity, element and material properties, constraints (boundary conditions), and loads. Some entries, such as loads and constraints, are selected by an appropriate Case Control command.

Entries are prepared in either fixed or free field format. The descriptions in this section show only the fixed format. Entries that are used by the MSGMESH program are not included in this guide.

## 10.2 Bulk Data Entry Descriptions

Each Bulk Data entry is described as follows:

### Description

A brief sentence about the function of the entry is given.

### Format

The name of the entry is given in the first field. Subsequent fields are described under the Field and Contents section. Shaded fields must be left blank. If field 10 is shaded, then no continuation entries are permitted. Character strings enclosed in quotation marks must be specified without the quotation marks as shown in the example.

### Example

A typical example is given.

### Field and Contents

Each of the fields 2 through 9 that is named in the Format section is briefly described under Contents. The field's type (e.g., Integer, Real, or Character), allowable range, and default value are enclosed in parentheses. The field must be specified by the user if no default value is given.

### Remarks

The remarks in the Remarks Section are generally arranged in order of importance and indicate such things as how the Bulk Data entry is selected in the Case Control Section, its relationship to other entries, restrictions and recommendations on its use, and further descriptions of the fields.



## 10.3 Format of Bulk Data Entries

### Real, Integer, and Character Input Data

NX Nastran is quite particular about the input requirements for data entry. The three possible types of data entries are Integer, Real, and Character (sometimes called literal, or BCD-binary coded decimal). The three types of data are described as follows:

|           |                                                                                                           |
|-----------|-----------------------------------------------------------------------------------------------------------|
| Integer   | Cannot contain a decimal point.                                                                           |
| Real      | Must contain a decimal point.                                                                             |
| Character | Can be alphanumeric, but must always start with an alpha character and be 8 characters or less in length. |

**10**  
**BULK**

Real numbers may be entered in a variety of ways. For example, the following are all acceptable versions of the real number seven:

|       |       |       |
|-------|-------|-------|
| 7.0   | .7E1  | 0.7+1 |
| .70+1 | 7.E+0 | 70.-1 |

### Free, Small, and Large Field Formats

NX Nastran has three different field formats for input data:


|                    |                                                                                                                                          |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Free Field Format  | Input data fields are separated by commas.                                                                                               |
| Small Field Format | Ten fields of eight characters each.                                                                                                     |
| Large Field Format | Ten fields—fields containing actual data are sixteen characters each. Large fields are used when greater numerical accuracy is required. |

The NASTRAN statement, File Management Section, Executive Control Section, and Case Control Section use free field format. The Bulk Data Section allows the use of any of the three formats.

NX Nastran Bulk Data contains ten fields per input data entry. The first field contains the character name of the Bulk Data item (e.g., GRID, CBAR, MAT1, etc.). Fields two through nine contain data input information for the Bulk Data entry. The tenth field never contains data—it is reserved for entry continuation information, if applicable.

Consider the format of a typical NX Nastran Bulk Data entry, the GRID entry, which is used in NX Nastran to describe the geometry of the structural model.

## 922 Format of Bulk Data Entries

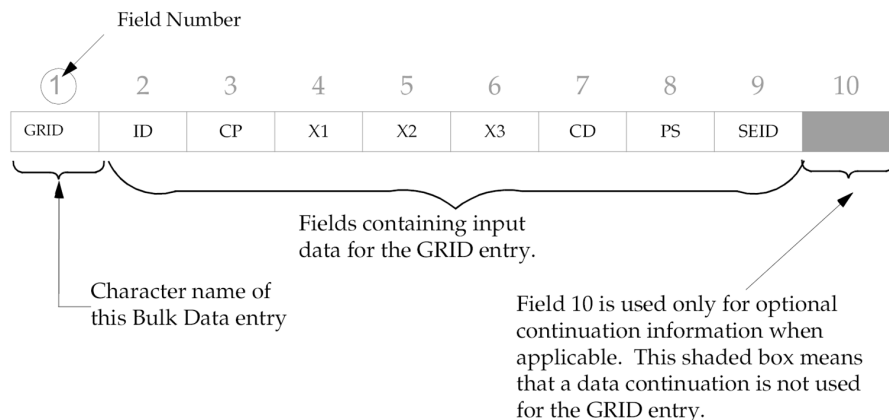

**10**  
**BULK**

### Example:

| 1    | 2 | 3 | 4   | 5    | 6   | 7 | 8   | 9 | 10 |
|------|---|---|-----|------|-----|---|-----|---|----|
| GRID | 2 |   | 1.0 | -2.0 | 3.0 |   | 136 |   |    |

We will now represent this example in free field, small field, and large field formats.

### Free Field Format

In free field format, data fields are separated by commas. The following shows the GRID Bulk Data entry example in free field format:

GRID,2,,1.0,-2.0,3.0,,136

These two commas indicate an empty field.

The rules for free field format are as follows:

- Free field data entries must start in column 1.
- To skip one field, use two commas in succession. To skip two fields, use three commas in succession (and so on).
- Integer or character fields with more than eight characters cause a fatal error.
- Real numbers with more than eight characters are rounded off and lose some precision. For example, an entry of 1.2345678+2 becomes 123.4568. If more significant digits are needed, use the large field format.

- Free field data can't contain embedded blanks. An example of a free field

GRID, 2, , 1 0, -2.0, 3.0, , 136

Embedded blank not allowed

embedded blank is shown below:

- A dollar sign terminates the entry and comments may follow.

### Small Field Format

Small field format separates a Bulk Data entry into ten equal fields of eight characters each:




| 1             | 2             | 3             | 4             | 5             | 6             | 7             | 8             | 9             | 10            |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> | <-8<br>Char-> |

The following is an example of the GRID entry in small field format:

| 1    | 2 | 3 | 4   | 5    | 6   | 7 | 8   | 9 | 10 |
|------|---|---|-----|------|-----|---|-----|---|----|
| GRID | 2 |   | 1.0 | -2.0 | 3.0 |   | 136 |   |    |

The rules for small field format are:

- Fields 1 and 10 must be left justified.
- Fields 2 through 9 don't need to be either right or left justified, although aligning the data fields is good practice.
- Small field input data cannot contain any embedded blanks. An example of a small field embedded blank is shown below:

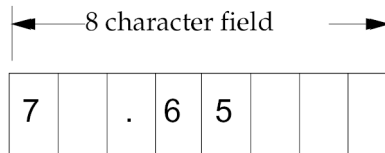

Embedded blank not allowed

## Large Field Format

A high degree of numerical accuracy is required in some NX Nastran applications. Large field format is used when the small field format does not provide enough significant digits (recall that a minus sign, decimal point, and the “E” in scientific notation count as characters).

Large field format requires (at least) two lines for each entry: the first and last field of each line contains eight columns, and the fields in between contain 16 columns. The short field becomes two lines. Large field entries are denoted by an asterisk (\*) immediately following the character string in field 1A of the first line and immediately preceding the character string in field 1B of the second line.

The following is an example of the GRID Bulk Data entry example in large field format:

### First Line: (Left half of single field)

| Field | 1A      | 2      | 3      | 4      | 5      | 6       |
|-------|---------|--------|--------|--------|--------|---------|
|       | GRID*   | 2      |        | 1.0    | -2.0   | *GRID10 |
|       | ← 8 →   | ← 16 → | ← 16 → | ← 16 → | ← 16 → | ← 8 →   |
|       | columns |        |        |        |        |         |

### Second Line: (Right half of single field)

| Field | 1B      | 6      | 7      | 8      | 9      | 10B   |
|-------|---------|--------|--------|--------|--------|-------|
|       | *GRID10 | 3.0    |        | 136    |        |       |
|       | ← 8 →   | ← 16 → | ← 16 → | ← 16 → | ← 16 → | ← 8 → |
|       | columns |        |        |        |        |       |

## Continuations

Some Bulk Data entries require more than eight fields (72 columns) of data. Continuations are required in such cases. To do this, a parent entry (the first line) is followed by one or more continuation entries on subsequent lines. For example, consider the following PBAR simple beam property entry (do not worry about what each field represents—this will be explained later):

**Format:**

| 1    | 2   | 3   | 4   | 5  | 6  | 7  | 8   | 9  | 10 |
|------|-----|-----|-----|----|----|----|-----|----|----|
| PBAR | PID | MID | A   | I1 | I2 | J  | NSM |    |    |
|      | C1  | C2  | D1  | D2 | E1 | E2 | F1  | F2 |    |
|      | K1  | K2  | I12 |    |    |    |     |    |    |

**Continuation Example:**

|      |     |     |     |      |      |     |    |    |      |
|------|-----|-----|-----|------|------|-----|----|----|------|
| PBAR | 39  | 6   | 2.9 | 1.86 | 2.92 | .48 |    |    | +PB1 |
| +PB1 | 0.  | 0.  | 0.  | 1.   | 1.   | 1.  | 1. | 0. | +PB2 |
| +PB2 | .86 | .86 |     |      |      |     |    |    |      |

**10  
BULK**

+PB1 in field 10 of the parent entry is an arbitrary (and unique) user-defined pointer to field 1 of the second line. +PB2 in the second line points to the third line, and so on.

Continuation fields can also be generated automatically by NX Nastran (this approach is the recommended practice). To automatically generate a continuation, the continuation line (or lines) must immediately follow the parent Bulk Data entry. In addition, fields 1 and 10 of the continuation line (or lines) must be left blank. When double-width generated continuations are not blank in field 1, but have an “\*” in column 1, NX Nastran will generate unique continuations for you. This process is illustrated in the following example:

Input (.DAT) file:

```
CHEXA,      1,      10,      3,      5,      7,      1,      15,      17,
           ,      19,      13,      4,      6,      8,      2,      10,      11,
           ,      12,      9,      16,      18,      20,      14
```

Output (.F06) file:

```
GEAR TOOTH EXAMPLE          JUNE 29, 2003 NX Nastran 06/29/2003 PAGE    3
  S O R T E D   B U L K   D A T A   E C H O
CARD
COUNT . 1 .. 2 .. 3 .. 4 .. 5 .. 6 .. 7 .. 8 .. 9 ..10 .
1-    CHEXA  1    10    3    5    7    1    15    17    +000001
2-    ++00000119  13    4    6    8    2    10    11    +000002
3-    ++00000212  9    16   18   20   14    +000003
```

Continuation fields (fields one and ten) are replicated using the following conventions:

1. Only letters of the alphabet and integers may be used. They are coded into a base 36 number. That is, the sequence of numbers is 0,1, 2, ..., 8, 9, A, B, ...
2. The first character in field one or ten is not incremented.

3. The continuation fields are incremented by +1 regardless of the value specified by the user.
4. The number of characters in an incremented field will not be increased. For example, if the first field is "0", the thirty-seventh field will also be "0", resulting in an illegal entry. A method to solve this problem would be to start with a first field of "00". This will provide thirty-six squared unique fields.
5. At least one field in fields 2 through 8 of continuation entries must be non-blank.

## Replication

Replication is a limited data generation capability which may be used in a fixed or free-field format.

1. Duplication of fields from the preceding entry is accomplished by coding the symbol =.
2. Duplication of all trailing fields from the preceding entry is accomplished by coding the symbol ==.
3. Incrementing a value from the previous entry is indicated by coding \*x or \*(x), where x is the value of the increment. "x" should be a real number for real fields or an integer for integer fields.
4. Repeated replication is indicated by coding =n or =(n), where n is the number of images to be generated using the values of the increments on the preceding entry.
5. Data items may be enclosed within parentheses or the parentheses may be deleted.
6. If NASTRAN MESH is specified in the File Management Section, MSGMESH includes the capabilities.
  - Continuation entry fields may be incremented or decremented.
  - Repeated replication is indicated by coding =(n) in field 1, where n is the number of entry images to be generated using the values of increments from the current or preceding replication entry.

Entered entries:

```
GRID,101 ,17,1 .0,10.5,,17,3456
=(4) , *(1) , = , * (0.2) , ==§
```

Generated entries:

|      |     |    |     |      |  |    |      |  |  |
|------|-----|----|-----|------|--|----|------|--|--|
| GRID | 101 | 17 | 1.0 | 10.5 |  | 17 | 3456 |  |  |
| GRID | 102 | 17 | 1.2 | 10.5 |  | 17 | 3456 |  |  |
| GRID | 103 | 17 | 1.4 | 10.5 |  | 17 | 3456 |  |  |
| GRID | 104 | 17 | 1.6 | 10.5 |  | 17 | 3456 |  |  |
| GRID | 105 | 17 | 1.8 | 10.5 |  | 17 | 3456 |  |  |

- A blank in field 1 indicates immediate continuation entry replication. The default continuation entry increment is 1. Example:

```
BSET1,123,1,2,3,4,5,6,7
,,*7,*7,*7,*7,*7,*7,*7
=(3)
```

Generated entries:

|         |     |    |    |    |    |    |    |    |        |
|---------|-----|----|----|----|----|----|----|----|--------|
| BSET1   | 123 | 1  | 2  | 3  | 4  | 5  | 6  | 7  | +00001 |
| ++00001 |     | 8  | 9  | 10 | 11 | 12 | 13 | 14 | +00002 |
| ++00002 |     | 15 | 16 | 17 | 18 | 19 | 20 | 21 | +00003 |
| ++00003 |     | 22 | 23 | 24 | 25 | 26 | 27 | 28 | +00004 |
| ++00004 |     | 29 | 30 | 31 | 32 | 33 | 34 | 35 | +00005 |

- An “=(D)” in field 1 indicates delayed continuation entry replication. A maximum of 9 entries may be replicated as a group. The default continuation entry increment is 10. Example:

Entered entries:

```
CTRIA3,10,1,1,10,11/+C1
=(D),*(1),=,*(1),*(1)/*(20)
+C1,,,2.0,1.0,1.0
=(2),==
```

Generated entries:

|        |    |   |     |     |     |  |  |  |      |
|--------|----|---|-----|-----|-----|--|--|--|------|
| CTRIA3 | 10 | 1 | 1   | 10  | 11  |  |  |  | +C1  |
| +C1    |    |   | 2.0 | 1.0 | 1.0 |  |  |  |      |
| CTRIA3 | 11 | 1 | 1   | 11  | 12  |  |  |  | +C21 |
| +C21   |    |   | 2.0 | 1.0 | 1.0 |  |  |  |      |
| CTRIA3 | 12 | 1 | 1   | 12  | 13  |  |  |  | +C41 |
| +C41   |    |   | 2.0 | 1.0 | 1.0 |  |  |  |      |

- Parentheses are optional on replication entries and an equal sign may replace an asterisk.

The following is an example of the use of replication, automatic continuation field generation, and the free field format.

## 928 Format of Bulk Data Entries

```

GRID,101 ,17,1.0,10.5,,17,3456
=,*1,=,*0.2, *(0.1), == $ COMMENTS MAY APPEAR AFTER $
=3
EIGR,13,GIV,,30.
,MASS
CBAR,1 ,1 ,101 ,102,0.,0.,1.,,+0
=,*1,=,*1,*1====*1
+0,56
*1,=$

```

The above free-field entries will generate the following Bulk Data in the 8-column format, as seen in the SORTED BULK DATA ECHO:

### Note

A “,” should always be used after the “\*1” for the continuation increment even if fixed field format is being used.

|          |      |    |     |      |    |    |      |  |         |
|----------|------|----|-----|------|----|----|------|--|---------|
| CBAR     | 1    | 1  | 101 | 102  | 0. | 0. | 1.   |  | +0      |
| +0       | 56   |    |     |      |    |    |      |  |         |
| CBAR     | 2    | 1  | 102 | 103  | 0. | 0. | 1.   |  | +1      |
| +1       | 56   |    |     |      |    |    |      |  |         |
| EIGR     | 13   |    |     | 30.  |    |    |      |  | +000001 |
| ++000001 | MASS |    |     |      |    |    |      |  |         |
| GRID     | 101  | 17 | 1.0 | 10.5 |    | 17 | 3456 |  |         |
| GRID     | 102  | 17 | 1.2 | 10.6 |    | 17 | 3456 |  |         |
| GRID     | 103  | 17 | 1.4 | 10.7 |    | 17 | 3456 |  |         |
| GRID     | 104  | 17 | 1.6 | 10.8 |    | 17 | 3456 |  |         |
| GRID     | 105  | 17 | 1.8 | 10.9 |    | 17 | 3456 |  |         |

The automatically generated continuation entries start with the number 1, are incremented by 1, and are padded with zeros and plus signs as shown above. If this feature is used, it is the user's responsibility not to enter continuation entries that also use this convention. In particular, data generated on another run and then written to the PUNCH file with the ECHO=PUNCH, will cause problems when introduced into other data with blank continuation fields.



## 10.4 Bulk Data Entry Summary

This section contains a summary of all Bulk Data entries under the following headings:

- Geometry
- Elements
- Materials
- Material Selection by Property
- Constraints and Partitioning
- Loads
- Solution Control
- Miscellaneous

### Geometry

#### Grid Points

|        |                                                                                                                                                                                       |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GRID   | Defines the location of a geometric grid point, the directions of its displacement, and its permanent single-point constraints.                                                       |
| GRIDB  | Defines the location of a geometric grid point on a fluid point (RINGFL entry) for an axisymmetric fluid model and/or axisymmetric structure. Also defines the boundary of the fluid. |
| GRDSET | Defines default options for fields 3, 7, 8, and 9 of all GRID entries.                                                                                                                |
| SEQGP  | Used to manually order the grid points and scalar points of the problem. This entry is used to redefine the sequence of grid and scalar points to optimize bandwidth.                 |

#### Coordinate Systems

|        |                                           |
|--------|-------------------------------------------|
| CORDiC | Cylindrical coordinate system definition. |
| CORDiR | Rectangular coordinate system definition. |
| CORDiS | Spherical coordinate system definition.   |

|        |                                                                                                                                         |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------|
| CORD3G | Defines a general coordinate system using three rotational angles as functions of coordinate values in the reference coordinate system. |
| BEAMOR | Defines default values for field 3 and fields 6 through 8 of the CBEAM entry.                                                           |
| BAROR  | Defines default values for field 3 and fields 6 through 8 of the CBAR entry.                                                            |

### Scalar Points

|        |                                                               |
|--------|---------------------------------------------------------------|
| SPOINT | Defines scalar points.                                        |
| EPOINT | Defines extra points for use in dynamic problems.             |
| SEQGP  | Grid and scalar point number resequencing.                    |
| SEQEP  | Redefines the sequence of extra points to optimize bandwidth. |

### Fluid Points

|        |                                                                                                                               |
|--------|-------------------------------------------------------------------------------------------------------------------------------|
| ACMODL | Defines modeling parameters for the interface between the fluid and the structure.                                            |
| GRID   | Defines fluid points in coupled fluid-structural analysis.                                                                    |
| GRIDB  | Grid point location on RINGFL.                                                                                                |
| RINGFL | Defines a circle (fluid point) in an axisymmetric fluid model.                                                                |
| GRIDF  | Defines a scalar degree-of-freedom for harmonic analysis of a fluid.                                                          |
| GRIDS  | Defines a scalar degree-of-freedom with a two-dimensional location. Used in defining pressure in slotted acoustic cavities.   |
| FREEPT | Defines the location of points on the surface of a fluid for recovery of surface displacements in a gravity field.            |
| PRESPT | Defines the location of pressure points in the fluid for recovery of pressure data.                                           |
| FSLIST | Defines the fluid points (RINGFL entry) that lie on a free surface boundary.                                                  |
| SLBDY  | Defines a list of slot points that lie on an interface between an axisymmetric fluid and a set of evenly spaced radial slots. |

**Axisymmetry**

|         |                                                                                                                                                                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AXIC    | Defines the existence of an axisymmetric conical shell problem.                                                                                                                                                                                           |
| AXIF    | Defines basic parameters and the existence of an axisymmetric fluid analysis.                                                                                                                                                                             |
| FLSYM   | Defines the relationship between the axisymmetric fluid and a structural boundary having symmetric constraints. The purpose is to allow fluid boundary matrices to conform to structural symmetry definitions.                                            |
| AXSLOT  | Defines the harmonic index and the default values for acoustic analysis entries.                                                                                                                                                                          |
| RINGAX  | Defines a ring for conical shell problem.                                                                                                                                                                                                                 |
| SECTAX  | Defines a sector of a conical shell.                                                                                                                                                                                                                      |
| POINTAX | Defines the location of a point on an axisymmetric shell ring at which loads may be applied via the FORCE or MOMENT entries and at which displacements may be requested. These points are not subject to constraints via MPCAX, SPCAX, or OMITAX entries. |

**Cyclic Symmetry**

|        |                                                                                 |
|--------|---------------------------------------------------------------------------------|
| CYAX   | Lists grid points that lie on the axis of symmetry in cyclic symmetry analysis. |
| CYJOIN | Defines the boundary points of a segment in cyclic symmetry problems.           |

**Superelement Analysis**

|         |                                                                                                                                                                                    |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CSUPEXT | Assigns exterior points to a superelement.                                                                                                                                         |
| CSUPER  | Defines the grid or scalar point connections for identical or mirror image superelements or superelements from an external source. These are all known as secondary superelements. |
| EXTRN   | Defines a boundary connection for an external superelement.                                                                                                                        |
| GRID    | Defines interior points for a superelement.                                                                                                                                        |
| SESET   | Defines interior grid points for a superelement.                                                                                                                                   |

|         |                                                                                                                                                                                 |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEQSEP  | Used with the CSUPER entry to define the correspondence of the exterior grid points between an identical or mirror-image superelement and its primary superelement.             |
| RELEASE | Defines degrees-of-freedom for superelement exterior grid points that are not connected to the superelement.                                                                    |
| SEELT   | Reassigns superelement boundary elements to an upstream superelement.                                                                                                           |
| SEBNDRY | Defines a list of grid points in a partitioned superelement for the automatic boundary search between a specified superelement or between all other superelements in the model. |
| SEBULK  | Defines superelement boundary search options and a repeated, mirrored, or collector superelement.                                                                               |
| SECONCT | Explicitly defines grid and scalar point connection procedures for a partitioned superelement.                                                                                  |
| SEEXCLD | Defines grid points that will be excluded during the attachment of a partitioned superelement.                                                                                  |
| SELABEL | Defines a label or name to be printed in the superelement output headings.                                                                                                      |
| SELOC   | Defines a partitioned superelement relocation by listing three non-colinear points in the superelement and three corresponding points not belonging to the superelement.        |
| SEMPLN  | Defines a mirror plane for mirroring a partitioned superelement.                                                                                                                |
| SETREE  | Specifies superelement reduction order.                                                                                                                                         |

### p-element and Adaptivity Analysis

|        |                                                                                                                                      |
|--------|--------------------------------------------------------------------------------------------------------------------------------------|
| FEEDGE | Defines a finite element edge and associates it with a curve.                                                                        |
| FEFACE | Defines geometric information that will be used in elements, surface definition, load definition, and boundary condition definition. |
| GMCORD | Defines a convective/follower coordinate system on an FEEDGE, GMCURV, FEFACE, or GMSURF entry.                                       |

|        |                                                                                                                                                            |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GMCURV | Defines the geometric curve that will be used in element geometry, load definition, and boundary condition definition.                                     |
| GMSURF | Defines geometric information that will be used in elements, surface definition, load definition, and boundary condition definition.                       |
| GMBNDC | Defines a geometric boundary consisting of p-element edges along a curve interface. The boundary may consist of edges of shell, beam, or p-solid elements. |
| GMINTC | Defines curve interface elements to connect dissimilar meshes.                                                                                             |
| PINTC  | Defines properties for curve interface elements (see GMINTC).                                                                                              |
| POINT  | Defines the edge point for a FEEDGE entry.                                                                                                                 |
| GMBNDS | Defines a geometric boundary consisting of p-element faces along a surface interface. The boundary may consist of faces of p-solid or p-shell elements.    |
| GMINTS | Defines an interface element along a surface interface between boundaries of multiple subdomains.                                                          |
| PINTS  | Defines the properties for interface elements along surface interfaces between boundaries of multiple subdomains of p-elements.                            |

### Aeroelastic Control Points

|         |                                                                                                     |
|---------|-----------------------------------------------------------------------------------------------------|
| AECOMP  | Defines a component for use in aeroelastic monitor point definition.                                |
| AECOMPL | Defines a component for use in aeroelastic monitor point definition as a union of other components. |
| MONPNT1 | Defines an integrated load monitor point at a point (x,y,z) in a user defined coordinate system.    |
| UXVEC   | Specification of a vector of aerodynamic control point (extra point) values.                        |

## Elements

### Line Elements

|         |                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------|
| CBAR    | Defines a simple beam element.                                                                                        |
| PBAR    | Defines the properties of a simple beam element (CBAR entry).                                                         |
| PBARL   | Defines the properties of a simple beam element (CBAR entry) by cross-sectional dimensions.                           |
| BAROR   | Default for orientation and property for CBAR.                                                                        |
| BEAMOR  | Default for orientation and property for CBEAM.                                                                       |
| CBEAM   | Defines a beam element.                                                                                               |
| PBEAM   | Defines the properties of a beam element (CBEAM entry). This element may be used to model tapered beams.              |
| PBEAML  | Defines the properties of a beam element by cross-sectional dimensions.                                               |
| PBCOMP  | Alternate form of the PBEAM entry to define properties of a uniform cross-sectional beam referenced by a CBEAM entry. |
| CBEND   | Connection definition for a curved beam.                                                                              |
| PBEND   | Defines the properties of a curved beam, curved pipe, or elbow element (CBEND entry).                                 |
| CBUSH1D | Defines the connectivity of a one-dimensional spring and viscous damper element.                                      |
| PBUSH1D | Defines linear and nonlinear properties of a one-dimensional spring and damper element (CBUSH1D entry).               |
| CONROD  | Defines a rod element without reference to a property entry.                                                          |
| CROD    | Defines a tension-compression-torsion element.                                                                        |
| PROD    | Defines the properties of a rod element (CROD entry).                                                                 |
| CTUBE   | Defines a tension-compression-torsion tube element.                                                                   |
| PTUBE   | Defines the properties of a thin-walled cylindrical tube element (CTUBE entry).                                       |
| CWELD   | Defines a weld or fastener connecting two surface patches or points.                                                  |

PWELD Defines the properties of connector (CWELD) elements.

## Surface Elements

CTRIA3 Defines an isoparametric membrane-bending or plane-strain triangular plate element.

CTRIA6 Defines a curved triangular shell element or plane-strain element with six grid points.

CTRIAR Defines an isoparametric membrane-bending triangular plate element. However, this element does not include membrane-bending coupling. It is a companion to the CQUADR element.

CQUAD4 Defines an isoparametric membrane-bending or plane-strain quadrilateral plate element.

CQUAD8 Defines a curved quadrilateral shell or plane-strain element with eight grid points.

CQUAD Defines a plane-strain quadrilateral element with up to nine grid points for use in fully nonlinear (i.e., large strain and large rotation) hyperelastic analysis.

CQUADR Defines an isoparametric membrane and bending quadrilateral plate element.

PLPLANE Defines the properties of a fully nonlinear (i.e., large strain and large rotation) hyperelastic plane-strain or axisymmetric element.

PSHELL Defines the membrane, bending, transverse shear, and coupling properties of thin shell elements.

PCOMP Defines the properties of an n-ply composite material laminate.

CSHEAR Defines a shear panel element.

PSHEAR Defines the properties of a shear panel (CSHEAR entry).

SNORM Defines a surface normal vector at a grid point for CQUAD4, CQUADR, CTRIA3, and CTRIAR shell elements.

**Solid Elements**

|         |                                                                                               |
|---------|-----------------------------------------------------------------------------------------------|
| CTETRA  | Defines the connections of the four-sided solid element with four to ten grid points.         |
| CPENTA  | Defines the connections of a five-sided solid element with six to fifteen grid points.        |
| CHEXA   | Defines the connections of the six-sided solid element with eight to twenty grid points.      |
| PSOLID  | Defines the properties of solid elements (CHEXA, CPENTA, and CTETRA entries).                 |
| PLSOLID | Defines a fully nonlinear (i.e., large strain and large rotation) hyperelastic solid element. |

**10**  
BULK

**Scalar and Bushing Elements**

|         |                                                                                                                                       |
|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| CELASi  | Connection definition for scalar spring, also property definition for i=2 or 4.                                                       |
| PELAS   | Specifies the stiffness, damping coefficient, and stress coefficient of a scalar elastic (spring) element (CELAS1 or CELAS3 entry).   |
| PELAST  | Defines the frequency dependent properties for a PELAS Bulk Data entry.                                                               |
| GENEL   | Defines a general element.                                                                                                            |
| CBUSH   | Defines a generalized spring-and-damper structural element that may be nonlinear or frequency dependent.                              |
| PBUSH   | Defines the nominal property values for a generalized spring-and-damper structural element.                                           |
| PBUSHT  | Defines the frequency dependent properties or the stress dependent properties for a generalized spring and damper structural element. |
| CBUSH1D | Defines the connectivity of a one-dimensional spring and viscous damper element.                                                      |
| PBUSH1D | Defines linear and nonlinear properties of a one-dimensional spring and damper element (CBUSH1D entry).                               |



**Axisymmetric Elements**

|         |                                                                                                                                                                      |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CCONEAX | Defines a conical shell element.                                                                                                                                     |
| PCONEAX | Defines the properties of a conical shell element described on a CCONEAX entry.                                                                                      |
| CTRIAX6 | Defines an isoparametric and axisymmetric triangular cross section ring element with midside grid points.                                                            |
| CTRIAX  | Defines an axisymmetric triangular element with up to 6 grid points for use in fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis.       |
| CQUADX  | Defines an axisymmetric quadrilateral element with up to nine grid points for use in fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis. |

**10**  
**BULK**
**p-element Interface Elements**

|        |                                                |
|--------|------------------------------------------------|
| GMINTC | Defines a p-interface element along a curve.   |
| PINTC  | Property definition for GMINTC.                |
| GMINTS | Defines a p-interface element along a surface. |
| PINTS  | Property definition for GMINTS.                |

**Rigid Elements**

|         |                                                                                                                                                                                                    |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RBAR    | Defines a rigid bar with six degrees-of-freedom at each end.                                                                                                                                       |
| RBE1    | Defines a rigid body connected to an arbitrary number of grid points.                                                                                                                              |
| RBE2    | Defines a rigid body with independent degrees-of-freedom that are specified at a single grid point and with dependent degrees-of-freedom that are specified at an arbitrary number of grid points. |
| RBE3    | Defines the motion at a reference grid point as the weighted average of the motions at a set of other grid points.                                                                                 |
| RROD    | Defines a pin-ended element that is rigid in translation.                                                                                                                                          |
| RSPLINE | Defines multipoint constraints for the interpolation of displacements at grid points.                                                                                                              |

|        |                                                                                         |
|--------|-----------------------------------------------------------------------------------------|
| RSSCON | Defines multipoint constraints to model clamped connections of shell-to-solid elements. |
| RTRPLT | Defines a rigid triangular plate.                                                       |

### Mass Elements

|        |                                                                               |
|--------|-------------------------------------------------------------------------------|
| CMASSi | Connection definition for scalar mass, also property definition for i=2 or 4. |
| PMASS  | Specifies the mass value of a scalar mass element (CMASS1 or CMASS3 entries). |
| CONM1  | Defines a 6 x 6 symmetric mass matrix at a geometric grid point.              |
| CONM2  | Defines concentrated mass at a grid point.                                    |

### Damping Elements

|         |                                                                                                                                        |
|---------|----------------------------------------------------------------------------------------------------------------------------------------|
| CDAMPi  | Connection definition for a scalar damper, also property definition for i=2 or 4.                                                      |
| PDAMP   | Specifies the damping value of a scalar damper element using defined CDAMP1 or CDAMP3 entries.                                         |
| PDAMP5  | Defines the damping multiplier and references the material properties for damping. CDAMP5 is intended for heat transfer analysis only. |
| PDAMPT  | Defines the frequency-dependent properties for a PDAMP Bulk Data entry.                                                                |
| CVISC   | Defines a viscous damper element.                                                                                                      |
| PVISC   | Defines properties of a one-dimensional viscous damping element (CVISC entry).                                                         |
| CBUSH1D | See line elements.                                                                                                                     |
| PBUSH1D | See line elements.                                                                                                                     |

### Fluid and Acoustic Elements

|        |                                                                                               |
|--------|-----------------------------------------------------------------------------------------------|
| CAABSF | Defines a frequency-dependent acoustic absorber element in coupled fluid-structural analysis. |
| PAABSF | Defines the properties of a frequency-dependent acoustic absorber element.                    |

|         |                                                                                                                    |
|---------|--------------------------------------------------------------------------------------------------------------------|
| CHEXA   | Connection definition for a pentahedron element in coupled fluid-structural analysis.                              |
| CPENTA  | Connection definition for a tetrahedron element in coupled fluid-structural analysis.                              |
| CTETRA  | Defines the connections of the four-sided solid element with four to ten grid points.                              |
| PSOLID  | Defines the fluid properties of solid elements (CHEXA, CPENTA, and CTETRA entries).                                |
| PANEL   | Selects the set of structural grid points that define one or more panels.                                          |
| CHACAB  | Defines the acoustic absorber element in coupled fluid-structural analysis.                                        |
| PACABS  | Defines the properties of the acoustic absorber element.                                                           |
| CHACBR  | Defines the acoustic barrier element.                                                                              |
| PACBAR  | Defines the properties of the acoustic barrier element.                                                            |
| CAXIFi  | Defines an axisymmetric fluid element that connects $i = 2, 3,$ or 4 fluid points.                                 |
| CFLUIDi | Defines three types of fluid elements for an axisymmetric fluid model.                                             |
| CSLOTi  | Defines slot element for acoustic cavity analysis.                                                                 |
| ELIST   | Defines a list of structural elements for virtual fluid mass.                                                      |
| SET1    | Defines a list of structural grid points for aerodynamic analysis, XY-plots for SORT1 output, and the PANEL entry. |

## Heat Transfer Elements

|        |                                                                                                                                |
|--------|--------------------------------------------------------------------------------------------------------------------------------|
| CHBDYi | Connection definition for surface element (CHBDYE, CHBDYG, CHBDYP).                                                            |
| PHBDY  | A property entry referenced by CHBDYP entries to give auxiliary geometric information for boundary condition surface elements. |
| BDYOR  | Defines default values for the CHBDYP, CHBDYG, and CHBDYE entries.                                                             |

The following elastic elements may also be used as heat conduction elements.

|               |                                          |
|---------------|------------------------------------------|
| Linear:       | CBAR, CROD, CONROD, CTUBE, CBEAM, CBEND. |
| Membrane:     | CTRIA3, CTRIA6, CQUAD4, CQUAD8.          |
| Axisymmetric: | CTRIAX6.                                 |
| Solid:        | CTETRA, CHEXA, CPENTA.                   |

### Dummy Elements

|        |                                                                                                    |
|--------|----------------------------------------------------------------------------------------------------|
| ADUMi  | Defines attributes of the dummy elements ( $1 \leq i \leq 9$ ).                                    |
| CDUMi  | Defines a dummy element ( $1 \leq i \leq 9$ ).                                                     |
| PDUMi  | Defines the properties of a dummy element ( $1 \leq i \leq 9$ ).<br>Referenced by the CDUMi entry. |
| PLOTEL | Defines a one-dimensional dummy element for use in plotting.                                       |

### Contact or Gap Elements

|        |                                                                                                                                    |
|--------|------------------------------------------------------------------------------------------------------------------------------------|
| CGAP   | Defines a gap or friction element.                                                                                                 |
| PGAP   | Defines the properties of the gap element (CGAP entry).                                                                            |
| BCONP  | Defines the parameters for a contact region and its properties.                                                                    |
| BFRIC  | Defines frictional properties between two bodies in contact.                                                                       |
| BLSEG  | Defines a curve that consists of a number of line segments via grid numbers that may come in contact with another body.            |
| BWIDTH | Defines widths or thicknesses for line segments in 3-D or 2-D sideline contact defined in the corresponding BLSEG Bulk Data entry. |

### Crack Tip Elements

|        |                                                                                                        |
|--------|--------------------------------------------------------------------------------------------------------|
| CRAC2D | Defines a two-dimensional crack tip element.                                                           |
| CRAC3D | Defines a three-dimensional crack tip element.                                                         |
| PRAC2D | Defines the properties and stress evaluation techniques to be used with the CRAC2D structural element. |

PRAC3D Defines the properties of the CRAC3D structural element.

## Aerodynamic Elements

AEFACT Defines real numbers for aeroelastic analysis.

AELINK Defines relationships between or among AESTAT and AESURF entries.

AELIST Defines a list of aerodynamic elements to undergo the motion prescribed with the AESURF Bulk Data entry for static aeroelasticity.

AESTAT Specifies rigid body motions to be used as trim variables in static aeroelasticity.

AESURF Specifies an aerodynamic control surface as a member of the set of aerodynamic extra points.

AESURFS Optional specification of the structural nodes associated with an aerodynamic control surface that has been defined on an AESURF entry.

CAERO1 Defines an aerodynamic macro element (panel) in terms of two leading edge locations and side chords.

CAERO2 Defines aerodynamic slender body and interference elements for Doublet-Lattice aerodynamics.

CAERO3 Defines the aerodynamic edges of a Mach Box lifting surface. If no cranks are present, this entry defines the aerodynamic Mach Box lifting surface.

CAERO4 Defines an aerodynamic macro element for Strip theory.

CAERO5 Defines an aerodynamic macro element for Piston theory.

CSSCHD Defines a scheduled control surface deflection as a function of Mach number and angle of attack.

PAERO1 Defines associated bodies for the panels in the Doublet-Lattice method.

PAERO2 Defines the cross-sectional properties of aerodynamic bodies.

PAERO3 Defines the number of Mach boxes in the flow direction and the location of cranks and control surfaces of a Mach box lifting surface.

|        |                                                             |
|--------|-------------------------------------------------------------|
| PAERO4 | Defines properties of each strip element for Strip theory.  |
| PAERO5 | Defines properties of each strip element for Piston theory. |

### Aerodynamic to Structure Interconnection

|         |                                                                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SET1    | Defines a list of structural grid points.                                                                                                                                                                      |
| SET2    | Defines a list of structural grid points in terms of aerodynamic macro elements.                                                                                                                               |
| SPLINE1 | Defines a surface spline for interpolating motion and/or forces for aeroelastic problems on aerodynamic geometries defined by regular arrays of aerodynamic points.                                            |
| SPLINE2 | Defines a beam spline for interpolating motion and/or forces for aeroelastic problems on aerodynamic geometries defined by regular arrays of aerodynamic points.                                               |
| SPLINE3 | Defines a constraint equation for aeroelastic problems. Useful for control surface constraints.                                                                                                                |
| SPLINE4 | Defines a curved surface spline for interpolating motion and/or forces for aeroelastic problems on general aerodynamic geometries using either the Infinite Plate, Thin Plate or Finite Plate splining method. |
| SPLINE5 | Defines a 1D beam spline for interpolating motion and/or forces for aeroelastic problems on aerodynamic geometries defined by irregular arrays of aerodynamic points.                                          |

### Materials

#### Isotropic

|       |                                                                                                                                                                                                                                    |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAT1  | Defines the material properties for linear isotropic materials.                                                                                                                                                                    |
| MAT4  | Defines the constant or temperature-dependent thermal material properties for conductivity, heat capacity, density, dynamic viscosity, heat generation, reference enthalpy, and latent heat associated with a single-phase change. |
| MATHP | Specifies material properties for use in fully nonlinear (i.e., large strain and large rotation) hyperelastic analysis of rubber-like materials (elastomers).                                                                      |

RADM Defines the radiation properties of a boundary element for heat transfer analysis.

## Anisotropic

MAT2 Defines the material properties for linear anisotropic materials for two-dimensional elements.

MAT3 Defines the material properties for linear orthotropic materials used by the CTRIAX6 element entry.

MAT5 Defines the thermal material properties for anisotropic materials.

MAT8 Defines the material property for an orthotropic material for isoparametric shell elements.

MAT9 Defines the material properties for linear, temperature-independent, anisotropic materials for solid isoparametric elements (see the PSOLID entry description).

**10**  
**BULK**

## Temperature Dependent

MATTi Table references for temperature-dependent MATi materials.

RADMT Specifies table references for temperature dependent RADM entry radiation boundary properties.

TEMP Defines temperature at grid points for determination of thermal loading, temperature-dependent material properties, or stress recovery.

TEMPD Defines a temperature value for all grid points of the structural model that have not been given a temperature on a TEMP entry.

TEMPPi Defines a temperature field for surface elements.

TEMPRB Defines a temperature field for the CBAR, CBEAM, CBEND, CROD, CTUBE, and CONROD elements for determination of thermal loading, temperature-dependent material properties, or stress recovery.

TEMPAX Defines temperature sets for conical shell problems.

|         |                                                                             |
|---------|-----------------------------------------------------------------------------|
| TABLEST | Table references for temperature dependent MATS1 materials.                 |
| TABLEMi | Tabular functions for generating temperature-dependent material properties. |

### Stress Dependent

|         |                                                                                                                                                                                                       |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MATS1   | Specifies stress-dependent material properties for use in applications involving nonlinear materials.                                                                                                 |
| TABLES1 | Defines a tabular function for stress-dependent material properties such as the stress-strain curve (MATS1 entry), creep parameters (CREEP entry) and hyperelastic material parameters (MATHP entry). |
| CREEP   | Defines creep characteristics based on experimental data or known empirical creep law.                                                                                                                |

### Fluid

|         |                                                                                                               |
|---------|---------------------------------------------------------------------------------------------------------------|
| AXIF    | Includes default values for mass density and bulk modulus.                                                    |
| AXSLOT  | Includes default values for mass density and bulk modulus.                                                    |
| BDYLIST | Defines the boundary between a fluid and a structure.                                                         |
| CFLUIDi | Includes mass density and bulk modulus.                                                                       |
| CSLOTi  | Includes mass density and bulk modulus.                                                                       |
| FSLIST  | Defines the fluid points (RINGFL entry) that lie on a free surface boundary.                                  |
| MAT10   | Defines material properties for fluid elements in coupled fluid-structural analysis.                          |
| MFLUID  | Defines the properties of an incompressible fluid volume for the purpose of generating a virtual mass matrix. |
| SLBDY   | Includes mass density at interface between fluid and radial slots.                                            |





|        |               |   |   |   |   |   |   |  |  |  |  |   |   |
|--------|---------------|---|---|---|---|---|---|--|--|--|--|---|---|
| PROD   | X             |   |   | X |   |   |   |  |  |  |  | X | X |
| PSHEAR | Not Supported |   |   |   |   |   |   |  |  |  |  |   |   |
| PSHELL | X             | X |   | X | X | X |   |  |  |  |  | X | X |
| PSOLID | X             |   | X | X | X |   | X |  |  |  |  | X | X |
| PTUBE  | Not Supported |   |   |   |   |   |   |  |  |  |  |   |   |

## Constraints and Partitioning

### Single Point Constraints

|         |                                                                                                                                                                                     |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SPC     | Defines a set of single-point constraints and enforced motion—enforced displacements in static analysis and enforced displacements, velocities or acceleration in dynamic analysis. |
| SPC1    | Defines a set of single point constraints.                                                                                                                                          |
| SPCADD  | Defines a single-point constraint set as a union of single-point constraint sets defined on SPC or SPC1 entries.                                                                    |
| SPCAX   | Defines a set of single-point constraints or enforced displacements for conical shell coordinates.                                                                                  |
| SPCOFFi | Defines degrees-of-freedom to be excluded from the AUTOSPC operation.                                                                                                               |
| GRID    | Includes single point constraint definition.                                                                                                                                        |
| GRIDB   | Includes single point constraint definition.                                                                                                                                        |
| GRDSET  | Includes default for single point constraints.                                                                                                                                      |
| FLSYM   | Symmetry control for boundary in axisymmetric fluid problem.                                                                                                                        |

### Multipoint Constraints

|        |                                                                                                       |
|--------|-------------------------------------------------------------------------------------------------------|
| MPC    | Defines a linear relationship for two or more degrees-of-freedom.                                     |
| MPCADD | Defines a multipoint constraint set as a union of multipoint constraint sets defined via MPC entries. |
| MPCAX  | Defines multipoint constraints for conical shell problems.                                            |

|         |                                                                      |
|---------|----------------------------------------------------------------------|
| POINTAX | Defines multipoint constraints for point on conical shell.           |
| RBAR    | Defines multipoint constraints for rigid bar.                        |
| RBEi    | Defines multipoint constraints for RBE1, RBE2, and RBE3.             |
| RROD    | Defines multipoint constraints for rigid rod.                        |
| RSPLINE | Defines multipoint constraints for spline element.                   |
| RTRPLT  | Defines multipoint constraints for rigid triangular plate.           |
| CWELD   | Defines a weld or fastener connecting two surface patches or points. |
| PWELD   | Defines the properties of connector (CWELD) elements.                |

## Partitioning

|         |                                                                                                              |
|---------|--------------------------------------------------------------------------------------------------------------|
| ASET    | Defines degrees-of-freedom in the analysis set (a-set).                                                      |
| ASET1   | Defines degrees-of-freedom in the analysis set (a-set).                                                      |
| OMIT    | Defines degrees-of-freedom to be excluded (o-set) from the analysis set (a-set).                             |
| OMIT1   | Defines degrees-of-freedom to be excluded (o-set) from the analysis set (a-set).                             |
| OMITAX  | Defines degrees-of-freedom to be excluded (o-set) from the analysis set (a-set).                             |
| GRID    | Defines interior points for a superelement.                                                                  |
| SESET   | Defines interior grid points for a superelement.                                                             |
| CSUPEXT | Assigns exterior points to a superelement.                                                                   |
| RELEASE | Defines degrees-of-freedom for superelement exterior grid points that are not connected to the superelement. |
| SEELT   | Reassigns superelement boundary elements to an upstream superelement.                                        |

## Free Body Supports

|          |                                                       |
|----------|-------------------------------------------------------|
| SUPPORTi | Defines degrees-of-freedom for determinate reactions. |
|----------|-------------------------------------------------------|

|       |                                                                                            |
|-------|--------------------------------------------------------------------------------------------|
| SUPAX | Defines determinate reaction degrees-of-freedom in free bodies for conical shell analysis. |
| CYSUP | Defines fictitious supports for cyclic symmetry analysis.                                  |

### p-element Geometry Constraints

|       |                                                                                      |
|-------|--------------------------------------------------------------------------------------|
| GMBC  | Defines enforced displacements for GRID, FEEDGE, FEFACE, GMCURV, and GMSURF entries. |
| GMSPC | Defines constraints for entries.                                                     |

### Component Mode Boundary Conditions

|         |                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------|
| BSET    | Defines the analysis set (a-set) degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations. |
| BSET1   | Defines the analysis set (a-set) degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations. |
| CSET    | Defines the analysis set (a-set) degrees-of-freedom to be free (c-set) during component modes calculations.           |
| CSET1   | Defines the analysis set (a-set) degrees-of-freedom to be free (c-set) during component modes calculations.           |
| QSET    | Defines the generalized degrees-of-freedom (q-set) to be used for component mode synthesis.                           |
| QSET1   | Defines the generalized degrees-of-freedom (q-set) to be used for component mode synthesis.                           |
| SEBSET  | Defines the boundary degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations.             |
| SEBSET1 | Defines the fixed boundary points for a superelement.                                                                 |
| SECSET  | Defines the boundary degrees-of-freedom to be free (c-set) during component mode synthesis calculations.              |
| SECSET1 | Defines the boundary degrees-of-freedom to be free (c-set) during component mode synthesis calculations.              |
| SENQSET | Defines the number of internally generated scalar points for superelement dynamic reduction.                          |

|         |                                                                                                        |
|---------|--------------------------------------------------------------------------------------------------------|
| SEQSET  | Defines the generalized degrees-of-freedom of the superelement to be used in component mode synthesis. |
| SEQSET1 | Defines the generalized degrees-of-freedom of the superelement to be used in component mode synthesis. |
| SESUP   | Defines the determinate reaction superelement degrees-of-freedom in a free-body analysis.              |

### User Sets

|         |                                                     |
|---------|-----------------------------------------------------|
| DEFUSET | Defines the new names for degree-of-freedom sets.   |
| SEUSET  | Defines a degree-of-freedom set for a superelement. |
| SEUSET1 | Defines a degree-of-freedom set for a superelement. |
| USET    | Defines a degree-of-freedom set.                    |
| USET1   | Defines a degrees-of-freedom set.                   |

**10**  
**BULK**

### Loads

#### Static Loads

|         |                                                                                                                                                                    |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CLOAD   | Defines a static load as a linear combination of previously calculated superelement loads defined by the LSEQ entry in nonlinear static analysis (SOL 106 or 153). |
| DEFORM  | Defines the enforced axial deformation for one-dimensional elements for use in statics problems.                                                                   |
| FORCE   | Defines a static concentrated force at a grid point by specifying a vector.                                                                                        |
| FORCEi  | Defines a concentrated load at grid point.                                                                                                                         |
| GRAV    | Defines acceleration vectors for gravity or other acceleration loading.                                                                                            |
| MOMENT  | Defines a static concentrated moment at a grid point by specifying a scale factor and a vector that determines the direction.                                      |
| MOMENTi | Defines moment at grid point.                                                                                                                                      |

## 950 Bulk Data Entry Summary

10  
BULK

|         |                                                                                                                                                                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PLOAD   | Defines a uniform static pressure load on a triangular or quadrilateral surface comprised of surface elements and/or the faces of solid elements.                                                                                          |
| PLOAD1  | Defines concentrated, uniformly distributed, or linearly distributed applied loads to the CBAR or CBEAM elements at user-chosen points along the axis. For the CBEND element, only distributed loads over an entire length may be defined. |
| PLOAD2  | Defines a uniform static pressure load applied to CQUAD4, CSHEAR, or CTRIA3 two-dimensional elements.                                                                                                                                      |
| PLOAD4  | Defines a pressure load on a face of a CHEXA, CPENTA, CTETRA, CTRIA3, CTRIA6, CTRIAR, CQUAD4, CQUAD8, or CQUADR element.                                                                                                                   |
| PLOADX1 | Defines surface traction to be used with the CQUADX, CTRIAX, and CTRIAX6 axisymmetric element.                                                                                                                                             |
| RFORCE  | Defines a static loading condition due to an angular velocity and/or acceleration.                                                                                                                                                         |
| SPCD    | Defines an enforced displacement value for static analysis and an enforced motion value (displacement, velocity or acceleration) in dynamic analysis.                                                                                      |
| SLOAD   | Defines concentrated static loads on scalar or grid points.                                                                                                                                                                                |
| LOAD    | Defines a static load as a linear combination of load sets defined via FORCE, MOMENT, FORCE1, MOMENT1, FORCE2, MOMENT2, PLOAD, PLOAD1, PLOAD2, PLOAD4, PLOADX1, SLOAD, RFORCE, and GRAV entries.                                           |
| TEMP    | Defines temperature at grid points for determination of thermal loading, temperature-dependent material properties, or stress recovery.                                                                                                    |
| TEMPD   | Defines a temperature value for all grid points of the structural model that have not been given a temperature on a TEMP entry.                                                                                                            |
| TEMPPi  | Defines a temperature field for surface elements.                                                                                                                                                                                          |
| TEMPRB  | Defines a temperature field for the CBAR, CBEAM, CBEND, CROD, CTUBE, and CONROD elements for determination of thermal loading, temperature-dependent material properties, or stress recovery.                                              |

|         |                                                                                                                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FORCEAX | Defines a concentrated force on a conical shell ring.                                                                                                                                           |
| MOMAX   | Defines a static concentrated moment load on a ring of a conical shell.                                                                                                                         |
| PRESAX  | Defines the static pressure loading on a conical shell element.                                                                                                                                 |
| TEMPAX  | Defines temperature sets for conical shell problems.                                                                                                                                            |
| LOADCYH | Defines the harmonic coefficients of a static or dynamic load for use in cyclic symmetry analysis.                                                                                              |
| LOADCYN | Defines a physical static or dynamic load for use in cyclic symmetry analysis.                                                                                                                  |
| LOADCYT | Specifies loads as a function of azimuth angle by references to tables that define scale factors of loads versus azimuth angles. This entry is used only when STYPE = "AXI" on the CYSYM entry. |

## Dynamic Loads

|         |                                                                                                                                              |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------|
| ACSRCE  | Defines the power versus frequency curve for a simple acoustic source.                                                                       |
| DAREA   | Defines scale (area) factors for static and dynamic loads. In dynamic analysis, DAREA is used in conjunction with RLOADi and TLOADi entries. |
| DELAY   | Defines the time delay term $t$ in the equations of the dynamic loading function.                                                            |
| DPHASE  | Defines the phase lead term $q$ in the equation of the dynamic loading function.                                                             |
| RLOADi  | Frequency dependent excitation definition.                                                                                                   |
| TLOADi  | Time dependent excitation definition.                                                                                                        |
| NOLINi  | Nonlinear transient load definition.                                                                                                         |
| NLRGAP  | Defines a nonlinear transient radial (circular) gap.                                                                                         |
| TABLEDi | Tabular functions for generating dynamic loads.                                                                                              |

|         |                                                                                                                                                                                                                                                |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DLOAD   | Defines a dynamic loading condition for frequency response or transient response problems as a linear combination of load sets defined via RLOAD1 or RLOAD2 entries for frequency response or TLOAD1 or TLOAD2 entries for transient response. |
| LOADCYH | Defines the harmonic coefficients of a static or dynamic load for use in cyclic symmetry analysis.                                                                                                                                             |
| LOADCYN | Defines a physical static or dynamic load for use in cyclic symmetry analysis.                                                                                                                                                                 |
| LSEQ    | Defines a sequence of static load sets.                                                                                                                                                                                                        |

### Heat Transfer Loads

|        |                                                                                                                                        |
|--------|----------------------------------------------------------------------------------------------------------------------------------------|
| CONV   | Specifies a free convection boundary condition for heat transfer analysis through connection to a surface element (CHBDYi entry).      |
| CONVM  | Specifies a forced convection boundary condition for heat transfer analysis through connection to a surface element (CHBDYi entry).    |
| PCONV  | Specifies the free convection boundary condition properties of a boundary condition surface element used for heat transfer analysis.   |
| PCONVM | Specifies the forced convection boundary condition properties of a boundary condition surface element used for heat transfer analysis. |
| QVECT  | Defines thermal vector flux from a distant source into a face of one or more CHBDYi boundary condition surface elements.               |
| QVOL   | Defines a rate of volumetric heat addition in a conduction element.                                                                    |
| QHBDY  | Defines a uniform heat flux into a set of grid points.                                                                                 |
| QBDY1  | Defines a uniform heat flux into CHBDYj elements.                                                                                      |
| QBDY2  | Defines grid point heat flux into CHBDYj elements.                                                                                     |
| QBDY3  | Defines a uniform heat flux load for a boundary surface.                                                                               |



|        |                                                                                                                                             |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------|
| RADBC  | Specifies a CHBDYi element face for the application of radiation boundary conditions.                                                       |
| RADBND | Specifies Planck's second radiation constant and the wavelength breakpoints used for radiation exchange problems.                           |
| RADCAV | Identifies the characteristics of each radiant enclosure.                                                                                   |
| RADLST | Identifies the individual CHBDYi surface elements that comprise the entire radiation enclosure.                                             |
| RADMTX | Provides the $F_{ji} = A_j F_{ji}$ exchange factors for all the faces of a radiation enclosure specified in the corresponding RADLST entry. |
| RADSET | Specifies which radiation cavities are to be included for radiation enclosure analysis.                                                     |
| SLOAD  | Defines concentrated static loads on scalar or grid points.                                                                                 |
| TEMP   | Defines temperature at grid points for determination of thermal loading, temperature-dependent material properties, or stress recovery.     |
| TEMPBC | Defines the temperature boundary conditions for heat transfer analysis. This applies to steady-state and transient conditions.              |
| TEMPD  | Specifies default initial temperature at grid points.                                                                                       |
| VIEW   | Defines radiation cavity and shadowing for radiation view factor calculations.                                                              |
| VIEW3D | Defines parameters to control and/or request the Gaussian Integration method of view factor calculation for a specified cavity.             |

### p-element Loads

|        |                                                                                            |
|--------|--------------------------------------------------------------------------------------------|
| GMLOAD | Defines the forces and moments to be applied to a FEEDGE, GMCURV, FEFACE, or GMSURF entry. |
| GMBC   | Defines enforced displacements for GRID, FEEDGE, GMCURV, FEFACE, and GMSURF entries.       |
| TEMPF  | Defines the thermal loading to be applied to a group of elements.                          |

## Solution Control

### Buckling Analysis

|       |                                                                                                          |
|-------|----------------------------------------------------------------------------------------------------------|
| EIGB  | Defines data needed to perform buckling analysis.                                                        |
| EIGRL | Defines data needed to perform real eigenvalue (vibration or buckling) analysis with the Lanczos method. |

### Eigenvalue Analysis

|       |                                                                                                          |
|-------|----------------------------------------------------------------------------------------------------------|
| EIGR  | Defines data needed to perform real eigenvalue analysis.                                                 |
| EIGC  | Defines data needed to perform complex eigenvalue analysis.                                              |
| EIGRL | Defines data needed to perform real eigenvalue (vibration or buckling) analysis with the Lanczos method. |
| EIGP  | Defines poles that are used in complex eigenvalue extraction by the Determinant method.                  |

### Cyclic Symmetry

|       |                                                  |
|-------|--------------------------------------------------|
| CYSYM | Defines parameters for cyclic symmetry analysis. |
|-------|--------------------------------------------------|

### Frequency Response

|         |                                                                                         |
|---------|-----------------------------------------------------------------------------------------|
| FREQ    | Defines a set of frequencies to be used in the solution of frequency response problems. |
| FREQi   | Defines a set of frequencies for problem solution.                                      |
| TABDMP1 | Defines modal damping as a tabular function of natural frequency.                       |

### Random Response

|        |                                                                                             |
|--------|---------------------------------------------------------------------------------------------|
| RANDPS | Defines load set power spectral density factors for use in random analysis.                 |
| RANDT1 | Defines time lag constants for use in random analysis autocorrelation function calculation. |

TABRND1 Defines power spectral density as a tabular function of frequency for use in random analysis. This is referenced by the RANDPS entry.

## Transient Response

TIC Defines values for the initial conditions of variables used in structural transient analysis.

TSTEP Defines time step intervals at which a solution will be generated and output in transient analysis.

TSTEPNL Defines parametric controls and data for nonlinear transient structural or heat transfer analysis. TSTEPNL is intended for SOLs 129, 159, and 99.

**10**  
**BULK**

## Nonlinear Static Analysis

ITER Defines options for the iterative solver in SOLs 101, 106, 108, 111 and 153.

NLPARM Defines a set of parameters for nonlinear static analysis iteration strategy.

NLPCI Defines a set of parameters for the arc-length incremental solution strategies in nonlinear static analysis (SOL 106).

## Original Design Sensitivity Analysis (DSA)

DSCONS Defines a design constraint in design sensitivity analysis (original DSA).

DVAR Defines a design variable for design sensitivity analysis (original DSA).

DVSET Defines a set of element properties that vary in a fixed relation to a design variable for design sensitivity analysis (original DSA).

## Optimization (SOL 200 Only)

BNDGRID Specifies a list of grid point identification numbers on design boundaries or surfaces for shape optimization (SOL 200).

|            |                                                                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DCONADD    | Defines the design constraints for a subcase as a union of DCONSTR entries.                                                                                  |
| DCONSTR    | Defines design constraints.                                                                                                                                  |
| DDVAL      | Defines real, discrete design variable values for discrete variable optimization.                                                                            |
| DEQATN     | Defines a design variable for design optimization.                                                                                                           |
| DESVAR     | Defines a design variable for design optimization.                                                                                                           |
| DLINK      | Relates one design variable to one or more other design variables.                                                                                           |
| DOPTPRM    | Overrides default values of parameters used in design optimization.                                                                                          |
| DRESP1     | Defines a set of structural responses that is used in the design either as constraints or as an objective.                                                   |
| DRESP2     | Defines equation responses that are used in the design, either as constraints or as an objective.                                                            |
| DRESP3     | Defines SOL 200 design responses to be evaluated in an external user-supplied program, that are used in the design either as constraints or as an objective. |
| DSCREEN    | Defines screening data for constraint deletion.                                                                                                              |
| DTABLE     | Defines a table of real constants that are used in equations (see the DEQATN entry).                                                                         |
| DTI,DFRFNC | Frequency function input for use in DRESP2 & DRESP3.                                                                                                         |
| DVBSHAP    | Associates a design variable identification number to a linear combination of boundary shape vectors from a particular auxiliary model.                      |
| DVCREL1    | Defines the relation between a connectivity property and design variables.                                                                                   |
| DVCREL2    | Defines the relation between a connectivity property and design variables with a user-supplied equation.                                                     |
| DVGEOM     | Associates a design variable with a GMCURV or GMSURF geometry definition.                                                                                    |
| DVGRID     | Defines the relationship between design variables and grid point locations.                                                                                  |

|         |                                                                                                                              |
|---------|------------------------------------------------------------------------------------------------------------------------------|
| DVMREL1 | Defines the relation between a material property and design variables.                                                       |
| DVMREL2 | Defines the relation between a material property and design variables with a user-supplied equation.                         |
| DVPREL1 | Defines the relation between an analysis model property and design variables.                                                |
| DVPREL2 | Defines the relation between an analysis model property and design variables with a user-supplied equation.                  |
| DVSHAP  | Defines a shape basis vector by relating a design variable identification number (DVID) to columns of a displacement matrix. |
| MODTRAK | Specifies parameters for mode tracking in design optimization (SOL 200).                                                     |

### Aerodynamic Matrix Generation

|         |                                                                                                      |
|---------|------------------------------------------------------------------------------------------------------|
| MKAERO1 | Provides a table of Mach numbers (m) and reduced frequencies (k) for aerodynamic matrix calculation. |
| MKAERO2 | Provides a list of Mach numbers (m) and reduced frequencies (k) for aerodynamic matrix calculation.  |

### Aeroelastic Stability Analysis

|         |                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------|
| FLFACT  | Used to specify density ratios, Mach numbers, reduced frequencies, and velocities for flutter analysis. |
| FLUTTER | Defines data needed to perform flutter analysis.                                                        |
| DIVERG  | Defines Mach numbers (m) for a divergence analysis in SOLs 144 and 200.                                 |

### Aeroelastic Response Analysis

|      |                                                                                                                                                                                                                                                                |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AEDW | Defines a downwash vector associated with a particular control vector of the associated aerodynamic configuration (AECONFIG). From this downwash vector, a force vector on the aerodynamic grids will be defined for use in nonlinear static aeroelastic trim. |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|         |                                                                                                                                     |
|---------|-------------------------------------------------------------------------------------------------------------------------------------|
| AEFORCE | Defines a vector of absolute forces (it will <b>not</b> be scaled by dynamic pressure) associated with a particular control vector. |
| AEPARAM | Defines a general aerodynamic trim variable degree of freedom (aerodynamic extra point).                                            |
| AEPRESS | Defines a vector of pressure/unit dynamic pressure associated with a particular control vector.                                     |
| GUST    | Defines a stationary vertical gust for use in aeroelastic response analysis.                                                        |
| TABRNDG | Defines the power spectral density (PSD) of a gust for aeroelastic response analysis.                                               |
| TRIM    | Specifies constraints for aeroelastic trim variables. The SPLINE1 and SPLINE4 entries need to be here for the finite plate spline.  |

### Aerodynamic Parameters

|       |                                                               |
|-------|---------------------------------------------------------------|
| AERO  | Gives basic aerodynamic parameters for unsteady aerodynamics. |
| AEROS | Defines basic parameters for static aeroelasticity.           |

### p-element and Adaptivity Analysis

|       |                                                                                            |
|-------|--------------------------------------------------------------------------------------------|
| ADAPT | Defines controls for p-version adaptive analysis.                                          |
| PSET  | Describes polynomial order distribution and is selected by the ADAPT Case Control command. |
| PVAL  | Describes polynomial order distribution and is selected by the ADAPT Bulk Data entry.      |

### Miscellaneous

#### Comments

|    |                                                                                                            |
|----|------------------------------------------------------------------------------------------------------------|
| \$ | Used to insert comments into the input file. Comment statements may appear anywhere within the input file. |
|----|------------------------------------------------------------------------------------------------------------|

**Delete**

/ Removes entries on restart.

**Parameters**

PARAM Specifies values for parameters used in solution sequences or user-written DMAP programs.

**Direct Matrix Input**

CONM1 Defines a 6x6 mass matrix at a geometric grid point.

DMI Defines matrix data blocks.

DMIG Defines direct input matrices related to grid, extra, and/or scalar points.

DMIG,UACCEL Defines rigid body accelerations in the basic coordinate system.

DMIAX Defines axisymmetric (fluid or structure) related direct input matrix terms.

TF Defines a dynamic transfer function.

**10**  
**BULK**

**Direct Matrix Input for Aeroelasticity**

DMIJ Defines direct input matrices related to collation degrees-of-freedom (js-set) of aerodynamic mesh points for CAERO1, CAERO3, CAERO4 and CAERO5 and for the slender body elements of CAERO2. These include W2GJ, FA2J and input pressures and downwashes associated with AEPRESS and AEDW entries.

DMIJI Defines direct input matrices related to collation degrees-of-freedom (js-set) of aerodynamic mesh points for the interference elements of CAERO2.

DMIK Defines direct input matrices related to physical (displacement) degrees-of-freedom (ks-set) of aerodynamic grid points.

**Tabular Input**

|             |                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DTI         | Defines table data blocks.                                                                                                                                                                            |
| DTI,DFRFNC  | Frequency function input for use in DRESP2 & DRESP3. SOL 200 only.                                                                                                                                    |
| DTI,ESTDATA | Provides override data for time and space estimation for superelement processing operations.                                                                                                          |
| DTI,INDTA   | Specifies or overrides default item codes for the sorting and filtering of element stresses, strains, and forces.                                                                                     |
| DTI,SETREE  | Defines a superelement tree that determines the superelement processing order.                                                                                                                        |
| DTI,SPECSEL | Correlates spectra lines specified on TABLED1 entries with damping values.                                                                                                                            |
| DTI,SPSEL   | Correlates output requests with frequency and damping ranges.                                                                                                                                         |
| TABDMP1     | Defines modal damping as a tabular function of natural frequency.                                                                                                                                     |
| TABLEDi     | Tabular functions for generating dynamic loads.                                                                                                                                                       |
| TABLEMi     | Tabular functions for generating temperature-dependent material properties.                                                                                                                           |
| TABLES1     | Defines a tabular function for stress-dependent material properties such as the stress-strain curve (MATS1 entry), creep parameters (CREEP entry) and hyperelastic material parameters (MATHP entry). |
| TABRND1     | Defines power spectral density as a tabular function of frequency for use in random analysis. Referenced by the RANDPS entry.                                                                         |
| TABLE3D     | Specify a function of three variables for the GMBC, GMLOAD, and TEMPF entries only.                                                                                                                   |

**Output Control**

|         |                                                                                                               |
|---------|---------------------------------------------------------------------------------------------------------------|
| BOUTPUT | Defines slave nodes at which output is requested.                                                             |
| CBARAO  | Defines a series of points along the axis of a bar element (CBAR entry) for stress and force recovery output. |



|         |                                                                                                                                                                          |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ECHOOFF | Marks the point or points in the input file to deactivate printed echo of the Bulk Data.                                                                                 |
| ECHOON  | Marks the point or points in the input file to activate printed echo of the Bulk Data.                                                                                   |
| FREEPT  | Surface point location for data recovery in hydroelastic problems.                                                                                                       |
| PLOTEL  | Defines a one-dimensional dummy element for use in plotting.                                                                                                             |
| POINTAX | Defines the location of a point on an axisymmetric shell ring at which loads may be applied via the FORCE or MOMENT entries and at which displacements may be requested. |
| PRESPT  | Defines the location of pressure points in the fluid for recovery of pressure data in hydroelastic problems.                                                             |
| SET1    | Defines a set of grid points.                                                                                                                                            |
| TSTEP   | Specifies time step intervals for data recovery in transient response.                                                                                                   |
| TSTEPNL | Specifies time step intervals for data recovery in nonlinear transient response.                                                                                         |

### p-element Output Control

|        |                                                                                       |
|--------|---------------------------------------------------------------------------------------|
| OUTPUT | Output control for p-adaptive analysis.                                               |
| OUTRCV | Defines options for the output of displacements, stresses, and strains of p-elements. |

### Solution Control

|      |                                                                              |
|------|------------------------------------------------------------------------------|
| ITER | Defines options for the iterative solver in SOLs 101, 106, 108, 111 and 153. |
|------|------------------------------------------------------------------------------|

### End of Input

|         |                                              |
|---------|----------------------------------------------|
| ENDDATA | Designates the end of the Bulk Data Section. |
|---------|----------------------------------------------|

## 962 Bulk Data Entry Summary

### Include File

**INCLUDE** Inserts an external file into the input file. The **INCLUDE** statement may appear anywhere within the input data file.

**\$** Comment

Used to insert comments into the input file. Comment statements may appear anywhere within the input file.

**Format:**

\$ followed by any characters out to column 80.

**Example:**

```
$ TEST FIXTURE-THIRD MODE
```

**Remarks:**

1. Comments are ignored by the program.
2. Comments will appear only in the unsorted echo of the Bulk Data.

964 /  
Delete

/ Delete

Removes entries on restart.

**Format:**

| 1 | 2  | 3  | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|---|----|----|---|---|---|---|---|---|----|
| / | K1 | K2 |   |   |   |   |   |   |    |

**Example:**

|   |   |  |  |  |  |  |  |  |  |
|---|---|--|--|--|--|--|--|--|--|
| / | 4 |  |  |  |  |  |  |  |  |
|---|---|--|--|--|--|--|--|--|--|

| Field | Contents                                                                                       |
|-------|------------------------------------------------------------------------------------------------|
| K1    | Sorted sequence number of first entry in sequence to be removed.<br>(Integer > 0)              |
| K2    | Sorted sequence number of last entry in sequence to be removed.<br>(Integer > 0; Default = K1) |

**Remarks:**

1. This entry causes Bulk Data entries having sort sequence numbers K1 through K2 to be removed from the Bulk Data. The sort sequence numbers appear in the output of the previous run under the sorted Bulk Data echo.
2. If K2 is blank, only entry K1 is removed from the Bulk Data.
3. If the current execution is not a restart, the entries marked for deletion are ignored.
4. This entry can only be used in the rigid formats and the structured solution sequences. See "Executive Control Statements", under the SOL statement.
5. K2 may be specified as larger than the actual sequence number of the last entry. This is convenient when deleting entries to the end of the Bulk Data Section.

Chapter

# 11 Bulk Data Entries A—B

Bulk data entries ACCEL—BWIDTH

11

Bulk A-B

## ACCEL

Defines static acceleration loads, which may vary over a region of the structural model. The load variation is based on the tabular input defined on this Bulk Data entry.

### Format:

| 1     | 2    | 3    | 4    | 5    | 6                        | 7   | 8 | 9 | 10 |
|-------|------|------|------|------|--------------------------|-----|---|---|----|
| ACCEL | SID  | CID  | N1   | N2   | N3                       | DIR |   |   |    |
|       | LOC1 | VAL1 | LOC2 | VAL2 | Continues in groups of 2 |     |   |   |    |

### Example:

|       |     |     |      |     |     |   |  |  |  |
|-------|-----|-----|------|-----|-----|---|--|--|--|
| ACCEL | 100 | 2   | 0.0  | 1.0 | 0.0 | X |  |  |  |
|       | 0.0 | 1.0 | 33.1 | 2.0 |     |   |  |  |  |

### Fields:


| Field | Contents                                                                                                |
|-------|---------------------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer>0)                                                             |
| CID   | Coordinate system identification number. (Integer>0; Default=0)                                         |
| Ni    | Components of the acceleration vector measured in coordinate system CID. (Real; at least one Ni ≠ 0.0 ) |
| DIR   | Component direction of acceleration variation. (Character; one of X, Y or Z)                            |
| LOCi  | Location along direction DIR in coordinate system CID for specification of a load scale factor. (Real)  |
| VALi  | The load scale factor associated with location LOCi. (Real)                                             |

### Remarks:

- For all grids of the model, the acceleration vector is defined by:  $\vec{a} = VAL \vec{N}$  where  $\vec{N}$  is the vector defined by (N1, N2, and N3). The magnitude of  $\vec{a}$  is equal to VAL times the magnitude of  $\vec{N}$ . The scale factor VAL for each grid is found by linearly interpolating the DIR coordinate of the grid between table values LOCi/VALi. If the GRID point coordinate in coordinate system CID is outside

the range of the table, VAL is determined from the closer of *VAL1* or *VALn*. (See the following figure).

2. This type of acceleration load may be combined with other loads such as FORCE, MOMENT, GRAV and ACCEL1 loads only by specification on a LOAD bulk data entry. That is, the SID on an ACCEL entry may not be the same as that on any other load entry.
3. This acceleration load does not include effects due to mass on scalar points.
4. A blank CID entry or a CID of zero references the basic coordinate system.
5. The DIR field must contain one of the characters X, Y, or Z. The DIR direction defines the direction of acceleration load variation along direction 1, 2, or 3 respectively of coordinate system CID.
6. A minimum of two pairs of {*LOCi*, *VALi*} data must be specified.

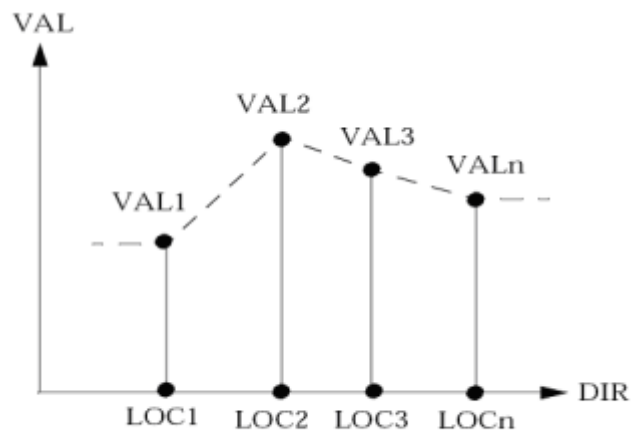

Definition of Load Scale Factor vs Location

## ACCEL1

Defines static acceleration loads at individual grid points.

## Format:

| 1      | 2       | 3       | 4   | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|---------|---------|-----|----|----|----|---|---|----|
| ACCEL1 | SID     | CID     | A   | N1 | N2 | N3 |   |   |    |
|        | GRIDID1 | GRIDID2 | etc |    |    |    |   |   |    |

## Example:

|        |     |    |       |     |     |     |     |     |  |
|--------|-----|----|-------|-----|-----|-----|-----|-----|--|
| ACCEL1 | 100 | 2  | 100.0 | 0.0 | 1.0 | 0.0 |     |     |  |
|        | 1   | 2  | 3     | 4   | 5   | 6   | 7   | 8   |  |
|        | 9   | 10 | THRU  | 100 | BY  | 5   | 200 | 250 |  |

## Fields:

| Field   | Contents                                                                                                                        |
|---------|---------------------------------------------------------------------------------------------------------------------------------|
| SID     | Load set identification number. (Integer>0)                                                                                     |
| CID     | Coordinate system identification number. (Integer>0: Default=0)                                                                 |
| a       | Acceleration vector scale factor. (Real)                                                                                        |
| Ni      | Components of the acceleration vector measured in coordinate system CID. (Real; at least one Ni ≠ 0.0 )                         |
| GRIDIDI | List of one or more GRID point identification numbers. Key words "THRU" and "BY" can be used to assist the listing. (Integer>0) |

## Remarks:

1. The acceleration vector is defined by  $\vec{a} = A \cdot \vec{N}$ , where  $\vec{N}$  is the vector (N1, N2, and N3). The magnitude of  $\vec{a}$  is equal to A times the magnitude of  $\vec{N}$ .
2. This type of acceleration load may be combined with other loads such as FORCE, MOMENT, GRAV and ACCEL loads only by specification on a LOAD bulk data entry. That is, the SID on an ACCEL1 entry may not be the same as that on any other load entry.
3. This acceleration load does not include effects due to mass on scalar points.



4. A blank CID entry or a CID of zero references the basic coordinate system.
5. The ACCEL1 card must contain at least one GRIDID.

**970 ACMODL**  
**Fluid-Structure Interface Modeling Parameters**

**ACMODL** Fluid-Structure Interface Modeling Parameters

Defines modeling parameters for the interface between the fluid and the structure.

**Format:**

| 1      | 2     | 3      | 4        | 5    | 6      | 7      | 8        | 9        | 10 |
|--------|-------|--------|----------|------|--------|--------|----------|----------|----|
| ACMODL | INTER | INFOR  | FSET     | SSET | NORMAL | METHOD | OVLPPANG | SRCHUNIT |    |
|        | INTOL | AREAOP | reserved |      |        |        |          |          |    |

**Example:**

|        |  |  |  |  |      |    |  |  |  |
|--------|--|--|--|--|------|----|--|--|--|
| ACMODL |  |  |  |  | 0.25 | AS |  |  |  |
|--------|--|--|--|--|------|----|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                                        |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INTER | <p>INTER is ignored when METHOD="AS".</p> <p>When METHOD = "CP", INTER defines the type of interface between the fluid and the structure. (Character = "IDENT" or "DIFF"; Default = "DIFF").</p>                                                                                                                |
| INFOR | <p>Indicates if FSET and SSET are to be used to define the fluid-structure interface.</p> <p>(Character = "ALL", "ELEMENTS", "PID" or "NONE", Default = "NONE"). See Remark 2.</p> <p>Acceptable values for AS method are "ELEMENTS" and "PID".</p> <p>Acceptable values for CP method are "ALL" or "NONE".</p> |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FSET         | <p>Defines the fluid elements for the interface.</p> <p>When METHOD = “AS”, FSET can be blank, or is the +/-ID of a SET1 bulk entry. The SET1 is interpreted according to the value of INFOR:</p> <p>If INFOR = “ELEMENTS”, SET1 is a list of fluid element IDs.<br/>           If INFOR = “PID”, SET1 is a list of fluid element property IDs.</p> <p>When a positive SET1 ID is entered on FSET, only these fluid elements are considered.<br/>           When a negative SET1 ID is entered on FSET, these elements will be excluded, and all other fluid elements are considered. See Remark 3. (Integer or blank)</p> <p>If METHOD = “CP”, FSET represents the SET1 entry that contains a list of fluid grid points on the interface. (Integer &gt; 0 or blank)</p>                              |
| SSET         | <p>Defines the structural elements for the interface.</p> <p>When METHOD = “AS”, SSET can be blank, or is the +/-ID of a SET1 bulk entry. The SET1 is interpreted according to the value of INFOR:</p> <p>If INFOR = “ELEMENTS”, SET1 is a list of structural element IDs.<br/>           If INFOR = “PID”, SET1 is a list of structural element property IDs.</p> <p>When a positive SET1 ID is entered on SSET, only these structural elements are considered.<br/>           When a negative SET1 ID is entered on FSET, these elements will be excluded, and all other structural elements are considered. See Remark 3. (Integer or blank)</p> <p>If METHOD = “CP”, SSET represents the SET1 entry that contains a list of structure grid points on the interface. (Integer &gt; 0 or blank)</p> |
| NORMAL       | <p>Outward normal search distance to detect fluid-structure interface. (Real &gt; 0.0; Default = 0.5 for METHOD = “AS”) See Remark 4.</p> <p>If METHOD = “AS” and SRCHUNIT is “REL”, NORMAL is a ratio of the height of the fluid box in the outward normal direction to the fluid surface to the maximum edge length of the fluid free face.<br/>           IF METHOD = “AS” and SRCHUNIT is “ABS”, NORMAL is the outward search distance in the model/absolute units.</p> <p>If METHOD = “CP” and INTER = “IDENT”, NORMAL represents a tolerance in units of length used in determining the fluid-structure interface. (Real &gt; 0.0; Default = 0.001 for METHOD = “CP”)</p>                                                                                                                       |

## 972 ACMODL Fluid-Structure Interface Modeling Parameters

| Field    | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| METHOD   | Interface calculation method.<br>“AS” = Accelerated Search Method (Default).<br>“CP” = Closed Pressure Method (old method).                                                                                                                                                                                                                                                                                                                                            |
| OVL PANG | Angular tolerance in degrees used to decide whether a fluid free face and a structural face can be considered as overlapping. If the angle between the normals of the fluid and structural faces exceeds this value, they cannot be coupled. (Real > 0.0; Default = 60.0).                                                                                                                                                                                             |
| SRCHUNIT | Search units. (Character; Default='REL'). See Remark 4.<br>= 'ABS' for absolute model units.<br>= 'REL' for relative model units based on element size.                                                                                                                                                                                                                                                                                                                |
| INTOL    | Inward normal search distance to detect fluid-structure interface. See Remark 4.<br><br>INTOL is ignored when METHOD = “CP”.<br>If METHOD = “AS” and SRCHUNIT is “REL”, INTOL is a ratio of the height of the fluid box in the inward normal direction to the fluid surface to the maximum edge length of the fluid free face.<br>IF METHOD = “AS” and SRCHUNIT is “ABS”, INTOL is the inward search distance in the model/absolute units (Real > 0.0; Default = 0.20) |
| AREAOP   | Alternative fluid-structure coupling method selection. See Remark 5. (Integer; Default=0)<br><br>= 0 The recommended method is used (default).<br>= 1 The alternative method is used.                                                                                                                                                                                                                                                                                  |

### Remarks:

1. Only one ACMODL entry is allowed. If this entry is not present, defaults will be used.
2. The INFOR field is interpreted as follows:

#### AS Method:

The acceptable values for this method are INFOR = “ELEMENTS” or “PID”. The AS method will interpret the FSET and SSET as described in Remark 4.

If INFOR = “ALL” or “NONE”, this field will be ignored.

#### CP Method:

If INTER = "IDENT" and INFOR = "NONE", the FSET and SSET entries are ignored.

When INTER = "IDENT" and INFOR = "ALL", matching is checked only at those grid points referenced by FSET and SSET.

If INTER = "DIFF", the FSET and SSET are used as described in Remark 4.

If INFOR = "ELEMENTS", NX Nastran will reset this field to INFOR = "NONE".

3. The FSET and the SSET fields are interpreted as follows:

**AS Method:**

FSET and SSET are used only when INFOR = "ELEMENTS" or "PID".

- If FSET > 0, only the fluid elements included in this set will participate in the coupling. All the other fluid elements will be ignored.
- If FSET < 0, the fluid elements included in this set will be suppressed from coupling computations.
- If FSET is blank, all fluid elements will be used for coupling computations.
- If SSET > 0, only the structural elements included in this set will participate in the coupling. All the other fluid elements will be ignored.
- If SSET < 0, the structural elements included in this set will be suppressed from coupling computations.
- If SSET is blank, all structural elements will be used for coupling computations.

**CP Method:**

If INTER = "IDENT", FSET and SSET should be greater than zero. If FSET/SSET is  $\leq 0$ , a FATAL message is issued.

The grid points defined by FSET and SSET must lie exactly on the fluid-structure interface. A FATAL message is issued if the FSET or SSET do not have a corresponding and coincident point in SSET or FSET, respectively.

If INTER = "DIFF" a FATAL message is issued if any point in SSET or FSET does not lie exactly on the interface.

4. The fields NORMAL and INTOL are interpreted as follows:

**AS Method:** (Real > 0.0; Default = 0.20)

If SRCHUNIT = "REL", NORMAL is a ratio of the outward height of the bounding box to the maximum edge length of the fluid free face. That is, if L is

## 974 **ACMODL** Fluid-Structure Interface Modeling Parameters

the largest edge of the fluid free face, the height H of the bounding box used to search for structural faces will be  $\text{NORMAL} * L$ . INTOL applies similarly, but the inward direction.

If SRCHUNIT = "ABS", NORMAL defines the outward height of the fluid bounding box in the model/absolute units. INTOL defines the inward height of the fluid bounding box in the model/absolute units.

If SRCHUNIT = "ABS" and NORMAL or INTOL are blank, SRCHUNIT will be reset to "REL" and their corresponding default value is used.

**CP Method:** (Real > 0.0; Default = 0.001)

INTOL is not used when METHOD=CP.

If INTER = "IDENT" or "DIFF", NORMAL represents a tolerance in units of length used in determining the fluid-structure interface. The default value is 0.001.

5. AREAOP=0 selects the default, recommended NX Nastran coupling option. Specifying AREAOP=1 selects an alternate option, which applies an area correction and removes parallel disconnected faces from the coupling.

**ACSRCE** Acoustic Source Specification

Defines the power versus frequency curve for a simple acoustic

source. 
$$\text{Power} = P(f) = A \cdot C(f)$$

**Format:**

| 1      | 2   | 3     | 4     | 5      | 6  | 7   | 8 | 9 | 10 |
|--------|-----|-------|-------|--------|----|-----|---|---|----|
| ACSRCE | SID | DAREA | DELAY | DPHASE | TC | RHO | B |   |    |

**Example:**

|        |     |    |  |  |    |     |      |  |  |
|--------|-----|----|--|--|----|-----|------|--|--|
| ACSRCE | 103 | 11 |  |  | 12 | 1.0 | 15.0 |  |  |
|--------|-----|----|--|--|----|-----|------|--|--|

**Fields:**

| Field  | Contents                                                                                             |
|--------|------------------------------------------------------------------------------------------------------|
| SID    | Load set identification number. (Integer > 0)                                                        |
| DAREA  | Identification number of a DAREA entry. (Integer > 0)                                                |
| DELAY  | Identification number of a DELAY entry. (Integer ≥ 0 or blank)                                       |
| DPHASE | Identification number of a DPHASE entry. (Integer ≥ 0 or blank)                                      |
| TC     | Identification number of a TABLEDi entry that defines power versus frequency. (Integer ≥ 0 or blank) |
| RHO    | Density of the fluid. (Real > 0.0)                                                                   |
| B      | Bulk modulus of the fluid. (Real > 0.0)                                                              |

**Remarks:**

1. Acoustic sources must be selected in the Case Control Section with DLOAD=SID.
2. For additional remarks, see the RLOAD1 entry description.
3. SID must be unique for all ACSRSE, RLOADi, and TLOADi entries.
4. The referenced DAREA, DELAY, and DPHASE entries must specify fluid points only.
5. Equations produced are as follows:

**976 ACSRCE**  
**Acoustic Source Specification**

$$\text{Source Strength} = Q = \left[ \frac{1}{2\pi f \lambda} \sqrt{\frac{8\pi CP(f)}{\rho}} \right] e^{i(\theta + 2\pi f\tau)}$$
$$C^2 = B / \rho$$



## ADAPT Version Adaptivity Control

Defines controls for p-version adaptive analysis.

### Format:

| 1     | 2                                                            | 3     | 4       | 5       | 6      | 7      | 8 | 9 | 10 |
|-------|--------------------------------------------------------------|-------|---------|---------|--------|--------|---|---|----|
| ADAPT | SID                                                          | ADGEN | MAXITER | PSTRTID | PMINID | PMAXID |   |   |    |
|       | PART=name1, option1=value1, option2=value2, etc., PART=name2 |       |         |         |        |        |   |   |    |
|       | option1=value1, option2=value2, etc., PART=name3, etc.       |       |         |         |        |        |   |   |    |

### Example:

|       |                                              |  |   |    |  |    |  |  |  |
|-------|----------------------------------------------|--|---|----|--|----|--|--|--|
| ADAPT | 127                                          |  | 3 | 23 |  | 45 |  |  |  |
|       | PART=LOWSTR, ELSET=11, TYPE=UNIP, SIGTOL=22  |  |   |    |  |    |  |  |  |
|       | PART=HISTR, ELSET=111, ERREST=2, EPSTOL=.002 |  |   |    |  |    |  |  |  |

### Fields:

| Field              | Contents                                                                                                                          |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| SID                | Adapt entry ID selected in Case Control by ADAPT command. (Integer > 0; Default=none)                                             |
| ADGEN              | ID of the first PVAL entry generated in the adaptive process. See Remark 14 (Integer > PSTRTID, PMINID, PMAXID; Default=1000).    |
| MAXITER            | Number of analyses performed before the adaptive process is stopped. (Integer > 0; Default=3)                                     |
| PSTRTID            | ID of PVAL entry describing the starting p-order distribution. (Integer > 0; Default=none)                                        |
| PMINID             | ID of PVAL entry describing the minimum p-order distribution. See Remark 10 (Integer > 0, Default=PSTRTID).                       |
| PMAXID             | ID of PVAL entry describing the maximum p-order distribution. See Remark 10 (Integer > 0; Default=PSTRTID).                       |
| optioni<br>=valuei | Assigns a value to an option described later. See Remark 16 .                                                                     |
| PART               | Part name of the elements defined in ELSET and controlled by TYPE, ERREST, ERRTOL, SIGTOL, and EPSTOL. (Character; Default=MODEL) |

## 978 ADAPT Version Adaptivity Control

| Field  | Contents                                                                                                                                                                         |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ELSET  | ID of the SET command under theSETS DEFINITION command. See Remark 7 (Integer > 0; Default=999999).                                                                              |
| TYPE   | p-order adjustment. See Remark 3 (Character or Integer > 0; Default=EBEP).                                                                                                       |
| ERREST | Error estimator activation flag. See Remark 2 (Integer ≥ 0; Default=1).                                                                                                          |
| ERRTOL | Error tolerance. Required if MAXITER is not specified. (0.0 < Real < 1.0; Default=0.01)                                                                                          |
| SIGTOL | Stress tolerance. If the von Mises stress at the center of the element is below this value, the element will not participate in the error analysis. (Real ≥ 0.0; Default=0.0)    |
| EPSTOL | Strain tolerance. If the von Mises strain at the center of the element is below this value, the element will not participate in the error analysis. (Real ≥ 0.0; Default=1.0E-8) |

**11**  
Bulk A-B

### Remarks:

1. Only one ADAPT entry may be specified. On the continuation entries, no commas can appear in columns 1 through 8 and the data in fields 2 through 9 must be specified in columns 9 through 72. The large-field format is not allowed.
2. The error estimator is activated by ERREST=1 and is based on strain energy density sensitivity and stress discontinuity in neighboring elements. ERREST=0 means no error estimation will be performed on the PART.
3. The types of p-order adjustment are given below.

| Type | Description                                                                                                                        |
|------|------------------------------------------------------------------------------------------------------------------------------------|
| EBEP | The p-order will increase only in the elements that are required by the error analysis.                                            |
| UNIP | If any element in the group has an error larger than the tolerance, all elements will be increased by one order in each direction. |
| NOCH | The p-order of the group does not change during the iterations.                                                                    |

| Type | Description                                                                                                                                                                                                                |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LIST | The PVAL distribution specified as PSTRTID is used for the first iteration. The user is required to provide PVAL entries with IDs starting with ADGEN, and these p-distributions will be used in the following iterations. |

4. If a PVAL ID is not specified for PSTRTID, PMINID, or PMAXID, then this is equivalent to no change at the last PVAL ID found for the element.
5. The elements specified in the SET could overlap. In this case, the highest  $p_1$ , highest  $p_2$ , highest  $p_3$  (the polynomial order of the elements in three directions) determined by the error estimator will be used.
6. n restart, PMINID and PMAXID must not refer to any PVAL identification number that was generated in the previous run(s). Also, PARAM,PVALINIT must specify the desired PVAL identification number from which to restart.
7. If an element in the SET does not have a PVAL for PSTRTID or PMINID or PMAXID, it will be excluded from the adaptivity process.
8. SET=999999 is a reserved set that includes all elements.
9. The user can specify as many PARTs as needed.
10. Each finite element has to have a unique PVAL for PSTRTID, PMINID, PMAXID. Any overlap of the PVAL specification will result in a warning message and the use of the PVAL with the highest pi field (highest  $p_2$  if same  $p_1$  and highest  $p_3$  if same  $p_1$  and  $p_2$ ) and the lowest CID value.
11. The p-distribution for an element specified by the PVAL entry referenced by PMAXID must be larger than the distribution specified by the PSTRTID, which must be larger than the distribution specified by the PMINID. A warning message will be issued if these conditions are not met, and the data is reset.
12. The solution vector of all the elements listed in the SET entries for all loads and boundary conditions will be used in the error estimation. New p values are generated for all the elements.
13. When ERREST = 0, no error analysis is performed. The p-value of the elements in the set are increased uniformly starting from p-values specified on the PVAL entry referenced by PSTRTID up to values specified on the PVAL entry referenced by PMAXID.
14. The intermediate PVAL entries generated will have an ID starting with ADGEN; thus, ADGEN must be larger than PSTRTID, PMINID, and PMAXID.

**980 ADAPT**  
**Version Adaptivity Control**

15. The displacement and stress output can be requested by a DATAREC Case Control command.
16. Each `optioni=valuei` must be specified on the same entry. In other words, `optioni` and `valuei` may not be specified on two separate continuation entries.

**ADUMi** Dummy Element Attributes

Defines attributes of the dummy elements ( $1 \leq i \leq 9$ ).

**Format:**

| 1     | 2  | 3  | 4  | 5  | 6    | 7 | 8 | 9 | 10 |
|-------|----|----|----|----|------|---|---|---|----|
| ADUMi | NG | NC | NP | ND | ELNM |   |   |   |    |

**Example:**

|       |   |   |   |   |        |  |  |  |  |
|-------|---|---|---|---|--------|--|--|--|--|
| ADUM2 | 8 | 2 | 1 | 3 | CTRIM6 |  |  |  |  |
|-------|---|---|---|---|--------|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                   |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NG    | Number of grid points connected by a DUMi dummy element. (Integer > 0)                                                                                                     |
| NC    | Number of additional fields (Ai) on the CDUMi connection entry. (Integer ≥ 0)                                                                                              |
| NP    | Number of additional fields (Ai) on the PDUMi property entry. (24 ≥ Integer ≥ 0)                                                                                           |
| ND    | Number of displacement components at each grid point used in the generation of the differential stiffness matrix. Zero implies no differential stiffness. (Integer 3 or 6) |
| ELNM  | The name of the element connection and property entry. In the example above, the connection entry is named “CTRIM6” and the property entry is named “PTRIM6”.              |

**982 AECOMP**  
**Component for an Integrated Load Monitor Point**

**AECOMP**      Component for an Integrated Load Monitor Point

Defines a component for use in aeroelastic monitor point definition.

**Format:**

| 1      | 2       | 3        | 4       | 5       | 6       | 7       | 8       | 9       | 10 |
|--------|---------|----------|---------|---------|---------|---------|---------|---------|----|
| AECOMP | NAME    | LISTTYPE | LISTID1 | LISTID2 | LISTID3 | LISTID4 | LISTID5 | LISTID6 |    |
|        | LISTID7 | -etc.-   |         |         |         |         |         |         |    |

**Example:**

|        |      |        |      |      |  |  |  |  |  |
|--------|------|--------|------|------|--|--|--|--|--|
| AECOMP | WING | AELIST | 1001 | 1002 |  |  |  |  |  |
|--------|------|--------|------|------|--|--|--|--|--|

**Fields:**

| Field               | Contents                                                                                                                                                                                                                                    |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                | A character string of up to eight characters identifying the component. (Character)                                                                                                                                                         |
| LISTTYPE            | One of CAERO or AELIST for aerodynamic components and SET1 for structural components. Aerodynamic components are defined on the aerodynamic ks-set mesh while the structural components are defined on the g-set mesh. See Remarks 2 and 3. |
| LISTID <sub>i</sub> | The identification number of either SET1, AELIST or CAERO <sub>i</sub> entries that define the set of grid points that comprise the component. See Remarks 2 and 3.                                                                         |

**Remarks:**

1. The identification name must be unique among all AECOMP and AECOMPL entries.
2. If the component is defined on the structure, the LISTIDs must refer to SET1 entry(ies) that define the list of associated GRID points. For the AELIST or CAERO option, the LISTID's must refer to AELIST or CAERO *i* entries, respectively. Note that for DLM models (CAERO1/2), the set of points defined by the AELIST are the box identification numbers. For example, if the control surface's grids are desired, the same AELIST used for the AESURF can be referred to here. An AECOMP component must be defined as either an aerodynamic mesh component or a structural component. The two mesh classes cannot be combined into a single component.

3. The AECOMPL entry can be used to combine AECOMP entries into new components. When combining components, the structural and aerodynamic classes must be kept separate.

**984 AECOMPL**  
**Component for an Integrated Load Monitor Point**

**AECOMPL**      Component for an Integrated Load Monitor Point

Defines a component for use in aeroelastic monitor point definition as a union of other components.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| AECOMPL  | NAME     | LABEL1   | LABEL2   | LABEL3   | LABEL4   | LABEL5   | LABEL6   | LABEL7   |           |
|          | LABEL8   | -etc.-   |          |          |          |          |          |          |           |

**Example:**


|         |       |      |      |         |  |  |  |  |  |
|---------|-------|------|------|---------|--|--|--|--|--|
| AECOMPL | HORIZ | STAB | ELEV | BALANCE |  |  |  |  |  |
|---------|-------|------|------|---------|--|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                        |
|--------------|------------------------------------------------------------------------------------------------------------------------|
| NAME         | A character string of up to eight characters identifying the component. (Character)                                    |
| LABELi       | A string of 8 characters referring to the names of other components defined by either AECOMP or other AECOMPL entries. |

**Remarks:**

1. The identification name must be unique among all AECOMP and AECOMPL entries.
2. The AECOMPL entry can be used to combine AECOMP entries into new components. When combining components, the structural and aerodynamic classes must be kept separate.





**AEDW** Parametric Normal Wash Loading for Aerodynamics

Defines a downwash vector associated with a particular control vector of the associated aerodynamic configuration (AECONFIG). From this downwash vector, a force vector on the aerodynamic grids will be defined for use in nonlinear static aeroelastic trim.

**Format:**

|      |      |       |       |      |      |       |   |   |    |
|------|------|-------|-------|------|------|-------|---|---|----|
| 1    | 2    | 3     | 4     | 5    | 6    | 7     | 8 | 9 | 10 |
| AEDW | MACH | SYMXZ | SYMXY | UXID | DMIJ | DMIJI |   |   |    |

**Example:**

|      |      |      |       |     |      |  |  |  |  |
|------|------|------|-------|-----|------|--|--|--|--|
| AEDW | 0.90 | SYMM | ASYMM | 101 | ALP1 |  |  |  |  |
|------|------|------|-------|-----|------|--|--|--|--|

**Fields:**

| Field       | Contents                                                                                                                   |
|-------------|----------------------------------------------------------------------------------------------------------------------------|
| MACH        | The Mach number for this force. See Remark 2 (Real $\geq$ 0.0, $\neq$ 1.0).                                                |
| SYMXZ,SYMXY | The symmetry of this force vector. One of SYMM, ASYMM or ANTI (Character).                                                 |
| UXID        | The identification number of a UXVEC entry that defines the control parameter vector associated with this downwash vector. |
| DMIJ        | The name of a DMI or DMIJ entry that defines the downwash.                                                                 |
| DMIJI       | The name of a DMIJI entry that defines the CAERO2 interference element downwashes.                                         |

**Remarks:**

1. AEDW, AEFORCE and AEPRESS are associated with the current AECONFIG using either Case Control (if in the main Bulk Data Section) or using the BEGIN AECONFIG=<config> if in a partition of the Bulk Data.
2. The DMIJ field refers to either a DMI or a DMIJ entry. The DMIJI is only applicable to CAERO2 and is only required if nonzero downwash (j-set) input is needed on the interference body elements.
3. Mach numbers > 1.0 require that the supersonic aerodynamic option be available.

**986 AEFAC**  
**Aerodynamic Lists**

**AEFACT** Aerodynamic Lists

Defines real numbers for aeroelastic analysis.

**Format:**

| 1      | 2   | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|----|--------|----|----|----|----|----|----|
| AEFACT | SID | D1 | D2     | D3 | D4 | D5 | D6 | D7 |    |
|        | D8  | D9 | -etc.- |    |    |    |    |    |    |

**Example:**

|        |    |    |    |     |  |  |  |  |  |
|--------|----|----|----|-----|--|--|--|--|--|
| AEFACT | 97 | .3 | .7 | 1.0 |  |  |  |  |  |
|--------|----|----|----|-----|--|--|--|--|--|

**Fields:**

| Field | Contents                                        |
|-------|-------------------------------------------------|
| SID   | Set identification number. (Unique Integer > 0) |
| Di    | Number. (Real)                                  |

**Remarks:**

1. AEFAC entries must be selected by a CAEROi or PAEROi entry.
2. Embedded blank fields are not allowed.
3. To specify division points, there must be one more division point than the number of divisions.
4. When referenced by the CAERO3 entry, AEFAC defines the aerodynamic grid points. The ID number of the first point defined by each AEFAC entry is the value of the CAERO3 ID that selected the AEFAC entry. The ID of each following point defined on the AEFAC is incremented by 1.

## AEFORCE Parametric Force for Aerodynamics

Defines a vector of absolute forces (it will **not** be scaled by dynamic pressure) associated with a particular control vector. This force vector may be defined on either the aerodynamic mesh (ks-set) or the structural mesh (g-set). The force vector will be used in nonlinear static aeroelastic trim.

### Format:

| 1       | 2    | 3     | 4     | 5    | 6    | 7     | 8    | 9 | 10 |
|---------|------|-------|-------|------|------|-------|------|---|----|
| AEFORCE | MACH | SYMXZ | SYMXY | UXID | MESH | FORCE | DMIK |   |    |

### Example:

|         |      |      |       |     |      |  |      |  |  |
|---------|------|------|-------|-----|------|--|------|--|--|
| AEFORCE | 0.90 | SYMM | ASYMM | 101 | AERO |  | BETA |  |  |
|---------|------|------|-------|-----|------|--|------|--|--|

### Fields:

| Field        | Contents                                                                                                                                           |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| MACH         | The Mach number for this force. See Remark 2 (Real $\geq 0.0$ , $\neq 1.0$ ).                                                                      |
| SYMXZ, SYMXY | The symmetry of this force vector. One of SYMM, ASYMM or ANTI (Character).                                                                         |
| UXID         | The identification number of a UXVEC entry that defines the control parameter vector associated with this downwash vector.                         |
| MESH         | One of AERO or STRUCT that declares whether the force vector is defined on the aerodynamic ks-set mesh or the structural g-set mesh. See Remark 3. |
| FORCE        | The ID of a FORCE/MOMENT set that defines the vector. See Remark 3 (Integer $> 0$ if MESH=STRUCT).                                                 |
| DMIK         | The name of a DMIK entry that defines the aerodynamic force vector. See Remark 3 (Character; required if MESH=AERO).                               |

### Remarks:

1. AEDW, AEFORCE and AEPRESS are associated with the current AECONFIG.
2. Mach numbers  $> 1.0$  require that the supersonic aerodynamic option be available.
3. If the vector is defined on the structure, normal FORCE<sub>i</sub> and MOMENT<sub>i</sub> data are used. They will be subject to normal reduction to the solution set. For the

**988 AEFORCE**  
**Parametric Force for Aerodynamics**

AERO mesh option, the DMIK Bulk Data are used. Any forces associated with the permanently SPC'd degrees-of-freedom (which are dependent on the type of aerodynamic model being used) will be ignored.

**AELINK** Links Aeroelastic Variables

Defines relationships between or among AESTAT and AESURF entries, such that:

$$u^D + \sum_{i=1}^n C_i u_i^I = 0.0$$

$u^D$  = dependent variable

and

$u_i^I$  = independent variable

**Format:**

| 1      | 2     | 3     | 4      | 5  | 6     | 7  | 8     | 9  | 10 |
|--------|-------|-------|--------|----|-------|----|-------|----|----|
| AELINK | ID    | LABLD | LABL1  | C1 | LABL2 | C2 | LABL3 | C3 |    |
|        | LABL4 | C4    | -etc.- |    |       |    |       |    |    |



**Example:**

|        |    |       |       |      |  |  |  |  |  |
|--------|----|-------|-------|------|--|--|--|--|--|
| AELINK | 10 | INBDA | OTBDA | -2.0 |  |  |  |  |  |
|--------|----|-------|-------|------|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                            |
|-------|-------------------------------------------------------------------------------------|
| ID    | Trim set identification number. (Integer > 0)                                       |
| LABLD | Character string to identify the dependent aerodynamic variable. (Character)        |
| LABLi | Character string to identify the i-th independent aerodynamic variable. (Character) |
| Ci    | Linking coefficient for the i-th variable. (Real)                                   |

**Remarks:**

1. The AELINK entry (or entries) is selected by the TRIM=ID in Case Control.
2. This entry constrains the dependent variable to be a linear combination of the independent variables.

**990 AELINK**  
**Links Aeroelastic Variables**

3. LABLD data must be unique for a given ID (i.e., the variable cannot be constrained twice).
4. LABLD and LABLi data refer to AESURF or AESTAT Bulk Data entries.

**AELIST** Aerodynamic Elements List

Defines a list of aerodynamic elements to undergo the motion prescribed with the AESURF Bulk Data entry for static aeroelasticity.

**Format:**

| 1      | 2   | 3      | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|--------|----|----|----|----|----|----|----|
| AELIST | SID | E1     | E2 | E3 | E4 | E5 | E6 | E7 |    |
|        | E8  | -etc.- |    |    |    |    |    |    |    |

**Example:**

|        |      |      |      |      |      |      |      |      |  |
|--------|------|------|------|------|------|------|------|------|--|
| AELIST | 75   | 1001 | THRU | 1075 | 1101 | THRU | 1109 | 1201 |  |
|        | 1202 |      |      |      |      |      |      |      |  |

**Fields:**

| Field | Contents                                                                                           |
|-------|----------------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                           |
| Ei    | List of aerodynamic boxes generated by CAERO1 entries to define a surface. (Integer > 0 or "THRU") |

**Remarks:**

1. These entries are referenced by the AESURF entry.
2. When the "THRU" option is used, all intermediate grid points must exist. The word "THRU" may not appear in field 3 or 9 (2 or 9 for continuations).
3. Intervening blank fields are not allowed.

**992 AEPARM**  
**General Controller for Use in Trim**

**AEPARM**      General Controller for Use in Trim

Defines a general aerodynamic trim variable degree-of-freedom (aerodynamic extra point). The forces associated with this controller will be derived from AEDW, AEFORCE and AEPRESS input data.

**Format:**

| 1      | 2  | 3     | 4     | 5 | 6 | 7 | 8 | 9 | 10 |
|--------|----|-------|-------|---|---|---|---|---|----|
| AEPARM | ID | LABEL | UNITS |   |   |   |   |   |    |

**Example:**

|        |   |        |     |  |  |  |  |  |  |
|--------|---|--------|-----|--|--|--|--|--|--|
| AEPARM | 5 | THRUST | LBS |  |  |  |  |  |  |
|--------|---|--------|-----|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                               |
|-------|------------------------------------------------------------------------|
| ID    | Controller identification number. (Integer > 0)                        |
| LABEL | Controller name. See Remark 1 (Character).                             |
| UNITS | Label used to describe the units of the controller values. (Character) |

**Remarks:**

1. Controller LABELS that comprise the unique set relative to all the AESURF, AESTAT and AEPARM entries will define the set of trim variable degrees-of-freedom for the aeroelastic model.
2. Unit labels are optional and are only used to label outputs. No units will be associated with the controller if left blank.



**AEPRESS** Parametric Pressure Loading for Aerodynamics

Defines a vector of pressure/unit dynamic pressure associated with a particular control vector. From this pressure vector, a force vector on the aerodynamic grids will be defined for use in nonlinear static aeroelastic trim.

**Format:**

| 1       | 2    | 3     | 4     | 5    | 6    | 7     | 8 | 9 | 10 |
|---------|------|-------|-------|------|------|-------|---|---|----|
| AEPRESS | MACH | SYMZX | SYMXY | UXID | DMIJ | DMIJI |   |   |    |

**Example:**

|         |      |      |       |     |      |  |  |  |  |
|---------|------|------|-------|-----|------|--|--|--|--|
| AEPRESS | 0.90 | SYMM | ASYMM | 101 | ALP1 |  |  |  |  |
|---------|------|------|-------|-----|------|--|--|--|--|

**Fields:**

| Field        | Contents                                                                                                                   |
|--------------|----------------------------------------------------------------------------------------------------------------------------|
| MACH         | The Mach number for this force. See Remark 2. (Real $\geq 0.0$ , $\neq 1.0$ )                                              |
| SYMZX, SYMXY | The symmetry of this force vector. One of SYMM, ASYMM or ANTI (Character).                                                 |
| UXID         | The identification number of a UXVEC entry that defines the control parameter vector associated with this downwash vector. |
| DMIJ         | The name of a DMI or DMIJ entry that defines the pressure per unit dynamic pressure.                                       |
| DMIJI        | The name of a DMIJI entry that defines the CAERO2 interference element downwashes.                                         |

**Remarks:**

1. AEDW, AEFORCE, and AEPRESS are associated with the current AECONFIG using Case Control.
2. Mach numbers  $> 1.0$  require that the supersonic aerodynamic option be available.
3. The DMIJ field refers to either a DMI or a DMIJ entry. The DMIJI is only applicable to CAERO2 and is only required if nonzero downwash (j-set) input is needed on the interference body elements.

**994 AERO**  
**Aerodynamic Physical Data**

**AERO** Aerodynamic Physical Data

Gives basic aerodynamic parameters for unsteady aerodynamics.

**Format:**

| 1    | 2     | 3        | 4    | 5      | 6     | 7     | 8 | 9 | 10 |
|------|-------|----------|------|--------|-------|-------|---|---|----|
| AERO | ACSID | VELOCITY | REFC | RHOREF | SYMZX | SYMXY |   |   |    |

**Example:**

|      |   |       |      |      |   |    |  |  |  |
|------|---|-------|------|------|---|----|--|--|--|
| AERO | 3 | 1.3+4 | 100. | 1.-5 | 1 | -1 |  |  |  |
|------|---|-------|------|------|---|----|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                                        |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACSID    | Aerodynamic coordinate system identification. See Remark 2 .<br>(Integer $\geq 0$ ; Default is the basic coordinate system.)                                                    |
| VELOCITY | Velocity for aerodynamic force data recovery and to calculate the BOV parameter. See Remark 5 . (Real)                                                                          |
| REFC     | Reference length for reduced frequency. (Real)                                                                                                                                  |
| RHOREF   | Reference density. (Real)                                                                                                                                                       |
| SYMZX    | The symmetry key for the aero coordinate x-z plane. See Remark 6 (Integer=+1 for symmetry, 0 for no symmetry, and -1 for antisymmetry; Default=0).                              |
| SYMXY    | The symmetry key for the aero coordinate x-y plane that can be used to simulate ground effect. (Integer=-1 for symmetry, 0 for no symmetry, and +1 for antisymmetry; Default=0) |

**Remarks:**

1. This entry is required for aerodynamic problems. Only one AERO entry is allowed.
2. The ACSID must be a rectangular coordinate system. Flow is in the positive x-direction.
3. Set SYMXY=-1 to simulate ground effect.
4. PARAM,WTMASS does not affect aerodynamic matrices. RHOREF must be input in mass units.

5. VELOCITY is used only in aeroelastic response analysis, and it must be equal to V on the GUST Bulk Data entry.
6. The symmetry fields on this entry are only used if neither of the Case Control commands (AESYMXY, AESYMXZ) are supplied. If either Case Control command is supplied, even the defaults from Case will override these Bulk Data entries. The Case Control symmetry is the preferred means of declaring the flow and geometric symmetry for aeroelastic analysis.

**996 AEROS**  
**Static Aeroelasticity Physical Data**

**AEROS**      Static Aeroelasticity Physical Data

Defines basic parameters for static aeroelasticity.

**Format:**

| 1     | 2     | 3     | 4    | 5    | 6    | 7     | 8     | 9 | 10 |
|-------|-------|-------|------|------|------|-------|-------|---|----|
| AEROS | ACSID | RCSID | REFC | REFB | REFS | SYMZX | SYMXY |   |    |

**Example:**

|       |    |    |     |      |       |   |  |  |  |
|-------|----|----|-----|------|-------|---|--|--|--|
| AEROS | 10 | 20 | 10. | 100. | 1000. | 1 |  |  |  |
|-------|----|----|-----|------|-------|---|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                         |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACSID | Aerodynamic coordinate system identification. See Remark 2 .<br>(Integer $\geq 0$ ; Default is the basic coordinate system).                                                     |
| RCSID | Reference coordinate system identification for rigid body motions.<br>(Integer $\geq 0$ ; Default is the basic coordinate system.)                                               |
| REFC  | Reference chord length. (Real $> 0.0$ )                                                                                                                                          |
| REFB  | Reference span. (Real $> 0.0$ )                                                                                                                                                  |
| REFS  | Reference wing area. (Real $> 0.0$ )                                                                                                                                             |
| SYMZX | The symmetry key for the aero coordinate x-z plane. See Remark 6 . (Integer=+1 for symmetry, 0 for no symmetry, and -1 for antisymmetry; Default=0).                             |
| SYMXY | The symmetry key for the aero coordinate x-y plane that can be used to simulate ground effects. (Integer=+1 for antisymmetry, 0 for no symmetry, and -1 for symmetry; Default=0) |

**Remarks:**

1. This entry is required for static aeroelasticity problems. Only one AEROS entry is allowed.
2. The ACSID must be a rectangular coordinate system. Flow is in the positive x-direction (T1).



3. The RCSID must be a rectangular coordinate system. All AESTAT degrees-of-freedom defining trim variables will be defined in this coordinate system.
4. REFB should be full span, even on half-span models.
5. REFS should be half area on half-span models.
6. The symmetry fields on this entry are only used if neither of the Case Control commands (AESYMXY, AESYMXZ) are supplied. If either Case Control command is supplied, even the defaults from Case will override these Bulk Data entries. The Case Control symmetry is the preferred means of declaring the flow and geometric symmetry for aeroelastic analysis.

**998 AESTAT**  
**Static Aeroelasticity Trim Variables**

**AESTAT**      Static Aeroelasticity Trim Variables

Specifies rigid body motions to be used as trim variables in static aeroelasticity.

**Format:**

| 1      | 2  | 3     | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------|----|-------|---|---|---|---|---|---|----|
| AESTAT | ID | LABEL |   |   |   |   |   |   |    |

**Example:**

|        |      |        |  |  |  |  |  |  |  |
|--------|------|--------|--|--|--|--|--|--|--|
| AESTAT | 5001 | ANGLEA |  |  |  |  |  |  |  |
|--------|------|--------|--|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                           |
|-------|--------------------------------------------------------------------------------------------------------------------|
| ID    | Identification number of an aerodynamic trim variable degree-of-freedom. See Remark 1. (Integer > 0).              |
| LABEL | An alphanumeric string of up to eight characters used to identify the degree-of-freedom. See Remark 1 (Character). |

**Remarks:**

1. The degrees-of-freedom defined with this entry represent rigid body motion in the reference coordinate system defined on the AEROS entry. The standard labels that define the various rigid body motions are given below.

| <b>LABEL</b> | <b>Degree-of-Freedom Motion</b> | <b>Description</b>           |
|--------------|---------------------------------|------------------------------|
| ANGLEA       | $u_r$ (R2)                      | Angle of Attack              |
| SIDES        | $u_r$ (R3)                      | Angle of Sideslip            |
| ROLL         | $\dot{u}_r$ (R1)                | Roll Rate                    |
| PITCH        | $\dot{u}_r$ (R2)                | Pitch Rate                   |
| YAW          | $u_r$ (R3)                      | Yaw Rate                     |
| URDD1        | $\ddot{u}_r$ (T1)               | Longitudinal (See Remark 3.) |
| URDD2        | $\ddot{u}_r$ (T2)               | Lateral                      |
| URDD3        | $\ddot{u}_r$ (T3)               | Vertical                     |
| URDD4        | $\ddot{u}_r$ (R1)               | Roll                         |
| URDD5        | $\ddot{u}_r$ (R2)               | Pitch                        |

| <b>Table 11-1. Standard Labels Defining Rigid Body Motions</b> |                                 |                    |
|----------------------------------------------------------------|---------------------------------|--------------------|
| <b>LABEL</b>                                                   | <b>Degree-of-Freedom Motion</b> | <b>Description</b> |
| URDD6                                                          | $\ddot{u}_r$ (R3)               | Yaw                |

These reserved names may be defined on the AEPARM entry instead. See the AEPARM, AEPRESS, and AEFORCE entries.

2. The degrees-of-freedom defined with this entry are variables in the static aeroelastic trim solution, unless they are constrained by referencing them with a TRIM Bulk Data entry.
3. If a label other than those above is specified, then the user must either generate the corresponding forces with an AELINK or via a DMI Bulk Data entry along with a DMAP alter that includes the DMIIN module and additional statements to merge into the appropriate matrices. Or, using AEPARM and AEDW, AEPRESS, and/or AEFORCE, you can accomplish this purpose without the need for any alters.

## 1000 AESURF Aerodynamic Control Surface

### AESURF Aerodynamic Control Surface

Specifies an aerodynamic control surface as a member of the set of aerodynamic extra points. The forces associated with this controller will be derived from rigid rotation of the aerodynamic model about the hinge line(s) and from AEDW, AEFORCE and AEPRESS input data. The mass properties of the control surface can be specified using an AESURFS entry.

#### Format:

| 1      | 2     | 3     | 4     | 5     | 6      | 7      | 8      | 9      | 10 |
|--------|-------|-------|-------|-------|--------|--------|--------|--------|----|
| AESURF | ID    | LABEL | CID1  | ALID1 | CID2   | ALID2  | EFF    | LDW    |    |
|        | CREFC | CREFS | PLLIM | PULIM | HMLLIM | HMULIM | TQLLIM | TQULIM |    |

#### Example:

|        |      |       |     |     |        |       |    |    |  |
|--------|------|-------|-----|-----|--------|-------|----|----|--|
| AESURF | 6001 | ELEV  | 100 | 100 | 200    | 200   |    |    |  |
|        | 10.0 | 180.0 |     |     | -1.4E4 | 1.2E4 | 20 | 30 |  |

#### Fields:

| Field             | Contents                                                                                                                                           |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| ID                | Controller identification number. (Integer > 0)                                                                                                    |
| LABEL             | Controller name, see Remark 1 (Character).                                                                                                         |
| CID <sub>i</sub>  | Identification number of a rectangular coordinate system with a y-axis that defines the hinge line of the control surface component. (Integer > 0) |
| ALID <sub>i</sub> | Identification of an AELIST Bulk Data entry that identifies all aerodynamic elements that make up the control surface component. (Integer > 0)     |
| EFF               | Control surface effectiveness. See Remark 4 (Real ≠ 0.0; Default=1.0).                                                                             |
| LDW               | Linear downwash flag. See Remark 2 (Character, one of LDW or NOLDW; Default=LDW).                                                                  |
| CREFC             | Reference chord length for the control surface. (Real > 0.0; Default=1.0)                                                                          |
| CREFS             | Reference surface area for the control surface. (Real > 0.0; Default=1.0)                                                                          |



| <b>Field</b>      | <b>Contents</b>                                                                                                                                                                                 |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PLLIM, PULIM      | Lower and upper deflection limits for the control surface in radians. (Real; Default= $\pm \pi/2$ )                                                                                             |
| HMLLIM,<br>HMULIM | Lower and upper hinge moment limits for the control surface in force-length units. (Real, Default=no limit)                                                                                     |
| TQLLIM,<br>TQULIM | Set identification numbers of TABLEDi entries that provide the lower and upper deflection limits for the control surface as a function of the dynamic pressure. (Integer > 0, Default=no limit) |

**Remarks:**

1. The IDs on AESURF, AESTAT, and AEPARM entries are ignored. AESURFS can be used to define mass properties of the control surface.
2. The degrees-of-freedom defined on this entry represent a rigid body rotation of the control surface components about their hinge lines. In the default LDW (Linear DownWash) case, the downwash due to a unit perturbation of the control surface will be computed as part of the database. In the NOLDW case, the user must prescribe the controller's effects by direct definition of the induced forces using the AEPRESS, AEDW and/or AEFORCE entries.
3. Either one or two control surface components may be defined.
4. If EFF is specified, then the forces produced by this surface are modified by EFF (e.g., to achieve a 40% reduction, specify EFF=0.60).
5. The continuation is not required.
6. The CREFC and CREFS values are only used in computing the nondimensional hinge moment coefficients.
7. Position limits may be specified using either PiLIM or TQiLIM, but not both.
8. Position and hinge moment limits are not required.

## 1002 AESURFS Structural Grids on an Aerodynamic Control Surface

### AESURFS      Structural Grids on an Aerodynamic Control Surface

Optional specification of the structural nodes associated with an aerodynamic control surface that has been defined on an AESURF entry. The mass associated with these structural nodes define the control surface moment(s) of inertia about the hinge line(s).

#### Format:

| 1       | 2  | 3     | 4 | 5     | 6 | 7     | 8 | 9 | 10 |
|---------|----|-------|---|-------|---|-------|---|---|----|
| AESURFS | ID | LABEL |   | LIST1 |   | LIST2 |   |   |    |

#### Example:

|         |      |      |  |      |  |      |  |  |  |
|---------|------|------|--|------|--|------|--|--|--|
| AESURFS | 6001 | ELEV |  | 6002 |  | 6003 |  |  |  |
|---------|------|------|--|------|--|------|--|--|--|

#### Fields:

| Field | Contents                                                                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID    | Controller identification number. See Remark 1 (Integer > 0).                                                                                              |
| LABEL | Controller name. See Remark 1 (Character).                                                                                                                 |
| LISTi | Identification number of a SET1 entry that lists the structural grid points that are associated with this component of this control surface. (Integer > 0) |

#### Remarks:

1. The LABEL on the AESURFS entry must match one on an AESURF entry. The ID is ignored.
2. The mass of the GRID points listed on the SETi entries is used to compute the mass moment of inertia of the control surface about its i'th hinge line. The presence of these data will allow the hinge moments to include the inertial forces in the computations. These data are optional, and, if omitted, result in hinge moments which include only the applied, aeroelastically corrected, forces.
3. These data will be associated with a structural superelement by grid list or partitioned SUPER=<seid> if the AESURFS is defined in the main bulk data section.

**ASET**      Degrees-of-freedom for the a-set

Defines degrees-of-freedom in the analysis set (a-set).

**Format:**

|      |     |    |     |    |     |    |     |    |    |
|------|-----|----|-----|----|-----|----|-----|----|----|
| 1    | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
| ASET | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

**Example:**

|      |    |   |    |      |   |   |  |  |  |
|------|----|---|----|------|---|---|--|--|--|
| ASET | 16 | 2 | 23 | 3516 | 1 | 4 |  |  |  |
|------|----|---|----|------|---|---|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                      |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                                     |
| Ci    | Component numbers. (Integer zero or blank for scalar points, or any unique combinations of the Integers 1 through 6 for grid points with no embedded blanks.) |

**Remarks:**

1. Degrees-of-freedom specified on this entry form members of the mutually exclusive a-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
2. When ASET, ASET1, QSET, and/or QSET1 entries are present, all degrees-of-freedom not otherwise constrained (e.g., SPCi or MPC entries) will be placed in the omitted set (o-set).
3. In nonlinear analysis, all degrees-of-freedom attached to nonlinear elements must be placed in the a-set. In other words, if the ASET or ASET1 entry, is specified then all nonlinear degrees-of-freedom must be specified on the ASET or ASET1 entry.

**1004 ASET1**  
**Degrees-of-freedom for the a-set, Alternate Form of ASET Entry**

**ASET1**      Degrees-of-freedom for the a-set, Alternate Form of ASET Entry

Defines degrees-of-freedom in the analysis set (a-set).

**Format:**

| 1     | 2   | 3   | 4    | 5      | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|------|--------|-----|-----|-----|-----|----|
| ASET1 | C   | ID1 | ID2  | ID3    | ID4 | ID5 | ID6 | ID7 |    |
|       | ID8 | ID9 | ID10 | -etc.- |     |     |     |     |    |

**Example:**

|       |     |   |   |   |    |   |   |   |  |
|-------|-----|---|---|---|----|---|---|---|--|
| ASET1 | 345 | 2 | 1 | 3 | 10 | 9 | 6 | 5 |  |
|       | 7   | 8 |   |   |    |   |   |   |  |

**Alternate Format and Example:**

|       |        |     |        |     |  |  |  |  |  |
|-------|--------|-----|--------|-----|--|--|--|--|--|
| ASET1 | C      | ID1 | “THRU” | ID2 |  |  |  |  |  |
| ASET1 | 123456 | 7   | THRU   | 109 |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                     |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C     | Component number. (Integer zero or blank for scalar points, or any unique combinations of the Integers 1 through 6 for grid points with no embedded blanks.) |
| IDI   | Grid or scalar point identification numbers. (Integer > 0; for THRU option, ID1 < ID2)                                                                       |

**Remarks:**

1. Degrees-of-freedom specified on this entry form members of the a-set that are exclusive from other sets defined by Bulk Data entries. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
2. When ASET, ASET1, QSET, and/or QSET1 entries are present, all degrees-of-freedom not otherwise constrained (e.g., SPCi or MPC entries) will be placed in the omitted set (o-set).
3. If the alternate format is used, all points in the sequence ID1 through ID2 are not required to exist, but there must be at least one degree-of-freedom in the a-set for the model, or a fatal error will result. Any points implied in the THRU

**Degrees-of-freedom for the a-set, Alternate Form of ASET Entry**

that do not exist will collectively produce a warning message but will otherwise be ignored.

4. In nonlinear analysis, all degrees-of-freedom attached to nonlinear elements must be placed in the a-set. In other words, if the ASET or ASET1 entry is specified, then all nonlinear degrees-of-freedom must be specified on the ASET or ASET1 entry.

**1006 AXIC**  
**Conical Shell Problem Flag**

**AXIC** Conical Shell Problem Flag

Defines the existence of an axisymmetric conical shell problem.

**Format:**

|      |   |   |   |   |   |   |   |   |    |
|------|---|---|---|---|---|---|---|---|----|
| 1    | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| AXIC | H |   |   |   |   |   |   |   |    |

**Example:**

|      |    |  |  |  |  |  |  |  |  |
|------|----|--|--|--|--|--|--|--|--|
| AXIC | 15 |  |  |  |  |  |  |  |  |
|------|----|--|--|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                      |
|-------|---------------------------------------------------------------|
| H     | Highest harmonic defined for the problem. (0 < Integer < 998) |

**Remarks:**

1. Only one AXIC entry is allowed. When the AXIC entry is present, most other entries are not allowed. The types that are allowed with the AXIC entry are listed below:

|         |         |         |
|---------|---------|---------|
| CCONEAX | MAT1    | SECTAX  |
| DAREA   | MAT2    | SPCADD  |
| DELAY   | MATT1   | SPCAX   |
| DLOAD   | MOMAX   | SUPAX   |
| DMI     | MOMENT  | TABDMP1 |
| DMIG    | MPCADD  | TABLED1 |
| DPHASE  | MPCAX   | TABLED2 |
| EIGB    | NOLIN1  | TABLED3 |
| EIGC    | NOLIN2  | TABLED4 |
| EIGP    | NOLIN3  | TABLEM1 |
| EIGR    | NOLIN4  | TABLEM2 |
| EIGRL   | OMITAX  | TABLEM3 |
| EPOINT  | PARAM   | TABLEM4 |
| FORCE   | PCONEAX | TEMPAX  |

|         |         |        |
|---------|---------|--------|
| FORCEAX | POINTAX | TF     |
| FREQ    | PRESAX  | TIC    |
| FREQ1   | RINGAX  | TLOAD1 |
| FREQ2   | RFORCE  | TLOAD2 |
| GRAV    | RLOAD1  | TSTEP  |
| LOAD    | RLOAD2  |        |

2. For a discussion of the conical shell element, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.

**1008 AXIF**  
**Fluid Related Axisymmetric Parameters**

**AXIF** Fluid Related Axisymmetric Parameters

Defines basic parameters and the existence of an axisymmetric fluid analysis.

**Format:**

| 1    | 2   | 3  | 4    | 5  | 6     | 7      | 8 | 9 | 10 |
|------|-----|----|------|----|-------|--------|---|---|----|
| AXIF | CID | G  | DRHO | DB | NOSYM | F      |   |   |    |
|      | N1  | N2 | N3   | N4 | N5    | -etc.- |   |   |    |

**Example:**

|      |   |      |      |       |     |  |   |    |  |
|------|---|------|------|-------|-----|--|---|----|--|
| AXIF | 2 | 32.2 | 0.12 | 2.4+5 | YES |  |   |    |  |
|      | 1 | 2    | 3    |       | 4   |  | 7 | 10 |  |

**Alternate Formats and Examples of Continuation Data:**

|  |    |        |    |  |  |  |  |  |  |
|--|----|--------|----|--|--|--|--|--|--|
|  | N1 | "THRU" | Ni |  |  |  |  |  |  |
|  | 0  | THRU   | 10 |  |  |  |  |  |  |

|  |    |        |    |        |    |  |  |  |  |
|--|----|--------|----|--------|----|--|--|--|--|
|  | N1 | "THRU" | Ni | "STEP" | NS |  |  |  |  |
|  | 0  | THRU   | 9  | STEP   | 3  |  |  |  |  |

|      |     |        |    |      |    |    |  |  |  |
|------|-----|--------|----|------|----|----|--|--|--|
| AXIF | 100 | -386.0 |    | 0.0  | NO |    |  |  |  |
|      | 0   | THRU   | 50 | STEP | 5  |    |  |  |  |
|      | 52  |        |    |      |    |    |  |  |  |
|      | 54  | THRU   | 57 |      |    |    |  |  |  |
|      | 61  | THRU   | 65 |      |    |    |  |  |  |
|      | 68  |        | 71 |      | 72 | 75 |  |  |  |
|      | 81  | 92     |    |      |    |    |  |  |  |

**Fields:**

**Field Contents**

CID Fluid coordinate system identification number. (Integer > 0)

G Value of gravity for fluid elements in the axial direction. (Real)

DRHO Default mass density for fluid elements. (Real > 0.0 or blank)

DB Default bulk modulus for fluid elements. (Real)



| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NOSYM        | Request for nonsymmetric (sine) terms of series. (Character: "YES" or "NO")                                                                                                                                                                                                                                   |
| F            | Flag specifying harmonics. (Blank if harmonic is specified, or Character: "NONE.")                                                                                                                                                                                                                            |
| Ni           | Harmonic numbers for the solution, represented by an increasing sequence of integers. On continuation entries, without the "THRU" option, blank fields are ignored. "THRU" implies all numbers including upper and lower harmonics. ( $0 \leq \text{Integer} < 100$ , or Character: "THRU", "STEP" or blank.) |
| NS           | Every NSt <sup>h</sup> step of the harmonic numbers specified in the "THRU" range is used for the solution. If field 5 is "STEP", $N_i = i * NS + N_1$ where $i$ is the number of harmonics. (Integer)                                                                                                        |

**Remarks:**

1. Only one AXIF entry is allowed.
2. CID must reference a cylindrical or spherical coordinate system.
3. Positive gravity (+G) implies that the direction of free fall is in the -Z direction of the fluid coordinate system.
4. The DRHO value replaces blank values of RHO on the FSLIST, BDYLIST and CFLUIDi entries.
5. The DB value replaces blank values of B on the CFLUIDi entries. If the CFLUIDi entry is blank and DB is zero or blank, the fluid is incompressible.
6. If NOSYM="YES", both sine and cosine terms are specified. If NOSYM="NO", only cosine terms are specified.
7. If F="NONE", no harmonics are specified, no fluid elements are necessary, and no continuations may be present. In this case, AXIS="FLUID" should not be specified in the Case Control Section.
8. Superelements cannot be used.

**1010 AXSLOT**  
**Axisymmetric Slot Analysis Parameters**

**AXSLOT**      Axisymmetric Slot Analysis Parameters

Defines the harmonic index and the default values for acoustic analysis entries.

**Format:**

| 1      | 2    | 3  | 4 | 5  | 6  | 7 | 8 | 9 | 10 |
|--------|------|----|---|----|----|---|---|---|----|
| AXSLOT | RHOD | BD | N | WD | MD |   |   |   |    |

**Example:**

|        |       |       |   |      |   |  |  |  |  |
|--------|-------|-------|---|------|---|--|--|--|--|
| AXSLOT | 0.003 | 1.5+2 | 3 | 0.75 | 6 |  |  |  |  |
|--------|-------|-------|---|------|---|--|--|--|--|

**Fields:**

| Field | Contents                                                                                   |
|-------|--------------------------------------------------------------------------------------------|
| RHOD  | Default density of fluid in units of mass/volume. (Real=0.0 or blank)                      |
| BD    | Default bulk modulus of fluid in units of force/volume ratio change. (Real > 0.0 or blank) |
| N     | Harmonic index number. (Integer ≥ 0)                                                       |
| WD    | Default slot width. (Real ≥ 0.0 or blank)                                                  |
| MD    | Default number of slots. (Integer ≥ 0 or blank)                                            |

**Remarks:**

1. Only one AXSLOT entry is allowed.
2. If any of the RHO, B, and M fields on the GRID, SLBDY, CAXIFi, and CSLOTi entries are blank, then values must be specified for the RHOD, BD and MD fields.
3. If the number of slots (M) is different in different regions of the cavity, this fact may be indicated on the CSLOTi and SLBDY entries. If the number of slots is zero, no matrices for CSLOTi elements are generated.
4. BD=0.0 implies the fluid is incompressible.

**BAROR**    CBAR Entry Default Values

Defines default values for field 3 and fields 6 through 8 of the CBAR entry.

**Format:**

|       |   |     |   |   |    |    |    |   |    |
|-------|---|-----|---|---|----|----|----|---|----|
| 1     | 2 | 3   | 4 | 5 | 6  | 7  | 8  | 9 | 10 |
| BAROR |   | PID |   |   | X1 | X2 | X3 |   |    |

**Example:**

|       |  |    |  |  |     |     |       |  |  |
|-------|--|----|--|--|-----|-----|-------|--|--|
| BAROR |  | 39 |  |  | 0.6 | 2.9 | -5.87 |  |  |
|-------|--|----|--|--|-----|-----|-------|--|--|

**Alternate Format and Example**

|       |  |     |  |  |    |  |  |  |  |
|-------|--|-----|--|--|----|--|--|--|--|
| BAROR |  | PID |  |  | G0 |  |  |  |  |
|-------|--|-----|--|--|----|--|--|--|--|

|       |  |    |  |  |    |  |  |  |  |
|-------|--|----|--|--|----|--|--|--|--|
| BAROR |  | 39 |  |  | 18 |  |  |  |  |
|-------|--|----|--|--|----|--|--|--|--|

**Fields:**

| Field      | Contents                                                                                                                                                                                            |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID        | Property identification number of the PBAR entry. (Integer > 0 or blank)                                                                                                                            |
| X1, X2, X3 | Components of orientation vector $\vec{v}$ , from GA, in the displacement coordinate system at GA. (Real)                                                                                           |
| G0         | Alternate method to supply the orientation vector $\vec{v}$ , using grid point G0. The direction of $\vec{v}$ is from GA to G0. $\vec{v}$ is then translated to End A. (Integer > 0; G0 ≠ GA or GB) |

**Remarks:**

1. The contents of fields on this entry will be assumed for any CBAR entry whose corresponding fields are blank.
2. Only one BAROR entry is allowed.
3. For an explanation of bar element geometry, see “CBAR Element” in the *NX Nastran Element Library*.

**1012 BAROR**  
**CBAR Entry Default Values**

4. If field 6 is an integer, then G0 is used to define the orientation vector and X2 and X3 must be blank. If field 6 is real or blank, then X1, X2, and X3 are used.

**BCONP**      Slideline contact parameters

Defines the parameters for a slideline contact region and its properties.

**Format:**

| 1     | 2  | 3     | 4      | 5 | 6    | 7      | 8     | 9   | 10 |
|-------|----|-------|--------|---|------|--------|-------|-----|----|
| BCONP | ID | SLAVE | MASTER |   | SFAC | FRICID | PTYPE | CID |    |

**Example:**

|       |    |    |    |  |     |    |   |  |  |
|-------|----|----|----|--|-----|----|---|--|--|
| BCONP | 95 | 10 | 15 |  | 1.0 | 33 | 1 |  |  |
|-------|----|----|----|--|-----|----|---|--|--|

**Fields:**


| Field  | Contents                                                                                                                                                                                           |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID     | Contact region identification number. See Remark 1 (Integer > 0).                                                                                                                                  |
| SLAVE  | Slave region identification number. See Remark 2 (Integer > 0).                                                                                                                                    |
| MASTER | Master region identification number. See Remark 3 (Integer > 0).                                                                                                                                   |
| SFAC   | Stiffness scaling factor. SFAC is used to scale the penalty values automatically calculated by the program. See Remark 4 (Real > 0.0, Default=1.0).                                                |
| FRICID | Contact friction identification number. See Remark 5 (Integer > 0 or blank).                                                                                                                       |
| PTYPE  | Penetration type. See Remark 6 .<br><br>(Integer 1 or 2, Default=1)<br><br>1: unsymmetrical (slave penetration only—Default)<br><br>2: symmetrical                                                 |
| CID    | Coordinate system identification number to define the slideline plane vector and the slideline plane of contact. See Remark 7 . (Integer > 0, Default=0, which means the basic coordinate system.) |

**Remarks:**

1. The ID field must be unique with respect to all other BCONP identification numbers.

## 1014 BCONP Slideline contact parameters

2. The referenced SLAVE is the identification number in the BLSEG Bulk Data entry. This is the slave line. The width of each slave segment must also be defined to get proper contact stresses. See the Bulk Data entry, “**BWIDTH**” for details on specifying widths.
3. The referenced MASTER is the identification number in the BLSEG Bulk Data entry. This is the master line. For symmetrical penetration, the width of each master segment must also be defined. See the Bulk Data entry, “**BWIDTH**” for details on specifying widths.
4. SFAC may be used to scale the penalty values automatically calculated by the program. The program calculates the penalty value as a function of the diagonal stiffness matrix coefficients that are in the contact region. In addition to SFAC, penalty values calculated by the program may be further scaled by the ADPCON parameter. (See the ADPCON parameter description for more details). The penalty value is then equal to  $k \cdot \text{SFAC} \cdot |\text{ADPCON}|$ , where  $k$  is a function of the local stiffness. It should be noted that the value in SFAC applies to only one contact region, whereas the ADPCON parameter applies to all the contact regions in the model.
5. The referenced FRLCLD is the identification number of the BFRLC Bulk Data entry. The BFRLC defines the frictional properties for the contact region.
6. In an unsymmetrical contact algorithm, only slave nodes are checked for penetration into master segments. This may result in master nodes penetrating the slave line. However, the error depends only on the mesh discretization. In symmetric penetration, both slave and master nodes are checked for penetration. Thus, no distinction is made between slave and master. Symmetric penetration may be up to thirty percent more expensive than the unsymmetric penetration.
7. In [Figure 11-1](#), the unit vector in the Z-axis of the coordinate system defines the slideline plane vector. The slideline plane vector is normal to the slideline plane. Relative motions outside the slideline plane are ignored, and therefore must be small compared to a typical master segment. In a master segment, the direction from master node 1 to master node 2 gives the tangential direction ( $t$ ). The normal direction for a master segment is obtained by the cross product of the slideline plane vector with the unit tangent vector (i.e.,  $n = z \times t$ ). The definition of the coordinate system should be such that the normal direction must point toward the slave region. For symmetric penetration, the normals of master segments and slave segments must face each other. This is generally accomplished by traversing from master line to slave line in a counterclockwise or clockwise fashion depending on whether the slideline plane vector forms a right-hand or left-hand coordinate system with the slideline plane.

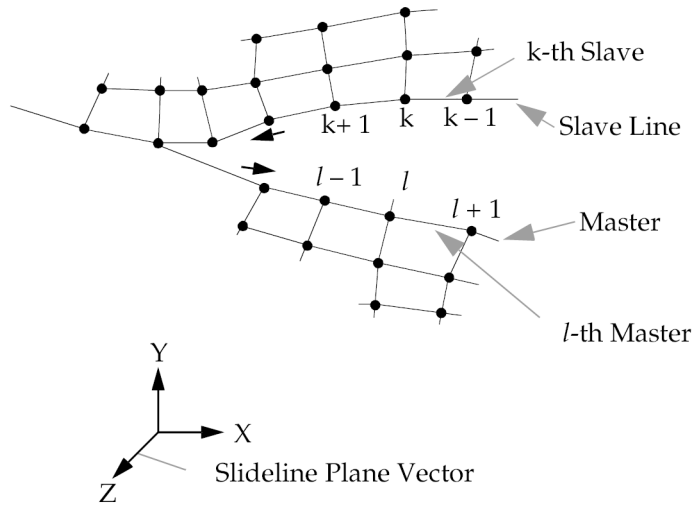

- The X-Y plane is the slideline plane. Unit normal in the Z-direction is the slideline plane vector.
- Arrows show positive direction for ordering nodes. Counterclockwise from master line to slave line.

**Figure 11-1. A Typical Finite Element Slideline Contact Region**

**1016 BCPROP**  
**Surface-to-Surface Contact or Glue Region Definition by Property ID**

**BCPROP**      Surface-to-Surface Contact or Glue Region Definition by Property ID

Defines a surface-to-surface contact or glue region by property IDs of shell elements.

**Format:**

| 1      | 2   | 3   | 4    | 5     | 6   | 7   | 8   | 9   | 10 |
|--------|-----|-----|------|-------|-----|-----|-----|-----|----|
| BCPROP | ID  | IP1 | IP2  | IP3   | IP4 | IP5 | IP6 | IP7 |    |
|        | IP8 | IP9 | IP10 | -etc- |     |     |     |     |    |

**Example:**

|        |   |   |   |   |   |    |  |  |  |
|--------|---|---|---|---|---|----|--|--|--|
| BCPROP | 3 | 1 | 5 | 8 | 3 | 22 |  |  |  |
|--------|---|---|---|---|---|----|--|--|--|

**Fields:**

| Field           | Contents                                                                             |
|-----------------|--------------------------------------------------------------------------------------|
| ID              | Identification number of a contact or glue region. See Remark 2 and 3. (Integer > 0) |
| IP <sub>i</sub> | Property ID of shell elements. (Integer > 0)                                         |

**Remarks:**

1. The continuation field is optional.
2. BCPROP is a collection of one or more shell property IDs. BCPROP defines a contact or glue region which may act as a source or target.
3. The ID must be unique with respect to all other BLSEG, BSURFS, BSURF, BCPROP, and BCPROPS entries.



**BCPROPS**      Contact or Glue Region Definition by PSOLID Property ID

Defines a surface-to-surface contact or glue region by PSOLID Property ID.

**Format:**

| 1       | 2   | 3   | 4    | 5     | 6   | 7   | 8   | 9   | 10 |
|---------|-----|-----|------|-------|-----|-----|-----|-----|----|
| BCPROPS | ID  | IP1 | IP2  | IP3   | IP4 | IP5 | IP6 | IP7 |    |
|         | IP8 | IP9 | IP10 | -etc- |     |     |     |     |    |

**Example:**

|         |   |   |   |   |   |    |  |  |  |
|---------|---|---|---|---|---|----|--|--|--|
| BCPROPS | 3 | 1 | 5 | 8 | 3 | 22 |  |  |  |
|---------|---|---|---|---|---|----|--|--|--|

**Fields:**

| Field           | Contents                                                                             |
|-----------------|--------------------------------------------------------------------------------------|
| ID              | Identification number of a contact or glue region. See Remark 2 and 3. (Integer > 0) |
| IP <sub>i</sub> | PSOLID Property IDs. (Integer > 0)                                                   |

**Remarks:**

1. The continuation field is optional.
2. BCPROPS is a collection of one or more solid property IDs. BCPROPS defines a contact or glue region formed by the free faces of the solid elements and may act as a source or target.
3. The ID must be unique with respect to all other BLSEG, BSURFS, BSURF, BCPROP, and BCPROPS entries.
4. Only the solid element free faces within the given set of PIDs are considered in the contact and/or glue algorithm. These free faces are automatically determined by the software.

## 1018 BCRPARA Surface-to-Surface Contact Region Parameters

### BCRPARA Surface-to-Surface Contact Region Parameters

Defines parameters for a surface-to-surface contact region.

#### Format:

| 1       | 2    | 3    | 4      | 5    | 6   | 7 | 8 | 9 | 10 |
|---------|------|------|--------|------|-----|---|---|---|----|
| BCRPARA | CRID | SURF | OFFSET | TYPE | MGP |   |   |   |    |

#### Example:

|         |   |     |      |  |  |  |  |  |  |
|---------|---|-----|------|--|--|--|--|--|--|
| BCRPARA | 1 | TOP | 0.02 |  |  |  |  |  |  |
|---------|---|-----|------|--|--|--|--|--|--|

#### Fields:

| Field  | Contents                                                                                                                                                                                                                                                            |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CRID   | Contact region ID. (Integer > 0)                                                                                                                                                                                                                                    |
| SURF   | Indicates the contact side of shell elements. See Remark 1 and SOL 601 and 701 Remarks 1 and 2. (Character="TOP" or "BOT"; Default="TOP")                                                                                                                           |
| OFFSET | Offset distance for the contact region.<br>For SOLs 101, 103, 111 and 112: Real, Default = 0.0<br>For SOLs 601 and 701: Real >= 0.0, Default = OFFSET value in BCTPARA entry. See SOL 601 and 701 Remark 3.                                                         |
| TYPE   | Indicates whether a 3D contact region is a rigid (target) surface or is a shell coating on solid elements. See Remarks 4 to 8 in the SOL 601 and 701 remarks. (Character="FLEX", "RIGID" or "COATING". Default="FLEX"). This is only supported by SOLs 601 and 701. |
| MGP    | Master grid point for a target contact region with TYPE=RIGID or when the rigid-target algorithm is used. The master grid point may be used to control the motion of a rigid surface. (Integer ≥ 0; Default=0) This is only supported by SOLs 601 and 701.          |

#### Remarks:

1. The BCRPARA bulk entry is not required. When it is not present, the default values are used.
2. SURF is used to define the contact side of shell element regions. When SURF is "TOP", the contact side is consistent with the shell element normal and when "BOT" the opposite. In a SOL 101 (including consecutive solutions 103, 111

and 112), SURF must be defined so that source and target contact sides either face one another to represent a separation condition, or oppose one another to represent an interference condition.

**Remarks related to SOL 601 and 701:**

1. For a 3D contact region, SURF is applicable only for a single-sided contact region defined on shell elements (i.e., using BSURF or BCPROP) and is used as a target region. For a contact region defined on 3D solid element faces (i.e., using BSURFS), the contact side is automatically determined by the program. For a contact region used as a source region (contactor), it does not matter which is the contact side.
2. For a 2D contact region, SURF is only applicable to a rigid target region defined by grid points that are not attached to any elements. For a 2D contact region with underlying 2D elements, the contact side is automatically determined by the program.
3. OFFSET is only applicable when the rigid target algorithm is not selected, (i.e., TYPE or XTYPE=0 or 1 in the BCTPARA entry).
4. TYPE="RIGID" is ignored if the contact region is used as a source region.
5. If the rigid target algorithm is selected (i.e., TYPE=2 (SOL 601) or XTYPE= 3 (SOL 701) in BCTPARA command), the target region must be attached to shell elements only (i.e., using BSURF or BCPROP) and it is automatically set as rigid.
6. TYPE and MGP are interpreted as follows:
  - 2D target regions using grids only (not attached to underlying elements) are always rigid. MGP>0 can be specified without TYPE=RIGID.
  - 2D target regions with underlying elements will behave as rigid only when both TYPE=RIGID and MGP>0 are specified. Otherwise, the target region is flexible and MGP is ignored.
  - 3D target regions that are attached to solid elements will behave as rigid only when both TYPE=RIGID and MGP>0 are specified. Otherwise, the target region is flexible and MGP is ignored.
  - 3D target regions that are attached to shell elements (i.e., using BSURF or BCPROP), only TYPE=RIGID is required for the region to behave as rigid. MGP is ignored when TYPE=FLEX.
7. TYPE="COATING" should only be specified for a contact region defined on shell elements (i.e., using BSURF or BCPROP), coated on solid elements. The contact region will be transferred onto the solid element faces and the shell elements

## 1020 BCRPARA

### Surface-to-Surface Contact Region Parameters

will be deleted. If there are no underlying solid elements, an error message will be issued.

8. A contact region is specified as a target or source region in the BCTSET entry.
9. When TYPE=COATING, the shell elements should match the solid element faces, i.e. element edges should match, linear shell on linear solid face, and parabolic shell on parabolic solid face.

**Surface-to-Surface Contact Set Combination (SOLs 101, 103, 111, 112, 601 and 701)**

**BCTADD** Surface-to-Surface Contact Set Combination (SOLs 101, 103, 111, 112, 601 and 701)

Defines a surface-to-surface contact set as a union of contact sets defined on BCTSET entries.

**Format:**

| 1      | 2    | 3  | 4     | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|------|----|-------|----|----|----|----|----|----|
| BCTADD | CSID | SI | S2    | S3 | S4 | S5 | S6 | S7 |    |
|        | S8   | S9 | -etc- |    |    |    |    |    |    |

**Example:**

|        |    |   |   |   |   |   |  |  |  |
|--------|----|---|---|---|---|---|--|--|--|
| BCTADD | 12 | 1 | 3 | 6 | 5 | 9 |  |  |  |
|--------|----|---|---|---|---|---|--|--|--|

**Fields:**

| Field | Contents                                                                         |
|-------|----------------------------------------------------------------------------------|
| CSID  | Contact set identification number. (Integer > 0)                                 |
| Si    | Identification numbers of contact sets defined via BCTSET entries. (Integer > 0) |

**Remarks:**

- Multiple contact sets (BCTSETs) with unique CSIDs can be combined by including their CSIDs on a BCTADD entry. The BCTADD entry has its own unique CSID which is used on the BCSET case control command. Multiple contact sets with their own CSID are necessary when different parameters (BCTPARA or BCTPARM) are needed for different contact sets.
- To include several contact sets defined via BCTSET entries in a model, BCTADD must be used to combine the contact sets. CSID in BCTADD is then selected with the Case Control command BCSET.
- Si must be unique and may not be the identification of this or any other BCTADD entry.

## 1022 BCTPARA SOLs 601 and 701 Contact Set Parameters

### BCTPARA SOLs 601 and 701 Contact Set Parameters

Defines parameters for a SOL 601 or 701 contact set.

#### Format:

| 1       | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9 | 10 |
|---------|--------|--------|--------|--------|--------|--------|--------|---|----|
| BCTPARA | CSID   | Param1 | Value1 | Param2 | Value2 | Param3 | Value3 |   |    |
|         | Param4 | Value4 | Param5 | Value5 | -etc-  |        |        |   |    |

#### Example:

|         |         |      |         |        |     |        |   |  |  |
|---------|---------|------|---------|--------|-----|--------|---|--|--|
| BCTPARA | 2       | EPSN | 1.0E-10 | TZPENE | 0.1 | CSTIFF | 1 |  |  |
|         | OFFTYPE | 2    | INIPENE | 3      |     |        |   |  |  |

#### Fields:

| Field  | Contents                                                                                                              |
|--------|-----------------------------------------------------------------------------------------------------------------------|
| CSID   | Contact set ID. Parameters defined in this command apply to contact set CSID defined by a BCTSET entry. (Integer > 0) |
| PARAMi | Name of the BCTPARA parameter. Allowable names are given in the parameter listing below. (Character)                  |
| VALUEi | Value of the parameter. See <a href="#">Table 11-2</a> for parameter listing. (Real or Integer)                       |

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name               | Description                                                                                                                                                                                                                              |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General Parameters |                                                                                                                                                                                                                                          |
| TYPE               | Selects the type of contact algorithm. TYPE = 2 is not applicable for 2D contact. (Integer; Default=0)<br><br>0 – Constraint function algorithm is used.<br>1 – Segment method algorithm is used.<br>2 – Rigid target algorithm is used. |

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NSIDE   | Flags single or double-sided contact. NSIDE is not applicable for 2D contact. (Integer; Default=1)<br><br>1 – Contact surfaces are single-sided.<br><br>2 – Contact surfaces are double-sided.                                                                                                                                                                                                                                                                                                                       |
| TBIRTH  | Birth time for contact set. (Real; Default=0.0; Unit = Time)                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| TDEATH  | Death time for contact set. (Real; Default=0.0; Unit = Time) If $TDEATH \leq TBIRTH$ , it is ignored.                                                                                                                                                                                                                                                                                                                                                                                                                |
| INIPENE | Flags how initial penetrations or gaps are handled. (Integer; Default=0)<br><br>0 – Initial penetrations are eliminated.<br><br>1 – Initial penetrations are eliminated and the list of penetrating nodes is printed.<br><br>2 – Initial penetrations are ignored. In successive steps, each contractor node is allowed to penetrate the target up to its initial penetration.<br><br>3 – Initial penetrations or gaps are overridden by GAPVAL. This option is not available for rigid target algorithm (TYPE = 2). |
| GAPVAL  | Specifies a constant gap distance between the source region (contactor) and the target region when INIPENE = 3. Negative GAPVAL means initial penetrations which will be eliminated. (Real, Default = 0.0; Unit = Length)                                                                                                                                                                                                                                                                                            |
| PDEPTH  | Penetration depth for single-sided contact (i.e. NSIDE=1). (Real; Default=0.0; Unit = Length) If PDEPTH > 0.0, then penetration is detected. When penetration $\leq$ PDEPTH, and if penetration > PDEPTH, penetration is deemed not to occur.                                                                                                                                                                                                                                                                        |

**1024 BCTPARA**  
**SOLs 601 and 701 Contact Set Parameters**

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEGNORM                                         | <p>Indicates whether a continuous (interpolated) contact segment normal is used for the contact surfaces. (Integer; Default=0)</p> <p>0 – SEGNORM=1 if NSIDE=1, SEGNORM=-1 if NSIDE=2.</p> <p>1 – Continuous segment normal is used.</p> <p>-1 – Continuous segment normal is not used.</p>                                                                                                                                                                                 |
| OFFTYPE                                         | <p>Type of offset for contact regions. OFFTYPE is not applicable for 2D contact. (Integer; Default=0)</p> <p>0 – Use offset value specified by OFFSET for single-sided contact only. (i.e., NSIDE=1). Use offset of 0.001 for double-sided contact (i.e., NSIDE=2)</p> <p>1 – Use specified offset value for either single- or double-sided contact.</p> <p>2 – Half the shell thickness is used for contact regions on shell elements and no offset is used otherwise.</p> |
| OFFSET                                          | <p>Default offset distance for contact regions. (Real <math>\geq</math> 0.0; Default=0.0; Unit = Length)</p> <p>Note: For contact algorithm TYPE=0 or 1, individual offset distances can be specified for each contact region using the BCRPARA entry to override the default offset distance specified here.</p>                                                                                                                                                           |
| <p>Standard contact algorithm (TYPE=0 or 1)</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| DISP                                            | <p>Selects the displacement formulation used for this contact set. (Integer; Default = 0)</p> <p>0 – Use the formulation selected by CTDISP in NXSTRAT entry (default)</p> <p>1 – Use small displacement formulation (contact conditions are not updated)</p> <p>2 – Use large displacement formulation (contact conditions are updated)</p>                                                                                                                                |



**Table 11-2. BCTPARA Parameters for SOL 601**

| Name    | Description                                                                                                                                                                                                                                                                                                                                          |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TZPENE  | Time to eliminate initial penetrations. (Real $\geq 0.0$ ; Default=0.0; Unit = Time) If TZPENE=0.0 and INIPENE=0 or 1, then the initial penetrations are eliminated in the first time step. This may cause convergence difficulties for certain problems. By using TZPENE > 0.0, the initial penetrations are eliminated gradually over time TZPENE. |
| CSTIFF  | Indicates whether consistent contact stiffness is used. (Integer; Default=0)<br><br>0 – Consistent contact stiffness is not used<br><br>1 – Consistent contact stiffness is used                                                                                                                                                                     |
| TIED    | Indicates whether contact regions in each contact pair are tied together. Currently, tied contact option assumes small rotations of the contact regions. (Integer; Default=0)<br><br>0 – Not tied<br><br>1 – Tied                                                                                                                                    |
| TIEDTOL | Tolerance used to determine whether contactor nodes are tied to the target region when TIED=1 is specified. A contactor node is tied to its target region if the distance between them is less than or equal to TIEDTOL. (Real; Default=0.0; Unit = Length)                                                                                          |
| EXTFAC  | Factor for extending contact surfaces beyond their boundaries. The amount of extension is given by this factor multiplied by the length of the contact segments. ( $1.0E-6 \leq \text{Real} \leq 0.1$ ; Default=0.001; Unitless)                                                                                                                     |

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FRICMOD | <p>Type of friction model (<math>0 \leq \text{Integer} \leq 13</math>; Default=0). See Remark 1.</p> <p>0 – Constant coefficient of friction specified for each contact pair, i.e. FRIC<sub>i</sub> in the BCTSET entry.</p> <p>1 – Constant coefficient of friction specified by FPARA1.</p> <p>2 – Friction model 1; uses FPARA1 and FPARA2.</p> <p>3 – Friction model 2; uses FPARA1, FPARA2, and FPARA3.</p> <p>4 – Use different static and dynamic friction coefficients; uses FPARA1, FPARA2, and FPARA3.</p> <p>5 – Friction coefficient varies with sliding velocity; uses FPARA1, FPARA2 and FPARA3.</p> <p>6 – Anisotropic friction model; uses FPARA1, FPARA2, FPARA3, FPARA4, and FPARA5.</p> <p>7 – Friction coefficient varies with consistent contact force; uses FPARA1 and FPARA2.</p> <p>8 – Friction coefficient varies with time; uses FPARA1, FPARA2 and FPARA3.</p> <p>9 – Friction coefficient varies with coordinate values; uses FPARA1, FPARA2, FPARA3, FPARA4, and FPARA5.</p> <p>12 – Modified friction model 1; uses FPARA1 and FPARA2.</p> <p>13 – Modified friction model 2; uses FPARA1, FPARA2, and FPARA3.</p> <p>See Section 4.4 of the Advanced Nonlinear Theory and Modeling Guide for a description of friction models.</p> |
| FPARA1  | Friction parameter A1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| FPARA2  | Friction parameter A2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| FPARA3  | Friction parameter A3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| FPARA4  | Friction parameter A4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name                                              | Description                                                                                                                                                                                                                                                                           |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FPARA5                                            | Friction parameter A5                                                                                                                                                                                                                                                                 |
| FRICDLY                                           | Indicates whether the application of friction is delayed, i.e., friction is applied on a node one time step after the node comes into contact. Delay of friction application may improve the convergence of the solution. (Integer; Default = 0)<br><br>0 – No delay<br><br>1 – Delay |
| Constraint Function Contact Algorithm (Type=0)    |                                                                                                                                                                                                                                                                                       |
| EPSN                                              | Parameter for normal constraint function, w. (Real; Default=1.0E-12; Unitless)                                                                                                                                                                                                        |
| EPST                                              | Parameter for frictional constraint function, v. (Real > 0.0; Default=0.001 Unit = Length/Time)                                                                                                                                                                                       |
| CFACTOR1                                          | Compliance factor. (Real; Default=0.0; Unit = Length <sup>3</sup> /Force)                                                                                                                                                                                                             |
| Thermo-Mechanical Coupling (for TYPE=0 only)      |                                                                                                                                                                                                                                                                                       |
| TMCHHAT                                           | Contact heat transfer coefficient used for calculating the amount of heat transfer between bodies in contact. (Real ≥ 0.0, Default = 0.0; Unit = Watt/(Length <sup>2</sup> *Temperature))                                                                                             |
| TMCFC                                             | Coefficient that specifies the proportion of heat generated due to frictional contact going to the contactor body. (0.0 ≤ Real ≤ 1.0, Default = 0.5, Unitless; TMCFC + TMCFT ≤ 1.0)                                                                                                   |
| TMCFT                                             | Coefficient that specifies the proportion of heat generated due to frictional contact going to the target body. (0.0 ≤ Real ≤ 1.0, Default = 0.5, Unitless; TMCFC + TMCFT ≤ 1.0)                                                                                                      |
| Rigid Target Algorithm (TYPE=2) (3D contact only) |                                                                                                                                                                                                                                                                                       |
| NCMOD                                             | Normal contact modulus. (Real; Default=1.0E11; Unit = Force/Length)                                                                                                                                                                                                                   |

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name                                                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters used with current rigid-target algorithm (RTALG=0 in NXSTRAT) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| TFORCE                                                                   | The maximum tensile contact force allowed for a converged solution. (Real $\geq$ 0.0, Default = 0.001; Unit = Force)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| SLIDVEL                                                                  | The maximum sliding velocity used in modeling sticking friction. When the velocity is smaller than SLIDVEL, sticking is assumed; when the velocity is larger than SLIDVEL, sliding is assumed. (Real $>$ 0.0, Default = 1.0E-10; Unit = Length/Time)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| OCHECK                                                                   | <p>Specifies whether oscillation checking is performed and when it is done. (Integer <math>\geq</math> 0; Default = 5)</p> <p>If OCHECK=0, no oscillation checking is performed. Otherwise, oscillation checking is performed after equilibrium iteration OCHECK. Oscillation checking consists of two checks:</p> <p>a) If a contactor node oscillates between two neighboring target segments during the equilibrium iterations, oscillation checking puts the contactor node into contact with the boundary edge between the target segments.</p> <p>b) In analysis with friction, if the sliding velocity of a contactor node oscillates during the equilibrium iterations, oscillation checking puts the contactor node into sticking contact.</p> |
| GAPBIAS                                                                  | Contact is detected when the distance between the target and contactor (accounting for any offsets) is less than GAPBIAS. (Real; Default = 0.0; Unit = Length)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name                                                                                                                                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OFFDET                                                                                                                                       | <p>Selects the implementation of offsets. (Integer; Default = 0) 0 – Program chooses the implementation based upon the shape of the target surfaces; if a target surface is flat or convex, spheres are used, otherwise, normals are used.</p> <p>1 – A sphere of radius equal to the offset is placed around each contactor node, and contact is detected between the sphere and the target surface.</p> <p>2 – Two surfaces are constructed for each contactor surface: an upper surface and a lower surface. These surfaces are constructed using the offsets and the averaged contactor normals. Contact is then detected between points on the constructed contactor surfaces and target surface.</p> |
| <p>Parameters used with old (NX Nastran Version 4) rigid-target algorithm (RTALG=1 in NXSTRAT) which may be removed in a future release.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| PENETOL                                                                                                                                      | <p>Penetration tolerance which gives the maximum penetration allowed into a rigid target surface. (Real; Default=1.0E-8)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| TCMOD                                                                                                                                        | <p>Tangential contact modulus. (Real; Default=0.0)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| RFORCE                                                                                                                                       | <p>Minimum tensile contact force required to change the state of a contact node from "node in contact" to "free node", i.e., if the normal tensile force is greater than RFORCE, a "node in contact" becomes a "free node". (Real; Default=0.001)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| LFORCE                                                                                                                                       | <p>Limit (maximum) for the sum of all contact forces for nodes changing from the state of "node in contact" to "free node". If the absolute value of the sum of the forces is bigger than LFORCE, then the automatic time stepping (ATS) method will be activated to subdivide the current time step into smaller time increments. (Real; Default=1.0)</p>                                                                                                                                                                                                                                                                                                                                                 |

**Table 11-2. BCTPARA Parameters for SOL 601**

| Name     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RTPCHECK | <p data-bbox="465 377 1267 495">Specifies whether penetration is checked (in addition to checking the tensile contact force) against the maximum allowable penetration when the rigid-target algorithm is used. (Integer; Default=0)</p> <p data-bbox="465 525 1267 613">0 – Penetration is not checked. Note that with this setting there is a possibility that the rigid target surface may penetrate the contactor surface excessively.</p> <p data-bbox="465 643 1267 696">1 – Penetration is checked and subdivision of the time step occurs if the penetration exceeds (RTPMAX * maximum model length.)</p> <p data-bbox="465 726 1267 779">2 – Penetration is checked and subdivision of time step occurs if the penetration exceeds RTPMAX.</p> |
| RTPMAX   | <p data-bbox="465 816 1292 938">Specifies the maximum allowable penetration when the rigid target algorithm is used. RTPMAX is either a factor of the model size or an absolute value depending on the RTPCHECK parameter. (Real &gt; 0.0; Default=0.001)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Table 11-3. BCTPARA Parameters for SOL 701 (3D contact only)**

| Name               | Description                                                                                                                                                                                                                                                                                                                      |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General Parameters |                                                                                                                                                                                                                                                                                                                                  |
| XTYPE              | <p data-bbox="465 1218 1178 1241">Selects the type of contact algorithm. (Integer; Default=0)</p> <p data-bbox="465 1271 1000 1294">0 – Kinematic constraint algorithm is used.</p> <p data-bbox="465 1324 836 1347">1 – Penalty algorithm is used.</p> <p data-bbox="465 1377 896 1400">3 – Rigid target algorithm is used.</p> |
| NSIDE              | <p data-bbox="465 1474 1169 1497">Flags single or double-sided contact. (Integer; Default=1)</p> <p data-bbox="465 1527 926 1550">1 – Contact surfaces are single-sided.</p> <p data-bbox="465 1580 936 1603">2 – Contact surfaces are double-sided.</p>                                                                         |

**Table 11-3. BCTPARA Parameters for SOL 701 (3D contact only)**

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TBIRTH  | Birth time for contact set. (Real; Default=0.0; Unit = Time)                                                                                                                                                                                                                                                                                                                                                               |
| TDEATH  | Death time for contact set. (Real; Default=0.0; Unit = Time) If TDEATH ≤ TBIRTH, it is ignored.                                                                                                                                                                                                                                                                                                                            |
| INIPENE | Flags how initial penetrations are handled. (Integer; Default=0)<br><br>0 – Initial penetrations are eliminated.<br><br>1 – Initial penetrations are eliminated and the list of penetrating nodes is printed.<br><br>2 – Initial penetrations are ignored. In successive steps, each contactor node is allowed to penetrate the target up to its initial penetration.                                                      |
| PDEPTH  | Penetration depth for single-sided contact (i.e. NSIDE=1). (Real; Default=0.0; Unit = Length) If PDEPTH > 0.0, then penetration is detected. When penetration ≤ PDEPTH, and if penetration > PDEPTH, penetration is deemed not to occur.                                                                                                                                                                                   |
| OFFTYPE | Type of offset for contact regions. (Integer; Default=0)<br><br>0 – Use offset value specified by OFFSET for single-sided contact only (i.e., NSIDE=1). Use offset of 0.001 for double-sided contact (i.e., NSIDE=2).<br><br>1 – Use specified offset value for either single- or double-sided contact.<br><br>2 – Half the shell thickness is used for contact regions on shell elements and no offset is used otherwise. |
| OFFSET  | Default offset distance for contact regions. (Real; Default=0.0; Unit = Length) Note: For contact algorithm XTYPE=0 or 1, individual offset distances can be specified for each contact region using the BCRPARA entry to override the default offset distance specified here.                                                                                                                                             |

**1032 BCTPARA**  
**SOLs 601 and 701 Contact Set Parameters**

**Table 11-3. BCTPARA Parameters for SOL 701 (3D contact only)**

| <b>Name</b>                         | <b>Description</b>                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TZPENE                              | Time to eliminate initial penetrations. (Real=0.0; Default=0.0; Unit = Time) If TZPENE=0.0 and INIPENE=0 or 1, then the initial penetrations are eliminated in the first time step. This may cause convergence difficulties for certain problems. By using TZPENE > 0.0, the initial penetrations are eliminated gradually over time TZPENE. |
| EXTFAC                              | Factor for extending contact surfaces beyond their boundaries. The amount of extension is given by this factor multiplied by the length of the contact segments. ( $1.0E-6 \leq \text{Real} \leq 0.1$ ; Default=0.001; Unitless)                                                                                                             |
| Penalty Contact Algorithm (XTYPE=1) |                                                                                                                                                                                                                                                                                                                                              |
| XKNCRIT                             | Selects the criterion for evaluation of normal penalty stiffness. (Integer; Default=0)<br><br>0 - The program calculates the normal penalty stiffness.<br>1 - The user specifies the normal penalty stiffness (XKN).                                                                                                                         |
| XKN                                 | Specifies the normal penalty stiffness to be used when XKNCRIT=1. (Real; Unit = Force/Length <sup>3</sup> )                                                                                                                                                                                                                                  |
| XKTCRIT                             | Selects the criterion for evaluation of tangential penalty stiffness. (Integer; Default=0)<br><br>0 - The program calculates the normal penalty stiffness<br>1 - The user specifies the normal penalty stiffness (XKT).                                                                                                                      |
| XKT                                 | Specifies the tangential penalty stiffness to be used when XKTCRIT=1. (Real; Unit = Force*Time/Length <sup>3</sup> )                                                                                                                                                                                                                         |



**Table 11-3. BCTPARA Parameters for SOL 701 (3D contact only)**

| Name                                                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XDAMP                                                                    | <p>Indicates whether damping is used when the penalty explicit contact algorithm is used. (Integer; Default=0)</p> <p>0 – Damping is not used, i.e., the XNDAMP parameter is ignored.</p> <p>1 – Damping is used and XNDAMP is a factor of the critical damping, i.e., the damping coefficient is given by XNDAMP multiplied by the critical damping. This is the recommended choice if damping is used.</p> <p>2 – Damping is included and the damping coefficient is specified directly by XNDAMP.</p> |
| XNDAMP                                                                   | <p>Specifies the relative or absolute damping coefficient (for normal penalty stiffness) when the penalty explicit contact algorithm is used and XDAMP=1 or 2. (Real=0.0; Default=0.1; Unit = Force*Time/Length<sup>3</sup>)</p>                                                                                                                                                                                                                                                                         |
| Rigid Target Algorithm (XTYPE=3)                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Parameters used with current rigid-target algorithm (RTALG=0 in NXSTRAT) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| SLIDVEL                                                                  | <p>The maximum sliding velocity used in modeling sticking friction. When the velocity is smaller than SLIDVEL, sticking is assumed; when the velocity is larger than SLIDVEL, sliding is assumed. (Real &gt; 0.0, Default = 1.0E-10)</p>                                                                                                                                                                                                                                                                 |
| GAPBIAS                                                                  | <p>Contact is detected when the distance between the target and contactor (accounting for any offsets) is less than GAPBIAS. (Real; Default = 0.0)</p>                                                                                                                                                                                                                                                                                                                                                   |

1034 **BCTPARA**  
SOLs 601 and 701 Contact Set Parameters

**Table 11-3. BCTPARA Parameters for SOL 701 (3D contact only)**

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OFFDET      | Selects the implementation of offsets. (Integer; Default = 0)<br><br>0 – Program chooses the implementation based upon the shape of the target surfaces; if a target surface is flat or convex, spheres are used, otherwise, normals are used.<br><br>1 – A sphere of radius equal to the offset is placed around each contactor node, and contact is detected between the sphere and the target surface.<br><br>2 – Two surfaces are constructed for each contactor surface: an upper surface and a lower surface. These surfaces are constructed using the offsets and the averaged contactor normals. Contact is then detected between points on the constructed contactor surfaces and target surface.<br><br>Parameters used with old (v4) rigid-target algorithm (RTALG=1 in NXSTRAT) which may be removed in a future release. |
| PENETOL     | Penetration tolerance which gives the maximum penetration allowed into a rigid target surface. (Real; Default=1.0E-8)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| TCMOD       | Tangential contact modulus. (Real; Default=0.0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Remarks:**

1. Field 9 on line 1 should be blank. Beginning on the continuation lines, fields 2 to 9 can be used for 4 pairs of PARAM/VALUE.
2. The BCTPARA bulk entry is not required. When it is not present, the default values are used. At least one parameter should be defined when a BCTPARA entry exists.

**Surface-to-Surface Contact Parameters (SOLs 101, 103, 111 and 112).**

**BCTPARAM** Surface-to-Surface Contact Parameters (SOLs 101, 103, 111 and 112).

Control parameters for the surface-to-surface contact algorithm.

**Format:**

| 1        | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9 | 10 |
|----------|--------|--------|--------|--------|--------|--------|--------|---|----|
| BCTPARAM | CSID   | Param1 | Value1 | Param2 | Value2 | Param3 | Value3 |   |    |
|          | Param4 | Value4 | Param5 | Value5 | -etc-  |        |        |   |    |

**Example:**

|          |        |      |      |      |     |      |       |  |  |
|----------|--------|------|------|------|-----|------|-------|--|--|
| BCTPARAM | 1      | PENN | 10.0 | PENT | 0.5 | CTOL | 0.001 |  |  |
|          | SHLTHK | 1    |      |      |     |      |       |  |  |

**Fields:**

| Field  | Contents                                                                                                              |
|--------|-----------------------------------------------------------------------------------------------------------------------|
| CSID   | Contact set ID. Parameters defined in this command apply to contact set CSID defined by a BCTSET entry. (Integer > 0) |
| PARAMi | Name of the BCTPARAM parameter. Allowable names are given in the parameter listing below. (Character)                 |
| VALUEi | Value of the parameter. See <a href="#">Table 11-4</a> for the parameter listing. (Real or Integer)                   |

**Note**

**Table 11-4. Primary BCTPARAM Parameters**

| Name | Description                                                                                         |
|------|-----------------------------------------------------------------------------------------------------|
| CTOL | Contact force convergence tolerance. (Default=0.01)                                                 |
| MAXF | Maximum number of iterations for a force loop. (Default=10)                                         |
| MAXS | Maximum number of iterations for a status loop. (Default=20)                                        |
| NCHG | Allowable number of contact changes for convergence. (Default=0.02). See <a href="#">Remark 2</a> . |

**1036 BCTPARM**  
**Surface-to-Surface Contact Parameters (SOLs 101, 103, 111 and 112).**

**Table 11-4. Primary BCTPARM Parameters**

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INIPENE*    | <p>Use when the goal is for a pair of contact regions to be initially touching without interference, but due to the faceted nature of finite elements around curved geometry, some of the element faces may have a slight gap or penetration.</p> <p>0 or 1 - Contact is evaluated exactly as geometry is modeled. No corrections will occur for gaps or penetrations (Default).</p> <p>2 - Penetrations will be reset to a new initial condition in which there is no interference.</p> <p>3 - Gaps and penetrations are both reset to a new initial condition in which there is no interference.</p> |
| SHLTHK      | <p>Shell thickness offset flag.</p> <p>0 - Includes half shell thickness as surface offset. (Default)</p> <p>1 - Does not include thickness offset.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ZOFFSET     | <p>Determines if the shell element z-offset is included in the contact solution.</p> <p>0 - Includes the shell z-offset when determining the contact surfaces (Default).</p> <p>1 - Does not include the shell z-offset when determining the contact surfaces.</p>                                                                                                                                                                                                                                                                                                                                     |

**Table 11-5. Secondary BCTPARM Parameters**

The following parameters are available for special cases.

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                              |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PENN*       | <p>Penalty factor for normal direction. PENN and PENT are automatically calculated by default. See <a href="#">Remark 1</a>. When PENT is defined but PENN is undefined, <math>PENN = 10 * PENT</math>.</p>     |
| PENT*       | <p>Penalty factor for transverse direction. PENN and PENT are automatically calculated by default. See <a href="#">Remark 1</a>. When PENN is defined but PENT is undefined, <math>PENT = PENN / 10</math>.</p> |

**Table 11-5. Secondary BCTPARAM Parameters**

The following parameters are available for special cases.

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PENTYP* | <p>Changes how contact element stiffness is calculated (Default=1). See <a href="#">Remark 1</a>.</p> <p>1- PENN and PENT are entered as units of 1/Length.</p> <p>2 - PENN and PENT are entered as units of Force/(Length x Area).</p>                                                                                                                                                                                                                                                          |
| RESET   | <p>Flag to indicate if the contact status for a specific subcase is to start from the final status of the previous subcase</p> <p>0 - Starts from previous subcase. (Default)</p> <p>1 - Starts from initial state.</p>                                                                                                                                                                                                                                                                          |
| REFINE  | <p>Requests that the software refine the mesh on the source region during the solution to be more consistent with the target side mesh. See <a href="#">Remark 4</a>.</p> <p>0 - Refinement does not occur.</p> <p>1 - Refinement occurs with the pre-NX Nastran 7 algorithm.</p> <p>2 - Refinement occurs with the new algorithm (default).</p>                                                                                                                                                 |
| INTORD  | <p>Determines the number of contact evaluation points for a single element face on the source region. The number of contact evaluation points is dependent on the value of INTORD, and on the type of element face. See the table in <a href="#">Remark 3</a> for specific values.</p> <p>1 – The reduced number of contact evaluation points is used.</p> <p>2 – Use an increased number of contact evaluation points (default).</p> <p>3 – Use a high number of contact evaluation points.</p> |

## 1038 BCTPARM

Surface-to-Surface Contact Parameters (SOLs 101, 103, 111 and 112).

**Table 11-5. Secondary BCTPARM Parameters**

The following parameters are available for special cases.

| Name   | Description                                                                                                                                                                                                                                                     |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CSTRAT | Prevents all of the contact elements from becoming inactive. See <a href="#">Remark 5</a> .<br><br>0 - All contact elements can become inactive (Default).<br><br>1 - The software will reduce the likelihood of all of the contact elements becoming inactive. |

\* Can be defined on local BCTPARM entries. The BCTPARM bulk entries associated to individual BCTSET bulk entries, which are then combined with a BCTADD bulk entry, define local parameters. A local parameter definition overrides a global definition.

See “Contact Control Parameters – BCTPARM” in the *NX Nastran User’s Guide* for more information on the BCTPARM options.

### Remarks:

1. The penalty factors PENN and PENT are automatically calculated by default. The automatic calculation is turned off if either PENN or PENT are defined, or when SYSTEM(480)=1 is defined. See [Remark 4](#).

When PENTYP=1 (default) is defined, PENN and PENT have units of 1/(Length), and the contact element stiffness is calculated by  $K = e * E * dA$  where e represents PENN or PENT, E is the modulus value (see [Remark 4](#)), and dA is area. A physical interpretation is that it is equivalent to the axial stiffness of a rod with area dA, modulus E, and length 1/e.

When PENTYP=2 is defined, PENN and PENT become a spring rate per area Force/(Length x Area), and the contact element stiffness is calculated as  $K=e*dA$ . The spring rate input is a more explicit way of entering contact stiffness since it is not dependent on the modulus value.

The penalty factors influence the rate of convergence, and to a lesser extent, the accuracy of the contact solution. The automatic penalty factor calculation works well for most instances, but manual adjustments may be necessary, particularly if a contact problem fails to converge. See “Tips for Setting PENN and PENT” in the *NX Nastran User’s Guide* for tips on adjusting penalty factors.

**Surface-to-Surface Contact Parameters (SOLs 101, 103, 111 and 112).**

2. If NCHG is a real number and is < 1.0, the software treats it as a percentage of the number of active contact elements in each outer loop of the contact algorithm. The number of active contact elements is evaluated at each outer loop iteration.

If NCHG is an integer ≥1, the value defines the allowable number of contact changes.

If NCHG = 0, no contact status changes can exist.

3. A higher number of contact evaluation points can be used to increase the accuracy of a contact solution. Inaccuracies sometimes appear in the form of nonuniform contact pressure and stress results. There may be a penalty associated with using more evaluation points since the time for a contact problem to converge may be longer. The table below shows how the number of contact evaluation points is dependent on the element type, and how it can be adjusted using the INTORD option. The “Face Type” column applies to shell elements, and to the solid element with the associated face type.

| Face Type          | Number of Contact Evaluation Points |          |          |
|--------------------|-------------------------------------|----------|----------|
|                    | INTORD=1                            | INTORD=2 | INTORD=3 |
| Linear Triangle    | 1                                   | 3        | 7        |
| Parabolic Triangle | 3                                   | 7        | 12       |
| Linear Quad        | 1                                   | 4        | 9        |
| Parabolic Quad     | 4                                   | 9        | 16       |

4. When SYSTEM(480)=1 is defined, the following options will revert to NX Nastran 6.1 settings:
  - The average modulus will be used when computing the contact stiffness for all contact pairs (the elastic modulus of the softer material in each contact pair is used by default).
  - The automatic penalty factor calculation will be turned off and PENN and PENT are always used. PENN defaults to “10” and PENT defaults to “1” in this case.
  - The "REFINE=1" source-refinement algorithm becomes the default.
5. Under certain conditions, all of the contact elements could become inactive which may lead to singularities. Setting the parameter CSTRAT=1 will reduce the likelihood of all contact elements becoming inactive.

**1040 BCTSET**  
**Contact Set Definition**

**BCTSET**    Contact Set Definition

Defines contact pairs of a 2D (SOL 601 only) or 3D contact set (SOLs 101, 103, 111, 112, 601 and 701).

**Format:**

| 1      | 2    | 3     | 4    | 5     | 6     | 7     | 8 | 9 | 10 |
|--------|------|-------|------|-------|-------|-------|---|---|----|
| BCTSET | CSID | SID1  | TID1 | FRIC1 | MIND1 | MAXD1 |   |   |    |
|        |      | SID2  | TID2 | FRIC2 | MIND2 | MAXD2 |   |   |    |
|        |      | -etc- |      |       |       |       |   |   |    |

**SOL 601 & 701 Example:**

|        |   |   |   |     |  |  |  |  |  |
|--------|---|---|---|-----|--|--|--|--|--|
| BCTSET | 4 | 3 | 2 | 0.0 |  |  |  |  |  |
|        |   | 1 | 8 | 0.0 |  |  |  |  |  |

**SOL 101 Example:**

|        |   |   |   |     |        |       |  |  |  |
|--------|---|---|---|-----|--------|-------|--|--|--|
| BCTSET | 4 | 3 | 2 | 0.0 | 0.0    | 0.01  |  |  |  |
|        |   | 1 | 8 | 0.0 | -0.001 | 0.005 |  |  |  |

**Fields:**

| Field             | Contents                                                                                            |
|-------------------|-----------------------------------------------------------------------------------------------------|
| CSID              | Contact set identification number. (Integer > 0)                                                    |
| SID <sub>i</sub>  | Source region (contactor) identification number for contact pair <i>i</i> . (Integer > 0)           |
| TID <sub>i</sub>  | Target region identification number for contact pair <i>i</i> . (Integer > 0)                       |
| FRIC <sub>i</sub> | Static coefficient of friction for contact pair <i>i</i> . (Real; Default=0.0)                      |
| MIND <sub>i</sub> | Minimum search distance for contact. (Real; Default=0.0) See Remark 5. Ignored by SOLs 601 and 701. |
| MAXD <sub>i</sub> | Maximum search distance for contact. (Real; Default=0.0) See Remark 5. Ignored by SOLs 601 and 701. |

**Remarks:**

1. CSID is selected by the case control command BCSET. If BCSET is not specified, the model will not include contact.



2. The parameters for a SOL 101 (including consecutive solutions 103, 111 and 112) contact set are defined by the BCTPARAM entry.
3. SID and TID are contact regions defined via BCPROP, BCPROPS, BSURF, or BSURFS entries for 3D contact and via BLSEG entry for 2D contact.
4. SID<sub>i</sub> can be equal to TID<sub>i</sub> to define a self-contacting pair.
5. The following rules apply to MIND<sub>i</sub> and MAX<sub>i</sub>:
  - Both default to “0”, but at least one must be explicitly defined as non-zero.
  - MAX<sub>i</sub> must be greater than MIND<sub>i</sub> (MIND<sub>i</sub><MAX<sub>i</sub>).
  - Negative values are allowed.
6. A converged SOL 101 contact condition can be included in a consecutive normal mode solution (SOL 103). The normal mode solution results, which included the SOL 101 contact conditions, can then be used in an optional dynamic response calculation (SOLs 111 and 112). See the chapter on contact in the *NX Nastran User's Guide* for more information.
7. When defining contact regions and pairs on geometry which is not tangent continuous, creating single contact regions which cross corner transitions can result in non-uniform stress results around the corners. It is recommended to break these areas into multiple regions and pairs. See the chapter on contact in the *NX Nastran User's Guide* for more information.
8. If the contact solution is having problems converging, the fields on the BCTPARAM bulk data entry can be modified from their defaults. See the BCTPARAM bulk data entry, and the chapter on surface contact in the *NX Nastran User's Guide* for more information.
9. Solution 101 (including consecutive solutions 103, 111, 112) contact conditions cannot be included when using the DMP solution methods.
10. Inertia relief using the parameter definition INREL -1 or -2 is not supported in models which include contact.
11. Multiple contact sets (BCTSETs) with unique CSID's can be combined by including their CSID's on a BCTADD entry. The BCTADD entry has its own unique CSID which will be used in the BCSET case control command. The reason to have multiple contact sets with their own CSID is when different parameters (BCTPARA) are needed for different contact sets.
12. If multiple eigenvalue subcases (solutions 103 or 105) include STATSUB commands to select linear static subcases, and the linear static subcases include

## 1042 BCTSET

### Contact Set Definition

glue and/or linear contact definitions, the BCSET and/or BGSET case control commands must be specified in the global case. Failure to do this can result in erroneous results.

#### Remarks related to SOL 601 and 701:

1. The parameters for a SOLs 601,701 contact set are defined by the BCTPARA entry.
2. If multiple BCTSET entries with the same CSID are specified, they will be combined. If duplicate contact pairs are defined, the last one defined will be used.
3. For SOL 601, contact surfaces do not support element faces which are missing midside nodes on variable node CPYRAM and CTETRA elements.

**BDYLIST** Fluid Boundary List

Defines the boundary between a fluid and a structure.

**Format:**

| 1       | 2    | 3      | 4    | 5    | 6    | 7    | 8    | 9    | 10 |
|---------|------|--------|------|------|------|------|------|------|----|
| BDYLIST | RHO  | IDF1   | IDF2 | IDF3 | IDF4 | IDF5 | IDF6 | IDF7 |    |
|         | IDF8 | -etc.- |      |      |      |      |      |      |    |

**Example:**

|         |      |     |      |     |     |     |     |     |  |
|---------|------|-----|------|-----|-----|-----|-----|-----|--|
| BDYLIST | .037 | 432 | 325  | 416 | 203 | 256 | 175 | 153 |  |
|         | 101  | 105 | AXIS |     |     |     |     |     |  |

**Fields:**

| Field | Contents                                                                                                                                   |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------|
| RHO   | Fluid mass density at boundary. (Real $\geq 0.0$ ; Default is DRHO on the AXIF entry.)                                                     |
| IDFi  | Identification number of a RINGFL entry. (Integer $> 0$ or Character="AXIS" may be specified in the first and/or last field on the entry.) |

**Remarks:**

1. This entry is allowed only if an AXIF entry is also present.
2. Each entry defines a boundary if RHO  $\neq 0.0$ . The order of the points must be sequential with the fluid on the right with respect to the direction of travel.
3. The word "AXIS" defines an intersection with the polar axis of the fluid coordinate system.
4. There is no limit to the number of BDYLIST entries specified. If the fluid density varies along the boundary, there must be one BDYLIST entry for each interval between fluid points.
5. The BDYLIST entry is not required and should not be used to specify a rigid boundary where structural points are not defined. Such a boundary is automatically implied by the omission of a BDYLIST.

## 1044 **BDYLIST** Fluid Boundary List

6. If  $RHO=0.0$ , no boundary matrix terms will be generated to connect the GRIDB points to the fluid. See “Performing a Coupled Fluid-Structural Analysis” in the *NX Nastran User’s Guide*. This option is a convenience for structural plotting purposes. GRIDB points may be located on a fluid ring (RINGFL entry) only if the rings are included in a BDYLIST.

**BDYOR** CHBDYi Entry Default Values

Defines default values for the CHBDYP, CHBDYG, and CHBDYE entries.

**Format:**

| 1     | 2    | 3      | 4      | 5       | 6       | 7 | 8   | 9  | 10 |
|-------|------|--------|--------|---------|---------|---|-----|----|----|
| BDYOR | TYPE | IVIEWF | IVIEWB | RADMINF | RADMIDB |   | PID | GO |    |
|       | CE   | E1     | E2     | E3      |         |   |     |    |    |

**Example:**

|       |       |   |   |   |   |  |    |  |  |
|-------|-------|---|---|---|---|--|----|--|--|
| BDYOR | AREA4 | 2 | 2 | 3 | 3 |  | 10 |  |  |
|-------|-------|---|---|---|---|--|----|--|--|

**Fields:**

| Field      | Contents                                                                                                                                            |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| TYPE       | Default surface type. See Remark 2 (Character).                                                                                                     |
| IVIEWF     | Default identification number of the front VIEW entry. (Integer > 0 or blank)                                                                       |
| IVIEWB     | Default identification number of the back VIEW entry. (Integer > 0 or blank)                                                                        |
| RADMIDF    | Default identification number of a RADM entry for the front face. (Integer ≥ 0 or blank)                                                            |
| RADMIDB    | Default identification number of a RADM entry for the back face. (Integer ≥ 0 or blank)                                                             |
| PID        | Default PHBDY property entry identification number. (Integer > 0 or blank)                                                                          |
| GO         | Default orientation grid point. (Integer ≥ 0; Default=0)                                                                                            |
| CE         | Default coordinate system for defining the orientation vector. (Integer ≥ 0 or blank)                                                               |
| E1, E2, E3 | Default components of the orientation vector in coordinate system CE. The origin of this vector is grid point G1 on a CHBDYP entry. (Real or blank) |

**Remarks:**

1. Only one BDYOR entry may be specified in the Bulk Data Section.

## 1046 **BDYOR** CHBDYi Entry Default Values

2. TYPE specifies the type of CHBDYi element surface; allowable values are: POINT, LINE, REV, AREA3, AREA4, ELCYL, FTUBE, AREA6, AREA8, and TUBE.
3. IVIEWF and IVIEWB are specified for view factor calculations only. (See the VIEW entry).
4. GO is only used from BDYOR if neither GO nor the orientation vector is defined on the CHBDYP entry and GO is > 0.
5. E1, E2, E3 is not used if GO is defined on either the BDYOR entry or the CHBDYP entry.

### **Remarks related to SOL 601:**

1. Only TYPE, RADMINF and RADMINB are supported.

**BEAMOR**      CBEAM Entry Default Values

Defines default values for field 3 and fields 6 through 8 of the CBEAM entry.

**Format:**

|        |   |     |   |   |    |    |    |   |    |
|--------|---|-----|---|---|----|----|----|---|----|
| 1      | 2 | 3   | 4 | 5 | 6  | 7  | 8  | 9 | 10 |
| BEAMOR |   | PID |   |   | X1 | X2 | X3 |   |    |

**Example:**

|        |  |    |  |  |     |     |       |  |  |
|--------|--|----|--|--|-----|-----|-------|--|--|
| BEAMOR |  | 39 |  |  | 0.6 | 2.9 | -5.87 |  |  |
|--------|--|----|--|--|-----|-----|-------|--|--|

**Alternate Format and Example:**

|        |  |     |  |  |    |  |  |  |  |
|--------|--|-----|--|--|----|--|--|--|--|
| BEAMOR |  | PID |  |  | G0 |  |  |  |  |
|--------|--|-----|--|--|----|--|--|--|--|

|        |  |    |  |  |    |  |  |  |  |
|--------|--|----|--|--|----|--|--|--|--|
| BEAMOR |  | 39 |  |  | 86 |  |  |  |  |
|--------|--|----|--|--|----|--|--|--|--|

**Fields:**

| Field      | Contents                                                                                                                                                                                       |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID        | Property identification number of the PBEAM or PBCOMP entry. (Integer > 0 or blank)                                                                                                            |
| X1, X2, X3 | Components of the orientation vector, from GA, in the displacement coordinate system at GA. (Real)                                                                                             |
| G0         | Alternate method to supply the orientation vector, using grid point G0. The direction of the vector is from GA to G0. is then translated to End A. (Integer > 0; G0 ≠ GA or GB on CBEAM entry) |

**Remarks:**

1. The contents of fields on this entry will be assumed for any CBEAM entry with corresponding fields that are blank.
2. Only one BEAMOR entry is allowed.
3. For an explanation of beam element geometry, see the CBEAM entry description.
4. If X1 or G0 is an integer, G0 is used. If X1 or G0 is blank or real, then X1, X2, X3 is used.

## 1048 BFRIC Slideline Contact Friction

### BFRIC Slideline Contact Friction

Defines frictional properties between two bodies in contact.

#### Format:

| 1     | 2   | 3 | 4     | 5   | 6 | 7 | 8 | 9 | 10 |
|-------|-----|---|-------|-----|---|---|---|---|----|
| BFRIC | FID |   | FSTIF | MU1 |   |   |   |   |    |

#### Example:

|       |    |  |  |     |  |  |  |  |  |
|-------|----|--|--|-----|--|--|--|--|--|
| BFRIC | 33 |  |  | 0.3 |  |  |  |  |  |
|-------|----|--|--|-----|--|--|--|--|--|

#### Fields:

| Field | Contents                                                                                                        |
|-------|-----------------------------------------------------------------------------------------------------------------|
| FID   | Friction identification number. See Remark 1 (Integer > 0).                                                     |
| FSTIF | Frictional stiffness in stick. See Remarks 2 and 3 (Real > 0.0; Default=automatically selected by the program.) |
| MU1   | Coefficient of static friction. (Real > 0.0)                                                                    |

#### Remarks:

1. This identification number must be unique with respect to all other friction identification numbers. This is used in the FRICID field of the BCONP Bulk Data entry.
2. The value of frictional stiffness requires care. A method of choosing its value is to divide the expected frictional strength ( $MU1 * \text{expected normal force}$ ) by a reasonable value of the relative displacement that may be allowed before slip occurs. The relative value of displacement before slip occurs must be small compared to expected relative displacements during slip. A large stiffness value may cause poor convergence, while too small a value may cause poor accuracy.

Frictional stiffness specified by the user is selected as the initial value. If convergence difficulties are encountered during the analysis, the frictional stiffness may be reduced automatically to improve convergence.

3. The stiffness matrix for frictional slip is unsymmetrical. However, the program does not use the true unsymmetrical matrix, but uses the symmetric terms instead. This is to avoid using the unsymmetrical solver to reduce CPU time.



**BGADD**      Surface-to-Surface Glue Set Combination

Defines a surface-to-surface glue set as a union of glue sets defined on BGSET entries.

**Format:**

| 1     | 2    | 3  | 4     | 5  | 6  | 7  | 8  | 9  | 10 |
|-------|------|----|-------|----|----|----|----|----|----|
| BGADD | GSID | SI | S2    | S3 | S4 | S5 | S6 | S7 |    |
|       | S8   | S9 | -etc- |    |    |    |    |    |    |

**Example:**

|       |    |   |   |   |   |   |  |  |  |
|-------|----|---|---|---|---|---|--|--|--|
| BGADD | 12 | 1 | 3 | 6 | 5 | 9 |  |  |  |
|-------|----|---|---|---|---|---|--|--|--|

**Fields:**

| Field | Contents                                                                        |
|-------|---------------------------------------------------------------------------------|
| GSID  | Glue set identification number. (Integer > 0)                                   |
| Si    | Identification numbers of glue sets defined via BGSET entries.<br>(Integer > 0) |

**Remarks:**

- Multiple glue sets (BGSETs) with unique GSIDs can be combined by including their GSIDs on a BGADD entry. The BGADD entry has its own unique GSID which is used on the BGSET case control command. Multiple glue sets with their own GSID are necessary when different parameters (BGPARM) are needed for different glue sets.
- To include several glue sets defined via BGSET entries in a model, BGADD must be used to combine the glue sets. GSID on BGADD is then selected with the BGSET case control command.
- Si must be unique and may not be the identification of this or any other BGADD entry.
- Glue definitions are supported in all solution sequences except for SOLs 144–146 and 701. The BGADD entry is not supported by SOL 601. In a SOL 153/159 heat transfer analysis, glue definitions are treated as a constant near infinite conductivity connection.

## 1050 BGPARM Glue Parameters

### BGPARM      Glue Parameters

Control parameters for the glue algorithm.

**Format:**

| 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9 | 10 |
|--------|--------|--------|--------|--------|--------|--------|--------|---|----|
| BGPARM | GSID   | Param1 | Value1 | Param2 | Value2 | Param3 | Value3 |   |    |
|        | Param4 | Value4 | Param5 | Value5 | -etc.- |        |        |   |    |

**Example:**

|        |        |        |   |      |      |      |      |  |  |
|--------|--------|--------|---|------|------|------|------|--|--|
| BGPARM | 4      | INTORD | 2 | PENN | 10.0 | PENT | 10.0 |  |  |
|        | REFINE | 0      |   |      |      |      |      |  |  |

**Fields:**

| Field  | Contents                                                                                                       |
|--------|----------------------------------------------------------------------------------------------------------------|
| GSID   | Glue set ID. Parameters defined in this command apply to glue set GSID defined by a BGSET entry. (Integer > 0) |
| PARAMi | Name of the BGPARM parameter. Allowable names are given in the parameter listing below. (Character)            |
| VALUEi | Value of the parameter. See below for the parameter listing. (Real or Integer)                                 |

**Table 11-6. BGPARM Parameters**

| Name      | Description                                                                                                                                                                                                                                                               |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GLUETYPE* | Selects the glue formulation. (Default=2) See Remark 1.<br>Edge-to-surface glue pairs always use GLUETYPE=2.<br><br>1 - Normal and tangential springs will be used to define the connections.<br><br>2 - A “weld like” connection will be used to define the connections. |
| PENTYP*   | Changes how glue element stiffness and “conductance” are calculated. (Default=1) See Remark 1.                                                                                                                                                                            |
| PENN*     | Penalty factor for normal direction when GLUETYPE=1. (Default=100) See Remarks 1 and 6.                                                                                                                                                                                   |

**Table 11-6. BGPARM Parameters**

| Name     | Description                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PENT*    | Penalty factor for transverse direction when GLUETYPE=1. (Default=100) See Remarks 1 and 6.                                                                                                                                                                                                                                                                                                              |
| PENGLUE* | Penalty factor when GLUETYPE=2. (Default=1) See Remarks 1 and 6.                                                                                                                                                                                                                                                                                                                                         |
| INTORD   | Determines the number of glue points for a single element face on the source region. Edge-to-surface glue pairs always use INTORD=3.<br><br>1 - Low order<br>2 - Medium order (default)<br>3 - High order                                                                                                                                                                                                |
| REFINE   | Requests that the software refine the mesh on the source region during the solution to be more consistent with the target side mesh (not supported with shell elements). See Remark 4. REFINE is ignored by an edge-to-surface glue pair.<br><br>0 - Refinement does not occur.<br>1 - Refinement occurs with the pre-NX Nastran 7 algorithm.<br>2 - Refinement occurs with the new algorithm (default). |

\* Can be defined on local BGPARM entries. The BGPARM bulk entries associated to individual BGSET bulk entries, which are then combined with a BGADD bulk entry, define local parameters. A local parameter definition overrides a global definition.

**Remarks**

1. When gluing acoustic faces, GLUETYPE, PENTYP, and PENT are all ignored, and PENN is described in Remark 2.

For structural solutions and for Solutions 153 and 159, GLUETYPE has unique penalty factor inputs. These inputs and units are described below.

Edge-to-surface glue pairs can not be used as acoustics glue connections or in heat transfer solutions 153 and 159.

**1052 BGPARM**  
**Glue Parameters**

**11**  
**Bulk A-B**

|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GLUETYPE=1 | <p>The glue penalty stiffness is defined by PENN and PENT. (Solutions 153 and 159 - Heat transfer analysis always uses GLUETYPE=1.)</p> <p>Note: When GLUETYPE=1 in releases prior to NX Nastran 7, the tangential stiffness was lowered by a factor of 10 (stiffness was lowered in the program, PENT did not change). Beginning in NX Nastran 7, this no longer occurs. Results may be slightly different relative to releases before version 7.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|            | PENTYP=1                                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>Structural solutions: PENN and PENT have units of 1/(length), and the glue element stiffness is calculated by <math>K = e * E * dA</math> where e represents PENN or PENT, E is an average modulus (averaged over the entire model), and dA is area. A physical interpretation is that it is equivalent to the axial stiffness of a rod with area dA, modulus E, and length 1/e.</p> <p>Solutions 153 and 159: PENT is ignored. PENN has the units of 1/(length), and "conductance" at the glue connection is calculated as <math>C = e * k_{avg} * dA</math>, where e represents PENN, <math>k_{avg}</math> is an average of the thermal conductivity (k) values for all MAT4 entries, and dA is area. A physical interpretation is that it is equivalent to the axial "conductance" of a rod with area dA, conductivity <math>k_{avg}</math>, and length 1/e.</p> |
|            | PENTYP=2                                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>Acoustic Glue: PENTYP is ignored.</p> <p>Structural solutions: PENN and PENT become a spring rate per area Force/(Length x Area), and the glue element stiffness is calculated as <math>K=e*dA</math>. The spring rate input is a more explicit way of entering glue stiffness since it is not dependent on the average modulus.</p> <p>Solutions 153 and 159: PENT is ignored. PENN has the units of (thermal conductivity*length)/area, and the "conductance" at the glue connection is calculated as <math>C = e*dA</math>. Another term for e is heat flux.</p>                                                                                                                                                                                                                                                                                                 |

|                       |                                                                                  |                                                            |
|-----------------------|----------------------------------------------------------------------------------|------------------------------------------------------------|
| GLUETYPE=2            | The glue penalty stiffness is defined by the PENGLUE penalty factor (default=1). |                                                            |
| Structural solutions: | PENTYP=1                                                                         | PENGLUE is a unitless value (glue stiffness scale factor). |
|                       | PENTYP=2                                                                         | PENGLUE has the units of F/L <sup>2</sup> .                |

|                        |                         |
|------------------------|-------------------------|
| Solutions 153 and 159: | Always uses GLUETYPE=1. |
|------------------------|-------------------------|

2. When gluing acoustic faces, GLUETYPE, PENTYPE, PENT are all ignored, and PENN is used to calculate the acoustics penalty matrix K:

$$K = e * \frac{1}{\rho} * dA$$

where e is PENN,  $\rho$  is the average density of all fluid elements in the model, and dA is the surface area. The K matrix for an acoustic element is defined by

$$K = \frac{1}{\rho} \int_V \nabla N^T \nabla N dV$$

For a small fluid column (tube of length L and cross-sectional area dA), the K matrix can be written as

$$K = \frac{1}{L} * \frac{1}{\rho} * dA$$

. Therefore, the penalty factor PENN (e) can be interpreted as 1/L.

Edge-to-surface glue pairs can not be used as acoustics glue connections.

3. BGPARM is not supported in SOL 601, although glue definitions (BGSET) are supported.
4. When SYSTEM(480)=1 is defined, REFINE=1 becomes the default.
5. The BGPARM bulk entry is not required. When it is not present, the default values are used. At least one parameter should be defined when a BGPARM entry exists.
6. Only PENGLUE and PENTYP are applicable to edge-to-surface glue pairs. All other parameters are ignored.

**1054 BGSET**  
**Glue Contact Set Definition**

**BGSET**      Glue Contact Set Definition

Defines glued contact pairs.

**Format:**

| 1     | 2    | 3     | 4    | 5      | 6 | 7    | 8 | 9 | 10 |
|-------|------|-------|------|--------|---|------|---|---|----|
| BGSET | GSID | SID1  | TID1 | SDIST1 |   | EXT1 |   |   |    |
|       |      | SID2  | TID2 | SDIST2 |   | EXT2 |   |   |    |
|       |      | -etc- |      |        |   |      |   |   |    |

**Example:**

|       |   |   |   |  |  |  |  |  |  |
|-------|---|---|---|--|--|--|--|--|--|
| BGSET | 4 | 1 | 2 |  |  |  |  |  |  |
|       |   | 4 | 3 |  |  |  |  |  |  |

**Fields:**

| Field              | Contents                                                                                                                                                                        |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GSID               | Glue set identification number. (Integer > 0).                                                                                                                                  |
| SID <sub>i</sub>   | Source region identification number for glue pair i. (Integer > 0)                                                                                                              |
| TID <sub>i</sub>   | Target region identification number for glue pair i. (Integer > 0)                                                                                                              |
| SDIST <sub>i</sub> | Search distance for glue regions (Real); (Default=10.0)                                                                                                                         |
| EXT <sub>i</sub>   | Extension factor for target region (SOL 601 only). The extension value is equal to the extension factor multiplied by element edge length. (0.0 < Real < 0.25) (Default = 0.01) |

**Remarks:**

1. The default search distance will glue all overlapping sections of the source and target regions. This value can be adjusted to control the parts of a region to be glued.
2. Surface-to-surface glue definitions are supported in all solution sequences except for solutions 144 -146, and 701. In solutions 153 and 159 heat transfer analysis, they are treated as constant conductivity connections. They can also be used to represent an acoustics glue connection. See the BGPARM bulk entry for details.

Edge-to-surface glue definitions are supported in all solution sequences except solutions 144 -146, 153, 159, 601 and 701. They cannot be used to represent acoustic glue connections.

3. Shell offsets are not accounted for in any glue definitions. The gluing occurs at the grid locations and not at the offset location.
4. When defining glue regions and pairs on geometry which is not tangent continuous, creating single glue regions which cross corner transitions can result in non-uniform stress results around the corners. It is recommended to break these regions into multiple regions and pairs. See the chapter on constraints in the *NX Nastran User's Guide* for more information on glue definitions.
5. SID and TID are glue regions defined via BCPROP, BCPROPS, BSURF, or BSURFS entries for glue surfaces and via BLSEG entry for glue edges.
6. With edge-to-surface gluing, the BLSEG entry is used to define an edge region that can be glued to the face of solid or shell elements. The BLSEG ID must be entered as the source region ID on the BGSET bulk entry, and a shell or solid element face region ID ( BSURF, BSURFS, BCPROP, and BCPROPS) is entered as the target region ID.
7. If multiple eigenvalue subcases (solutions 103 or 105) include STATSUB commands to select linear static subcases, and the linear static subcases include glue and/or linear contact definitions, the BCSET and/or BGSET case control commands must be specified in the global case. Failure to do this can result in erroneous results.
8. Glue conditions cannot be defined between different superelements. They must be defined within a superelement or within the residual.

**Remarks related to SOL 601:**

1. SDISTI is not used by SOL 601. SOL 601 uses a search distance that is equal to the largest element edge in the source and target region.
2. BGSET can only be used to glue 3D solid elements. Hence, both the source and target regions must be defined by the BSURFS or BCPROPS entry.

## 1056 BLSEG

Defines a glue or contact edge region, or a curve for sideline contact.

**BLSEG** Defines a glue or contact edge region, or a curve for sideline contact.

Defines a glue or contact edge region or a curve for sideline contact via grid numbers.

**Format 1: (Formats 1 and 2 cannot be combined on the same line)**

| 1     | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|-------|----|----|----|----|----|----|----|----|----|
| BLSEG | ID | G1 | G2 | G3 | G4 | G5 | G6 | G7 |    |

**Format 2:**

|       |    |    |        |    |      |     |  |  |  |
|-------|----|----|--------|----|------|-----|--|--|--|
| BLSEG | ID | G1 | "THRU" | G2 | "BY" | INC |  |  |  |
|-------|----|----|--------|----|------|-----|--|--|--|

**Continuation Format 1: (Continuation formats 1 and 2 cannot be combined on a single continuation line)**

|  |    |    |     |     |        |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|
|  | G8 | G9 | G10 | G11 | -etc.- |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|

**Continuation Format 2:**

|  |    |        |    |      |     |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|
|  | G8 | "THRU" | G9 | "BY" | INC |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|

**Example:**

|       |     |      |      |     |    |    |  |  |  |
|-------|-----|------|------|-----|----|----|--|--|--|
| BLSEG | 14  | 101  | THRU | 190 | BY | 5  |  |  |  |
|       | 46  | 23   | 57   | 82  | 9  | 16 |  |  |  |
|       | 201 | THRU | 255  |     |    |    |  |  |  |
|       | 93  | 94   | 95   | 97  |    |    |  |  |  |

**Fields:**

| Field | Contents                                                                                         |
|-------|--------------------------------------------------------------------------------------------------|
| ID    | Edge region or curve identification number. See Remark 1 (Integer > 0).                          |
| Gi    | Grid point identification numbers in a continuous topological order. See Remark 2 (Integer > 0). |
| INC   | Grid point identification number increment. See Remark 3 for default (Integer or blank).         |



Defines a glue or contact edge region, or a curve for slideline contact.

**Remarks:**

1. The ID must be unique with respect to all other BLSEG entries and all surface region IDs defined with the BSURF, BSURFS, BCPROP, and BCPROPS entries.
2. An edge region or curve consists of one or more line segments defined between consecutive grid points. The grid points defining the edge region or curve must be entered in a continuous topological order. If an edge region or curve forms a closed loop, for example, the grids around the perimeter of a cylinder edge, the last grid point identification number should be the same as the first grid point number.
3. When selecting grid points in a range using "THRU", the default increment value is 1 if grid numbers are increasing or -1 if grid numbers are decreasing.
4. With edge-to-surface gluing:
  - The BLSEG entry is used to define an edge region that can be glued to the face of solid or shell elements. The BLSEG ID must be entered as the source region ID on the BGSET bulk entry, and a shell or solid element face region ID ( BSURF, BSURFS, BCPROP, and BCPROPS) is entered as the target region ID.
  - The grid point IDs on the BLSEG entry used to define a glue edge region can only be part of the CQUAD4, CQUADR, CQUAD8, CTRIA3, CTRIAR and CTRIA6 element connectivity.
  - The BWIDTH bulk entry is ignored.
5. With slideline contact:
  - A corresponding BWIDTH Bulk Data entry may be required to define the width/thickness of each line segment. If the corresponding BWIDTH is not present, the width/thickness for each line segment is assumed to be unity.
  - Each line segment has a width in a 3-D slideline and a thickness in a 2-D slideline contact to calculate contact stresses. The width/thickness of each line segment is defined via the BWIDTH Bulk Data entry. The ID in BLSEG must be same as the ID specified in the BWIDTH. That is, there must be a one to one correspondence between BLSEG and BWIDTH. BWIDTH Bulk Data entry may be omitted only if the width/thickness of each segment is unity.
  - The normal to the segment is determined by the cross product of the slideline plane vector (i.e., the Z direction of the coordinate system defined in the 'CID' field of the BCONP Bulk Data entry) and the tangential direction

## 1058 BLSEG

Defines a glue or contact edge region, or a curve for slideline contact.

of the segment. The tangential direction is the direction from node 1 to node 2 of the line segment.

### Remarks related to SOL 601 edge contact:

1. BLSEG defines a flexible or rigid 2D contact region on axisymmetric elements CQUADX4, CQUADX8, CTRAX3 and CTRAX6, plane stress elements CPLSTS3, CPLSTS4, CPLSTS6 and CPLSTS8, plane strain elements CPLSTN3, CPLSTN4, CPLSTN6 and CPLSTN8, or a rigid 2D contact target region when the grid points are not attached to any elements.
2. The grid points in a BLSEG entry must either be all attached to elements or all not attached to elements.
3. For a rigid target region, it is important to note that the top surface is on the left side of the line from  $G_i$  to  $G_{i+1}$ . By default, contact is expected to occur from the top surface. SURF='BOT' in BCRPARA entry may be used to change the contact side.
4. Grid points in BLSEG entry must lie in the basic XZ plane.
5. The BWIDTH bulk entry is ignored.
6. Contact set pairs are defined by BCTSET entry instead of BCONP entry.
7. Contact region properties are defined by BCRPARA entry and contact set properties are defined by BCTPARA entry in a similar way as for 3-D contact. In addition, global contact settings may be specified in the NXSTRAT entry.

**BNDFIX** Fixed Boundary Degrees of Freedom

Defines analysis set (a-set) degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations.

**Format:**

| 1      | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|--------|-----|----|-----|----|-----|----|-----|----|----|
| BNDFIX | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

**Example:**

|        |   |     |    |   |  |  |  |  |  |
|--------|---|-----|----|---|--|--|--|--|--|
| BNDFIX | 2 | 135 | 14 | 6 |  |  |  |  |  |
|--------|---|-----|----|---|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                 |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                                |
| Ci    | Component number. (Integer zero or blank for scalar points, or any unique combinations of the integers 1 through 6 for grid points. No embedded blanks.) |

**Remarks:**

1. BSET and BNDFIX entries are equivalent.
2. If there are no BNDFREEi or BNDFIXi entries present, all a-set points are considered fixed during component mode analysis. If there are only BSETi entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BNDFREEi or BNDFIXi entries present, the c-set degrees-of-freedom are defined by the BNDFREEi entries, and any remaining a-set points are placed in the b-set.
3. Degrees-of-freedom specified on this entry form members of the mutually exclusive b-set. They may not be specified on other entries that define mutually exclusive sets. See the [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.

**1060 BNDFIX**  
**Fixed Boundary Degrees of Freedom**

- If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**BNDFIX1 1061**

**Fixed Boundary Degrees of Freedom, Alternate Form of BNDFIX Entry**

**BNDFIX1** Fixed Boundary Degrees of Freedom, Alternate Form of BNDFIX Entry

Defines analysis set (a-set) degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations.

**Format:**

| 1       | 2   | 3   | 4    | 5      | 6   | 7   | 8   | 9   | 10 |
|---------|-----|-----|------|--------|-----|-----|-----|-----|----|
| BNDFIX1 | C   | ID1 | ID2  | ID3    | ID4 | ID5 | ID6 | ID7 |    |
|         | ID8 | ID9 | ID10 | -etc.- |     |     |     |     |    |

**Example:**

|         |     |     |    |   |    |    |    |    |  |
|---------|-----|-----|----|---|----|----|----|----|--|
| BNDFIX1 | 2   | 135 | 14 | 6 | 23 | 24 | 25 | 26 |  |
|         | 122 | 127 |    |   |    |    |    |    |  |

**Alternate Format and Example:**

|         |   |     |        |     |  |  |  |  |  |
|---------|---|-----|--------|-----|--|--|--|--|--|
| BNDFIX1 | C | ID1 | "THRU" | ID2 |  |  |  |  |  |
| BNDFIX1 | 3 | 6   | THRU   | 32  |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                      |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C     | Component numbers. (Integer zero or blank for scalar points, or any unique combinations of the integers 1 through 6 for grid points with no embedded blanks.) |
| IDI   | Grid or scalar point identification numbers. (Integer > 0; For "THRU" option, ID1 < ID2)                                                                      |

**Remarks:**

1. BSET1 and BNDFIX1 entries are equivalent.
2. If there are no BNDFREEi or BNDFIXi entries present, all a-set points are considered fixed during component mode analysis. If there are only BNDFIXi entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BNDFREEi or BNDFIXi entries present, the c-set degrees-of-freedom are defined by the BNDFREEi entries, and any remaining a-set points are placed in the b-set.

## 1062 BNDFIX1

### Fixed Boundary Degrees of Freedom, Alternate Form of BNDFIX Entry

3. Degrees-of-freedom specified on this entry form members of the mutually exclusive b-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.
  - If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**BNDFREE** Free Boundary Degrees-of-Freedom

Defines analysis set (a-set) degrees-of-freedom to be free (c-set) during component modes calculations.

**Format:**

| 1       | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|---------|-----|----|-----|----|-----|----|-----|----|----|
| BNDFREE | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

**Example:**

|         |     |   |   |    |   |    |  |  |  |
|---------|-----|---|---|----|---|----|--|--|--|
| BNDFREE | 124 | 1 | 5 | 23 | 6 | 16 |  |  |  |
|---------|-----|---|---|----|---|----|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                     |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                                    |
| CI    | Component numbers. (Integer zero or blank for scalar points, or any unique combination of the integers 1 through 6 for grid points with no embedded blanks.) |

**Remarks:**

1. CSET and BNDFREE entries are equivalent.
2. If there are no BNDFREEi or BNDFIXi entries present, all a-set degrees-of-freedom are considered fixed during component modes analysis. If there are only BNDFIXi entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BNDFREEi or BNDFIXi entries present, the c-set degrees-of-freedom are defined by the BNDFREEi entries, and any remaining a-set points are placed in the b-set.
3. Degrees-of-freedom specified on this entry form members of the mutually exclusive c-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.

**1064 BDNFREE**  
**Free Boundary Degrees-of-Freedom**

- If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.



**Free Boundary Degrees-of-Freedom, Alternate Form of BNDFREE Entry**

**BNDFREE1** Free Boundary Degrees-of-Freedom, Alternate Form of BNDFREE Entry

Defines analysis set (a-set) degrees-of-freedom to be free (c-set) during component modes calculations.

**Format:**

| 1        | 2   | 3   | 4      | 5   | 6   | 7   | 8   | 9   | 10 |
|----------|-----|-----|--------|-----|-----|-----|-----|-----|----|
| BNDFREE1 | C   | ID1 | ID2    | ID3 | ID4 | ID5 | ID6 | ID7 |    |
|          | ID8 | ID9 | -etc.- |     |     |     |     |     |    |

**Example:**

|          |     |   |   |   |   |   |    |     |  |
|----------|-----|---|---|---|---|---|----|-----|--|
| BNDFREE1 | 124 | 1 | 5 | 7 | 6 | 9 | 12 | 122 |  |
|          | 127 |   |   |   |   |   |    |     |  |

**Alternate Formats and Example:**

|          |   |       |        |     |  |  |  |  |  |
|----------|---|-------|--------|-----|--|--|--|--|--|
| BNDFREE1 | C | ID1   | “THRU” | ID2 |  |  |  |  |  |
| BNDFREE1 | 3 | 6     | THRU   | 32  |  |  |  |  |  |
| BNDFREE1 |   | “ALL” |        |     |  |  |  |  |  |
| BNDFREE1 |   | ALL   |        |     |  |  |  |  |  |



**Fields:**

| Field | Contents                                                                                                                                                    |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C     | Component number. (Integer zero or blank for scalar points, or any unique combination of the Integers 1 through 6 for grid points with no embedded blanks.) |
| IDI   | Grid or scalar point identification number. (Integer > 0; For THRU option, ID1 < ID2)                                                                       |

**Remarks:**

1. CSET1 and BNDFREE1 entries are equivalent.
2. If there are no BNDFREEi or BNDFIXi entries present, all a-set degrees-of-freedom are considered fixed during component modes analysis. If there are only BNDFIXi entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BNDFREEi

## 1066 BDNDFREE1

### Free Boundary Degrees-of-Freedom, Alternate Form of BDNDFREE Entry

or BDNDFIXi entries present, the c-set degrees-of-freedom are defined by the BDNDFREEi entries, and any remaining a-set points are placed in the b-set.

3. Degrees-of-freedom specified on this entry form members of the mutually exclusive c-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.
  - If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**BNDGRID**      Boundary Grid Points

Specifies a list of grid point identification numbers on design boundaries or surfaces for shape optimization (SOL 200).

**Format:**

| 1       | 2   | 3      | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|---------|-----|--------|-----|-----|-----|-----|-----|-----|----|
| BNDGRID | C   | GP1    | GP2 | GP3 | GP4 | GP5 | GP6 | GP7 |    |
|         | GP8 | -etc.- |     |     |     |     |     |     |    |

**Example:**

|         |     |    |    |    |    |    |    |    |  |
|---------|-----|----|----|----|----|----|----|----|--|
| BNDGRID | 123 | 41 | 42 | 43 | 44 | 45 | 46 | 47 |  |
|         | 49  |    |    |    |    |    |    |    |  |

**Alternate Format and Example:**

|         |     |     |        |     |  |  |  |  |  |
|---------|-----|-----|--------|-----|--|--|--|--|--|
| BNDGRID | C   | GP1 | “THRU” | GP2 |  |  |  |  |  |
| BNDGRID | 123 | 41  | THRU   | 49  |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                  |
|-------|-----------------------------------------------------------------------------------------------------------|
| C     | Component number (any unique combination of integers 1 through 6 with no embedded blanks). See Remark 1 . |
| GPi   | Shape boundary grid point identification number. (0 < Integer < 1000000; For THRU option, GP1 < GP2)      |

**Remarks:**

1. C specifies the components for the listed grid points for which boundary motion is prescribed.
2. Multiple BNDGRID entries may be used to specify the shape boundary grid point identification numbers.
3. Both fixed and free shape boundary grid point identification numbers are listed on this entry.
4. The degrees-of-freedom specified on BNDGRID entries must be sufficient to statically constrain the model.

**1068 BNDGRID**  
**Boundary Grid Points**

5. Degrees-of-freedom specified on this entry form members of the mutually exclusive s-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.

**BOLT** Bolt definition

Selects the CBEAM or CBAR elements to be included in the bolt pre-load calculation.

**Format:**

| 1    | 2     | 3      | 4    | 5    | 6    | 7    | 8 | 9 | 10 |
|------|-------|--------|------|------|------|------|---|---|----|
| BOLT | BID   | ETYPE  | EID1 | EID2 | EID3 | etc. |   |   |    |
|      | EID7  | "THRU" | EID8 |      |      |      |   |   |    |
|      | -etc- |        |      |      |      |      |   |   |    |

**Alternate Format:**

| 1    | 2   | 3     | 4    | 5      | 6    | 7 | 8 | 9 | 10 |
|------|-----|-------|------|--------|------|---|---|---|----|
| BOLT | BID | ETYPE | EID1 | "THRU" | EID2 |   |   |   |    |

**SOLs 101, 103, 105, 107 through 112 Example (single EID defines bolt):**

|      |   |   |    |  |  |  |  |  |  |
|------|---|---|----|--|--|--|--|--|--|
| BOLT | 4 | 1 | 11 |  |  |  |  |  |  |
|------|---|---|----|--|--|--|--|--|--|

**SOL 601 Example (all EIDs required to define bolt):**

|      |    |    |    |    |    |   |    |    |  |
|------|----|----|----|----|----|---|----|----|--|
| BOLT | 4  | 1  | 11 | 8  | 2  | 1 | 20 | 14 |  |
|      | 15 | 16 | 28 | 30 | 33 |   |    |    |  |

**Fields:**

| Field | Contents                                                                                                                                                       |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BID   | Bolt identification number. (Integer>0)                                                                                                                        |
| ETYPE | Element type (Integer=1 is required in this field until other options become available in the future).                                                         |
| EIDi  | Element identification numbers of CBEAM or CBAR elements to include in the bolt pre-load calculation.(Integer>0), or using "THRU" (EID7<EID8 for THRU option). |

**Remarks:**

1. One BOLT entry is required to define each physical bolt.
2. Bolt preload is supported in SOLs 101, 103, 105, 107 through 112 and 601.

## 1070 BOLT

### Bolt definition

3. In a SOL 101, 103, 105, 107 through 112, only one EID is required to define a bolt even if it was modeled as several elements. Any additional entries will be ignored.
4. In a SOL 105, both the bolt preload and service load will be scaled to determine the buckling load.
5. The grids connected to any CBEAM or CBAR elements used in a bolt preload definition should be unconstrained (no SPC).

#### Remarks related to SOL 601:

1. All CBEAM or CBAR elements representing a physical bolt must be identified in the BOLT entry.

**BOLTFOR**    Preload Force on Set of Bolts

Defines preload force for a set of bolts.

**Format:**

| 1       | 2   | 3    | 4     | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|-----|------|-------|----|----|----|----|----|----|
| BOLTFOR | SID | LOAD | B1    | B2 | B3 | B4 | B5 | B6 |    |
|         | B7  | THRU | B8    |    |    |    |    |    |    |
|         | B9  | B10  | -etc- |    |    |    |    |    |    |

**Example:**

|         |    |        |    |      |    |    |    |    |  |
|---------|----|--------|----|------|----|----|----|----|--|
| BOLTFOR | 4  | 1000.0 | 12 | THRU | 21 |    |    |    |  |
|         | 1  | 4      | 6  | 9    | 10 | 26 | 32 | 34 |  |
|         | 37 | 43     | 51 |      |    |    |    |    |  |

**Fields:**

| Field | Contents                                                                                                                   |
|-------|----------------------------------------------------------------------------------------------------------------------------|
| SID   | Set identification number (SID) of BOLTFOR bulk entry. (Integer>0)                                                         |
| LOAD  | Magnitude of the preload force. (Real)                                                                                     |
| Bi    | Bolt identification numbers (BID) defined by BOLT bulk entries. (Integer>0 or use "THRU" option. For "THRU" option, B7<B8) |

**Remarks:**

- Multiple BOLTFOR entries having the same SID can be used and the data will be combined.
- If the SID referenced by a BOLTLD case control command is present on both a BOLTLD bulk entry and BOLTFOR bulk entries, the BOLTLD bulk entry takes precedence and is selected. The BOLTFOR bulk entries that are not selected can optionally be included in the subcase by listing their SID in one of the Li fields on the BOLTLD bulk entry.
- Repeated BID in a subcase is not allowed. A repeated BID occurs when:
  - A BID is included more than once on a BOLTFOR bulk entry.
  - A BID is included on multiple BOLTFOR bulk entries having the same SID.

**1072 BOLTFOR**  
**Preload Force on Set of Bolts**

- A BID is included on multiple BOLTFOR bulk entries having different SID, but referenced by the same BOLTLD bulk entry.



**BOLTLD (bulk entry)** Bolt preload combining and scaling

Combines sets of bolts defined by BOLTFOR bulk entries and optionally scales the corresponding bolt preload forces.

**Format:**

| 1      | 2   | 3  | 4     | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|----|-------|----|----|----|----|----|----|
| BOLTLD | SID | S  | S1    | L1 | S2 | L2 | S3 | L3 |    |
|        | S4  | L4 | -etc- |    |    |    |    |    |    |

**Example:**

|        |     |     |     |   |     |   |  |  |  |
|--------|-----|-----|-----|---|-----|---|--|--|--|
| BOLTLD | 101 | 0.5 | 1.0 | 3 | 6.2 | 4 |  |  |  |
|--------|-----|-----|-----|---|-----|---|--|--|--|

**Fields:**

| Field | Contents                                                          |
|-------|-------------------------------------------------------------------|
| SID   | Set identification number (SID) of BOLTLD bulk entry. (Integer>0) |
| S     | Overall scale factor. (Real)                                      |
| Si    | Scale factor for individual Li. (Real)                            |
| Li    | SID of BOLTFOR bulk entries. (Integer>0)                          |

**Remarks:**

- The applied preload value  $P_i$  for each BOLT bulk entry referenced by BOLTFOR bulk entry  $L_i$  is given by:

$$P_i = S * S_i * P_{L_i}$$

where  $P_{L_i}$  is the preload value defined for BOLTFOR bulk entry  $L_i$ ,  $S_i$  is the individual scale factor corresponding to  $L_i$ , and  $S$  is the overall scale factor.

- $L_i$  must be unique. However, a single  $L_i$  on a BOLTLD bulk entry can reference multiple BOLTFOR bulk entries. When this occurs, all the preload forces defined by the BOLTFOR bulk entries sharing the same SID are scaled by the corresponding individual scale factor  $S_i$  and the overall scale factor  $S$ .

**1074 BOLTLD (bulk entry)**  
**Bolt preload combining and scaling**

3. The bolt identification numbers (BID) in all BOLTFOR bulk entries selected by a single BOLTLD bulk entry must be unique.
4. The SID of each BOLTLD bulk entry must be unique.

**BOUTPUT**      Output for Slideline Contact

Defines slave nodes at which output is requested.

**Format:**

|         |    |    |    |    |    |    |    |    |    |
|---------|----|----|----|----|----|----|----|----|----|
| 1       | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
| BOUTPUT | ID | G1 | G2 | G3 | G4 | G5 | G6 | G7 |    |

**Alternate Format:**

|         |    |    |        |    |      |     |  |  |  |
|---------|----|----|--------|----|------|-----|--|--|--|
| BOUTPUT | ID | G1 | "THRU" | G2 | "BY" | INC |  |  |  |
|---------|----|----|--------|----|------|-----|--|--|--|

The Continuation Entry formats may be used more than once and in any order. They may also be used with either format above.

**Continuation Entry Format 1:**

|  |    |    |     |     |        |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|
|  | G8 | G9 | G10 | G11 | -etc.- |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|

**Continuation Entry Format 2:**

|  |    |        |    |      |     |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|
|  | G8 | "THRU" | G9 | "BY" | INC |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|

**Example:**

|         |    |      |      |    |    |    |  |  |  |
|---------|----|------|------|----|----|----|--|--|--|
| BOUTPUT | 15 | 5    | THRU | 21 | BY | 4  |  |  |  |
|         | 27 | 30   | 32   | 33 |    |    |  |  |  |
|         | 35 | THRU | 44   |    |    |    |  |  |  |
|         | 67 | 68   | 72   | 75 | 84 | 93 |  |  |  |

**Format and Example Using "ALL" (No continuation entry is allowed):**

|         |    |     |  |  |  |  |  |  |  |
|---------|----|-----|--|--|--|--|--|--|--|
| BOUTPUT | ID | ALL |  |  |  |  |  |  |  |
| BOUTPUT | 15 | ALL |  |  |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                         |
|-------|--------------------------------------------------------------------------------------------------|
| ID    | Contact region identification number of a BCONP entry for which output is desired. (Integer > 0) |
| Gi    | Slave node numbers for which output is desired. (Integer > 0)                                    |

**1076 BOUTPUT**  
**Output for Slideline Contact**

| <b>Field</b> | <b>Contents</b>                                                            |
|--------------|----------------------------------------------------------------------------|
| INC          | Grid point identification number increment. See Remark (Integer or blank). |

**Remarks:**

For automatic generation of grid numbers, the default increment value is 1 if grid numbers are increasing or -1 if grid numbers are decreasing (i.e., the user need not specify BY and the increment value).

**BSET** Fixed Boundary Degrees of Freedom

Defines analysis set (a-set) degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations.

**Format:**

| 1    | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|------|-----|----|-----|----|-----|----|-----|----|----|
| BSET | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

**Example:**

|      |   |     |    |   |  |  |  |  |  |
|------|---|-----|----|---|--|--|--|--|--|
| BSET | 2 | 135 | 14 | 6 |  |  |  |  |  |
|------|---|-----|----|---|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                 |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                                |
| Ci    | Component number. (Integer zero or blank for scalar points, or any unique combinations of the integers 1 through 6 for grid points. No embedded blanks.) |

**Remarks:**

1. BSET and BNDFIX entries are equivalent.
2. If there are no CSETi or BSETi entries present, all a-set points are considered fixed during component mode analysis. If there are only BSETi entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BSETi and CSETi entries present, the c-set degrees-of-freedom are defined by the CSETi entries, and any remaining a-set points are placed in the b-set.
3. Degrees-of-freedom specified on this entry form members of the mutually exclusive b-set. They may not be specified on other entries that define mutually exclusive sets. See the [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.

**1078 BSET**  
**Fixed Boundary Degrees of Freedom**

- If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**Fixed Boundary Degrees of Freedom, Alternate Form of BSET Entry**

**BSET1** Fixed Boundary Degrees of Freedom, Alternate Form of BSET Entry

Defines analysis set (a-set) degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| BSET1    | C        | ID1      | ID2      | ID3      | ID4      | ID5      | ID6      | ID7      |           |
|          | ID8      | ID9      | ID10     | -etc.-   |          |          |          |          |           |

**Example:**

|       |     |     |    |   |    |    |    |    |  |
|-------|-----|-----|----|---|----|----|----|----|--|
| BSET1 | 2   | 135 | 14 | 6 | 23 | 24 | 25 | 26 |  |
|       | 122 | 127 |    |   |    |    |    |    |  |

**Alternate Format and Example:**

|       |   |     |        |     |  |  |  |  |  |
|-------|---|-----|--------|-----|--|--|--|--|--|
| BSET1 | C | ID1 | “THRU” | ID2 |  |  |  |  |  |
| BSET1 | 3 | 6   | THRU   | 32  |  |  |  |  |  |

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C            | Component numbers. (Integer zero or blank for scalar points, or any unique combinations of the integers 1 through 6 for grid points with no embedded blanks.) |
| IDI          | Grid or scalar point identification numbers. (Integer > 0; For “THRU” option, ID1< ID2)                                                                       |

**Remarks:**

1. BSET1 and BNDFIX1 entries are equivalent.
2. If there are no CSETi or BSETi entries present, all a-set points are considered fixed during component mode analysis. If there are only BSETi entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BSETi and CSETi entries present, the c-set degrees-of-freedom are defined by the CSETi entries, and any remaining a-set points are placed in the b-set.

## 1080 BSET1

### Fixed Boundary Degrees of Freedom, Alternate Form of BSET Entry

3. Degrees-of-freedom specified on this entry form members of the mutually exclusive b-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.
  - If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.



**BSURF** 3D Contact or Glue Region Definition by Shell Elements

Defines a 3D contact or glue region by shell element IDs.

**Format:**

|       |      |      |       |       |      |      |      |      |    |
|-------|------|------|-------|-------|------|------|------|------|----|
| 1     | 2    | 3    | 4     | 5     | 6    | 7    | 8    | 9    | 10 |
| BSURF | ID   | EID1 | EID2  | EID3  | EID4 | EID5 | EID6 | EID7 |    |
|       | EID8 | EID9 | EID10 | -etc- |      |      |      |      |    |

**Alternate Format:**

|       |    |      |      |      |    |     |  |  |  |
|-------|----|------|------|------|----|-----|--|--|--|
| BSURF | ID | EID1 | THRU | EID2 | BY | INC |  |  |  |
|-------|----|------|------|------|----|-----|--|--|--|

The Continuation Entry formats may be used more than once and in any order. They may also be used with either format above.

**Continuation Entry Format 1:**

|  |      |      |       |       |       |  |  |  |  |
|--|------|------|-------|-------|-------|--|--|--|--|
|  | EID8 | EID9 | EID10 | EID11 | -etc- |  |  |  |  |
|--|------|------|-------|-------|-------|--|--|--|--|

**Continuation Entry Format 2:**

|  |      |        |      |      |     |  |  |  |  |
|--|------|--------|------|------|-----|--|--|--|--|
|  | EID8 | "THRU" | EID9 | "BY" | INC |  |  |  |  |
|--|------|--------|------|------|-----|--|--|--|--|

**Example:**

|       |    |      |      |    |    |   |  |  |  |
|-------|----|------|------|----|----|---|--|--|--|
| BSURF | 15 | 5    | THRU | 21 | BY | 4 |  |  |  |
|       | 27 | 30   | 32   | 33 |    |   |  |  |  |
|       | 35 | THRU | 44   |    |    |   |  |  |  |
|       | 67 | 68   | 70   | 85 | 92 |   |  |  |  |

**Fields:**

| Field            | Contents                                                                              |
|------------------|---------------------------------------------------------------------------------------|
| ID               | Identification number of a contact or glue region. See Remarks 2 and 3. (Integer > 0) |
| EID <sub>i</sub> | Element identification numbers of shell elements. (Integer > 0)                       |
| INC              | Identification number increment. See Remark 4 (Integer or blank).                     |

## 1082 **BSURF** 3D Contact or Glue Region Definition by Shell Elements

### Remarks:

1. The continuation field is optional.
2. BSURF is a collection of one or more shell elements. BSURF defines a contact or glue region which may act as a source or target.
3. The ID must be unique with respect to all other BLSEG, BSURFS, BSURF, BCPROP, and BCPROPS entries.
4. For automatic generation of element ids, the default increment value is 1 if element numbers are increasing or -1 if element numbers are decreasing (i.e., the user need not specify BY and the increment value).
5. Understanding shell element normals, and making sure those in the same regions are consistent is very important to ensuring that contact elements will be created as expected. See the chapter on contact in the NX Nastran User's Guide for more information.

**BSURFS**      3D Contact or Glue Region Definition by Solid Elements

Defines a 3D contact or glue region by the faces of the CHEXA, CPENTA or CTETRA elements.

**Format:**

| 1      | 2     | 3  | 4  | 5  | 6    | 7  | 8  | 9  | 10 |
|--------|-------|----|----|----|------|----|----|----|----|
| BSURFS | ID    |    |    |    | EID1 | G1 | G2 | G3 |    |
|        | EID2  | G1 | G2 | G3 | EID3 | G1 | G2 | G3 |    |
|        | -etc- |    |    |    |      |    |    |    |    |

**Example:**

|        |    |    |    |    |    |    |    |    |  |
|--------|----|----|----|----|----|----|----|----|--|
| BSURFS | 7  |    |    |    | 10 | 15 | 16 | 20 |  |
|        | 15 | 16 | 17 | 21 | 20 | 17 | 18 | 22 |  |
|        | 11 | 19 | 20 | 24 | 16 | 20 | 21 | 25 |  |
|        | 21 | 21 | 22 | 26 |    |    |    |    |  |

**Fields:**

| Field            | Contents                                                                                                                     |
|------------------|------------------------------------------------------------------------------------------------------------------------------|
| ID               | Identification number of a contact or glue region. See Remarks 2 and 3. (Integer > 0)                                        |
| EID <sub>i</sub> | Element identification numbers of solid elements. (Integer > 0)                                                              |
| G1 - G3          | Identification numbers of 3 corner grid points on the face (triangular or quadrilateral) of the solid element. (Integer > 0) |

**Remarks:**

1. The continuation field is optional.
2. BSURFS is a collection of one or more element faces on solid elements. BSURFS defines a contact or glue region which may act as a source or target.
3. The ID must be unique with respect to all other BLSEG, BSURFS, BSURF, BCPROP, and BCPROPS entries.

**1084 BWIDTH**  
**Boundary Line Segment Width or Thickness**

**BWIDTH**      Boundary Line Segment Width or Thickness

Defines widths or thicknesses for line segments in 3-D or 2-D slideline contact defined in the corresponding BLSEG Bulk Data entry.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| BWIDTH   | ID       | W1       | W2       | W3       | W4       | W5       | W6       | W7       |           |

**Alternate Format:**

|        |    |    |        |    |      |     |  |  |  |
|--------|----|----|--------|----|------|-----|--|--|--|
| BWIDTH | ID | W1 | "THRU" | W2 | "BY" | INC |  |  |  |
|--------|----|----|--------|----|------|-----|--|--|--|

The Continuation Entry formats may be used more than once and in any order. They may also be used with either format above.

**Continuation Entry Format 1:**

|  |    |    |     |     |        |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|
|  | W8 | W9 | W10 | W11 | -etc.- |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|

**Continuation Entry Format 2:**


|  |    |        |    |      |     |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|
|  | W8 | "THRU" | W9 | "BY" | INC |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|

**Example:**

|        |     |      |      |     |     |     |  |  |  |
|--------|-----|------|------|-----|-----|-----|--|--|--|
| BWIDTH | 15  | 2.0  | THRU | 5.0 | BY  | 1.0 |  |  |  |
|        | 2.0 | 2.0  | 2.0  | 2.0 |     |     |  |  |  |
|        | 35. | THRU | 44.  |     |     |     |  |  |  |
|        | 1.5 | 3.4  | 7.6  | 0.4 | 0.7 |     |  |  |  |

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| ID           | BLSEG entry identification number. (Integer > 0)                                                        |
| Wi           | Width values for the corresponding line segments defined in the BLSEG entry. See Remark 1 (Real > 0.0). |
| INC          | Width value increment. See Remark 2 (Real or blank).                                                    |



**Remarks:**

1. BWIDTH may be omitted if the width of each segment defined in the BLSEG entry is unity. The number of widths to be specified is equal to the number of segments defined in the corresponding BLSEG entry.
2. The default value for INC is 1.0 if the width is increasing or -1.0 if the width is decreasing. That is, the user need not specify BY and the increment value. If the number of widths specified is less than the number of segments defined in the corresponding BLSEG entry, the width for the remaining segments is assumed to be equal to the last width specified.
3. If there is only one grid point in the corresponding BLSEG entry, there is no contributory area associated with the grid point. To compute correct contact stresses, an area may be associated with a single grid point by specifying the area in field W1.

**1086 BWIDTH**  
Boundary Line Segment Width or Thickness

**11**

Bulk A-B

Chapter

# 12 Bulk Data Entries CA—CM

Bulk data entries CAABSF—CMASS4

**12**  
Bulk  
CA-CM

## 1088 CAABSF Frequency-Dependent Acoustic Absorber Element

### CAABSF Frequency-Dependent Acoustic Absorber Element

Defines a frequency-dependent acoustic absorber element in coupled fluid-structural analysis.

#### Format:

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|-----|-----|----|----|----|----|---|---|----|
| CAABSF | EID | PID | G1 | G2 | G3 | G4 |   |   |    |

#### Example:

|        |    |    |   |    |    |  |  |  |  |
|--------|----|----|---|----|----|--|--|--|--|
| CAABSF | 44 | 38 | 1 | 10 | 20 |  |  |  |  |
|--------|----|----|---|----|----|--|--|--|--|

#### Fields:

| Field | Contents                                                                                 |
|-------|------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                             |
| PID   | Property identification number that matches a PAABSF entry. (Integer > 0; Default = EID) |
| Gi    | Grid point identification number of fluid connection points. (Integer $\geq 0$ or blank) |

#### Remarks:

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. If only G1 is specified then a point impedance is assumed. If G1 and G2 are specified then a line impedance is assumed. If G1, G2, and G3 are specified, then an impedance is associated with the area of the triangular face. If G1 through G4 are specified, then an impedance is associated with the quadrilateral face. See [Figure 12-1](#).
3. The CAABSF element must connect entirely to fluid points on the fluid-structure boundary.



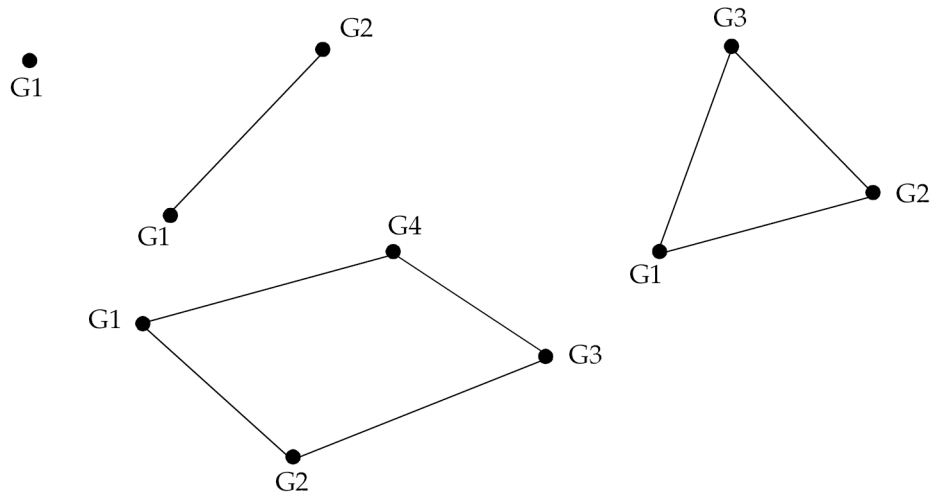


Figure 12-1. Four Types of CAABSF Elements

## 1090 CAERO1 Aerodynamic Panel Element Connection

### CAERO1 Aerodynamic Panel Element Connection

Defines an aerodynamic macro element (panel) in terms of two leading edge locations and side chords. This is used for the Doublet-Lattice theory for subsonic aerodynamics and the ZONA51 theory for supersonic aerodynamics.

#### Format:

| 1      | 2   | 3   | 4  | 5     | 6      | 7     | 8      | 9    | 10 |
|--------|-----|-----|----|-------|--------|-------|--------|------|----|
| CAERO1 | EID | PID | CP | NSPAN | NCHORD | LSPAN | LCHORD | IGID |    |
|        | X1  | Y1  | Z1 | X12   | X4     | Y4    | Z4     | X43  |    |

#### Example:

|        |      |     |     |     |     |     |     |     |  |
|--------|------|-----|-----|-----|-----|-----|-----|-----|--|
| CAERO1 | 1000 | 1   |     | 3   |     |     | 2   | 1   |  |
|        | 0.0  | 0.0 | 0.0 | 1.0 | 0.2 | 1.0 | 0.0 | 0.8 |  |

#### Fields:


| Field  | Contents                                                                                                                                                                            |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID    | Element identification number. (Integer > 0)                                                                                                                                        |
| PID    | Property identification number of a PAERO1 entry; used to specify associated bodies. Required even if there are no associated bodies. (Integer > 0)                                 |
| CP     | Coordinate system for locating points 1 and 4. (Integer ≥ 0; Default = 0)                                                                                                           |
| NSPAN  | Number of spanwise boxes; if a positive value is given, NSPAN equal divisions are assumed. If zero or blank, a list of division points is given by LSPAN, field 7. (Integer ≥ 0)    |
| NCHORD | Number of chordwise boxes; if a positive value is given NCHORD, equal divisions are assumed; if zero or blank, a list of division points is given at LCHORD, field 8. (Integer ≥ 0) |
| LSPAN  | ID of an AEFAC data entry containing a list of division points for spanwise boxes. Used only if the NSPAN field 5 is zero or blank. (Integer > 0)                                   |

| <b>Field</b> | <b>Contents</b>                                                                                                                                       |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| LCHORD       | ID of an AEFAC data entry containing a list of division points for chordwise boxes. Used only if the NCHORD, field 6, is zero or blank. (Integer > 0) |
| IGID         | Interference group identification; aerodynamic elements with different IGIDs are uncoupled. (Integer > 0) See remark 8 for restriction.               |
| X1, Y1, Z1   | Location of points 1 and 4 in coordinate system CP. (Real)                                                                                            |
| X4, Y4, Z4   |                                                                                                                                                       |
| X12, X43     | Edge chord lengths in aerodynamic coordinate system. (Real $\geq$ 0.0, but not both zero.)                                                            |

**Remarks:**

1. The boxes and corner point nodes are numbered sequentially, beginning with EID. The user should be careful to ensure that all box and corner point node numbers are unique. There can be overlapping ID's between the structural and aerodynamic model, but post processors may not be able to display any results. Also, non-unique corner ID's are allowed, but most post processor do not support this capability.
2. The number of division points is one greater than the number of boxes. Thus, if NSPAN=3, the division points are 0.0, 0.333, 0.667, 1.000. If the user supplies division points, the first and last points need not be 0.0 and 1.0 (in which case the corners of the panel would not be at the reference points).
3. A triangular element is formed if X12 or X43=0.0.
4. The element coordinate system is right-handed as shown in [Figure 12-2](#).
5. The continuation is required.
6. It is recommended that NCHORD or LCHORD be chosen such that the typical box chord length  $\Delta x$  satisfies the condition  $\Delta x < 0.08V/f$ . Recent studies indicate that .02  $V/f$  is needed to get converged stability derivatives. Where  $V$  is the minimum velocity and  $f$ , in hertz, is the maximum frequency to be analyzed (see the *NX Nastran Aeroelastic Analysis User's Guide*).
7. This entry can be used for two different aerodynamic theories: Doublet-Lattice for subsonic and ZONA51 for supersonic. The proper theory is selected based on the specification of Mach number on the MKAEROi or TRIM entry.

## 1092 CAERO1 Aerodynamic Panel Element Connection

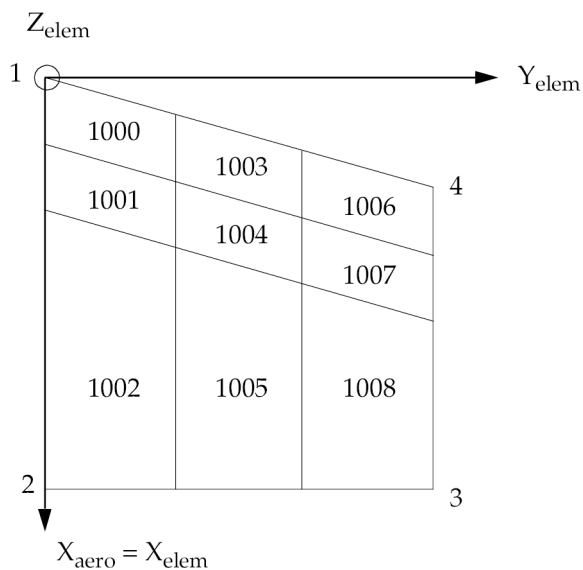

**Figure 12-2. Element Coordinate System for Aerodynamic Panel**

- CAERO1 and CAERO2 panels should be defined in an IGID increasing order. For example, if you have a CAERO1 or CAERO2 card with EID1 and ... IGID1, and another with EID2 and ... IGID2, IGID2 must be greater than IGID1, independent of whether EID1 < or > EID2. Failure to follow this restriction will create an erroneous pressure distribution resulting in incorrect flutter results.

**CAERO2** Aerodynamic Body Connection

Defines aerodynamic slender body and interference elements for Doublet-Lattice aerodynamics.

**Format:**

| 1      | 2   | 3   | 4  | 5   | 6    | 7   | 8    | 9    | 10 |
|--------|-----|-----|----|-----|------|-----|------|------|----|
| CAERO2 | EID | PID | CP | NSB | NINT | LSB | LINT | IGID |    |
|        | X1  | Y1  | Z1 | X12 |      |     |      |      |    |

**Example:**

|        |      |      |      |      |   |    |  |   |  |
|--------|------|------|------|------|---|----|--|---|--|
| CAERO2 | 1500 | 2    | 100  |      | 4 | 99 |  | 1 |  |
|        | -1.0 | 100. | -30. | 175. |   |    |  |   |  |

**Fields:**

| Field | Contents                                                                                                                                                  |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                              |
| PID   | Property identification number of a PAERO2 entry. (Integer > 0)                                                                                           |
| CP    | Coordinate system for locating point 1. (Integer ≥ 0; Default = 0)                                                                                        |
| NSB   | Number of slender body elements. If NSB > 0, then NSB equal divisions are assumed; if zero or blank, specify a list of divisions in LSB. (Integer ≥ 0)    |
| NINT  | Number of interference elements. If NINT > 0, then NINT equal divisions are assumed; if zero or blank, specify a list of divisions in LINT. (Integer ≥ 0) |
| LSB   | ID of an AEFACT Bulk Data entry for slender body division points; used only if NSB is zero or blank. (Integer ≥ 0)                                        |
| LINT  | ID of an AEFACT data entry containing a list of division points for interference elements; used only if NINT is zero or blank. (Integer ≥ 0)              |
| IGID  | Interference group identification. Aerodynamic elements with different IGIDs are uncoupled. (Integer ≥ 0) See remark 8 for restriction.                   |

## 1094 CAERO2 Aerodynamic Body Connection

| Field      | Contents                                                                                 |
|------------|------------------------------------------------------------------------------------------|
| X1, Y1, Z1 | Location of point 1 in coordinate system CP. (Real)                                      |
| X12        | Length of body in the x-direction of the aerodynamic coordinate system. (Real $\geq 0$ ) |

### Remarks:

- Point 1 is the leading point of the body.
- All CAERO1 (panels) and CAERO2 (bodies) in the same group (IGID) will have aerodynamic interaction.
- At least one interference element is required for the aerodynamic body specified by this entry.
- The beams and connection points are numbered sequentially beginning with EID. The user should be careful to ensure that all aero elements and connection point IDs are unique. Overlapping IDs between structure and aerodynamic models are allowed, but will prevent results visualization in most post processors.  
  
Old rules regarding numbering among Z, ZY, Y bodies and CAERO1 no longer apply: arbitrary ordering is allowed.
- At least two slender body elements are required for each aerodynamic body.
- Interference elements are only intended for use with panels.
- Determining the size of the j-set (i.e., the number of aerodynamic elements) is essential to input D1JE and D2JE matrices. Use the following expressions for locating the proper row in the two matrices:

$$\begin{aligned}
 J = \text{Number of boxes} &= + \text{Number of I-elements, z} \\
 &= + 2 * (\text{Number of I-elements, zy}) \\
 &= + \text{Number of I-elements, y} \\
 &= + \text{Number of S-elements, z} \\
 &= + 2 * (\text{Number of S-elements, zy}) \\
 &= + \text{Number of S-elements, y}
 \end{aligned}$$

where I-elements denote interference and S-elements denote slender body.

- CAERO1 and CAERO2 panels should be defined in an IGID increasing order. For example, if you have a CAERO1 or CAERO2 card with EID1 and ... IGID1,

and another with EID2 and ... IGID2, IGID2 must be greater than IGID1, independent of whether  $EID1 < \text{or} > EID2$ . Failure to follow this restriction will create an erroneous pressure distribution resulting in incorrect flutter results.

**1096 CAERO3**  
**Aerodynamic Panel Element Configuration**

**CAERO3** Aerodynamic Panel Element Configuration

Defines the aerodynamic edges of a Mach Box lifting surface. If no cranks are present, this entry defines the aerodynamic Mach Box lifting surface.

**Format:**

| 1      | 2   | 3   | 4  | 5     | 6      | 7      | 8  | 9   | 10 |
|--------|-----|-----|----|-------|--------|--------|----|-----|----|
| CAERO3 | EID | PID | CP | LISTW | LISTC1 | LISTC2 |    |     |    |
|        | X1  | Y1  | Z1 | X12   | X4     | Y4     | Z4 | X43 |    |

**Example:**

|        |      |      |     |      |     |      |    |      |  |
|--------|------|------|-----|------|-----|------|----|------|--|
| CAERO3 | 2000 | 2001 | 0   | 22   | 33  |      |    |      |  |
|        | 1.0  | 0.0  | 0.0 | 100. | 17. | 130. | 0. | 100. |  |

**Fields:**


| Field                        | Contents                                                                                                               |
|------------------------------|------------------------------------------------------------------------------------------------------------------------|
| EID                          | Element identification number. (Integer > 0)                                                                           |
| PID                          | Property identification number of a PAERO3 entry. (Integer > 0)                                                        |
| CP                           | Coordinate system for locating points 1 and 4. (Integer ≥ 0; Default = 0)                                              |
| LISTW                        | Identification number of an AEFAC entry that lists (x,y) pairs for structural interpolation of the wing. (Integer > 0) |
| LISTC1,<br>LISTC2            | Identification number of AEFAC entries that list (x,y) pairs for control surfaces, if they exist. (Integer ≥ 0)        |
| X1, Y1,<br>Z1, X4,<br>Y4, Z4 | Location of points 1 and 4 in coordinate system CP. (Real)                                                             |
| X12, X43                     | Edge chord lengths in the aerodynamic coordinate system. (Real ≥ 0, X12 ≠ 0)                                           |

**Remarks:**

1. EID must be unique with respect to all other element identification numbers.



2. The (x,y) pairs on LISTW, LISTC1 and LISTC2 AEFAC entries are in the aero element coordinate system (see Figure 12-3). The (x,y) pairs define a set of aerodynamic grid points that are independent of the Mach number and are selected by the user to be representative of the platform and motions of interest. The (x,y) pairs must be sufficient in number and distribution such that: the surface spline provides an accurate interpolation between them and the Mach Box centers that are variously located on the planform as a function of Mach number. A complete description of the Mach Box Method is given in the *NX Nastran Aeroelastic Analysis User's Guide*.
3. The (x,y) pairs are numbered sequentially, beginning with EID for LISTW, then LISTC1, and finally for LISTC2. On SPLINEi entries, the box numbers (BOX1 and BOX2 on SPLINE1, ID1 and ID2 on SPLINE2, and UKID on SPLINE3) refer to the (x,y) pair sequence number appropriate for the surface (primary, or first or second control) being splined.
4. If cranks and/or control surfaces exist, their locations are given on the PAERO3 entry.
5. The numbering system and coordinate system are shown below:

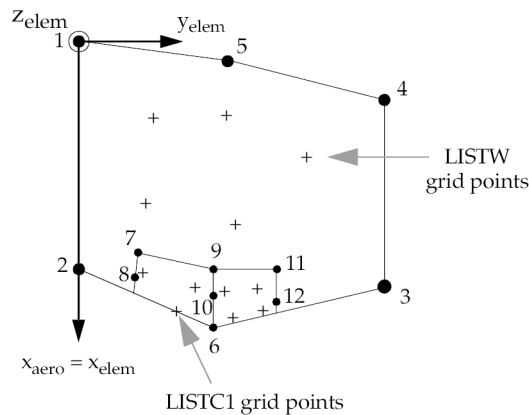

**Figure 12-3. CAERO3 Element Configuration**

|   | Planform Corners        | Control                                        |
|---|-------------------------|------------------------------------------------|
| 1 | Leading edge, inboard   | 7 Hinge line, inboard                          |
| 2 | Trailing edge, inboard  | 8 On inboard edge (usually at trailing edge)   |
| 3 | Trailing edge, outboard | 9 Hinge line, outboard                         |
| 4 | Leading edge, outboard  | 10 On outboard edge (usually at trailing edge) |

**1098 CAERO3**  
**Aerodynamic Panel Element Configuration**

| Cranks |               | Control (if two) |                                             |
|--------|---------------|------------------|---------------------------------------------|
| 5      | Leading edge  | 9                | Hinge line, inboard                         |
| 6      | Trailing edge | 10               | On inboard edge (usually at trailing edge)  |
|        |               | 11               | Hinge line, outboard                        |
|        |               | 12               | On outboard edge (usually at trailing edge) |

**CAERO4** Aerodynamic Macro-Strip Element Connection

Defines an aerodynamic macro element for Strip theory.

**Format:**

| 1      | 2   | 3   | 4  | 5     | 6     | 7  | 8  | 9   | 10 |
|--------|-----|-----|----|-------|-------|----|----|-----|----|
| CAERO4 | EID | PID | CP | NSPAN | LSPAN |    |    |     |    |
|        | X1  | Y1  | Z1 | X12   | X4    | Y4 | Z4 | X43 |    |

**Example:**

|        |      |      |     |     |     |     |     |     |  |
|--------|------|------|-----|-----|-----|-----|-----|-----|--|
| CAERO4 | 6000 | 6001 | 100 |     | 315 |     |     |     |  |
|        | 0.0  | 0.0  | 0.0 | 1.0 | 0.2 | 1.0 | 0.0 | 0.8 |  |

**Fields:**

| Field                        | Contents                                                                                                                                 |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| EID                          | Element identification number. (Integer > 0)                                                                                             |
| PID                          | Property identification number of a PAERO4 entry. (Integer > 0)                                                                          |
| CP                           | Coordinate system for locating points 1 and 4. (Integer ≥ 0; Default = 0)                                                                |
| NSPAN                        | Number of strips; if a positive value is given, NSPAN equal strips are assumed. If zero or blank, LSPAN must be specified. (Integer ≥ 0) |
| LSPAN                        | ID of an AEFACT entry containing a list of division points for strips. Used only if NSPAN is zero or blank. (Integer > 0)                |
| X1, Y1,<br>Z1, X4,<br>Y4, Z4 | Location of points 1 and 4 in coordinate system CP. (Real)                                                                               |
| X12, X43                     | Edge chord lengths in aerodynamic coordinate system. (Real ≥ 0.0, and not both zero.)                                                    |

## 1100 CAERO4 Aerodynamic Macro-Strip Element Connection

### Remarks:

1. The strips are numbered sequentially, beginning with EID. The user must ensure that all strip numbers are unique and greater than structural grid, scalar, and extra point IDs.
2. The number of division points is one greater than the number of boxes. Thus, if  $NSPAN = 3$ , the division points are 0.0, 0.333, 0.667, and 1.000. If the user supplies division points, the first and last points need not be 0.0 and 1.0 (in which case the corners of the panel would not be at the reference points).
3. A triangular element is formed if  $X12$  or  $X43 = 0$ .

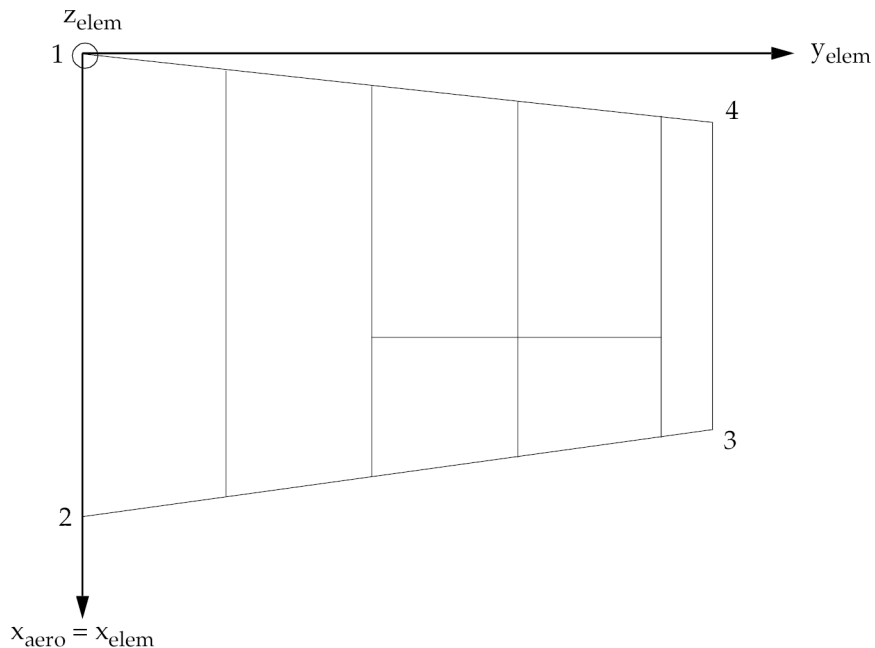


Figure 12-4. CAERO4 Element Connection

**CAERO5** Aerodynamic Panel Element Configuration

Defines an aerodynamic macro element for Piston theory.

**Format:**

| 1      | 2   | 3   | 4  | 5     | 6     | 7     | 8      | 9   | 10 |
|--------|-----|-----|----|-------|-------|-------|--------|-----|----|
| CAERO5 | EID | PID | CP | NSPAN | LSPAN | NTHRY | NTHICK |     |    |
|        | X1  | Y1  | Z1 | X12   | X4    | Y4    | Z4     | X43 |    |

**Example:**


|        |      |      |     |     |     |     |    |     |  |
|--------|------|------|-----|-----|-----|-----|----|-----|--|
| CAERO5 | 6000 | 6001 | 100 |     | 315 | 0   | 0  |     |  |
|        | 0.0  | 0.0  | 0.0 | 1.0 | 0.2 | 1.0 | 0. | 0.8 |  |

**Fields:**

| Field | Contents                                                                                                                            |
|-------|-------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                        |
| PID   | Property identification number of a PAERO5 entry. (Integer > 0)                                                                     |
| CP    | Coordinate system for locating points 1 and 4. (Integer ≥ 0; Default = 0)                                                           |
| NSPAN | Number of strips. If a positive value is given, equal strips are assumed. If zero or blank, then LSPAN must be specified. (Integer) |
| LSPAN | ID of an AEFAC entry containing a list of division points for strips. Used only if NSPAN is zero or blank. (Integer > 0)            |
| NTHRY | Parameter to select Piston or van Dyke's theory. (Integer = 0, 1, or 2; Default = 0)                                                |
|       | Blank - Piston theory is used to compute $\bar{C}_1$ and $\bar{C}_2$                                                                |
|       | or 1                                                                                                                                |
|       | 1 = van Dyke's theory is used to compute $\bar{C}_1$ and $\bar{C}_2$ with no sweep correction (secΛ = 1.0).                         |
|       | 2 = van Dyke's theory is used to compute $\bar{C}_1$ and $\bar{C}_2$ with a sweep correction based on the actual Λ.                 |

**1102 CAERO5**  
**Aerodynamic Panel Element Configuration**

| Field                        | Contents                                                                                                                                                                                                                                                                                         |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NTHICK                       | Parameter to select thickness integrals input. (Integer $\geq 0$ ; Default = 0)<br><br>0 or Blank - Thickness integrals are computed internally.<br><br>>0 - Thickness integrals are input directly and are the ID number of an AEFACCT entry that lists the <i>I</i> and/or <i>J</i> integrals. |
| X1, Y1,<br>Z1, X4,<br>Y4, Z4 | Location of points 1 and 4 in coordinate system CP. (Real)                                                                                                                                                                                                                                       |
| X12, X43                     | Edge chord lengths in aerodynamic coordinate system. (Real $\geq 0$ ; X12 and X43 cannot both be zero.)                                                                                                                                                                                          |

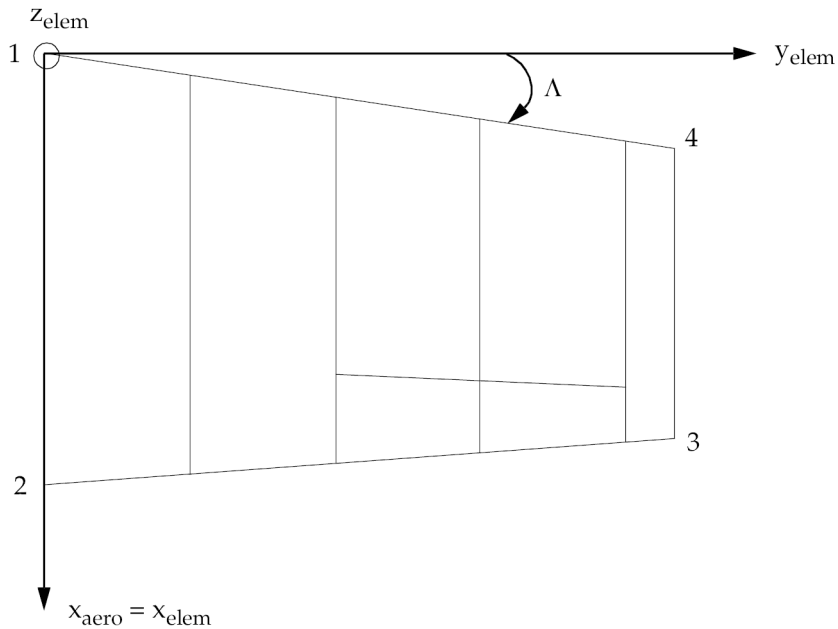

**Figure 12-5. CAERO5 Element Configuration**

**Remarks:**

1. The strips are numbered sequentially, beginning with EID. The user must ensure that all strip numbers are unique and different from structural grid IDs.

2. The number of division points is one greater than the number of boxes. Thus, if NSPAN=3, the division points are 0.0, 0.333, 0.667, 1.000. If the user supplies division points, the first and last points need not be 0.0 and 1.0 (in which case the corners of the panel would not be at the reference points).
3. A triangular element is formed if X12 or X43 = 0.0.

$$4. \quad \bar{C}_1 = m / (m^2 - \sec^2 \Lambda)^{1/2}$$

$$\bar{C}_2 = [m^4 (g + 1) - 4 \sec^2 \Lambda (m^2 - \sec^2 \Lambda)] / [4(m^2 - \sec^2 \Lambda)^2]$$

where:


- m = Mach number  
g = Specific heat ratio  
 $\Lambda$  = Leading edge sweep angle

When  $\sec \Lambda = 0.0$ , Piston theory coefficients are obtained (NTHRY = 1).

When  $\sec \Lambda = 1.0$ , van Dyke coefficients are obtained (NTHRY = blank or 0).

When  $\sec \Lambda \neq 0.0$  or  $\neq 1.0$ , sweep corrections are included (NTHRY = 2).

5. *I* and *J* thickness integral definitions:

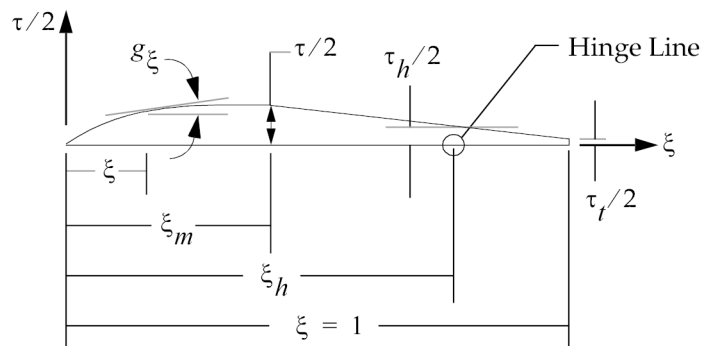

$g_\xi \equiv \frac{dg}{d\xi} = \text{slope of airfoil semithickness}$

$$I_1 = \int_0^1 g_\xi d\xi \quad J_1 = \int_{\xi_h}^1 g_\xi d\xi$$

$$I_2 = \int_0^1 \xi g_\xi d\xi \quad J_2 = \int_{\xi_h}^1 \xi g_\xi d\xi$$

$$I_3 = \int_0^1 \xi^2 g_\xi d\xi \quad J_3 = \int_{\xi_h}^1 \xi^2 g_\xi d\xi$$

$$I_4 = \int_0^1 g_\xi^2 d\xi \quad J_4 = \int_{\xi_h}^1 g_\xi^2 d\xi$$

$$I_5 = \int_0^1 \xi g_\xi^2 d\xi \quad J_5 = \int_{\xi_h}^1 \xi g_\xi^2 d\xi$$

$$I_6 = \int_0^1 \xi^2 g_\xi^2 d\xi \quad J_6 = \int_{\xi_h}^1 \xi^2 g_\xi^2 d\xi$$

Figure 12-6. CAERO5 I and J Thickness Integral Definitions



## CAXIFi Fluid Element Connections

Defines an axisymmetric fluid element that connects  $i = 2, 3,$  or  $4$  fluid points.

### Formats:

| 1      | 2   | 3    | 4    | 5    | 6    | 7   | 8 | 9 | 10 |
|--------|-----|------|------|------|------|-----|---|---|----|
| CAXIF2 | EID | IDF1 | IDF2 |      |      | RHO | B |   |    |
| CAXIF3 | EID | IDF1 | IDF2 | IDF3 |      | RHO | B |   |    |
| CAXIF4 | EID | IDF1 | IDF2 | IDF3 | IDF4 | RHO | B |   |    |

### Example:

|        |     |     |     |     |     |         |       |  |  |
|--------|-----|-----|-----|-----|-----|---------|-------|--|--|
| CAXIF2 | 11  | 23  | 25  |     |     | 0.25E-3 |       |  |  |
| CAXIF3 | 105 | 31  | 32  | 33  |     | 6.47E-3 |       |  |  |
| CAXIF4 | 524 | 421 | 425 | 424 | 422 | 0.5E-3  | 2.5+3 |  |  |

### Fields:

| Field | Contents                                                        |
|-------|-----------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                    |
| IDFi  | Identification numbers of connected GRIDF points. (Integer > 0) |
| RHO   | Fluid density in mass units. (Real > 0.0 or blank)              |
| B     | Fluid bulk modulus. (Real $\geq$ 0.0 or blank)                  |

### Remarks:

1. CAXIFi is allowed only if an AXSLOT entry is also present.
2. The element identification number (EID) must be unique with respect to all other fluid or structural elements.
3. If RHO or B is blank, then the corresponding RHOD and BD fields must be specified on the AXSLOT entry.
4. Plot elements are generated for these elements. Because each plot element connects two points, one is generated for the CAXIF2 element, three are generated for the CAXIF3 element, and four plot elements are generated for the CAXIF4 element. In the last case, the elements connect the pairs of points (1-2), (2-3), (3-4), and (4-1).

**1106 CAXIFi**  
**Fluid Element Connections**

5. If  $B = 0.0$ , the fluid is incompressible.

**CBAR** Simple Beam Element Connection

Defines a simple beam element.

**Format:**

| 1    | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| CBAR | EID | PID | GA  | GB  | X1  | X2  | X3  |     |    |
|      | PA  | PB  | W1A | W2A | W3A | W1B | W2B | W3B |    |

**Example:**

|      |   |     |   |   |     |     |     |  |  |
|------|---|-----|---|---|-----|-----|-----|--|--|
| CBAR | 2 | 39  | 7 | 3 | 0.6 | 18. | 26. |  |  |
|      |   | 513 |   |   |     |     |     |  |  |

**Alternate Format and Example:**

|      |     |     |     |     |     |     |     |     |  |
|------|-----|-----|-----|-----|-----|-----|-----|-----|--|
| CBAR | EID | PID | GA  | GB  | G0  |     |     |     |  |
|      | PA  | PB  | W1A | W2A | W3A | W1B | W2B | W3B |  |

|      |   |     |   |   |     |  |  |  |  |
|------|---|-----|---|---|-----|--|--|--|--|
| CBAR | 2 | 39  | 7 | 6 | 105 |  |  |  |  |
|      |   | 513 |   |   |     |  |  |  |  |

**Fields:**

| Field      | Contents                                                                                                                                    |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| EID        | Unique element identification number. (Integer > 0)                                                                                         |
| PID        | Property identification number of a PBAR or PBARL entry. (Integer > 0 or blank; Default = EID unless BAROR has a nonzero entry in field 3.) |
| GA, GB     | Grid point identification numbers of connection points. (Integer > 0; GA ≠ GB)                                                              |
| X1, X2, X3 | Components of orientation vector<br>$\vec{v}$ , from GA, in the displacement coordinate system at GA.<br>(Real)                             |

## 1108 CBAR Simple Beam Element Connection


| Field                           | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| G0                              | Alternate method to supply the orientation vector $\vec{v}$ using grid point G0. The direction of $\vec{v}$ is from GA to G0. $\vec{v}$ is then translated to End A. (Integer > 0; G0 ≠ GA or GB)                                                                                                                                                                                                                                                                                                                                                                                  |
| PA, PB                          | Pin flags for bar ends A and B, respectively. Used to remove connections between the grid point and selected degrees-of-freedom of the bar. The degrees-of-freedom are defined in the element's coordinate system (see <a href="#">Figure 12-7</a> ). The bar must have stiffness associated with the PA and PB degrees-of-freedom to be released by the pin flags. For example, if PA = 4 is specified, the PBAR entry must have a value for J, the torsional stiffness. (Up to 5 of the unique integers 1 through 6 anywhere in the field with no embedded blanks; Integer > 0.) |
| W1A, W2A, W3A,<br>W1B, W2B, W3B | Components of offset vectors $\vec{w}_a$ and $\vec{w}_b$ , respectively (see <a href="#">Figure 12-7</a> ) in displacement coordinate systems at points GA and GB, respectively. See <a href="#">Remark 7</a> (Real; Default = 0.0)                                                                                                                                                                                                                                                                                                                                                |

### Note


See the BEAMOR entry for default options for field 3 and fields 6 through 8.

### Remarks:

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. [Figure 12-7](#) and [Figure 12-8](#) define bar element geometry with and without offsets.

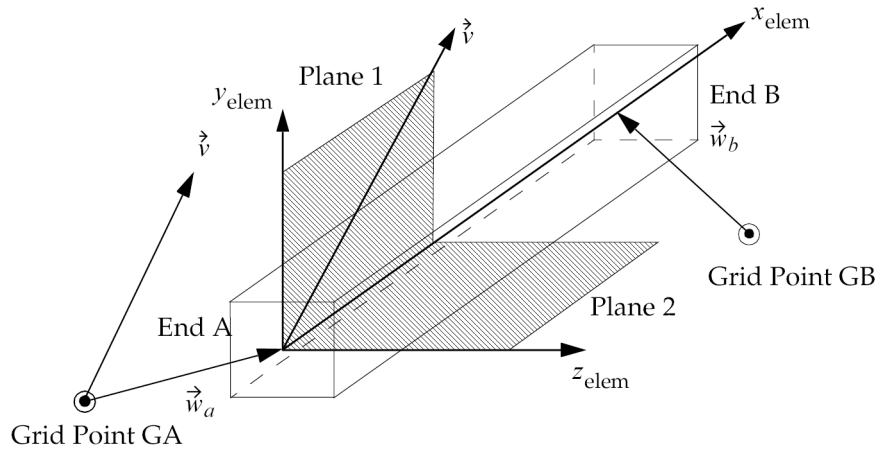


**Figure 12-7. CBAR Element Geometry with Offsets**

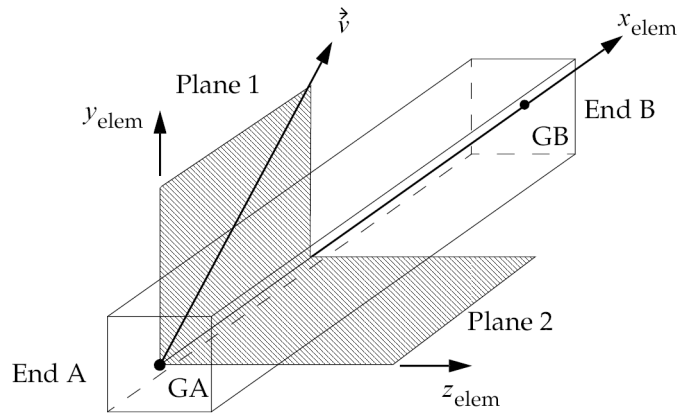


**Figure 12-8. CBAR Element Geometry without Offsets**

- Figure 8-10 and Figure 8-11 define the elemental force and moment sign convention.

1110 **CBAR**  
Simple Beam Element Connection

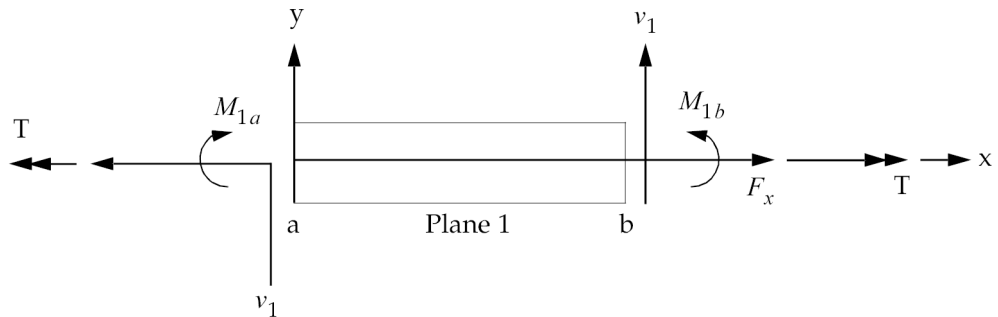

**Figure 12-9. CBAR Element Internal Forces and Moments (x-y Plane)**

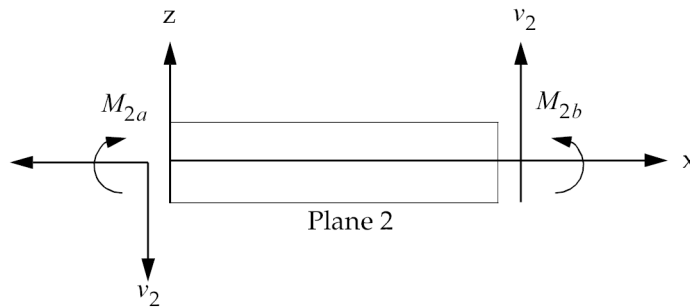

**Figure 12-10. CBAR Element Internal Forces and Moments (x-z Plane)**

4. The continuation may be omitted if there are no pin flags or offsets.
5. For the case where field 9 is blank and not provided by the BAROR entry, if an integer is specified in field 6, then G0 is used; if field 6 is blank or real, then X1, X2, X3 is used.
6. See “Overview of Coordinate Systems in NX Nastran” in the *NX Nastran User’s Guide* for a definition of coordinate system terminology.
7. Offset vectors are treated like rigid elements and are therefore subject to the same limitations.
  - Offset vectors are not affected by thermal loads.
  - The specification of offset vectors is not recommended in solution sequences that compute differential stiffness because the offset vector remains parallel to its original orientation. (Differential stiffness is computed in buckling analysis provided in SOLs 105, and 200 and also in nonlinear analysis provided in SOLs 106, 129, 153, and 159 with PARAM,LGDISP,1.) As a

result, the specification of offset vectors is not permitted. However, setting the SYSTEM(463) to 1 will disable the FATAL error message and the analysis will be allowed to continue (with offset vector remaining parallel to its original orientation).

**Remarks related to SOLs 601 and 701:**

1. W1A, W2A, W3A, W1B, W2B, and W3B are ignored.
2. CBAR defines the same element as CBEAM for SOL 601 and 701.
3. Result output for this element is requested using Case Control command STRESS. However, element forces instead of stresses are output for CBAR (and CBEAM) elements.

## 1112 CBARAO Auxiliary Output Points Along Bar Element Axis (CBAR Entry)

### CBARAO Auxiliary Output Points Along Bar Element Axis (CBAR Entry)

Defines a series of points along the axis of a bar element (CBAR entry) for stress and force recovery output.

#### Format:

| 1      | 2   | 3     | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-------|----|----|----|----|----|----|----|
| CBARAO | EID | SCALE | X1 | X2 | X3 | X4 | X5 | X6 |    |

#### Example:

|        |      |    |     |     |     |     |  |  |  |
|--------|------|----|-----|-----|-----|-----|--|--|--|
| CBARAO | 1065 | FR | 0.2 | 0.4 | 0.6 | 0.8 |  |  |  |
|--------|------|----|-----|-----|-----|-----|--|--|--|

#### Alternate Format and Example:

|        |      |       |      |     |       |  |  |  |  |
|--------|------|-------|------|-----|-------|--|--|--|--|
| CBARAO | EID  | SCALE | NPTS | X1  | DELTA |  |  |  |  |
| CBARAO | 1065 | FR    | 4    | 0.2 | 0.2   |  |  |  |  |

#### Fields:

| Field | Contents                                                                              |
|-------|---------------------------------------------------------------------------------------|
| EID   | Element identification of a CBAR entry. (Integer > 0)                                 |
| SCALE | Defines scale of Xi values. (Character = "LE" or "FR")                                |
| Xi    | Series of locations along element axis for stress and force data recovery. (Real > 0) |
| DELTA | Incremental distance along element axis. (Real)                                       |
| NPTS  | Number of stress recovery points, not including the end points. (Integer > 0)         |

#### Remarks:

1. This entry defines intermediate locations on the axis of selected CBAR elements for additional data recovery. The values of Xi are actual distances along the length if SCALE = "LE". If SCALE = "FR", the values of Xi are ratios of actual distances to the bar length. A PLOAD1 Bulk Data entry for the CBAR element in question must be present to obtain intermediate data recovery.
2. When the alternate format is used, a series of locations  $X_i = X_{[i-1]} + \text{DELTA}$ ,  $i = 1, 2, \dots, \text{NPTS}$  is generated.



**CBARAO 1113**

**Auxiliary Output Points Along Bar Element Axis (CBAR Entry)**

3. If a CBARAO or PLOAD1 entry is specified and stress and/or force output is requested, then the stresses and/or forces will be calculated at each location  $X_i$  and output as a separate line. The force and stress values at the end points of the beam will always be output. This output format will be used for all beam and bar elements.
4. Intermediate loads on the element defined by the PLOAD1 entry will be accounted for in the calculation of element stresses and forces. If no PLOAD1 entry is defined for the element, the shear forces are constant, the moments are linear, and it is not necessary that the user define additional points.
5. For each bar element, either the basic format or the alternate format, but not both, may be used. A maximum of six internal points can be specified with the basic form. The end points must not be listed because data will be generated for them, as explained in Remark 3. If more than six unequally spaced internal points are desired, it is advisable to subdivide the bar into two or more elements.

**1114 CBEAM**  
Beam Element Connection

**CBEAM** Beam Element Connection

Defines a beam element.

**Format:**

| 1     | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| CBEAM | EID | PID | GA  | GB  | X1  | X2  | X3  | BIT |    |
|       | PA  | PB  | W1A | W2A | W3A | W1B | W2B | W3B |    |
|       | SA  | SB  |     |     |     |     |     |     |    |

**Example:**

|       |   |     |   |     |     |     |      |  |  |
|-------|---|-----|---|-----|-----|-----|------|--|--|
| CBEAM | 2 | 39  | 7 | 13  | 8.2 | 6.1 | -5.6 |  |  |
|       |   | 513 |   | 3.0 |     |     |      |  |  |
|       | 8 | 5   |   |     |     |     |      |  |  |

**Alternate Format and Example:**

|       |     |     |     |     |     |     |     |     |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|--|
| CBEAM | EID | PID | GA  | GB  | G0  |     |     | BIT |  |
|       | PA  | PB  | W1A | W2A | W3A | W1B | W2B | W3B |  |
|       | SA  | SB  |     |     |     |     |     |     |  |

|       |   |     |   |    |     |  |  |  |  |
|-------|---|-----|---|----|-----|--|--|--|--|
| CBEAM | 2 | 39  | 7 | 13 | 105 |  |  |  |  |
|       |   | 513 |   |    |     |  |  |  |  |

**Fields:**

| Field      | Contents                                                                                                  |
|------------|-----------------------------------------------------------------------------------------------------------|
| EID        | Unique element identification number. (Integer > 0)                                                       |
| PID        | Property identification number of PBEAM, PBCOMP or PBEAML entry. (Integer > 0; Default=EID)               |
| GA, GB     | Grid point identification numbers of connection points. (Integer > 0; GA ≠ GB)                            |
| X1, X2, X3 | Components of orientation vector $\vec{v}$ , from GA, in the displacement coordinate system at GA. (Real) |

| <b>Field</b>                    | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| G0                              | Alternate method to supply the orientation vector $\vec{v}$ using grid point G0. Direction of $\vec{v}$ is from GA to G0. $\vec{v}$ is then transferred to end A. (Integer > 0; G0 ≠ GA or GB)                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| BIT                             | Built-in twist of the cross-sectional axes about the beam axis at end B relative to end A. For beam p-elements only. (Real, default = 0.0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| PA, PB                          | Pin flags for beam ends A and B, respectively; used to remove connections between the grid point and selected degrees-of-freedom of the beam. The degrees-of-freedom are defined in the element's coordinate system and the pin flags are applied at the offset ends of the beam (see <a href="#">Figure 12-11</a> ). The beam must have stiffness associated with the PA and PB degrees-of-freedom to be released by the pin flags. For example, if PA = 4, the PBEAM entry must have a nonzero value for J, the torsional stiffness. Pin flags are not allowed for beam p-elements. (Up to five of the unique integers 1 through 6 with no embedded blanks.) |
| W1A, W2A, W3A,<br>W1B, W2B, W3B | Components of offset vectors, measured in the displacement coordinate systems at grid points A and B, from the grid points to the end points of the axis of shear center. See <a href="#">Remark 7</a> (Real; Default = 0.0)                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SA, SB                          | Scalar or grid point identification numbers for the ends A and B, respectively. The degrees-of-freedom at these points are the warping variables $dq/dx$ . SA and SB cannot be specified for beam p-elements. (Integers > 0 or blank)                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Note**

See the BEAMOR entry for default options for field 3 and fields 6 through 8.

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. For an additional explanation of the beam element, see "CBEAM Element" in the *NX Nastran Element Library*. Figures [12-11](#) through [12-11](#) show CBEAM element geometry, forces and moments.

1116 **CBEAM**  
Beam Element Connection

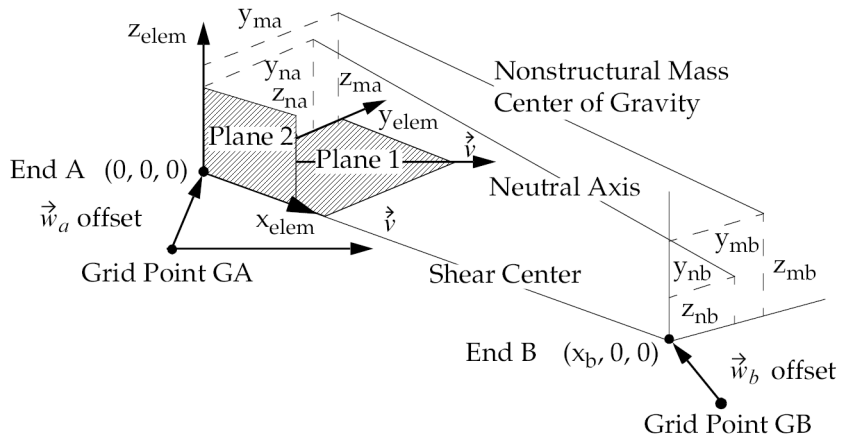


Figure 12-11. CBEAM Element Geometry System (Non p-adaptive)


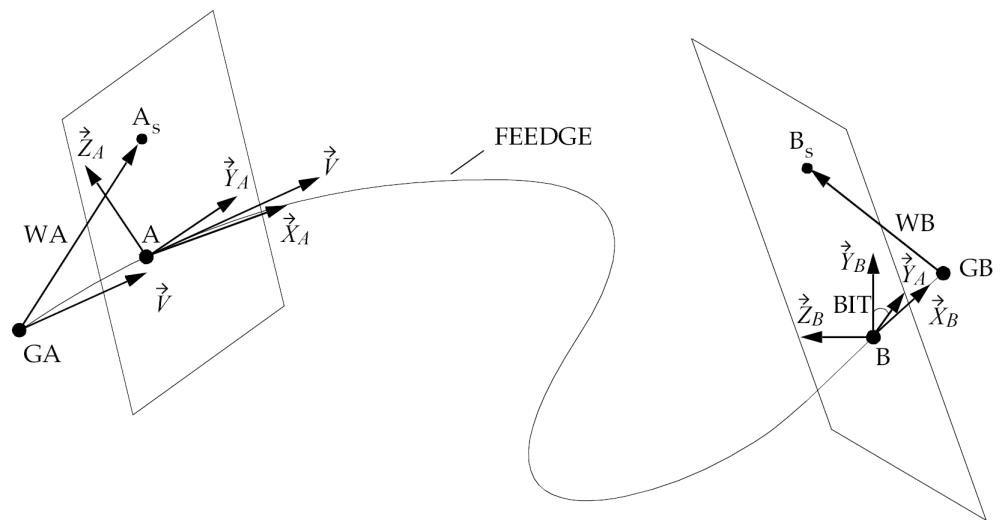


Figure 12-12. CBEAM Element Geometry System (p-adaptive)

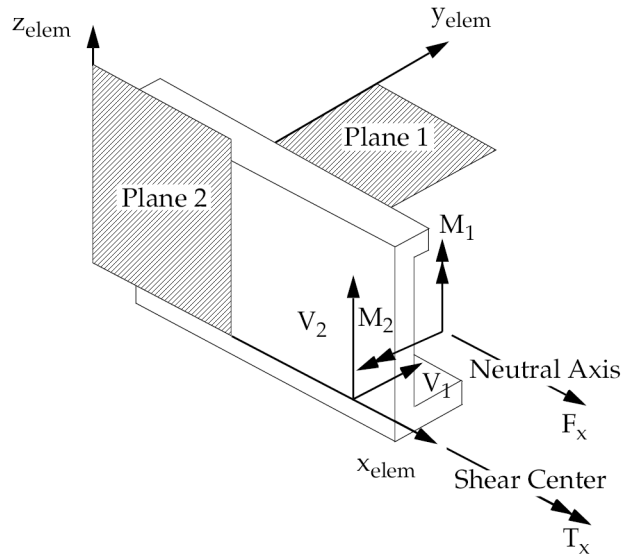

**Figure 12-13. CBEAM Internal Element Forces and Moments**

3. If field 6 is an integer, then G0 is used. If field 6 is blank or real, then X1, X2, X3 is used.
4. G0 cannot be located at GA or GB.
5. The rules for the continuations entries are:
  - Both continuations may be omitted if there are no pin flags, offsets, or warping variables.
  - If the second continuation is used, then the first continuation must be included, even if all fields are blank.
  - If the second continuation is omitted, torsional stiffness due to warping of the cross section will not be considered.
6. If warping is allowed ( $SA$  and  $SB > 0$ ), then  $SA$  and  $SB$  must be defined with SPOINT or GRID entries. If GRID entries are used, the warping degree-of-freedom is attached to the first (T1) component.
7. Offset vectors are treated like rigid elements and are therefore subject to the same limitations.
  - Offset vectors are not affected by thermal loads.

## 1118 CBEAM

### Beam Element Connection

- The specification of offset vectors is not recommended in solution sequences that compute differential stiffness because the offset vector remains parallel to its original orientation. (Differential stiffness is computed in buckling analysis provided in SOLs 16, 105, and 200 and also in nonlinear analysis provided in SOLs 106, 129, 153, and 159 with PARAM, LGDISP, 1). As a result, the specification of offset vectors is not permitted. However, setting SYSTEM(463) to 1 will disable the FATAL error message and the analysis will be allowed to continue (with offset vector remaining parallel to its original orientation).
  - In SOLs 106 and 129, offset vectors should not be defined on elements which use nonlinear material definitions..
8. If the CBEAM element is referenced by a PSET or PVAL entry, then a p-version formulation is used and the element can have curved edges.
- By default, the edge of the element is considered straight unless the element is a p-element and the edge is associated to curved geometry with a FEEDGE entry.
  - If a curved edge of a p-element is shared by an h-element without midside nodes, the geometry of the edge is ignored and considered to be straight. Edges with midside nodes cannot be shared by p-elements.
  - For the beam p-element, components of the offset vectors parallel to the beam axis (FEEDGE) will be ignored.

#### Remarks related to SOLs 601 and 701:

1. BIT, W1A, W2A, W3A, W1B, W2B, W3B, SA, and SB are ignored.
2. CBEAM defines the same element as CBAR for SOLs 601 and 701.
3. Result output for this element is requested using Case Control command STRESS. However, element forces instead of stresses are output for CBEAM (and CBAR) elements.

**CBEND** Curved Beam or Pipe Element Connection

Defines a curved beam, curved pipe, or elbow element.

**Format:**

| 1     | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9    | 10 |
|-------|-----|-----|----|----|----|----|----|------|----|
| CBEND | EID | PID | GA | GB | X1 | X2 | X3 | GEOM |    |

**Example:**

|       |    |    |    |    |     |     |      |  |  |
|-------|----|----|----|----|-----|-----|------|--|--|
| CBEND | 32 | 39 | 17 | 19 | 6.2 | 5.1 | -1.2 |  |  |
|-------|----|----|----|----|-----|-----|------|--|--|

**Alternate Format and Example:**

| CBEND | EID | PID | GA | GB | G0 |  |  | GEOM |  |
|-------|-----|-----|----|----|----|--|--|------|--|
|-------|-----|-----|----|----|----|--|--|------|--|

|       |    |    |    |    |     |  |  |  |  |
|-------|----|----|----|----|-----|--|--|--|--|
| CBEND | 32 | 39 | 17 | 19 | 106 |  |  |  |  |
|-------|----|----|----|----|-----|--|--|--|--|

**Fields:**


| Field      | Contents                                                                                                                                                                                      |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID        | Unique element identification number. (Integer > 0)                                                                                                                                           |
| PID        | Property identification number of a PBEND entry. (Integer > 0; Default = EID)                                                                                                                 |
| GA, GB     | Grid point identification numbers of connection points. (Integer > 0; GA ≠ GB)                                                                                                                |
| X1, X2, X3 | Components of orientation vector $\vec{v}$ , from GA, in the displacement coordinate system at GA. (Real)                                                                                     |
| G0         | Alternate method to supply the orientation vector $\vec{v}$ using grid point G0. Direction of $\vec{v}$ is from GA to G0. $\vec{v}$ is then translated to end A. (Integer > 0; G0 ≠ GA or GB) |
| GEOM       | Flag to select specification of the bend element. See Remark 3 (1 < Integer < 4)                                                                                                              |

# 1120 CBEND


## Curved Beam or Pipe Element Connection

### Remarks:

1. Element identification numbers must be unique with respect to all other element identification numbers.
2. For an additional explanation of the CBEND element, see the PBEND entry description. [Figure 12-14](#) and [Figure 12-15](#) define the element coordinate system and internal forces and moments.

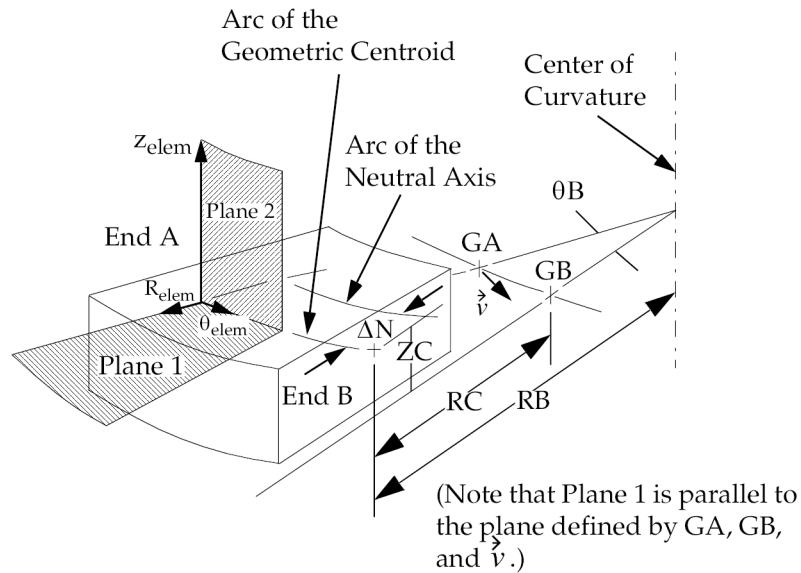





**Figure 12-14. CBEND Element Coordinate System**

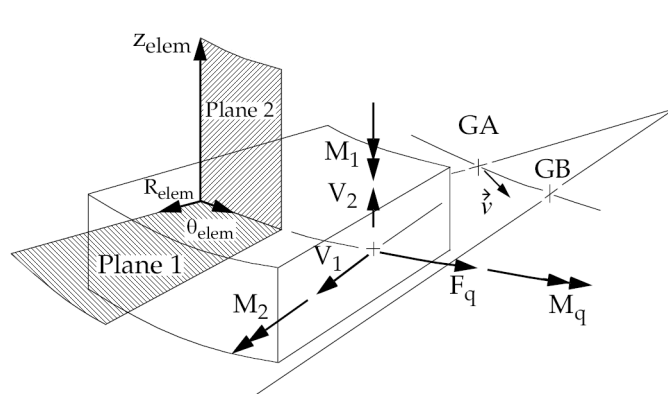

**Figure 12-15. CBEND Element Internal Forces and Moments**



3. The options for element connection to GA, GB using GEOM are shown below.

| <b>Table 12-1. GEOM Options</b>                                                    |             |                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Configuration</b>                                                               | <b>GEOM</b> | <b>Description</b>                                                                                                                                                                                                                                                             |
|   | 1           | The center of curvature lies on the line AO (or its extension) or vector $\vec{v}$ .                                                                                                                                                                                           |
|   | 2           | The tangent of centroid arc at end A is parallel to line AO or vector $\vec{v}$ . Point O (or vector $\vec{v}$ ) and the arc $\overline{AB}$ must be on the same side of the chord $\overline{AB}$ .                                                                           |
|   | 3           | The bend radius (RB) is specified on the PBEND entry: Points A, B, and O (or vector $\vec{v}$ ) define a plane parallel or coincident with the plane of the element arc. Point O (or vector $\vec{v}$ ) lies on the opposite side of line AB from the center of the curvature. |
|  | 4           | THETAB is specified on the PBEND entry. Points A, B, and O (or vector $\vec{v}$ ) define a plane parallel or coincident with the plane of the element arc. Point O (or vector $\vec{v}$ ) lies on the opposite side of line AB from the center of curvature.                   |

## 1122 CBUSH Generalized Spring-and-Damper Connection

### CBUSH Generalized Spring-and-Damper Connection

Defines a generalized spring-and-damper structural element that may be nonlinear or frequency dependent.

#### Format:

| 1     | 2   | 3    | 4  | 5  | 6     | 7  | 8  | 9   | 10 |
|-------|-----|------|----|----|-------|----|----|-----|----|
| CBUSH | EID | PID  | GA | GB | GO/X1 | X2 | X3 | CID |    |
|       | S   | OCID | S1 | S2 | S3    |    |    |     |    |

#### Example 1:

##### Noncoincident grid points.

|       |    |   |   |     |    |  |  |  |  |
|-------|----|---|---|-----|----|--|--|--|--|
| CBUSH | 39 | 6 | 1 | 100 | 75 |  |  |  |  |
|-------|----|---|---|-----|----|--|--|--|--|

#### Example 2:

##### GB not specified.

|       |    |   |   |  |  |  |  |   |  |
|-------|----|---|---|--|--|--|--|---|--|
| CBUSH | 39 | 6 | 1 |  |  |  |  | 0 |  |
|-------|----|---|---|--|--|--|--|---|--|

#### Example 3:

##### Coincident grid points (GA=GB).

|       |    |   |   |     |  |  |  |   |  |
|-------|----|---|---|-----|--|--|--|---|--|
| CBUSH | 39 | 6 | 1 | 100 |  |  |  | 6 |  |
|-------|----|---|---|-----|--|--|--|---|--|

#### Example 4:

##### Noncoincident grid points with fields 6 through 9 blank and a spring-damper offset.

|       |      |    |    |     |     |  |  |  |  |
|-------|------|----|----|-----|-----|--|--|--|--|
| CBUSH | 39   | 6  | 1  | 600 |     |  |  |  |  |
|       | 0.25 | 10 | 0. | 10. | 10. |  |  |  |  |

#### Fields:

| Field | Contents                                                                      |
|-------|-------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                  |
| PID   | Property identification number of a PBUSH entry. (Integer > 0; Default = EID) |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                          |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GA, GB       | Grid point identification number of connection points. See Remark 6 (Integer > 0)                                                                                                                                        |
| Xi           | Components of orientation vector<br>$\vec{v}$ , from GA, in the displacement coordinate system at GA. (Real)                                                                                                             |
| GO           | Alternate method to supply vector<br>$\vec{v}$ using grid point GO. Direction of $\vec{v}$ is from GA to GO. $\vec{v}$ is then transferred to end A. See Remark 3 . (Integer > 0)                                        |
| CID          | Element coordinate system identification. A 0 means the basic coordinate system. If CID is blank, then the element coordinate system is determined from GO or Xi. See Figure 12-16 and Remark 3 . (Integer ≥ 0 or blank) |
| S            | Location of spring damper. See Figure 12-16. (0.0 ≤ Real ≤ 1.0; Default = 0.5)                                                                                                                                           |
| OCID         | Coordinate system identification of spring-damper offset. See Remark 9 . (Integer ≥ -1; Default = -1, which means the offset point lies on the line between GA and GB according to Figure 12-16.)                        |
| S1, S2, S3   | Components of spring-damper offset in the OCID coordinate system if OCID ≥ 0. See Figure 12-17 and Remark 9 .. (Real)                                                                                                    |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Figure 12-16 shows the bush element geometry.
3. CID ≥ 0 overrides GO and Xi. Then the element x-axis is along T1, the element y-axis is along T2, and the element z-axis is along T3 of the CID coordinate system. If the CID refers to a cylindrical coordinate system or a spherical coordinate system, then grid GA is used to locate the system. For cylindrical or spherical coordinate systems, if GA falls on the z-axis used to define them, it is recommended that another CID be selected to define the element x-axis.

## 1124 CBUSH Generalized Spring-and-Damper Connection

4. For noncoincident grids ( $GA \neq GB$ ), when  $GO$  or  $X1, X2, X3$  is given and no  $CID$  is specified, the line  $AB$  is the element  $x$ -axis and the orientation vector  $\vec{v}$  lies in the  $x$ - $y$  plane (similar to the  $CBEAM$  element).
5. For noncoincident grids ( $GA \neq GB$ ), if neither  $GO$  or  $X1, X2, X3$  is specified and no  $CID$  is specified, then the line  $AB$  is the element  $x$ -axis. This option is valid only when  $K1$  (or  $B1$ ) or  $K4$  (or  $B4$ ) or both are specified on the  $PBUSHT$  entry (but  $K2, K3, K5, K6$  or  $B2, B3, B5, B6$  are not specified). If  $K2, K3, K5, K6$  (or  $B2, B3, B5, B6$ ) are specified, a fatal message will be issued.
6. If  $GA$  and  $GB$  are coincident, or if  $GB$  is blank, then  $CID$  must be specified.
7. If  $PID$  references a  $PBUSHT$  entry, then the  $CBUSH$  element may only be defined in the residual structure and cannot be attached to any omitted degrees-of-freedom.
8. Element impedance output is computed in the  $CID$  coordinate system. The impedances in this system are uncoupled.
9. If  $OCID = -1$  or blank (default) then  $S$  is used and  $S1, S2, S3$  are ignored. If  $OCID \geq 0$ , then  $S$  is ignored and  $S1, S2, S3$  are used.


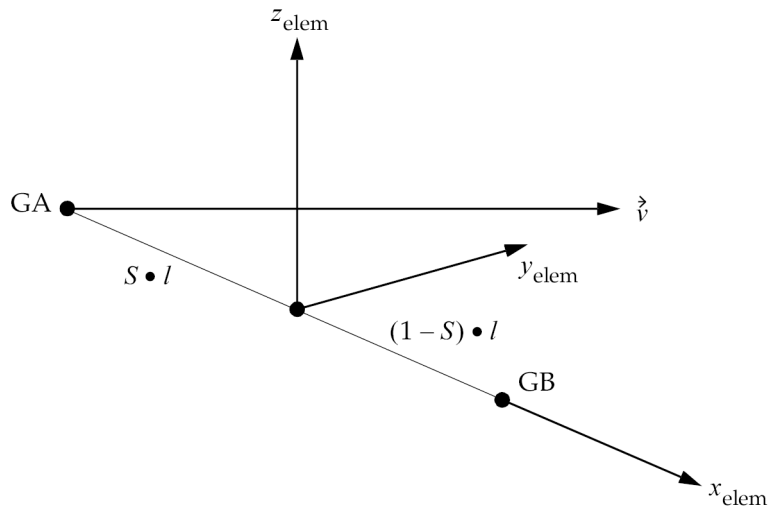


Figure 12-16. CBUSH Element

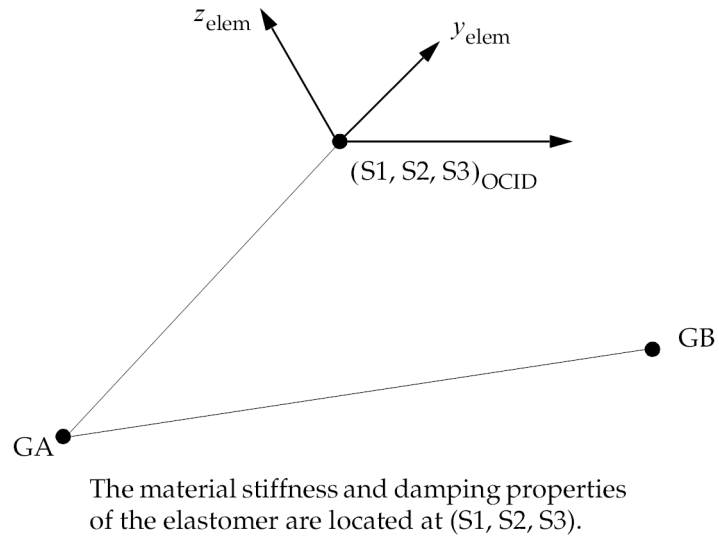

**Figure 12-17. Definition of Offset S1, S2, S3**

- When  $CID \geq 0$ , the element x-axis is set as in Remark 2 . This means that the element force is always computed as  $K_e \cdot (UB - UA)$ ; if  $UA > UB$ , a compressive force will result. This is unlike the GO or Xi options, where relative positive elongation is tension and relative negative elongation is compression.

**1126 CBUSH1D**  
**Rod Type Spring-and-Damper Connection**

**CBUSH1D** Rod Type Spring-and-Damper Connection

Defines the connectivity of a one-dimensional spring and viscous damper element.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| CBUSH1D  | EID      | PID      | GA       | GB       | CID      |          |          |          |           |

**Example:**


|         |    |     |     |     |  |  |  |  |  |
|---------|----|-----|-----|-----|--|--|--|--|--|
| CBUSH1D | 35 | 102 | 108 | 112 |  |  |  |  |  |
|---------|----|-----|-----|-----|--|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                   | <b>Default Values</b> |
|--------------|-------------------------------------------------------------------|-----------------------|
| EID          | Element identification number.                                    | Required              |
| PID          | Property identification number of a PBUSH1D entry. (Integer > 0). | EID                   |
| GA           | Grid point id of first grid.                                      | Required              |
| GB           | Grid point id of second grid                                      | Blank                 |
| CID          | Coordinate system id. (Integer ≥ 0)                               | Blank                 |

**Remarks:**

1. For noncoincident grids  $GA \neq GB$  and if CID is blank, the line GA to GB is the element axis. In geometric nonlinear analysis, the element axis (line GA to GB) follows the deformation of grids GA and GB. See [Figure 12-18](#).
2. If  $CID \geq 0$  is specified, the x-axis of the CID coordinate system is the element axis. In geometric nonlinear analysis, the element axis (x-axis of CID) remains fixed.
3. If GA and GB are coincident or if GB is blank, then  $CID \geq 0$  must be specified and the element axis is the x-axis of CID.

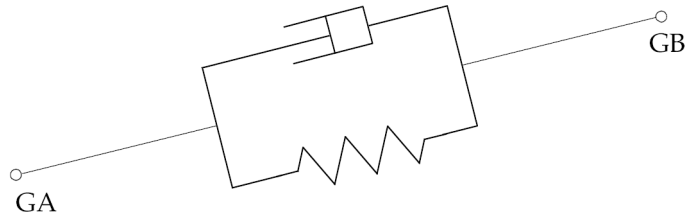

**Figure 12-18. Spring and Damper Element**

**Remarks related to SOLs 601 and 701:**

1. CID is only supported when GB is blank. If both GB and  $CID \geq 0$  are specified, the program will issue an error.

**1128 CCONEAX**  
**Axisymmetric Shell Element Connection**

**CCONEAX**      Axisymmetric Shell Element Connection

Defines a conical shell element.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|---------|-----|-----|----|----|---|---|---|---|----|
| CCONEAX | EID | PID | RA | RB |   |   |   |   |    |

**Example:**

|         |   |   |   |   |  |  |  |  |  |
|---------|---|---|---|---|--|--|--|--|--|
| CCONEAX | 1 | 2 | 3 | 4 |  |  |  |  |  |
|---------|---|---|---|---|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                        |
|-------|---------------------------------------------------------------------------------|
| EID   | Unique element identification number. (Integer > 0)                             |
| PID   | Property identification number of a PCONEAX entry. (Integer > 0; Default = EID) |
| RA    | Identification number of a RINGAX entry. (Integer > 0; RA ≠ RB)                 |
| RB    | Identification number of a RINGAX entry. (Integer > 0; RA ≠ RB)                 |

**Remarks:**

1. This element has limited capabilities. See “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
2. This entry is allowed only if an AXIC entry is also present.
3. In order to reference this entry on a SET Case Control command, the ID must be modified by

$$(ID_n = ID) \cdot 1000 + n$$

where n is the harmonic number plus one and ID<sub>n</sub> is the value specified on the SET entry.



## CDAMP1      Scalar Damper Connection

Defines a scalar damper element.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|-----|-----|----|----|----|----|---|---|----|
| CDAMP1 | EID | PID | G1 | C1 | G2 | C2 |   |   |    |

**Example:**

|        |    |   |   |  |    |   |  |  |  |
|--------|----|---|---|--|----|---|--|--|--|
| CDAMP1 | 19 | 6 | 0 |  | 23 | 2 |  |  |  |
|--------|----|---|---|--|----|---|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                                                                                                 |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                                                                                                                                                      |
| PID    | Property identification number of a PDAMP property entry. (Integer > 0; Default = EID)                                                                                                                   |
| G1, G2 | Geometric grid point identification number. (Integer ≥ 0)                                                                                                                                                |
| C1, C2 | Component number. (0 ≤ Integer ≤ 6; 0 or up to six unique integers, 1 through 6 may be specified in the field with no embedded blanks. 0 applies to scalar points and 1 through 6 apply to grid points.) |

**Remarks:**

- Scalar points may be used for G1 and/or G2, in which case the corresponding C1 and/or C2 must be zero or blank. Zero or blank may be used to indicate a grounded terminal G1 or G2 with a corresponding blank or zero C1 or C2. A grounded terminal is a point with a displacement that is constrained to zero.
- Element identification numbers should be unique with respect to all other element identification numbers.
- The two connection points (G1, C1) and (G2, C2), must be distinct.
- For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
- When CDAMP1 is used in heat transfer analysis, it generates a lumped heat capacity.

**1130 CDAMP1**  
**Scalar Damper Connection**

6. A scalar point specified on this entry need not be defined on an SPOINT entry.
7. If  $G_i$  refers to a grid point then  $C_i$  refers to degrees-of-freedom(s) in the displacement coordinate system specified by CD on the GRID entry.

**Remarks related to SOLs 601 and 701:**

G1 and G2 must be grid points, i.e., they cannot be scalar points.

**CDAMP2**     Scalar Damper Property and Connection

Defines a scalar damper element without reference to a material or property entry.

**Format:**

|        |     |   |    |    |    |    |   |   |    |
|--------|-----|---|----|----|----|----|---|---|----|
| 1      | 2   | 3 | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
| CDAMP2 | EID | B | G1 | C1 | G2 | C2 |   |   |    |

**Example:**

|        |    |      |    |   |  |  |  |  |  |
|--------|----|------|----|---|--|--|--|--|--|
| CDAMP2 | 16 | 2.98 | 32 | 1 |  |  |  |  |  |
|--------|----|------|----|---|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                                                                                                 |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                                                                                                                                                      |
| B      | Value of the scalar damper. (Real)                                                                                                                                                                       |
| G1, G2 | Geometric grid point identification number. (Integer ≥ 0)                                                                                                                                                |
| C1, C2 | Component number. (0 ≤ Integer ≤ 6; 0 or up to six unique integers, 1 through 6 may be specified in the field with no embedded blanks. 0 applies to scalar points and 1 through 6 apply to grid points.) |

**Remarks:**

1. Scalar points may be used for G1 and/or G2, in which case the corresponding C1 and/or C2 must be zero or blank. Zero or blank may be used to indicate a grounded terminal G1 or G2 with a corresponding blank or zero C1 or C2. A grounded terminal is a point with a displacement that is constrained to zero.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. The two connection points (G1, C1) and (G2, C2), must be distinct.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. When CDAMP2 is used in heat transfer analysis, it generates a lumped heat capacity.

**1132 CDAMP2**  
**Scalar Damper Property and Connection**

6. A scalar point specified on this entry need not be defined on an SPOINT entry.
7. If  $G_i$  refers to a grid point then  $C_i$  refers to degrees-of-freedom(s) in the displacement coordinate system specified by CD on the GRID entry.

**Remarks related to SOLs 601 and 701:**

G1 and G2 must be grid points, i.e., they cannot be scalar points.

**CDAMP3**     Scalar Damper Connection to Scalar Points Only

Defines a scalar damper element that is connected only to scalar points.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|--------|-----|-----|----|----|---|---|---|---|----|
| CDAMP3 | EID | PID | S1 | S2 |   |   |   |   |    |

**Example:**

|        |    |     |    |    |  |  |  |  |  |
|--------|----|-----|----|----|--|--|--|--|--|
| CDAMP3 | 16 | 978 | 24 | 36 |  |  |  |  |  |
|--------|----|-----|----|----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                      |
|--------|-------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                           |
| PID    | Property identification number of a PDAMP entry. (Integer > 0; Default = EID) |
| S1, S2 | Scalar point identification numbers. (Integer ≥ 0; S1 ≠ S2)                   |

**Remarks:**

1. S1 or S2 may be blank or zero, indicating a constrained coordinate.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. Only one scalar damper element may be defined on a single entry.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. When CDAMP3 is used in heat transfer analysis, it generates a lumped heat capacity.
6. A scalar point specified on this entry need not be defined on an SPOINT entry.

**1134 CDAMP4**  
**Scalar Damper Property and Connection to Scalar Points Only**

**CDAMP4**      Scalar Damper Property and Connection to Scalar Points Only

Defines a scalar damper element that is connected only to scalar points, without reference to a material or property entry.

**Format:**

| 1      | 2   | 3 | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|--------|-----|---|----|----|---|---|---|---|----|
| CDAMP4 | EID | B | S1 | S2 |   |   |   |   |    |

**Example:**

|        |    |      |   |   |  |  |  |  |  |
|--------|----|------|---|---|--|--|--|--|--|
| CDAMP4 | 16 | -2.6 | 4 | 9 |  |  |  |  |  |
|--------|----|------|---|---|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                    |
|--------|-------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)         |
| B      | Scalar damper value. (Real)                                 |
| S1, S2 | Scalar point identification numbers. (Integer ≥ 0; S1 ≠ S2) |

**Remarks:**

1. S1 or S2 may be blank or zero, indicating a constrained coordinate.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. Only one scalar damper element may be defined on a single entry.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. If this entry is used in heat transfer analysis, it generates a lumped heat capacity.
6. A scalar point specified on this entry need not be defined on an SPOINT entry.

**CDAMP5**      Scalar Damper with Material Property

Defines a damping element that refers to a material property entry and connection to grid or scalar points. This element is intended for heat transfer analysis only.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|--------|-----|-----|----|----|---|---|---|---|----|
| CDAMP5 | EID | PID | G1 | G2 |   |   |   |   |    |

**Example:**

|        |   |   |    |    |  |  |  |  |  |
|--------|---|---|----|----|--|--|--|--|--|
| CDAMP5 | 1 | 4 | 10 | 20 |  |  |  |  |  |
|--------|---|---|----|----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                       |
|--------|--------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                            |
| PID    | Identification number of a PDAMP5 property entry. (Integer > 0; Default = EID) |
| G1, G2 | Grid or scalar point identification numbers. (Integer ≥ 0 and G1 ≠ G2)         |

**Remarks:**

1. G1 or G2 may be blank or zero indicating a constraint.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. CDAMP5 generates a lumped heat capacity in heat transfer analysis.
4. A scalar point specified on CDAMP5 need not be defined on an SPOINT entry.

## 1136 CDUMi Dummy Element Connection

### CDUMi      Dummy Element Connection

Defines a dummy element ( $1 \leq i \leq 9$ )

#### Format:

| 1     | 2   | 3   | 4      | 5  | 6  | 7  | 8      | 9 | 10 |
|-------|-----|-----|--------|----|----|----|--------|---|----|
| CDUMi | EID | PID | G1     | G2 | G3 | G4 | -etc.- |   |    |
|       | A1  | A2  | -etc.- |    |    |    |        |   |    |

#### Example:

|       |     |     |      |   |   |    |    |  |  |
|-------|-----|-----|------|---|---|----|----|--|--|
| CDUM2 | 114 | 108 | 2    | 5 | 6 | 8  | 11 |  |  |
|       | 2.4 |     | 3.E4 | 2 |   | 50 |    |  |  |

#### Fields:

| Field | Contents                                                                                |
|-------|-----------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                            |
| PID   | Property identification number of a PDUMi entry. See Remark 2 . (Integer > 0)           |
| Gi    | Grid point identification numbers of connection points. (Integer > 0, G1 ≠ G2 ... ≠ GN) |
| Ai    | Additional fields. (Real or Integer)                                                    |

#### Remarks:

1. The user must write the associated element subroutines for matrix generation, stress recovery, etc., and perform a link edit to replace the dummy routines.
2. If no property entry is required, PID may contain the material identification number.
3. Additional entries are defined in the user-written element routines.
4. CDUM1 is replaced by the CTRIAX6 element. If CDUM1 is used, User Fatal Message 307 will be issued.



## CELAS1      Scalar Spring Connection

Defines a scalar spring element.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|-----|-----|----|----|----|----|---|---|----|
| CELAS1 | EID | PID | G1 | C1 | G2 | C2 |   |   |    |

**Example:**

|        |   |   |  |  |   |   |  |  |  |
|--------|---|---|--|--|---|---|--|--|--|
| CELAS1 | 2 | 6 |  |  | 8 | 1 |  |  |  |
|--------|---|---|--|--|---|---|--|--|--|

**Fields:**

| Field  | Contents                                                                      |
|--------|-------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                           |
| PID    | Property identification number of a PELAS entry. (Integer > 0; Default = EID) |
| G1, G2 | Geometric grid point identification number. (Integer ≥ 0)                     |
| C1, C2 | Component number. (0 ≤ Integer ≤ 6; blank or zero if scalar point)            |

**Remarks:**

- Scalar points may be used for G1 and/or G2, in which case the corresponding C1 and/or C2 must be zero or blank. Zero or blank may be used to indicate a grounded terminal G1 or G2 with a corresponding blank or zero C1 or C2. A grounded terminal is a point with a displacement that is constrained to zero. If only scalar points and/or ground are involved, it is more efficient to use the CELAS3 entry.
- Element identification numbers should be unique with respect to all other element identification numbers.
- The two connection points (G1, C1) and (G2, C2) must be distinct.
- For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
- A scalar point specified on this entry need not be defined on an SPOINT entry.

**1138 CELAS1**  
**Scalar Spring Connection**

6. If  $G_i$  refers to a grid point, then  $C_i$  refers to degrees-of-freedom(s) in the displacement coordinate system specified by CD on the GRID entry.

**Remarks related to SOLs 601 and 701:**

1.  $G_1$  and  $G_2$  must be grid points, i.e., they cannot be scalar points.
2. In SOL 701, this spring element is not considered in the critical time step size calculation because it has no mass.

**CELAS2**     Scalar Spring Property and Connection

Defines a scalar spring element without reference to a property entry.

**Format:**

| 1      | 2   | 3 | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|--------|-----|---|----|----|----|----|----|---|----|
| CELAS2 | EID | K | G1 | C1 | G2 | C2 | GE | S |    |

**Example:**

|        |    |       |    |  |    |   |  |  |  |
|--------|----|-------|----|--|----|---|--|--|--|
| CELAS2 | 28 | 6.2+3 | 32 |  | 19 | 4 |  |  |  |
|--------|----|-------|----|--|----|---|--|--|--|

**Fields:**

| Field  | Contents                                                            |
|--------|---------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                 |
| K      | Stiffness of the scalar spring. See Remark 10. (Real)               |
| G1, G2 | Geometric grid point or scalar identification number. (Integer ≥ 0) |
| C1, C2 | Component number. (0 ≤ Integer ≤ 6; blank or zero if scalar point)  |
| GE     | Damping coefficient. See Remarks 6 and 8 (Real).                    |
| S      | Stress coefficient. (Real)                                          |

**Remarks:**

- Scalar points may be used for G1 and/or G2, in which case the corresponding C1 and/or C2 must be zero or blank. Zero or blank may be used to indicate a grounded terminal G1 or G2 with a corresponding blank or zero C1 or C2. A grounded terminal is a point with a displacement that is constrained to zero. If only scalar points and/or ground are involved, it is more efficient to use the CELAS4 entry.
- Element identification numbers should be unique with respect to all other element identification numbers.
- The two connection points (G1, C1) and (G2, C2) must be distinct.
- For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.

**1140 CELAS2**  
**Scalar Spring Property and Connection**

5. A scalar point specified on this entry need not be defined on an SPOINT entry.
6. If PARAM,W4 is not specified, GE is ignored in transient analysis. See [“Parameters”](#).
7. If  $G_i$  refers to a grid point, then  $C_i$  refers to degrees-of-freedom in the displacement coordinate system specified by CD on the GRID entry.
8. To obtain the damping coefficient GE, multiply the critical damping ratio  $C/C_0$  by 2.0.
9. For this particular element, the effect of any PARAM G type damping is also considered in the force recovery.
10. Rotational stiffness should be specified as moment per radian.

**Remarks related to SOLs 601 and 701:**

1. G1 and G2 must be grid points, i.e., they cannot be scalar points.
2. GE is ignored.
3. In SOL 701, this spring element is not considered in the critical time step size calculation because it has no mass.

**CELAS3**      Scalar Spring Connection to Scalar Points Only

Defines a scalar spring element that connects only to scalar points.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|--------|-----|-----|----|----|---|---|---|---|----|
| CELAS3 | EID | PID | S1 | S2 |   |   |   |   |    |

**Example:**

|        |    |   |    |    |  |  |  |  |  |
|--------|----|---|----|----|--|--|--|--|--|
| CELAS3 | 19 | 2 | 14 | 15 |  |  |  |  |  |
|--------|----|---|----|----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                      |
|--------|-------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                           |
| PID    | Property identification number of a PELAS entry. (Integer > 0; Default = EID) |
| S1, S2 | Scalar point identification numbers. (Integer ≥ 0; S1 ≠ S2)                   |

**Remarks:**

1. S1 or S2 may be blank or zero, indicating a constrained coordinate.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. Only one scalar spring element may be defined on a single entry.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. A scalar point specified on this entry need not be defined on an SPOINT entry.

**1142 CELAS4**  
**Scalar Spring Property and Connection to Scalar Points Only**

**CELAS4**      Scalar Spring Property and Connection to Scalar Points Only

Defines a scalar spring element that is connected only to scalar points, without reference to a property entry.

**Format:**

| 1      | 2   | 3 | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|--------|-----|---|----|----|---|---|---|---|----|
| CELAS4 | EID | K | S1 | S2 |   |   |   |   |    |

**Example:**

|        |    |       |   |  |  |  |  |  |  |
|--------|----|-------|---|--|--|--|--|--|--|
| CELAS4 | 42 | 6.2-3 | 2 |  |  |  |  |  |  |
|--------|----|-------|---|--|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                    |
|--------|-------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)         |
| K      | Stiffness of the scalar spring. See Remark 8. (Real)        |
| S1, S2 | Scalar point identification numbers. (Integer ≥ 0; S1 ≠ S2) |

**Remarks:**

1. S1 or S2, but not both, may be blank or zero indicating a constrained coordinate.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. A structural damping coefficient is not available with CELAS4. The value of g is assumed to be 0.0.
4. No stress coefficient is available with CELAS4.
5. Only one scalar spring element may be defined on a single entry.
6. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
7. A scalar point specified on this entry need not be defined on an SPOINT entry.
8. Rotational stiffness should be specified as moment per radian.

**CFAST** Defines a shell patch connection.

Defines a shell patch connection with direct stiffness input.

**Format:**

| 1     | 2   | 3   | 4    | 5   | 6   | 7  | 8  | 9  | 10 |
|-------|-----|-----|------|-----|-----|----|----|----|----|
| CFAST | EID | PID | TYPE | IDA | IDB | GS | GA | GB |    |
|       | XS  | YS  | ZS   |     |     |    |    |    |    |

**Example using PROP:**

| 1     | 2  | 3  | 4    | 5 | 6 | 7   | 8 | 9 | 10 |
|-------|----|----|------|---|---|-----|---|---|----|
| CFAST | 10 | 25 | PROP | 2 | 4 | 105 |   |   |    |

**Example using ELEM:**

| 1     | 2  | 3  | 4    | 5  | 6  | 7   | 8 | 9 | 10 |
|-------|----|----|------|----|----|-----|---|---|----|
| CFAST | 10 | 25 | ELEM | 36 | 46 | 105 |   |   |    |

**Fields:**

| Field   | Contents                                                                                                                                                                                                                                                                                       |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID     | Element identification number. (Integer > 0)                                                                                                                                                                                                                                                   |
| PID     | Property identification number of a PFAST bulk data entry (Integer > 0; Default = EID)                                                                                                                                                                                                         |
| TYPE    | Determines if shell element patches A and B are defined by element or property identification numbers. (Character) See Remark 1.<br><br>If TYPE = 'PROP', IDA,IDB define pshell property identification numbers.<br><br>If TYPE = 'ELEM', IDA,IDB define shell element identification numbers. |
| IDA,IDB | Property id (for type PROP) or Element id (for type ELEM) defining patches A and B. IDA and IDB should be unique. (Integer > 0)                                                                                                                                                                |
| GS      | Grid point used to determine the location of the connection on patches A and B, only when GA,GB are blank or 0. See Remark 2. (Integer > 0 or blank)                                                                                                                                           |

## 1144 CFAST

Defines a shell patch connection.

| Field    | Contents                                                                                                                                     |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------|
| GA,GB    | Grid point used to determine the location of the connection on patches A and B. See Remark 2 . (Integer > 0 or blank)                        |
| XS,YS,ZS | Determines the coordinate location of the connection on patches A and B, only if GA,GB,GS are all 0 or blank. See Remark 2 . (Real or blank) |

### Remarks:

1. The CFAST element defines a weld like connection between two shell element patches. The CFAST element TYPE = "PROP" and "ELEM" are similar to the CWELD element TYPE = "PARTPAT" and "ELPAT", respectively, except that the CFAST element stiffness is entered directly on the KTi and KRi fields of the PFAST entry. The CWELD element stiffness is derived from an axial rod of diameter D, where D is specified on the PWELD bulk entry. The diameter D specified on the PFAST entry is only used to determine the CFAST connectivity on the patches (grid points GA1-GA4 on patch A and GB1-GB4 on patch B). See Remark 2 on the CWELD bulk entry for the CFAST element connectivity information.
2. GA/GB, or GS, or XS/YS/ZS, in that order of precedence, determine the location(s) of the CFAST connection on surface patches A and/or B. The connection location on patch A is a specification of grid point GA, or a projection of GS or XS/YS/ZS normal to surface patch A. The location on patch B is a specification of grid point GB, or a projection of GS or XS/YS/ZS normal to surface patch B. When GS or XS/YS/ZS are used, a normal projection must exist in order to define a valid connection element. GS or XS/YS/ZS do not need to lie on either surface patch A or B.
3. The displacement results at GA and GB are always output to the .f06 file regardless of the case control options. Since grid points do not typically exist at these locations, grid numbers are automatically generated using:  
Grid ID = 1000000 + 10\*(cfast ID) + (end ID)  
where the end ID is 1 or 2 for the two ends.  
The new grid ID's are only used for labeling the displacement output and do not exist in the analysis or internal tables. This displacement result is not written to the .op2 or punch file.



## CFLUIDi Fluid Element Connections

Defines three types of fluid elements for an axisymmetric fluid model.

### Formats:

| 1       | 2   | 3    | 4    | 5    | 6    | 7   | 8 | 9 | 10 |
|---------|-----|------|------|------|------|-----|---|---|----|
| CFLUID2 | EID | IDF1 | IDF2 |      |      | RHO | B |   |    |
| CFLUID3 | EID | IDF1 | IDF2 | IDF3 |      | RHO | B |   |    |
| CFLUID4 | EID | IDF1 | IDF2 | IDF3 | IDF4 | RHO | B |   |    |

### Example:

|         |     |    |    |    |    |      |     |  |  |
|---------|-----|----|----|----|----|------|-----|--|--|
| CFLUID2 | 100 | 11 | 14 |    |    | .025 | 0.0 |  |  |
| CFLUID3 | 110 | 15 | 13 | 12 |    | 1.2  |     |  |  |
| CFLUID4 | 120 | 11 | 15 | 12 | 14 |      |     |  |  |

### Fields:

| Field | Contents                                                                                                         |
|-------|------------------------------------------------------------------------------------------------------------------|
| EID   | Unique element identification number. (Integer > 0)                                                              |
| IDFi  | Identification number of a RINGFL entry. (Integer > 0; IDF1 ≠ IDF2 ≠ IDF3 ≠ IDF4; all IDF <sub>i</sub> < 500000) |
| RHO   | Mass density. (Real > 0.0; Default is the value of DRHO on the AXIF entry.)                                      |
| B     | Bulk modulus, pressure per volume ratio. (Real; Default is the value of DB on the AXIF entry.)                   |

### Remarks:

1. CFLUIDi is allowed only if an AXIF entry is also present.
2. The element identification number must be unique with respect to all other fluid, scalar, and structural elements.
3. The volume defined by IDF<sub>i</sub> is a body of revolution about the polar axis of the fluid coordinate system defined by AXIF. CFLUID2 defines a thick disk with IDF1 and IDF2 defining the outer corners as shown in [Figure 12-19](#).

1146 CFLUIDi  
Fluid Element Connections

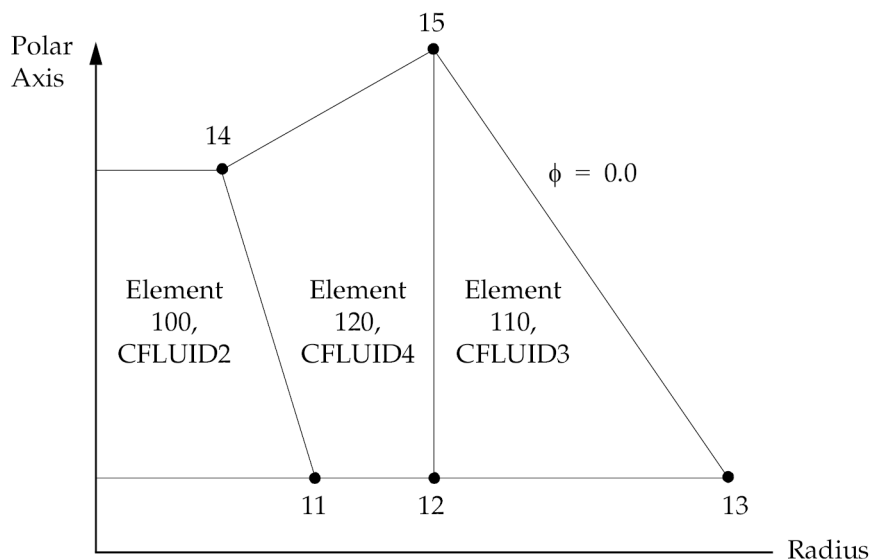


Figure 12-19. CFLUIDi Examples

4. All interior angles must be less than  $180^\circ$ .
5. The order of connected RINGFL points is arbitrary.
6. If  $B = 0.0$ , the fluid is incompressible.

**CGAP**      Gap Element Connection

Defines a gap or friction element.

**Format:**

| 1    | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9   | 10 |
|------|-----|-----|----|----|----|----|----|-----|----|
| CGAP | EID | PID | GA | GB | X1 | X2 | X3 | CID |    |

**Example:**

|      |    |   |     |     |     |     |      |  |  |
|------|----|---|-----|-----|-----|-----|------|--|--|
| CGAP | 17 | 2 | 110 | 112 | 5.2 | 0.3 | -6.1 |  |  |
|------|----|---|-----|-----|-----|-----|------|--|--|

**Alternate Format and Example:**

| CGAP | EID | PID | GA | GB | G0 |  |  | CID |  |
|------|-----|-----|----|----|----|--|--|-----|--|
|------|-----|-----|----|----|----|--|--|-----|--|

|      |    |   |     |     |    |  |  |  |  |
|------|----|---|-----|-----|----|--|--|--|--|
| CGAP | 17 | 2 | 110 | 112 | 13 |  |  |  |  |
|------|----|---|-----|-----|----|--|--|--|--|

**Fields:**

| Field      | Contents                                                                                                                                                                                                                                 |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID        | Element identification number. (Integer > 0)                                                                                                                                                                                             |
| PID        | Property identification number of a PGAP entry. (Integer > 0; Default = EID)                                                                                                                                                             |
| GA, GB     | Connected grid points at ends A and B. (Integers > 0; GA ≠ GB)                                                                                                                                                                           |
| X1, X2, X3 | Components of the orientation vector $\hat{v}$ , from GA, in the displacement coordinate system at GA. See Remark 2. (Real)                                                                                                              |
| G0         | Alternate method to supply the orientation vector $\hat{v}$ using grid point G0. Direction of $\hat{v}$ is from GA to G0. See Remark 2. (Integer > 0)                                                                                    |
| CID        | Element coordinate system identification number. CID must be specified if GA and GB are coincident (distance from GA to GB < 10 <sup>-4</sup> ), or if an interference condition is desired. See Remarks 2 and 6. (Integer ≥ 0 or blank) |

## 1148 CGAP

### Gap Element Connection

#### Remarks:


1. The CGAP element is treated as a nonlinear gap element when used in the nonlinear solutions 106, 129, 153, and 159, in which the gap conditions update as the nonlinear solution iterates.

For linear solutions (solution 101 and consecutive solutions 103, 111 and 112) with contact defined (BCSET card exists), CGAP elements are treated as linear contact elements if the system cell (412) OLDGAPS is set to 0 (default). If the system cell OLDGAPS is set to 1, the CGAP will be treated the same as a linear spring element (as described below). See the chapter on surface contact in the *NX Nastran User's Guide* for more information.

For linear solutions without contact defined, and for all other solution sequences, the CGAP will be treated the same as a linear spring element, and remains linear with the initial stiffness. This stiffness depends on the value for the initial gap opening (U0 field in the PGAP entry).

2. The gap element coordinate system is defined by one of two following methods:
  - If the coordinate system (CID field) is specified, the element coordinate system is established using that coordinate system, in which the element x-axis is in the T1 direction and the y-axis in the T2 direction. The orientation vector  $\vec{v}$  will be ignored in this case. The basic coordinate system is used when CID=0.

If an interference condition is desired, the CID positive x-axis (gap direction) should point from the “GB side” to the “GA-side” of the gap.
  - If the CID field is blank and the grid points GA and GB are not coincident (distance from A to B  $\geq 10^{-4}$ ), then the line AB is the element x-axis and the orientation vector  $\vec{v}$  lies in the x-y plane. See Figure 20 .

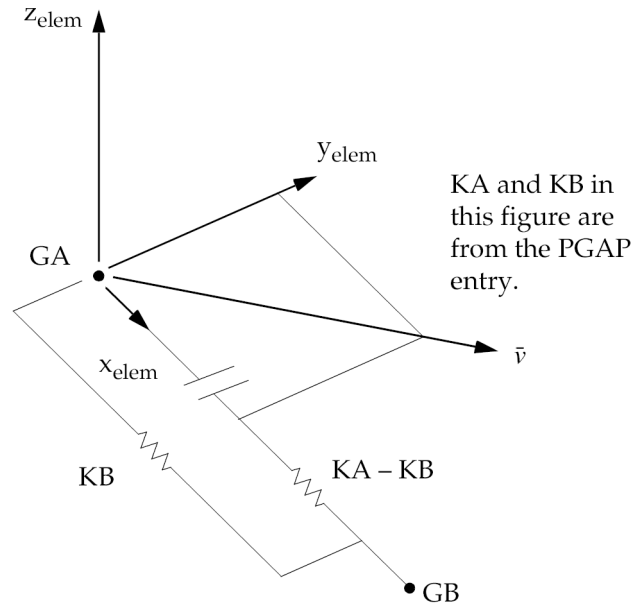

**Figure 12-20. CGAP Element Coordinate System**

3. The element coordinate system does not rotate as a result of deflections.
4. Initial gap openings are specified on the PGAP entry and not derived from the separation distance between GA and GB.
5. Forces, which are requested with the STRESS Case Control command, are output in the element coordinate system.  $F_x$  is positive for compression.
6. If CID is being used to define the element coordinate system and the CID refers to either a cylindrical or spherical coordinate system, then grid GA will be used to locate the system. If grid GA lies on the z-axis of the cylindrical or spherical coordinate system it is recommended that a different coordinate system be used for this element.
7. See PARAM,CDITER for an alternative approach.

**Remarks related to SOLs 601 and 701:**

1. CGAP is simulated with a nonlinear spring element in SOLs 601 and 701, i.e., the transverse properties of this element are ignored. Please see SOL 601 and 701 remarks in the PGAP entry.
2. X1, X2, and X3 are ignored.

**1150 CHACAB**  
**Acoustic Absorber Element Connection**

**CHACAB** Acoustic Absorber Element Connection

Defines the acoustic absorber element in coupled fluid-structural analysis.

**Format:**

| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8  | 9  | 10 |
|--------|-----|-----|-----|-----|-----|-----|----|----|----|
| CHACAB | EID | PID | G1  | G2  | G3  | G4  | G5 | G6 |    |
|        | G7  | G8  | G9  | G10 | G11 | G12 |    |    |    |
|        |     |     | G17 | G18 | G19 | G20 |    |    |    |

**Example:**

|        |    |    |   |   |   |   |   |   |  |
|--------|----|----|---|---|---|---|---|---|--|
| CHACAB | 95 | 12 | 1 | 2 | 5 | 7 | 8 | 9 |  |
|        | 24 | 23 |   |   |   |   |   |   |  |

**Fields:**

| Field | Contents                                                                       |
|-------|--------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                   |
| PID   | Property identification number of a PACABS entry. (Integer > 0)                |
| Gi    | Grid point identification numbers of connection points. (Integer ≥ 0 or blank) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Grid points G1 through G4 must be given in consecutive order about one quadrilateral face. G5 through G8 must be on the opposite face with G5 opposite G1, G6 opposite G2, etc.
3. The edge points, G9 to G20 are optional. Any or all of them may be deleted. If the ID of any edge connection point is left blank or set to zero (as for G9 and G10 in the example), the equations of the element are adjusted to give correct results for the reduced number of connections. Corner grid points cannot be deleted.
4. The second continuation is optional.

5. It is recommended that the edge points be located within the middle third of the edge.
6. The face consisting of grid points G1 through G4 and G9 through G12 is assumed to be in contact with the structure.

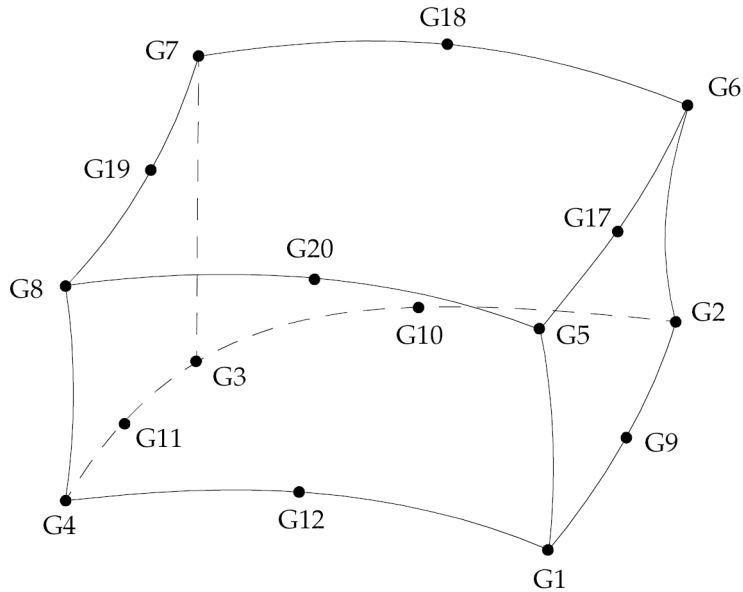


Figure 12-21. CHACAB Element Connection

7. The mass is lumped to the face formed by grid points G5 through G8 and G17 through G20 and defined to be in contact with the fluid. The opposite face has no mass contribution due to the absorber element. Also, the face in contact with the fluid has only translational stiffness in the direction normal to the face.

**1152 CHACBR**  
**Acoustic Barrier Element Connection**

**CHACBR** Acoustic Barrier Element Connection

Defines the acoustic barrier element.

**Format:**

| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8  | 9  | 10 |
|--------|-----|-----|-----|-----|-----|-----|----|----|----|
| CHACBR | EID | PID | G1  | G2  | G3  | G4  | G5 | G6 |    |
|        | G7  | G8  | G9  | G10 | G11 | G12 |    |    |    |
|        |     |     | G17 | G18 | G19 | G20 |    |    |    |

**Example:**

|        |    |    |   |   |   |   |   |   |  |
|--------|----|----|---|---|---|---|---|---|--|
| CHACBR | 95 | 12 | 1 | 2 | 5 | 7 | 8 | 9 |  |
|        | 24 | 23 |   |   |   |   |   |   |  |

**Fields:**

| Field | Contents                                                              |
|-------|-----------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                          |
| PID   | Property identification number of a PACBAR entry. (Integer > 0)       |
| Gi    | Grid point identification numbers of connection points. (Integer > 0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Grid points G1 through G4 must be given in consecutive order about one quadrilateral face. G5 through G8 must be on the opposite face with G5 opposite G1, G6 opposite G2, etc.
3. The edge points, G9 to G20, are optional. Any or all of them may be deleted. If the ID of any edge connection point is left blank or set to zero (as for G9 and G10 in the example), the equations of the element are adjusted to give correct results for the reduced number of connections. Corner grid points cannot be deleted.
4. The second continuation is optional.
5. It is recommended that the edge points be located within the middle third of the edge.



- The face consisting of grids G1 through G4 and G9 through G12 is assumed to be the backing that corresponds to MBACK on the PACBAR entry.
- The face consisting of grid points G5 through G8 and G17 through G20 is assumed to be the septum that corresponds to MSEPTM on the PACBAR entry.

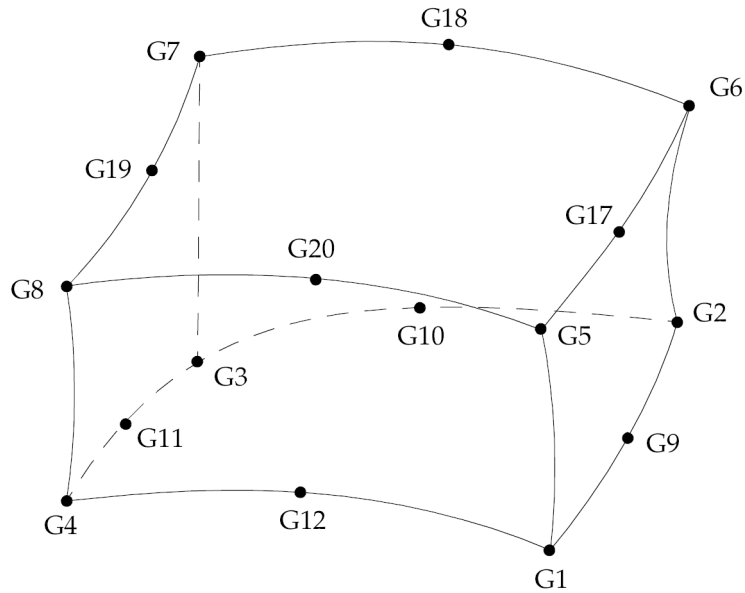


Figure 12-22. CHACBR Element Connection

- The face in contact with the fluid is defined to be the face formed by grid points G5 through G8 and G17 through G20 and has only translational stiffness in the direction normal to the face.

**1154 CHBDYE**  
**Geometric Surface Element Definition (Element Form)**

**CHBDYE** Geometric Surface Element Definition (Element Form)

Defines a boundary condition surface element with reference to a heat conduction element.

**Format:**

| 1      | 2   | 3    | 4    | 5      | 6      | 7       | 8       | 9 | 10 |
|--------|-----|------|------|--------|--------|---------|---------|---|----|
| CHBDYE | EID | EID2 | SIDE | IVIEWF | IVIEWB | RADMIDF | RADMIDB |   |    |

**Example:**

|        |   |    |   |   |   |   |   |  |  |
|--------|---|----|---|---|---|---|---|--|--|
| CHBDYE | 2 | 10 | 1 | 3 | 3 | 2 | 2 |  |  |
|--------|---|----|---|---|---|---|---|--|--|

**Fields:**

| Field   | Contents                                                                                                                                         |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| EID     | Surface element identification number for a specific side of a particular element. See Remarks 1 and 10. (Unique Integer > 0 among all elements) |
| EID2    | A heat conduction element identification number. (Integer > 0)                                                                                   |
| SIDE    | A consistent element side identification number. See Remarks 6, 7, 8, and 9. (1 ≤ Integer ≤ 6)                                                   |
| IVIEWF  | A VIEW entry identification number for the front face of the surface element. (Integer > 0, see Remark 2 for the default.)                       |
| IVIEWB  | A VIEW entry identification number for the back face of the surface element. (Integer > 0, see Remark 2 for the default.)                        |
| RADMIDF | RADM identification number for the front face of surface element. (Integer ≥ 0, see Remark 2 for the default.)                                   |
| RADMIDB | RADM identification number for the back face of the surface element. (Integer ≥ 0, see Remark 2 for the default.)                                |

**Remarks:**

1. EID is a unique elemental ID associated with a particular surface element. EID2 identifies the general heat conduction element being considered for this surface element.

## Geometric Surface Element Definition (Element Form)

2. The defaults for IVIEWF, IVIEWB, RADMIDF, and RADMIDB may be specified on the BDYOR entry. If a particular field is blank both on the CHBDYE entry and the BDYOR entry, then the default is zero.
3. For the front face of shell elements, the right-hand rule is used as one progresses around the element surface from G1 to G2 to ... Gn. For the edges of shell elements or the ends of line elements, an outward normal is used to define the front surface. For example, when a radiation boundary condition is defined on SIDE=1 of a shell element, a positive EID indicates that IVIEWF is relative to the top of the shell.
4. If the surface element is to be used in the calculation of view factors, it must have an associated VIEW entry.
5. All conduction elements to which any boundary condition is to be applied must be individually identified with the application of one of the surface element entries: CHBDYE, CHBDYG, or CHBDYP.
6. Side selection for solid elements:

The sides of the solid elements are numbered consecutively according to the order of the grid point numbers on the solid element entry. The sides of solid elements are either quadrilaterals or triangles. For each element type, tabulate the grid points (gp) at the corners of each side.

**Table 12-2. 8-node or 20-node CHEXA**

| side | gp | gp | gp | gp |
|------|----|----|----|----|
| 1    | 4  | 3  | 2  | 1  |
| 2    | 1  | 2  | 6  | 5  |
| 3    | 2  | 3  | 7  | 6  |
| 4    | 3  | 4  | 8  | 7  |
| 5    | 4  | 1  | 5  | 8  |
| 6    | 5  | 6  | 7  | 8  |

**Table 12-3. CPENTA**

| side | gp | gp | gp | gp |
|------|----|----|----|----|
| 1    | 3  | 2  | 1  |    |
| 2    | 1  | 2  | 5  | 4  |
| 3    | 2  | 3  | 6  | 5  |

1156 CHBDYE  
Geometric Surface Element Definition (Element Form)

| <b>Table 12-3. CPENTA</b> |           |           |           |           |
|---------------------------|-----------|-----------|-----------|-----------|
| <b>side</b>               | <b>gp</b> | <b>gp</b> | <b>gp</b> | <b>gp</b> |
| 4                         | 3         | 1         | 4         | 6         |
| 5                         | 4         | 5         | 6         |           |

| <b>Table 12-4. CPYRAM</b> |           |           |           |           |
|---------------------------|-----------|-----------|-----------|-----------|
| <b>side</b>               | <b>gp</b> | <b>gp</b> | <b>gp</b> | <b>gp</b> |
| 1                         | 4         | 3         | 2         | 1         |
| 2                         | 1         | 2         | 5         |           |
| 3                         | 2         | 3         | 5         |           |
| 4                         | 3         | 4         | 5         |           |
| 5                         | 4         | 1         | 5         |           |

| <b>Table 12-5. CTETRA</b> |           |           |           |
|---------------------------|-----------|-----------|-----------|
| <b>side</b>               | <b>gp</b> | <b>gp</b> | <b>gp</b> |
| 1                         | 3         | 2         | 1         |
| 2                         | 1         | 2         | 4         |
| 3                         | 2         | 3         | 4         |
| 4                         | 3         | 1         | 4         |

7. Side selection for shell elements:

SIDE=1 selects the face area of the element defined by the corner grids in the connectivity. SIDE = 2 through 4 for a TRI or 2 through 5 for a QUAD select the individual edge areas around the perimeter such that SIDE=2 selects the edge between the first and second grid points, SIDE=3 selects the edge between the second and the third, and so on. See “CHBDYG” for surface type definition. The thickness is that of the shell element. Note that midside grids are ignored. See Remark 3.

8. Side selection for line elements:

SIDE=1 selects the outside surface area of the element between the end grid points excluding the end areas. SIDE=2 and SIDE=3 select the end areas at the first and second grid points in the element connectivity, respectively. The area calculation is consistent with the element geometry.

Geometric Surface Element Definition (Element Form)

9. Side selection for axisymmetric elements:

The axisymmetric elements CTRIAX6, CTRAX3, CTRAX6, CQUADX4, and CQUADX8 have revolved sides. SIDE=1 is determined by the element connectivity in the table below. The other sides are determined by the same connectivity pattern around the perimeter.

| Table 12-6. Axisymmetric rev sides |                     |                |
|------------------------------------|---------------------|----------------|
| Element                            | Number of rev sides | SIDE=1         |
| CTRIAX6                            | 3                   | G1, G2, and G3 |
| CTRAX3                             | 3                   | G1 and G2      |
| CTRAX6                             | 3                   | G1, G4, and G2 |
| CQUADX4                            | 4                   | G1 and G2      |
| CQUADX8                            | 4                   | G1, G5, and G2 |

10. The EID field on all CHBDYi entries is entered as positive integer, but the EID referenced on certain load or boundary condition entries can be entered as a +EID or -EID to represent the front or back of the CHBDYi entry, respectively. For example, entering a -EID on a QVECT entry applies a heat flux opposite to the CHBDYi normal orientation vector. The table below summarizes the thermal load and boundary conditions, if they support CHBDYi entires, and if so, if they support a negative EID.

| Loads  | Description                                                         | CHBDYi Supported | Negative EID Supported |
|--------|---------------------------------------------------------------------|------------------|------------------------|
| QVECT  | Directional heat flux from a distant source.                        | Yes              | Yes                    |
| QVOL   | Volumetric internal heat generation.                                | No               |                        |
| QHBDY  | Heat flux applied to an area defined on grid points.                | No               |                        |
| QBDY1  | Heat flux applied to surface elements.                              | Yes              | Yes                    |
| QBDY2  | Heat flux applied to grid points associated with a surface element. | Yes              | No                     |
| QBDY3  | Heat flux applied to surface elements with control node capability. | Yes              | Yes                    |
| SLOAD  | Power into a grid or scalar point.                                  | No               |                        |
| NOLIN1 | Nonlinear transient load as a tabular function.                     | No               |                        |
| NOLIN2 | Nonlinear transient load as a product of two variables.             | No               |                        |

**1158 CHBDYE**  
**Geometric Surface Element Definition (Element Form)**

|                            |                                                                    |                      |      |
|----------------------------|--------------------------------------------------------------------|----------------------|------|
| NOLIN3                     | Nonlinear transient load as a positive variable raised to a power. | No                   |      |
| NOLIN4                     | Nonlinear transient load as a negative variable raised to a power. | No                   |      |
|                            |                                                                    |                      |      |
| <b>Boundary Conditions</b> |                                                                    |                      |      |
| CONV                       | CONV Free convection                                               | Yes                  | No   |
| CONVM                      | CONVM Forced convection (fluid “element”)                          | Yes, but CHBDYP only | No   |
| RADBC                      | Radiation exchange with space                                      | Yes                  | Yes* |
| RADSET                     | Radiation exchange within an enclosure                             | No                   |      |
| RADLST                     | Listing of Enclosure Radiation Faces                               | Yes                  | Yes* |

\* RADBC and RADLST entries do support a negative EID, although the front and back IVIEWi and RADMIDi fields already allow for this control, and a negative EID is typically not needed. IVIEWF and RADMIDF are associated with the CHBDYi normal orientation vector and IVIEWB and RADMIDB with the opposite. For radiation problems, if the RADMIDF or RADMIDB is zero, default radiant properties assume perfect black body behavior.

**Remarks related to SOL 601:**

1. CHBDYE defines convection or radiation boundary condition on a side of 3D solid, shell or axisymmetric element for SOL 601,153 or SOL 601,159 analysis.
2. IVIEWF and IVIEWB are ignored.
3. RADMIDB applies only for radiation boundary condition applied on shell element.
4. If more than one CHBDYE or CHBDYG entry defines the same element side with the same material property and ambient grid point, only one of the entries will be used. A warning will be issued in such cases.

**CHBDYG** Geometric Surface Element Definition (Grid Form)

Defines a boundary condition surface element without reference to a property entry.

**Format:**

| 1      | 2   | 3  | 4    | 5      | 6      | 7       | 8       | 9  | 10 |
|--------|-----|----|------|--------|--------|---------|---------|----|----|
| CHBDYG | EID |    | TYPE | IVIEWF | IVIEWB | RADMIDF | RADMIDB |    |    |
|        | G1  | G2 | G3   | G4     | G5     | G6      | G7      | G8 |    |

**Example:**

|        |     |     |       |     |   |   |   |  |  |
|--------|-----|-----|-------|-----|---|---|---|--|--|
| CHBDYG | 2   |     | AREA4 | 3   | 3 | 2 | 2 |  |  |
|        | 100 | 103 | 102   | 101 |   |   |   |  |  |

**Fields:**

| Field   | Contents                                                                                                          |
|---------|-------------------------------------------------------------------------------------------------------------------|
| EID     | Surface element identification number. (Unique Integer > 0 among all elemental entries)                           |
| TYPE    | Surface type. See Remark 3 . (Character)                                                                          |
| IVIEWF  | A VIEW entry identification number for the front face. (Integer > 0; see Remark 2 for the default.)               |
| IVIEWB  | A VIEW entry identification number for the back face. (Integer > 0; see Remark 2 for the default.)                |
| RADMIDF | RADM identification number for front face of the surface element. (Integer > 0; see Remark 2 for the default.)    |
| RADMIDB | RADM identification number for the back face of the surface element. (Integer ≥ 0; see Remark 2 for the default.) |
| Gi      | Grid point IDs of grids bounding the surface. (Integer > 0)                                                       |


**Remarks:**

1. EID is a unique ID associated with a particular surface element as defined by the grid points.

**1160 CHBDYG**  
**Geometric Surface Element Definition (Grid Form)**

2. The defaults for TYPE, IVIEWF, IVIEWB, RADMIDF, and RADMIDB may be specified on the BDYOR entry. If a particular field is blank on both the CHBDYG entry and the BDYOR entry, then the default is zero.
3. TYPE specifies the kind of element surface; allowed types are: REV, AREA3, AREA4, AREA6, and AREA8. See [Figure 12-23](#), [Figure 12-24](#), and [Figure 12-25](#).
  - TYPE = REV

The “REV” type, which is used with elements CTRIAX6, CTRAX3, CTRAX6, CQUADX4, and CQUADX8, has two primary grid points that must lie in the x-z plane of the basic coordinate system with  $x > 0$ . A midside grid point G3 is optional and supports convection or heat flux from the edge of elements CTRIAX6, CTRAX6, and CQUADX8. The defined area is a conical section with z as the axis of symmetry. A property entry is required for convection, radiation, or thermal vector flux. Automatic view factor calculations with VIEW data are not supported for the REV option.

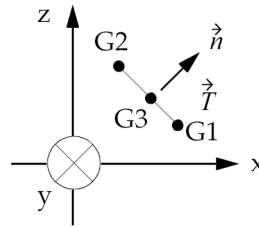

**Figure 12-23. Normal Vector for CHBDYG Element of Type “REV”**


The unit normal lies in the x-z plane, and is given by

$$\hat{n} = (\hat{e}_y \times \hat{T}) / |\hat{e}_y \times \hat{T}|.$$


$\hat{e}_y$  is the unit vector in the y direction.

- TYPE = AREA3, AREA4, AREA6, or AREA8
- These types have three and four primary grid points, respectively, that define a triangular or quadrilateral surface and must be ordered to go around the boundary. A property entry is required for convection, radiation, or thermal vector flux.



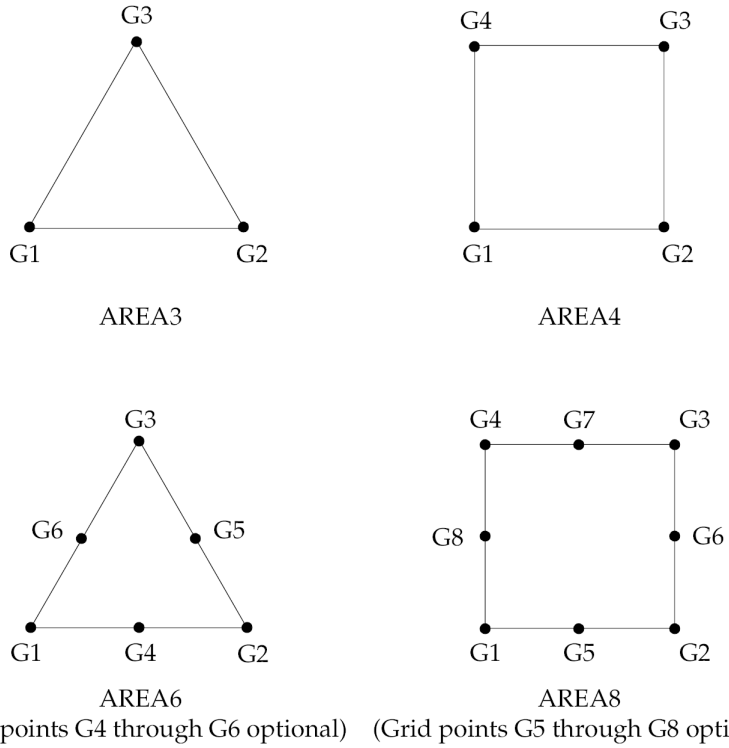

**Figure 12-24. TYPE Examples**

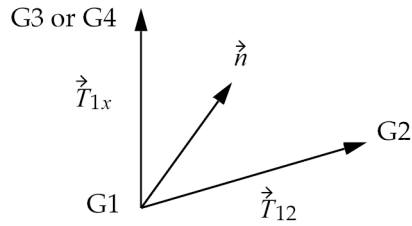

**Figure 12-25. Normal Vector for CHBDYG Element of Types “AREAi”**

The unit normal vector is given by

$$\vec{n} = \frac{(\vec{T}_{12} \times \vec{T}_{1x})}{|\vec{T}_{12} \times \vec{T}_{1x}|}$$

## 1162 CHBDYG Geometric Surface Element Definition (Grid Form)

(G3 is used for triangles, and G4 is used for quadrilaterals.)

4. For defining the front face, the right-hand rule is used on the sequence G1 to G2 to ... Gn of grid points.
5. If the surface element is to be used in the calculation of view factors, it must have an associated VIEW entry.
6. All conduction elements to which any boundary condition is to be applied must be individually identified with one of the surface element entries: CHBDYE, CHBDYG, or CHBDYP.
7. See Remark 10 of CHBDYE for application of boundary conditions using CHBDYG entries and a discussion of front and back faces.

### Remarks related to SOL 601:

1. CHBDYG defines convection or radiation boundary condition using grid points on a face of 3D solid or shell element or on an edge of axisymmetric element for SOL 601,153 or SOL 601,159 analysis.
2. IVIEWF and IVIEWB are ignored.
3. RADMIDB applies only for radiation boundary condition applied on shell element.
4. If more than one CHBDYE or CHBDYG entry defines the same element side with the same material property and ambient grid point, only one of the entries will be used. A warning will be issued in such cases.

**CHBDYP**      Geometric Surface Element Definition (Property Form)

Defines a boundary condition surface element with reference to a PHBDY entry.

**Format:**

| 1      | 2       | 3       | 4    | 5      | 6      | 7  | 8  | 9  | 10 |
|--------|---------|---------|------|--------|--------|----|----|----|----|
| CHBDYP | EID     | PID     | TYPE | IVIEWF | IVIEWB | G1 | G2 | G0 |    |
|        | RADMIDF | RADMIDB | GMID | CE     | E1     | E2 | E3 |    |    |

**Example:**

|        |   |   |       |   |     |     |     |     |  |
|--------|---|---|-------|---|-----|-----|-----|-----|--|
| CHBDYP | 2 | 5 | POINT | 2 | 2   | 101 |     | 500 |  |
|        | 3 | 3 |       |   | 0.0 | 0.0 | 1.0 |     |  |

**Fields:**

| Field   | Contents                                                                                             |
|---------|------------------------------------------------------------------------------------------------------|
| EID     | Surface element identification number. (Unique Integer > 0 among all element identification numbers) |
| PID     | PHBDY property entry identification numbers. (Integer > 0)                                           |
| TYPE    | Surface type. See Remark 3 . (Character).                                                            |
| IVIEWF  | VIEW entry identification number for the front face. (Integer > 0 or blank)                          |
| IVIEWB  | VIEW entry identification number for the back face. (Integer > 0 or blank)                           |
| G1, G2  | Grid point identification numbers of grids bounding the surface. (Integer > 0)                       |
| GO      | Orientation grid point. (Integer ≥ 0; Default = 0)                                                   |
| RADMIDF | RADM entry identification number for the front face. (Integer ≥ 0 or blank)                          |
| RADMIDB | RADM entry identification number for the back face. (Integer ≥ 0 or blank)                           |

**1164 CHBDYP**  
**Geometric Surface Element Definition (Property Form)**


| Field | Contents                                                                                                                             |
|-------|--------------------------------------------------------------------------------------------------------------------------------------|
| GMID  | Grid point identification number of a midside node if it is used with the line type surface element.                                 |
| CE    | Coordinate system for defining orientation vector. (Integer $\geq 0$ ; Default = 0)                                                  |
| Ei    | Components of the orientation vector in coordinate system CE. The origin of the orientation vector is grid point G1. (Real or blank) |

**Remarks:**

1. EID is a unique ID associated with a particular surface element as defined by the grid point(s).
2. The defaults for PID, TYPE, IVIEWF, IVIEWB, GO, RADMIDF, RADMIDB, CE, and Ei may be specified on the BDYOR entry. If a particular field is blank on both the CHBDYP entry and the BDYOR entry, then the default is zero.
3. TYPE specifies the kind of element surface; the allowed types are: "POINT," "LINE," "ELCYL," "FTUBE," and "TUBE." For TYPE = "FTUBE" and TYPE = "TUBE," the geometric orientation is completely determined by G1 and G2; the GO, CE, E1, E2, and E3 fields are ignored.

- TYPE = "POINT"

TYPE = "POINT" has one primary grid point, requires a property entry, and the normal vector  $\vec{V}_i$  must be specified if thermal flux is to be used.

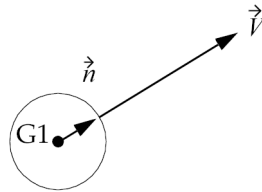

**Figure 12-26. Normal Vector for CHBDYP Element of Type "POINT"**  
**(See Remarks 4 and 5.)**

The unit normal vector is given by


$$\vec{n} = \vec{V} / |\vec{V}|$$

where

$\vec{V}$  is specified in the Ei field and given in the basic system at the referenced grid point. See Remarks 4 and 5 for the determination of  $\vec{V}$ .

- TYPE = “LINE,” “FTUBE,” or “TUBE”

The TYPE = “LINE” type has two primary grid points, requires a property entry, and the vector is required. TYPE = “FTUBE” and TYPE = “TUBE” are similar to TYPE = “LINE” except they can have linear taper with no automatic view factor calculations. GMID is an option for the TYPE = “LINE” surface element only and is ignored for TYPE = “FTUBE” and “TUBE”.

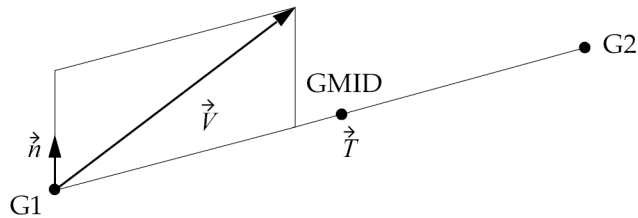

**Figure 12-27. Normal Vector for CHBDYP Element with  
 TYPE=“LINE”,TYPE=“FTUBE”, or TYPE=“TUBE”(See Remarks 4  
 and 5.)**


The unit normal lies in the plane  $\vec{V}$  and  $\vec{T}$ , is perpendicular to  $\vec{T}$ , and is given by:

$$\vec{n} = \frac{\vec{T} \times (\vec{V} \times \vec{T})}{|\vec{T} \times (\vec{V} \times \vec{T})|}$$

- TYPE = “ELCYL”

TYPE = “ELCYL” (elliptic cylinder) has two connected primary grid points and requires a property entry. The vector must be nonzero. Automatic view factor calculations are not available.

1166 CHBDYP  
Geometric Surface Element Definition (Property Form)

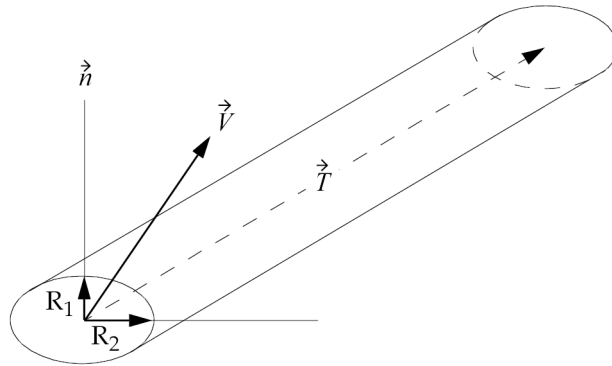

**Figure 12-28. Normal Vector for CHBDYP Element of TYPE="ELCYL"(See Remarks 4 and 5.)**

The same logic is used to determine  $\vec{n}$  as for TYPE = LINE. The “radius”  $R_1$  is in the  $\vec{n}$  direction, and  $R_2$  is the perpendicular to  $\vec{n}$  and  $\vec{T}$  (see fields 7 and 8 of the PHBDY entry).

4. For TYPE = “POINT,” TYPE = “LINE,” and TYPE = “ELCYL,” geometric orientation is required. The required information is sought in the following order:
  - If  $GO > 0$  is found on the CHBDYP entry, it is used.
  - Otherwise, if a nonblank CE is found on the CHBDYP continuation entry, this CE and the corresponding vectors E1, E2, and E3 are used.
  - If neither of the above is found, the same information is sought in the same way from the BDYOR entry.
  - If none of the above apply, a warning message is issued.
5. The geometric orientation can be defined by either GO or the vector E1, E2, E3.
  - If  $GO > \text{zero}$ :  
For a TYPE = “POINT” surface, the normal to the front face is the vector from G1 to GO. For the TYPE = “LINE” surface, the plane passes through G1, G2, GO and the right-hand rule is used on this sequence to get the normal to the front face. For a TYPE = “ELCYL” surface the first axis of the ellipse lies on the G1, G2, GO plane, and the second axis is normal to this plane. For TYPE = “FTUBE” or “TUBE” surface, no orientation is required, and GO is superfluous.
  - If GO is zero:

**CHBDYP 1167**

**Geometric Surface Element Definition (Property Form)**

For a TYPE = "POINT" surface, the normal to the front face is the orientation vector. For the TYPE = "LINE" surface, the plane passes through G1, G2, and the orientation vector; the front face is based on the right-hand rule for the vectors G2-G1 and the orientation vector. For a TYPE = "ELCYL" surface, the first axis of the ellipse lies on the G1, G2, orientation vector plane, and the second axis is normal to this plane.

6. The continuation entry is optional.
7. If the surface element is to be used in the calculation of view factors, it must have an associated VIEW entry.
8. All conduction elements to which any boundary condition is to be applied must be individually identified with the application of one of the following surface element entries: CHBDYE, CHBDYG, or CHBDYP.

**1168 CHEXA**  
**Six-Sided Solid Element Connection**

**CHEXA** Six-Sided Solid Element Connection

Defines the connections of the six-sided solid element with eight to twenty grid points.

**Format:**

| 1     | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| CHEXA | EID | PID | G1  | G2  | G3  | G4  | G5  | G6  |    |
|       | G7  | G8  | G9  | G10 | G11 | G12 | G13 | G14 |    |
|       | G15 | G16 | G17 | G18 | G19 | G20 |     |     |    |


**Example:**

|       |    |    |    |    |    |    |    |    |  |
|-------|----|----|----|----|----|----|----|----|--|
| CHEXA | 71 | 4  | 3  | 4  | 5  | 6  | 7  | 8  |  |
|       | 9  | 10 | 0  | 0  | 30 | 31 | 53 | 54 |  |
|       | 55 | 56 | 57 | 58 | 59 | 60 |    |    |  |

**Fields:**

| Field | Contents                                                    | Type                 | Default  |
|-------|-------------------------------------------------------------|----------------------|----------|
| EID   | Element identification number.                              | Integer > 0          | Required |
| PID   | Property identification number of aPSOLID or PLSOLID entry. | Integer > 0          | Required |
| Gi    | Grid point identification numbers of connection points.     | Integer ≥ 0 or blank | Required |



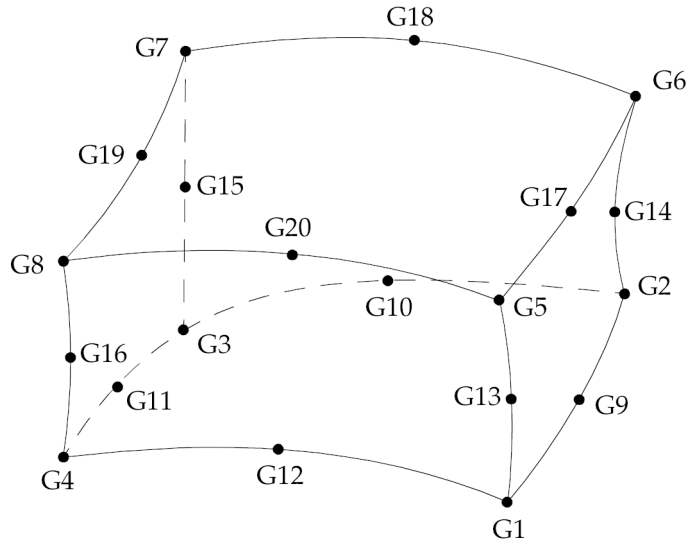

**Figure 12-29. CHEXA Element Connection**

**Remarks:**


1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Grid points G1 through G4 must be given in consecutive order about one quadrilateral face. G5 through G8 must be on the opposite face with G5 opposite G1, G6 opposite G2, etc.
3. The edge points G9 to G20 are optional. Any or all of them may be deleted. If the ID of any edge connection point is left blank or set to zero (as for G9 and G10 in the input example), the equations of the element are adjusted to give correct results for the reduced number of connections. Corner grid points cannot be deleted. The element is an isoparametric element (with shear correction) in all cases.
4. Components of stress are output in the material coordinate system. See remark 6 on the PSOLID bulk entry for hyperelastic and nonlinear exceptions.
5. The second continuation is optional.
6. For nonhyperelastic elements, the element coordinate system for the CHEXA element is defined in terms of the three vectors R, S, and T, which join the centroids of opposite faces.  
R vector joins the centroids of faces G4-G1-G5-G8 and G3-G2-G6-G7.

## 1170 CHEXA Six-Sided Solid Element Connection

S vector joins the centroids of faces G1-G2-G6-G5 and G4-G3-G7-G8.

T vector joins the centroids of faces G1-G2-G3-G4 and G5-G6-G7-G8.

The origin of the coordinate system is located at the intersection of these vectors. The X, Y, and Z axes of the element coordinate system are chosen as close as possible to the R, S, and T vectors and point in the same general direction. (Mathematically speaking, the coordinate system is computed in such a way that if the R, S, and T vectors are described in the element coordinate system a 3 x 3 positive-definite symmetric matrix would be produced.)

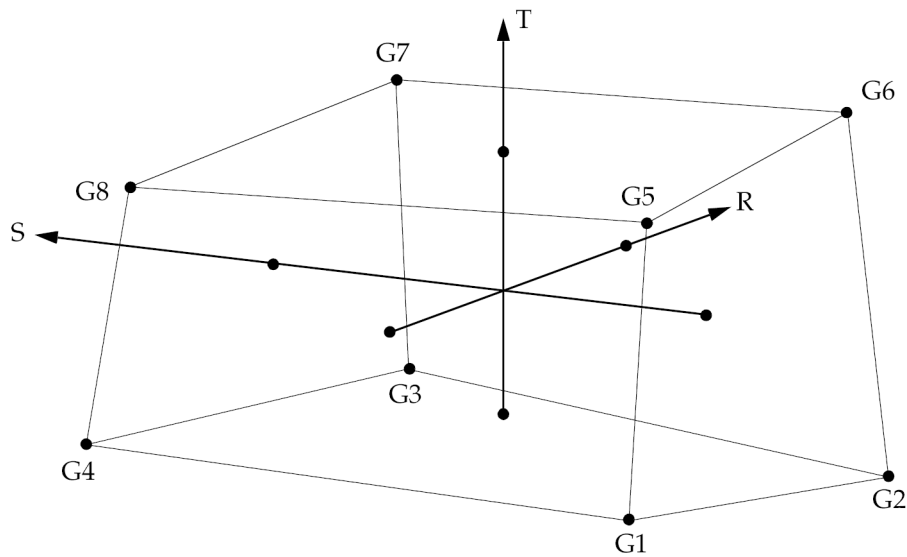

**Figure 12-30. CHEXA Element R, S, and T Vectors**

7. It is recommended that the edge points be located within the middle third of the edge.
8. For hyperelastic elements, the plot codes are specified under the CHEXAFD element name in “[Item Codes](#)”.
9. If a CHEXA element is referenced by a PSET or PVAL entry, then a p-version formulation is used and the element can have curved edges.
  - If a curved edge of a p-element is shared by an h-element without midside nodes, the geometry of the edge is ignored and set straight.
  - Elements with midside nodes cannot be p-elements and edges with midside nodes cannot be shared by p-elements.

10. By default, all twelve edges of the element are considered straight unless:
  - For p-elements there is an FEEDGE or FEFACE entry that contains the two grids of any edge of this element. In this case, the geometry of the edge is used in the element.
  - For h-elements, any of G9 through G20 are specified.

**Remarks related to SOLs 601 and 701:**

1. For SOL 601, only elements with 8 or 20 grid points are allowed, i.e., either all edge points G9 to G20 are specified or no edge points are specified. For SOL 701, only elements with 8 grid points are allowed.
2. For SOL 601, 20-node CHEXA elements may be converted to 27-node CHEXA elements (6 additional nodes on the centroid of the six faces and 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry. 27-node CHEXA elements are especially effective in the analysis of incompressible media and inelastic materials, e.g., rubber-like materials, elasto-plastic materials, and materials with Poisson's ratio close to 0.5. 27-node CHEXA elements also perform better than 20-node elements in contact analysis.

## 1172 CLOAD

### Static Load Combination for Superelement Loads (Superposition)

## CLOAD

### Static Load Combination for Superelement Loads (Superposition)

Defines a static load as a linear combination of previously calculated superelement loads defined by the LSEQ entry in nonlinear static analysis (SOL 106 or 153).

#### Format:

| 1     | 2   | 3    | 4      | 5    | 6  | 7    | 8  | 9    | 10 |
|-------|-----|------|--------|------|----|------|----|------|----|
| CLOAD | CID | S    | S1     | IDV1 | S2 | IDV2 | S3 | IDV3 |    |
|       | S4  | IDV4 | -etc.- |      |    |      |    |      |    |

#### Example:

|       |       |     |      |    |      |     |       |     |  |
|-------|-------|-----|------|----|------|-----|-------|-----|--|
| CLOAD | 25    | 1.0 | 25.0 | 10 | -1.0 | 101 | 2.2-1 | 604 |  |
|       | -62.0 | 62  |      |    |      |     |       |     |  |

#### Fields:

| Field | Contents                                                                                                                         |
|-------|----------------------------------------------------------------------------------------------------------------------------------|
| CID   | Combination identification number. (Integer > 0)                                                                                 |
| S     | Scale factor. (Real)                                                                                                             |
| Si    | Scale factors. (Real)                                                                                                            |
| IDVi  | Identification numbers of load vectors (DAREA of a selected LSEQ entry) calculated for a superelement loads entry. (Integer > 0) |

#### Remarks:

1. The CLOAD entry must be selected in the residual solution subcases of the Case Control with CLOAD = CID and must be used if loads are applied to upstream superelements in SOL 106 or 153.
2. The load vector defined is given by

$$\{P\} = S \sum_i S_i \{P_{IDV_i}\}$$

3. The IDVi field refers to a previously calculated load vector for the superelement via the LSEQ approach. That is, a LOADSET keyword must have been selected in Case Control that in turn refers to one or more LSEQ entries in the Bulk Data

**CLOAD 1173**

**Static Load Combination for Superelement Loads (Superposition)**

Section. The IDVi refers to the DAREA of such LSEQ entries. For more details, see the “LSEQ” and the “LOADSET”.

4. In the CID or IDV fields, a CLOAD entry may not reference an identification number defined by another CLOAD entry.

**1174 CMASS1**  
**Scalar Mass Connection**

**CMASS1**      Scalar Mass Connection

Defines a scalar mass element.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|-----|-----|----|----|----|----|---|---|----|
| CMASS1 | EID | PID | G1 | C1 | G2 | C2 |   |   |    |

**Example:**

|        |    |   |   |   |  |  |  |  |  |
|--------|----|---|---|---|--|--|--|--|--|
| CMASS1 | 32 | 6 | 2 | 1 |  |  |  |  |  |
|--------|----|---|---|---|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                      |
|--------|-------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                           |
| PID    | Property identification number of a PMASS entry. (Integer > 0; Default = EID) |
| G1, G2 | Geometric grid or scalar point identification number. (Integer ≥ 0)           |
| C1, C2 | Component number. (0 ≤ Integer ≤ 6; blank or zero if scalar point)            |

**Remarks:**

1. Scalar points may be used for G1 and/or G2, in which case the corresponding C1 and/or C2 must be zero or blank. Zero or blank may be used to indicate a grounded terminal G1 or G2 with a corresponding blank or zero C1 or C2. A grounded terminal is a point with a displacement that is constrained to zero. If only scalar points and/or ground are involved, it is more efficient to use the CMASS3 entry.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. The two connection points (G1, C1) and (G2, C2) must not be coincident.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. A scalar point specified on this entry need not be defined on an SPOINT entry.
6. If Gi refers to a grid point then Ci refers to degrees-of-freedom(s) in the displacement coordinate system specified by CD on the GRID entry.

7. Scalar elements input coupled mass matrices when the second pair of fields is entered. When uncoupled point masses are desired input only the first pair of fields. When a coupled mass matrix is requested the submatrix added has  $M$  on the diagonal, and  $-M$  on the off-diagonal. The element is not checked for internal constraints, which is the user's responsibility if desired. There are instances where elements with internal constraints are desired, although not frequently. To identify the presence of internal constraints caused by coupled mass, inspect GPWG output, OLOAD output due to GRAV loads, and rigid body modes of free structures. Some forms of coupled mass will cause coupling of rigid body translational mass terms in GPWG output, and poor rigid body modes in modal analysis.

**Remarks related to SOLs 601 and 701:**

1. G1 and G2 must be grid points, i.e., they cannot be scalar points.
2. If G1 and G2 are specified, CMASS1 models a mass between G1 and G2 in SOL 601. Note that this is different from how it is treated in other solution sequences. Please see the *Advanced Nonlinear Theory and Modeling Guide*.

**1176 CMASS2**  
**Scalar Mass Property and Connection**

**CMASS2**      Scalar Mass Property and Connection

Defines a scalar mass element without reference to a property entry.

**Format:**

| 1      | 2   | 3 | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|-----|---|----|----|----|----|---|---|----|
| CMASS2 | EID | M | G1 | C1 | G2 | C2 |   |   |    |

**Example:**

|        |    |      |   |   |  |  |  |  |  |
|--------|----|------|---|---|--|--|--|--|--|
| CMASS2 | 32 | 9.25 | 6 | 1 |  |  |  |  |  |
|--------|----|------|---|---|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                            |
|--------|---------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                 |
| M      | Value of the scalar mass. (Real)                                    |
| G1, G2 | Geometric grid or scalar point identification number. (Integer ≥ 0) |
| C1, C2 | Component number. (0 ≤ Integer ≤ 6; blank or zero if scalar point.) |

**Remarks:**

1. Scalar points may be used for G1 and/or G2, in which case the corresponding C1 and/or C2 must be zero or blank. Zero or blank may be used to indicate a grounded terminal G1 or G2 with a corresponding blank or zero C1 or C2. A grounded terminal is a point with a displacement that is constrained to zero. If only scalar points and/or ground are involved, it is more efficient to use the CMASS4 entry.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. The two connection points (G1, C1) and (G2, C2) must be distinct. Except in unusual circumstances, one of them will be a grounded terminal with blank entries for Gi and Ci.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. A scalar point specified on this entry need not be defined on an SPOINT entry.



6. If  $G_i$  refers to a grid point then  $C_i$  refers to degrees-of-freedom(s) in the displacement coordinate system specified by CD on the GRID entry.
7. See Remark 7 for “CMASS1”.

**Remarks related to SOLs 601 and 701:**

1. G1 and G2 must be grid points, i.e., they cannot be scalar points.
2. If G1 and G2 are specified, CMASS1 models a mass between G1 and G2 in SOL 601. Note that this is different from how it is treated in other solution sequences. Please see the *Advanced Nonlinear Theory and Modeling Guide*.

**1178 CMASS3**  
**Scalar Mass Connection to Scalar Points Only**

**CMASS3**      Scalar Mass Connection to Scalar Points Only

Defines a scalar mass element that is connected only to scalar points.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|--------|-----|-----|----|----|---|---|---|---|----|
| CMASS3 | EID | PID | S1 | S2 |   |   |   |   |    |

**Example:**

|        |    |    |    |  |  |  |  |  |  |
|--------|----|----|----|--|--|--|--|--|--|
| CMASS3 | 13 | 42 | 62 |  |  |  |  |  |  |
|--------|----|----|----|--|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                      |
|--------|-------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                           |
| PID    | Property identification number of a PMASS entry. (Integer > 0; Default = EID) |
| S1, S2 | Scalar point identification numbers. (Integer ≥ 0; S1 ≠ S2)                   |

**Remarks:**

1. S1 or S2 may be blank or zero, indicating a constrained coordinate.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. Only one scalar mass element may be defined on a single entry.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. A scalar point specified on this entry need not be defined on an SPOINT entry.

**CMASS4**     Scalar Mass Property and Connection to Scalar Points Only

Defines a scalar mass element that is connected only to scalar points, without reference to a property entry.

**Format:**

| 1      | 2   | 3 | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|--------|-----|---|----|----|---|---|---|---|----|
| CMASS4 | EID | M | S1 | S2 |   |   |   |   |    |

**Example:**

|        |    |       |  |    |  |  |  |  |  |
|--------|----|-------|--|----|--|--|--|--|--|
| CMASS4 | 23 | 14.92 |  | 23 |  |  |  |  |  |
|--------|----|-------|--|----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                    |
|--------|-------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)         |
| M      | Scalar mass value. (Real)                                   |
| S1, S2 | Scalar point identification numbers. (Integer ≥ 0; S1 ≠ S2) |

**Remarks:**

1. S1 or S2 may be blank or zero, indicating a constrained coordinate. This is the usual case.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. Only one scalar mass element may be defined on a single entry.
4. For a discussion of the scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.
5. A scalar point specified on this entry need not be defined on an SPOINT entry.

**1180 CMASS4**  
**Scalar Mass Property and Connection to Scalar Points Only**

Chapter

# 13 Bulk Data Entries CO—CY

Bulk data entries CONM1—CYSYM

**1182 CONM1**  
**Concentrated Mass Element Connection, General Form**

**CONM1** Concentrated Mass Element Connection, General Form

Defines a 6 x 6 symmetric mass matrix at a geometric grid point.

**Format:**

| 1     | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| CONM1 | EID | G   | CID | M11 | M21 | M22 | M31 | M32 |    |
|       | M33 | M41 | M42 | M43 | M44 | M51 | M52 | M53 |    |
|       | M54 | M55 | M61 | M62 | M63 | M64 | M65 | M66 |    |

**Example:**

|       |     |      |   |     |     |  |  |      |  |
|-------|-----|------|---|-----|-----|--|--|------|--|
| CONM1 | 2   | 22   | 2 | 2.9 | 6.3 |  |  |      |  |
|       | 4.8 | 28.6 |   |     |     |  |  |      |  |
|       |     | 28.6 |   |     |     |  |  | 28.6 |  |

**Fields:**

| Field | Contents                                                                   |
|-------|----------------------------------------------------------------------------|
| EID   | Unique element identification number. (Integer > 0)                        |
| G     | Grid point identification number. (Integer > 0)                            |
| CID   | Coordinate system identification number for the mass matrix. (Integer ≥ 0) |
| Mij   | Mass matrix values. (Real)                                                 |

**Remarks:**

1. For a less general means of defining concentrated mass at grid points, see the CONM2 entry description.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. The mass matrix has the form:

## Concentrated Mass Element Connection, General Form

$$\begin{bmatrix} M_{11} & & & & & & \\ M_{21} & M_{22} & & & & & \\ M_{31} & M_{32} & M_{33} & & & & \\ M_{41} & M_{42} & M_{43} & M_{44} & & & \\ M_{51} & M_{52} & M_{53} & M_{54} & M_{55} & & \\ M_{61} & M_{62} & M_{63} & M_{64} & M_{65} & M_{66} & \end{bmatrix} \quad \text{symmetric}$$

**Remarks related to SOLs 601 and 701:**

1. Only the diagonal terms of the mass matrix  $M_{ii}$  ( $1 \leq i \leq 6$ ) are used.
2. CID is ignored, i.e., mass components  $M_{ii}$  are assumed to be in the displacement coordinate system of grid point G.

**1184 CONM2**  
**Concentrated Mass Element Connection, Rigid Body Form**

**CONM2** Concentrated Mass Element Connection, Rigid Body Form

Defines a concentrated mass at a grid point.

**Format:**

| 1     | 2   | 3   | 4   | 5   | 6   | 7   | 8  | 9 | 10 |
|-------|-----|-----|-----|-----|-----|-----|----|---|----|
| CONM2 | EID | G   | CID | M   | X1  | X2  | X3 |   |    |
|       | I11 | I21 | I22 | I31 | I32 | I33 |    |   |    |

**Example:**

|       |      |    |      |      |  |     |  |  |  |
|-------|------|----|------|------|--|-----|--|--|--|
| CONM2 | 2    | 15 | 6    | 49.7 |  |     |  |  |  |
|       | 16.2 |    | 16.2 |      |  | 7.8 |  |  |  |

**Fields:**

| Field      | Contents                                                                                                                                                                                                                                                                       |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID        | Element identification number. (Integer > 0)                                                                                                                                                                                                                                   |
| G          | Grid point identification number. (Integer > 0)                                                                                                                                                                                                                                |
| CID        | Coordinate system identification number. For CID of -1 see X1, X2, X3 below. (Integer ≥ -1; Default = 0)                                                                                                                                                                       |
| M          | Mass value. (Real)                                                                                                                                                                                                                                                             |
| X1, X2, X3 | Offset distances from the grid point to the center of gravity of the mass in the coordinate system defined in field 4, unless CID = -1, in which case X1, X2, X3 are the coordinates, not offsets, of the center of gravity of the mass in the basic coordinate system. (Real) |
| lij        | Mass moments of inertia measured at the mass center of gravity in the coordinate system defined by field 4. If CID = -1, the basic coordinate system is implied. (For I11, I22, and I33; Real ≥ 0.0; for I21, I31, and I32; Real)                                              |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. For a more general means of defining concentrated mass at grid points, see the CONM1 entry description.



3. The continuation is optional.
4. If CID = -1, offsets are internally computed as the difference between the grid point location and X1, X2, X3. The grid point locations may be defined in a nonbasic coordinate system. In this case, the values of Iij must be in a coordinate system that parallels the basic coordinate system.
5. The form of the inertia matrix about its center of gravity is taken as:

$$\begin{bmatrix} M & & & & & & & & \\ & M & & & & & & & \\ & & M & & & & & & \\ & & & I11 & & & & & \\ & & & -I21 & I22 & & & & \\ & & & -I31 & -I32 & I33 & & & \end{bmatrix}$$

where

$$\begin{aligned} M &= \int r \, dV \\ I11 &= \int r (x_2^2 + x_3^2) dV \\ I22 &= \int r (x_1^2 + x_3^2) dV \\ I33 &= \int r (x_1^2 + x_2^2) dV \\ I21 &= \int r (x_1 x_2) dV \\ I31 &= \int r (x_1 x_3) dV \\ I32 &= \int r (x_2 x_3) dV \end{aligned}$$

and

$x_1, x_2, x_3$  are components of distance from the center of gravity in the coordinate system defined in field 4.

The negative signs for the off-diagonal terms are supplied automatically. A warning message is issued if the inertia matrix is nonpositive definite, since this may cause fatal errors in dynamic analysis modules.

6. If CID  $\geq 0$ , then X1, X2, and X3 are defined by a local Cartesian system, even if CID references a spherical or cylindrical coordinate system. This is similar to the manner in which displacement coordinate systems are defined.

**1186 CONM2**  
**Concentrated Mass Element Connection, Rigid Body Form**

7. See “Overview of Coordinate Systems in NX Nastran” in the *NX Nastran User’s Guide* for a definition of coordinate system terminology.

**Remarks related to SOLs 601 and 701:**

1. X1, X2, and X3 are ignored, i.e., the center of gravity of the mass is assumed to be at the grid point.
2. CID is ignored, i.e., mass moments of inertia components  $I_{ii}$  ( $1 \leq i \leq 3$ ) are assumed to be in the displacement coordinate system of grid point G.
3. I21, I31, and I32 are ignored. The displacement coordinate system for grid point G should coincide with the principal axes of the concentrated mass.

**CONROD** Rod Element Property and Connection

Defines a rod element without reference to a property entry.

**Format:**

| 1      | 2   | 3  | 4  | 5   | 6 | 7 | 8 | 9   | 10 |
|--------|-----|----|----|-----|---|---|---|-----|----|
| CONROD | EID | G1 | G2 | MID | A | J | C | NSM |    |

**Example:**

|        |   |    |    |   |      |  |  |  |  |
|--------|---|----|----|---|------|--|--|--|--|
| CONROD | 2 | 16 | 17 | 4 | 2.69 |  |  |  |  |
|--------|---|----|----|---|------|--|--|--|--|

**Fields:**

| Field  | Contents                                                                       |
|--------|--------------------------------------------------------------------------------|
| EID    | Unique element identification number. (Integer > 0)                            |
| G1, G2 | Grid point identification numbers of connection points. (Integer > 0; G1 ≠ G2) |
| MID    | Material identification number. (Integer > 0)                                  |
| A      | Area of the rod. (Real)                                                        |
| J      | Torsional constant. (Real)                                                     |
| C      | Coefficient for torsional stress determination. (Real)                         |
| NSM    | Nonstructural mass per unit length. (Real)                                     |

**Remarks:**


1. Element identification numbers should be unique with respect to all other element identification numbers.
2. For structural problems, MID must reference a MAT1 material entry.
3. For heat transfer problems, MID must reference a MAT4 or MAT5 material entry.

**Remarks related to SOLs 601 and 701:**

1. J, C, and NSM are ignored.
2. For structural problems, MID can reference a MAT1 or MATSMA material entry.

**1188 CONROD**  
**Rod Element Property and Connection**

3. For heat transfer problems, MID must reference a MAT4 entry.
4. CONROD defines a truss element with no torsional stiffness, i.e., only axial force is transmitted by the element.

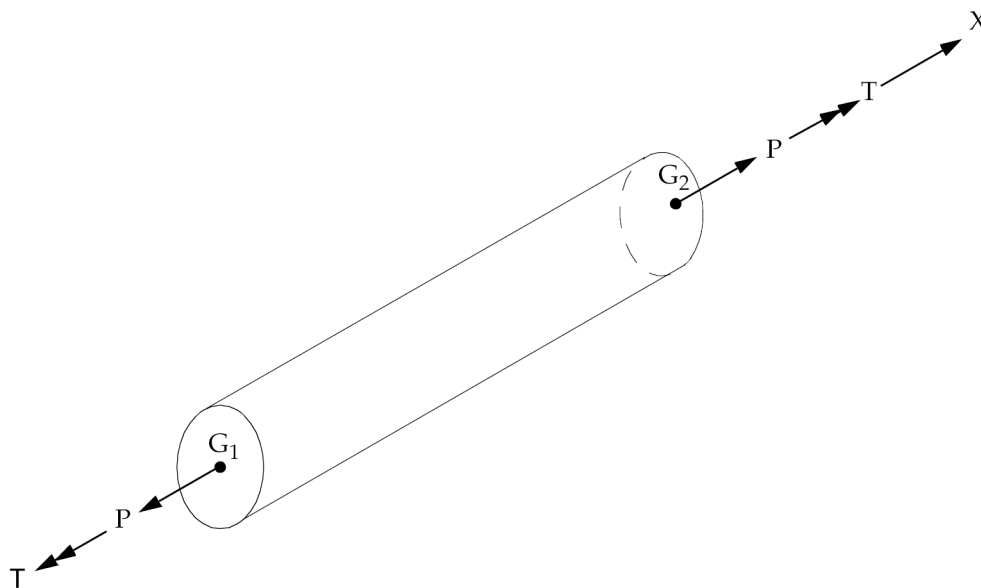

**Figure 13-1. CONROD Element Forces and Moments**

**CONV** Heat Boundary Element Free Convection Entry

Specifies a free convection boundary condition for heat transfer analysis through connection to a surface element (CHBDYi entry).

**Format:**

| 1    | 2   | 3      | 4     | 5       | 6   | 7   | 8   | 9   | 10 |
|------|-----|--------|-------|---------|-----|-----|-----|-----|----|
| CONV | EID | PCONID | FLMND | CNTRLND | TA1 | TA2 | TA3 | TA4 |    |
|      | TA5 | TA6    | TA7   | TA8     |     |     |     |     |    |

**Example:**

|      |   |     |   |     |     |  |  |  |  |
|------|---|-----|---|-----|-----|--|--|--|--|
| CONV | 2 | 101 | 3 | 201 | 301 |  |  |  |  |
|------|---|-----|---|-----|-----|--|--|--|--|

**Fields:**

| Field   | Contents                                                                                                                           |
|---------|------------------------------------------------------------------------------------------------------------------------------------|
| EID     | CHBDYG, CHBDYE, or CHBDYP surface element identification number. (Integer > 0)                                                     |
| PCONID  | Convection property identification number of a PCONV entry. (Integer > 0)                                                          |
| FLMND   | Point for film convection fluid property temperature. (Integer ≥ 0; Default = 0)                                                   |
| CNTRLND | Control point for free convection boundary condition. (Integer ≥ 0; Default = 0)                                                   |
| TAi     | Ambient points used for convection. (Integer > 0 for TA1 and Integer ≥ 0 for TA2 through TA8; Default for TA2 through TA8 is TA1.) |

**Remarks:**

- The basic exchange relationship can be expressed in one of the following forms:
  - $q = H \cdot (T - T_{AMB})^{EXPF(T - T_{AMB})}$ , CNTRLND = 0
  - $q = (H \cdot u_{CNTRLND})(T - T_{AMB})^{EXPF(T - T_{AMB})}$ , CNTRLND ≠ 0
  - $q = H \cdot (T^{EXPF} - T_{AMB}^{EXPF})$ , CNTRLND = 0
  - $q = (H \cdot u_{CNTRLND})(T^{EXPF} - T_{AMB}^{EXPF})$ , CNTRLND ≠ 0
 EXPF is specified on the PCONV entry.

## 1190 CONV

### Heat Boundary Element Free Convection Entry

(See “PCONV” for additional clarification of forms.)

2. The continuation entry is not required.
3. CONV is used with an CHBDYi (CHBDYG, CHBDYE, or CHBDYP) entry having the same EID.
4. The temperature of the film convection point provides the look up temperature to determine the convection film coefficient. If FLMND=0, the reference temperature has several options. It can be the average of surface and ambient temperatures, the surface temperature, or the ambient temperature, as defined in the FORM field of the PCONV Bulk Data entry.
5. If only one ambient point is specified then all the ambient points are assumed to have the same temperature. If midside ambient points are missing, the temperature of these points is assumed to be the average of the connecting corner points.
6. See the Bulk Data entry, “PCONV” , for an explanation of the mathematical relationships involved in free convection and the reference temperature for convection film coefficient.

#### Remarks related to SOL 601:

1. The basic exchange relationship can be expressed in one of the following forms:
  - $q = H \cdot (T - T_{AMB}), CNTRLND = 0$
  - $q = (H \cdot u_{CNTRLND})(T - T_{AMB}), CNTRLND \neq 0$
2. Only one ambient point TA1 is supported. TA2 to TA8 are ignored. The temperature on TA1 must be prescribed on a TEMPBC or SPC entry.
3. FLMND is ignored.
4. CNTRLND may be used to model time-dependent convection heat transfer coefficient. The temperature on CNTRLND must be prescribed on a TEMPBC or SPC entry.
5. H cannot be both time-dependent and temperature-dependent at the same time. Hence, temperature on CNTRLND cannot be time-dependent when H is made temperature-dependent by a MATT4 entry.

**CONVM 1191**  
**Heat Boundary Element Forced Convection Entry**

**CONVM** Heat Boundary Element Forced Convection Entry

Specifies a forced convection boundary condition for heat transfer analysis through connection to a surface element (CHBDYi entry).

**Format:**

| 1     | 2   | 3      | 4     | 5       | 6   | 7   | 8 | 9 | 10 |
|-------|-----|--------|-------|---------|-----|-----|---|---|----|
| CONVM | EID | PCONID | FLMND | CNTMDOT | TA1 | TA2 |   |   |    |

**Example:**

|       |     |   |     |     |    |    |  |  |  |
|-------|-----|---|-----|-----|----|----|--|--|--|
| CONVM | 101 | 1 | 201 | 301 | 20 | 21 |  |  |  |
|-------|-----|---|-----|-----|----|----|--|--|--|

**Fields:**

| Field    | Contents                                                                                                   |
|----------|------------------------------------------------------------------------------------------------------------|
| EID      | CHBDYP element identification number. (Integer > 0)                                                        |
| PCONID   | Convection property identification number of a PCONVM entry. (Integer > 0)                                 |
| FLMND    | Point used for fluid film temperature. (Integer ≥ 0; Default = 0)                                          |
| CNTMDOT  | Control point used for controlling mass flow. (Integer > 0)                                                |
| TA1, TA2 | Ambient points used for convection. (Integer > 0 for TA1 and Integer ≥ 0 for TA2; Default for TA2 is TA1.) |

**Remarks:**

1. CONVM is used with an CHBDYP entry of type FTUBE having the same EID.
2. The temperature of the fluid film point may be specified to determine the material properties for the fluid. If FLMND = 0, the reference temperature has several options. It can be the average of surface and ambient temperatures, the surface temperatures, or the ambient temperature, as defined in the FORM field of the PCONVM Bulk Data entry.
3. CNTMDOT must be set to the desired mass flow rate (mdot) to effect the advection of energy downstream at an  $\text{mdot} \cdot C_p \cdot T$  rate. In addition to the effect that mdot has on the transfer of thermal energy in the streamwise direction, this control point value is also used in computing the tube Reynolds number and subsequently the forced convection heat transfer coefficient if requested. This enables the fluid stream to exchange heat with its surroundings.

**1192 CONVM**  
**Heat Boundary Element Forced Convection Entry**

4. If only the first ambient point is specified, then the second ambient point is assumed to have the same temperature.
5. See the Bulk Data entry, "[PCONVM](#)", for an explanation of the mathematical relationships available for forced convection and the reference temperature for fluid material properties.



**CORD1C** Cylindrical Coordinate System Definition, Form 1

Defines a cylindrical coordinate system using three grid points.

**Format:**


|        |      |     |     |     |      |     |     |     |    |
|--------|------|-----|-----|-----|------|-----|-----|-----|----|
| 1      | 2    | 3   | 4   | 5   | 6    | 7   | 8   | 9   | 10 |
| CORD1C | CIDA | G1A | G2A | G3A | CIDB | G1B | G2B | G3B |    |

**Example:**

|        |   |    |    |    |  |  |  |  |  |
|--------|---|----|----|----|--|--|--|--|--|
| CORD1C | 3 | 16 | 32 | 19 |  |  |  |  |  |
|--------|---|----|----|----|--|--|--|--|--|

**Fields:**

| Field         | Contents                                                                               |
|---------------|----------------------------------------------------------------------------------------|
| CIDA,<br>CIDB | Coordinate system identification number. (Integer > 0)                                 |
| GiA, GiB      | Grid point identification numbers. (Integer > 0; G1A ≠ G2A ≠ G3A;<br>G1B ≠ G2B ≠ G3B;) |

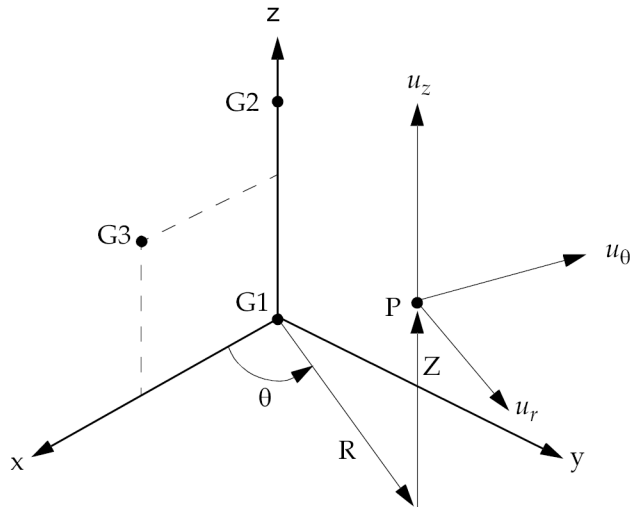

**Figure 13-2. CORD1C Definition**

## 1194 CORD1C

### Cylindrical Coordinate System Definition, Form 1

#### Remarks:

1. Coordinate system identification numbers on all CORD1R, CORD1C, CORD1S, CORD2R, CORD2C, CORD2S and CORD3G entries must be unique.
2. One or two coordinate systems may be defined on a single entry.
3. GiA and GiB must be defined in coordinate systems with definitions that do not involve the coordinate system being defined. The first point is the origin, the second lies on the z-axis, and the third lies in the plane of the azimuthal origin. The three grid points GiA (or GiB) must be non-colinear and not coincident.
4. The location of a grid point (P in [Figure 13-2](#)) in this coordinate system is given by (R, q, Z) where q is measured in degrees.
5. The displacement coordinate directions at P are dependent on the location of P as shown above by  $(u_r, u_q, u_z)$ .
6. It is recommended that points on the z-axis not have their displacement directions defined in this coordinate system. See the discussion of cylindrical coordinate systems in “Overview of Coordinate Systems in NX Nastran” in the *NX Nastran User's Guide*.

**CORD1R** Rectangular Coordinate System Definition, Form 1

Defines a rectangular coordinate system using three grid points.

**Format:**


|        |      |     |     |     |      |     |     |     |    |
|--------|------|-----|-----|-----|------|-----|-----|-----|----|
| 1      | 2    | 3   | 4   | 5   | 6    | 7   | 8   | 9   | 10 |
| CORD1R | CIDA | G1A | G2A | G3A | CIDB | G1B | G2B | G3B |    |

**Example:**

|        |   |    |    |    |  |  |  |  |  |
|--------|---|----|----|----|--|--|--|--|--|
| CORD1R | 3 | 16 | 32 | 19 |  |  |  |  |  |
|--------|---|----|----|----|--|--|--|--|--|

**Fields:**

| Field         | Contents                                                                              |
|---------------|---------------------------------------------------------------------------------------|
| CIDA,<br>CIDB | Coordinate system identification number. (Integer > 0)                                |
| GiA, GiB      | Grid point identification numbers. (Integer > 0; G1A ≠ G2A ≠ G3A and G1B ≠ G2B ≠ G3B) |

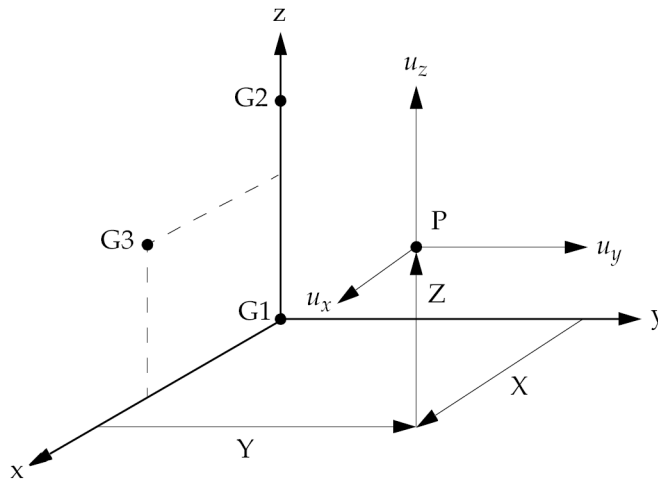

**Figure 13-3. CORD1R Definition**

**1196 CORD1R**  
**Rectangular Coordinate System Definition, Form 1**

**Remarks:**

1. Coordinate system identification numbers on all CORD1R, CORD1C, CORD1S, CORD2R, CORD2C, CORD2S and CORD3G entries must be unique.
2. One or two coordinate systems may be defined on a single entry.
3. GiA and GiB must be defined in coordinate systems with definitions that do not involve the coordinate system being defined. The first point is the origin, the second lies on the z-axis, and the third lies in the x-z plane. The three grid points GiA (or GiB) must be noncolinear and not coincident.
4. The location of a grid point (P in [Figure 13-3](#)) in this coordinate system is given by (X, Y, Z).
5. The displacement coordinate directions at P are shown above by  $(u_x, u_u, u_z)$ .

**CORD1S** Spherical Coordinate System Definition, Form 1

Defines a spherical coordinate system by reference to three grid points.

**Format:**


| 1      | 2    | 3   | 4   | 5   | 6    | 7   | 8   | 9   | 10 |
|--------|------|-----|-----|-----|------|-----|-----|-----|----|
| CORD1S | CIDA | G1A | G2A | G3A | CIDB | G1B | G2B | G3B |    |

**Example:**

|        |   |    |    |    |  |  |  |  |  |
|--------|---|----|----|----|--|--|--|--|--|
| CORD1S | 3 | 16 | 32 | 19 |  |  |  |  |  |
|--------|---|----|----|----|--|--|--|--|--|

**Fields:**

| Field      | Contents                                                                              |
|------------|---------------------------------------------------------------------------------------|
| CIDA, CIDB | Coordinate system identification numbers. (Integer > 0)                               |
| GiA, GiB   | Grid point identification numbers. (Integer > 0; G1A ≠ G2A ≠ G3A and G1B ≠ G2B ≠ G3B) |

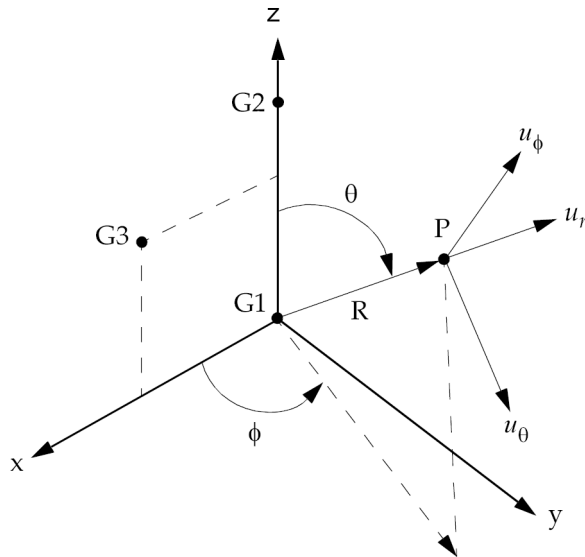

**Figure 13-4. CORD1S Definition**

## 1198 CORD1S

### Spherical Coordinate System Definition, Form 1

#### Remarks:

1. Coordinate system identification numbers on all CORD1R, CORD1C, CORD1S, CORD2R, CORD2C, CORD2S and CORD3G entries must be unique.
2. One or two coordinate systems may be defined on a single entry.
3. GiA and GiB must be defined in coordinate systems with a definition that does not involve the coordinate system being defined. The first point is the origin, the second lies on the z-axis, and the third lies in the plane of the azimuthal origin. The three grid points GiA (or GiB) must be noncolinear and not coincident.
4. The location of a grid point (P in [Figure 13-4](#)) in this coordinate system is given by  $(R, q, f)$  where  $q$  and  $f$  are measured in degrees.
5. The displacement coordinate directions at P are dependent on the location of P as shown above by  $(u_r, u_q, u_f)$ .
6. It is recommended that points on the z-axis not have their displacement directions defined in this coordinate system. See the discussion of spherical coordinate systems in “Overview of Coordinate Systems in NX Nastran” in the *NX Nastran User's Guide*.

**CORD2C** Cylindrical Coordinate System Definition, Form 2

Defines a cylindrical coordinate system using the coordinates of three points.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|----|----|----|----|----|----|----|
| CORD2C | CID | RID | A1 | A2 | A3 | B1 | B2 | B3 |    |
|        | C1  | C2  | C3 |    |    |    |    |    |    |


**Example:**

|        |     |     |      |     |     |     |     |     |  |
|--------|-----|-----|------|-----|-----|-----|-----|-----|--|
| CORD2C | 3   | 17  | -2.9 | 1.0 | 0.0 | 3.6 | 0.0 | 1.0 |  |
|        | 5.2 | 1.0 | -2.9 |     |     |     |     |     |  |

**Fields:**

| Field      | Contents                                                                                                                                                           |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CID        | Coordinate system identification number. (Integer > 0)                                                                                                             |
| RID        | Identification number of a coordinate system that is defined independently from this coordinate system. (Integer ≥ 0; Default = 0 is the basic coordinate system.) |
| Ai, Bi, Ci | Coordinates of three points in coordinate system defined in field 3. (Real)                                                                                        |

**1200 CORD2C**  
**Cylindrical Coordinate System Definition, Form 2**

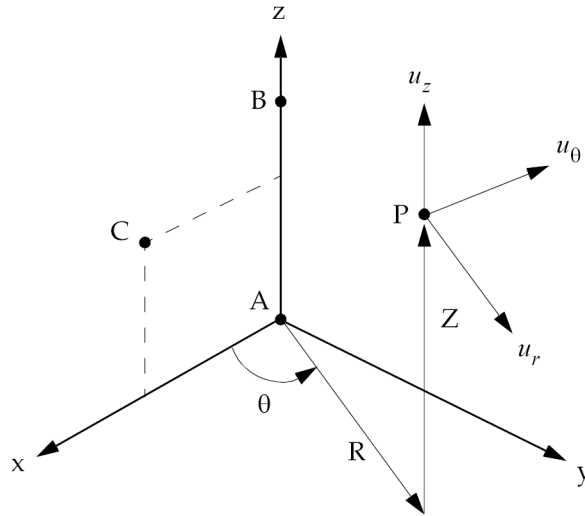

**Figure 13-5. CORD2C Definition**

**Remarks:**

1. Coordinate system identification numbers on all CORD1R, CORD1C, CORD1S, CORD2R, CORD2C, CORD2S and CORD3G entries must be unique.
2. The three points [(A1, A2, A3), (B1, B2, B3), (C1, C2, C3)] must be unique and noncolinear. Non-colinearity is checked by the geometry processor. The first point defines the origin. The second point defines the direction of the z-axis. The third lies in the plane of the azimuthal origin. The reference coordinate system must be independently defined.
3. The continuation entry is required.
4. If RID is zero or blank, the basic coordinate system is used.
5. The location of a grid point (P in [Figure 13-5](#)) in this coordinate system is given by (R, q, Z), where q is measured in degrees.
6. The displacement coordinate directions at P are dependent on the location of P as shown above by  $u_r, u_q, u_z$ .
7. It is recommended that points on the z-axis not have their displacement directions defined in this coordinate system. See the discussion of cylindrical coordinate systems in “Overview of Coordinate Systems in NX Nastran” in the *NX Nastran User’s Guide*.



8. If any CORD2C, CORD2R, or CORD2S entry is changed or added on restart, then a complete re-analysis is performed. Therefore, CORD2C, CORD2R, or CORD2S changes or additions are not recommended on restart.

**1202 CORD2R**  
**Rectangular Coordinate System Definition, Form 2**

**CORD2R**      Rectangular Coordinate System Definition, Form 2

Defines a rectangular coordinate system using the coordinates of three points.

**Format:**


| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|----|----|----|----|----|----|----|
| CORD2R | CID | RID | A1 | A2 | A3 | B1 | B2 | B3 |    |
|        | C1  | C2  | C3 |    |    |    |    |    |    |

**Example:**

|        |     |     |      |     |     |     |     |     |  |
|--------|-----|-----|------|-----|-----|-----|-----|-----|--|
| CORD2R | 3   | 17  | -2.9 | 1.0 | 0.0 | 3.6 | 0.0 | 1.0 |  |
|        | 5.2 | 1.0 | -2.9 |     |     |     |     |     |  |

**Fields:**

| Field      | Contents                                                                                                                                                                  |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CID        | Coordinate system identification number. (Integer > 0)                                                                                                                    |
| RID        | Identification number of a coordinate system that is defined independently from this coordinate system. (Integer ≥ 0; Default = 0, which is the basic coordinate system.) |
| Ai, Bi, Ci | Coordinates of three points in coordinate system defined in field 3. (Real)                                                                                               |

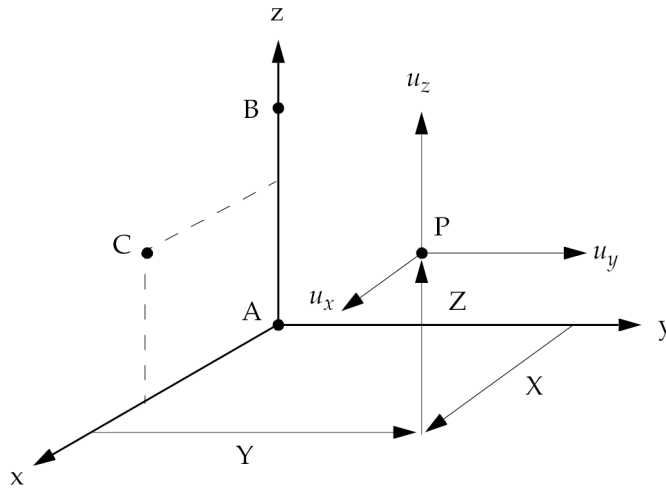

**Figure 13-6. CORD2R Definition**

**Remarks:**

1. Coordinate system identification numbers on all CORD1R, CORD1C, CORD1S, CORD2R, CORD2C, CORD2S, and CORD3G entries must be unique.
2. The three points [(A1, A2, A3), (B1, B2, B3), (C1, C2, C3)] must be unique and noncolinear. Noncolinearity is checked by the geometry processor. The first point defines the origin. The second defines the direction of the z-axis. The third point defines a vector which, with the z-axis, defines the x-z plane. The reference coordinate system must be independently defined.
3. The continuation entry is required.
4. If RID is zero or blank, the basic coordinate system is used.
5. The location of a grid point (P in the [Figure 13-6](#)) in this coordinate system is given by (X, Y, Z).
6. The displacement coordinate directions at P are shown by ( $u_x$ ,  $u_y$ ,  $u_z$ ).
7. If any CORD2C, CORD2R, or CORD2S entry is changed or added on restart, then a complete re-analysis is performed. Therefore, CORD2C, CORD2R, or CORD2S changes or additions are not recommended on restart.

**1204 CORD2S**  
**Spherical Coordinate System Definition, Form 2**

**CORD2S** Spherical Coordinate System Definition, Form 2

Defines a spherical coordinate system using the coordinates of three points.

**Format:**


| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|----|----|----|----|----|----|----|
| CORD2S | CID | RID | A1 | A2 | A3 | B1 | B2 | B3 |    |
|        | C1  | C2  | C3 |    |    |    |    |    |    |

**Example:**

|        |     |     |      |     |     |     |     |     |  |
|--------|-----|-----|------|-----|-----|-----|-----|-----|--|
| CORD2S | 3   | 17  | -2.9 | 1.0 | 0.0 | 3.6 | 0.0 | 1.0 |  |
|        | 5.2 | 1.0 | -2.9 |     |     |     |     |     |  |

**Fields:**

| Field      | Contents                                                                                                                                                           |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CID        | Coordinate system identification number. (Integer > 0)                                                                                                             |
| RID        | Identification number of a coordinate system that is defined independently from this coordinate system. (Integer ≥ 0; Default = 0 is the basic coordinate system.) |
| Ai, Bi, Ci | Coordinates of three points in coordinate system defined in field 3. (Real)                                                                                        |

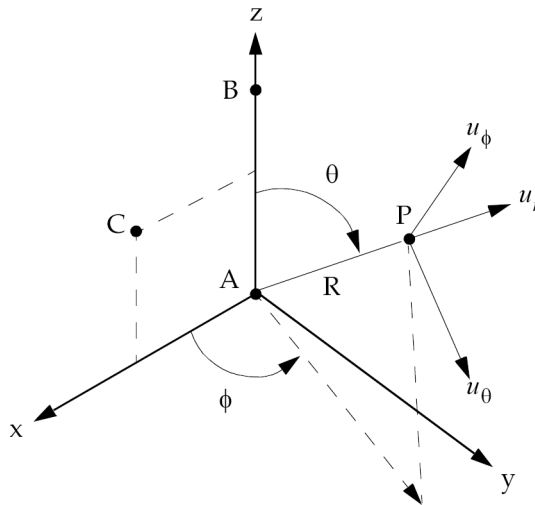

**Figure 13-7. CORD2S Definition**

**Remarks:**

1. Coordinate system identification numbers on all CORD1R, CORD1C, CORD1S, CORD2R, CORD2C, CORD2S, and CORD3G entries must all be unique.
2. The three points [(A1, A2, A3), (B1, B2, B3), (C1, C2, C3)] must be unique and noncolinear. Noncolinearity is checked by the geometry processor. The first point defines the origin. The second point defines the direction of the z-axis. The third lies in the plane of the azimuthal origin. The reference coordinate system must be independently defined.
3. The continuation entry is required.
4. If RID is zero or blank, the basic coordinate system is used.
5. The location of a grid point (P in Figure 13-7) in this coordinate system is given by (R, q, f), where q and f are measured in degrees.
6. The displacement coordinate directions at P are shown above by ( $u_r$ ,  $u_q$ ,  $u_f$ ).
7. It is recommended that points on the z-axis not have their displacement directions defined in this coordinate system. See the discussion of spherical coordinate systems in "Overview of Coordinate Systems in NX Nastran" in the *NX Nastran User's Guide*.
8. If any CORD2C, CORD2R, or CORD2S entry is changed or added on restart, then a complete re-analysis is performed. Therefore, CORD2C, CORD2R, or CORD2S changes or additions are not recommended on restart.

## 1206 CORD3G General Coordinate System

### CORD3G      General Coordinate System

Defines a general coordinate system using three rotational angles as functions of coordinate values in the reference coordinate system. The CORD3G entry is used with the MAT9 entry to orient material principal axes for 3-D composite analysis.

#### Format:

| 1      | 2   | 3      | 4    | 5        | 6        | 7        | 8      | 9 | 10 |
|--------|-----|--------|------|----------|----------|----------|--------|---|----|
| CORD3G | CID | METHOD | FORM | THETAID1 | THETAID2 | THETAID3 | CIDREF |   |    |

#### Example:

|        |     |      |     |     |     |     |   |  |  |
|--------|-----|------|-----|-----|-----|-----|---|--|--|
| CORD3G | 100 | E313 | EQN | 110 | 111 | 112 | 0 |  |  |
|--------|-----|------|-----|-----|-----|-----|---|--|--|

#### Fields:

| Field   | Contents                                                                                                                                                                                                            |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CID     | Coordinate system identification number. See Remark 1 . (Integer > 0)                                                                                                                                               |
| METHOD  | E313 or S321 for Euler angle rotation in 313 sequence or space-fixed rotation in 321 sequence. See Remark 2 . (Character; Default = "E313")                                                                         |
| FORM    | Specifies the Bulk Data entry which defines angles. FORM = "EQN" for DEQATN entry or FORM = "TABLE" for TABLE3D entry. (Character; Default = "EQN")                                                                 |
| THETAID | Identification number for DEQATN or TABLE3D Bulk Data entry which defines the three angles (in radians) measured from reference coordinates to the general material coordinate system. See Remark 3 . (Integer > 0) |
| CIDREF  | Identification number for the coordinate system from which the orientation of the general coordinate system is defined. (Integer > 0)                                                                               |

#### Remarks:

1. CID must be unique with respect to all other coordinate systems. CID cannot be referenced on GRID entries.
2. Three Euler angles specify the rotation of the CORD3G coordinate axes (xyz) with respect to the local Cartesian coordinate axes (XYZ) in CIDREF as follows: first rotate about Z-axis by  $q_1$ , next rotate about rotated x-axis by  $q_2$ , and then

rotate about rotated z-axis by  $q_3$ . On the other hand, the space-fixed rotations in 321 sequence specify all the rotations about the fixed coordinate axes: first rotate about Z by  $q_1$ , next about Y by  $q_2$ , then about X by  $q_3$ .

3. The three rotations define a coordinate transformation which transforms position vectors in the reference coordinate system into the general coordinate system.

**1208 CPENTA**  
**Five-Sided Solid Element Connection**

**CPENTA**      Five-Sided Solid Element Connection

Defines the connections of a five-sided solid element with six to fifteen grid points.

**Format:**

| 1      | 2   | 3   | 4  | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|-----|-----|----|-----|-----|-----|-----|-----|----|
| CPENTA | EID | PID | G1 | G2  | G3  | G4  | G5  | G6  |    |
|        | G7  | G8  | G9 | G10 | G11 | G12 | G13 | G14 |    |
|        | G15 |     |    |     |     |     |     |     |    |


**Example:**

|        |     |    |   |    |    |   |     |     |  |
|--------|-----|----|---|----|----|---|-----|-----|--|
| CPENTA | 112 | 2  | 3 | 15 | 14 | 4 | 103 | 115 |  |
|        | 5   | 16 | 8 |    |    |   | 120 | 125 |  |
|        | 130 |    |   |    |    |   |     |     |  |

**Fields:**

| Field | Contents                                                     | Type                 | Default  |
|-------|--------------------------------------------------------------|----------------------|----------|
| EID   | Element identification number.                               | Integer > 0          | Required |
| PID   | Property identification number of a PSOLID or PLSOLID entry. | Integer > 0          | Required |
| Gi    | Identification numbers of connected grid points.             | Integer ≥ 0 or blank | Required |



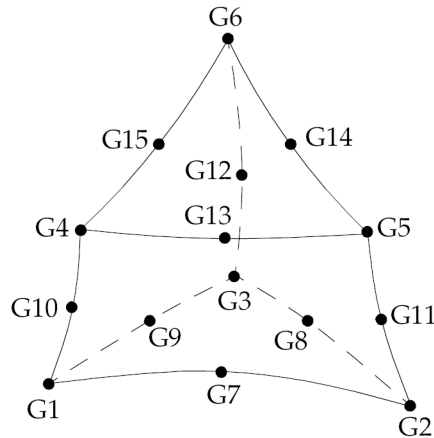


**Figure 13-8. CPENTA Element Connection**

**Remarks:**

1. Element ID numbers must be unique with respect to all other element ID numbers.
2. The topology of the diagram must be preserved; i.e., G1, G2, and G3 define a triangular face, G1, G10, and G4 are on the same edge, etc.
3. The edge grid points, G7 to G15, are optional. Any or all of them may be deleted. In the example shown, G10, G11, and G12 have been deleted. The continuations are not required if all edge grid points are deleted.
4. Components of stress are output in the material coordinate system. See remark 6 on the PSOLID bulk entry for hyperelastic and nonlinear exceptions.
5. For nonhyperelastic elements the element coordinate system for the CPENTA element is derived accordingly. The origin of the coordinate system is located at the midpoint of the straight line connecting the points G1 and G4. The Z axis points toward the triangle G4-G5-G6 and is oriented somewhere between the line joining the centroids of the triangular faces and a line perpendicular to the midplane. The midplane contains the midpoints of the straight lines between the triangular faces. The X and Y axes are perpendicular to the Z axis and point in a direction toward, but not necessarily intersecting, the edges G2 through G5 and G3 through G6, respectively.

**1210 CPENTA**  
**Five-Sided Solid Element Connection**

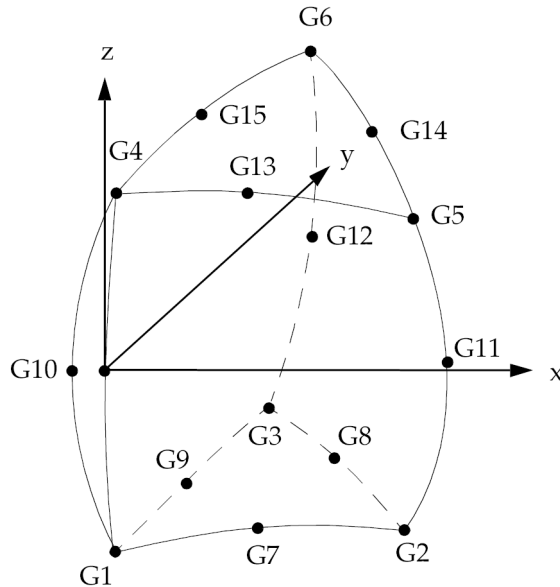

**Figure 13-9. CPENTA Element Coordinate System**

6. It is recommended that the edge grid points be located within the middle third of the edge.
7. For hyperelastic elements, the plot codes are specified under the CPENTAFD element name in “[Item Codes](#)” .
8. If a CPENTA element is referenced on a PSET or PVAL entry, then a p-version formulation is used and the element can have curved edges.
  - If a curved edge of a p-element is shared by an h-element without midside nodes, the geometry of the edge is ignored and set straight.
  - Elements with midside nodes cannot be p-elements and edges with midside nodes cannot be shared by p-elements.
9. By default, all of the nine edges of the element are considered straight unless:
  - For p-elements there is an FEEDGE or FEFACE entry that contains the two grids of any edge of this element. In this case, the geometry of the edge is used in the element.
  - For h-elements any of G7 through G15 are specified.

**Remarks related to SOLs 601 and 701:**

1. For SOL 601, only elements with 6 or 15 grid points are allowed, i.e., either all edge points G7 to G15 are specified or no edge points are specified. For SOL 701, only elements with 6 grid points are allowed.
2. For SOL 601, when ELCV=1 is specified in NXSTRAT (see Remark 2 (SOL 601) in the CHEXA entry), 15-node CPENTA elements will be converted to 21-node elements (5 additional nodes on the centroid of the five faces and 1 additional node at the centroid of the element).

**1212 CPLSTN3**  
**Plane Strain Triangular Element Connection (SOL 601 only)**

**CPLSTN3** Plane Strain Triangular Element Connection (SOL 601 only)

Defines a plane strain triangular element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6  | 7     | 8 | 9 | 10 |
|---------|-----|-----|----|----|----|-------|---|---|----|
| CPLSTN3 | EID | PID | G1 | G2 | G3 | THETA |   |   |    |

**Example:**

|         |     |     |    |    |    |      |  |  |  |
|---------|-----|-----|----|----|----|------|--|--|--|
| CPLSTN3 | 111 | 203 | 31 | 74 | 75 | 30.0 |  |  |  |
|---------|-----|-----|----|----|----|------|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer>0; Default = EID).                                                                                                                                                                                                  |
| Gi    | Grid point identification numbers of connection points. (Unique integers>0)                                                                                                                                                                                                               |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.

4. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1214 CPLSTN4**  
**Plane Strain Quadrilateral Element Connection (SOL 601 only)**

**CPLSTN4** Plane Strain Quadrilateral Element Connection (SOL 601 only)

Defines a plane strain quadrilateral element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6  | 7  | 8     | 9 | 10 |
|---------|-----|-----|----|----|----|----|-------|---|----|
| CPLSTN4 | EID | PID | G1 | G2 | G3 | G4 | THETA |   |    |

**Example:**

|         |     |     |    |    |    |    |      |  |  |
|---------|-----|-----|----|----|----|----|------|--|--|
| CPLSTN3 | 111 | 203 | 31 | 74 | 75 | 32 | 15.0 |  |  |
|---------|-----|-----|----|----|----|----|------|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer>0; Default = EID).                                                                                                                                                                                                  |
| Gi    | Grid point identification numbers of connection points. (Unique integers>0)                                                                                                                                                                                                               |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. Grid points G1 through G4 must be ordered consecutively around the perimeter of the element.
4. All interior angles must be less than 180°.
5. Incompatible modes are used for this element. Incompatible modes may be turned off by specifying ICMODE=0 in the NXSTRAT entry.

**CPLSTN4 1215**

**Plane Strain Quadrilateral Element Connection (SOL 601 only)**

6. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.
7. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1216 CPLSTN6**  
**Plane Strain Triangular Element Connection (SOL 601 only)**

**CPLSTN6** Plane Strain Triangular Element Connection (SOL 601 only)

Defines a plane strain triangular element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2     | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|-------|-----|----|----|----|----|----|----|----|
| CPLSTN6 | EID   | PID | G1 | G2 | G3 | G4 | G5 | G6 |    |
|         | THETA |     |    |    |    |    |    |    |    |

**Example:**

|         |     |   |    |    |    |    |    |    |  |
|---------|-----|---|----|----|----|----|----|----|--|
| CPLSTN6 | 302 | 3 | 31 | 33 | 71 | 32 | 51 | 52 |  |
|---------|-----|---|----|----|----|----|----|----|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                                                                                                                                                              |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer > 0; Default = EID).                                                                                                                                                                                                |
| Gi    | Grid point identification number of connected points. G1, G2, G3 are the corner grid points and G2, G4, G6 are the midside grid points. (Unique integers > 0)                                                                                                                             |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. Grid points G1 through G6 must be numbered as shown in CTRIA6.
4. 6-node triangular elements may be converted to 7-node triangular elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry.



5. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.
6. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1218 CPLSTN8**  
**Plane Strain Quadrilateral Element Connection (SOL 601 only)**

**CPLSTN8** Plane Strain Quadrilateral Element Connection (SOL 601 only)

Defines a plane strain quadrilateral element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2   | 3   | 4     | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|-----|-----|-------|----|----|----|----|----|----|
| CPLSTN8 | EID | PID | G1    | G2 | G3 | G4 | G5 | G6 |    |
|         | G7  | G8  | THETA |    |    |    |    |    |    |

**Example:**

|         |     |    |      |    |    |    |    |    |  |
|---------|-----|----|------|----|----|----|----|----|--|
| CPLSTN3 | 207 | 3  | 31   | 33 | 73 | 71 | 32 | 51 |  |
|         | 53  | 72 | 45.0 |    |    |    |    |    |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer>0; Default = EID).                                                                                                                                                                                                  |
| Gi    | Grid point identification number of connected points. G1 to G4 are the corner grid points and G5 to G8 are the midside grid points. (Unique integers > 0)                                                                                                                                 |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. Grid points G1 through G8 must be numbered as shown in CQUAD8.
4. 8-node elements may be converted to 9-node elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry. The

**CPLSTN8 1219**

**Plane Strain Quadrilateral Element Connection (SOL 601 only)**

9-node plane strain element is more effective in the analysis of incompressible media and inelastic materials, e.g., rubber-like materials, elasto-plastic materials, and materials with Poisson's ratio close to 0.5.

5. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.
6. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1220 CPLSTS3**  
**Plane Stress Triangular Element Connection (SOL 601 only)**

**CPLSTS3** Plane Stress Triangular Element Connection (SOL 601 only)

Defines a plane stress triangular element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2   | 3   | 4  | 5     | 6  | 7  | 8     | 9 | 10 |
|---------|-----|-----|----|-------|----|----|-------|---|----|
| CPLSTS3 | EID | PID | G1 | G2    | G3 |    | THETA |   |    |
|         |     |     |    | TFLAG | T1 | T2 | T3    |   |    |

**Example:**

|         |     |     |    |    |     |     |      |  |  |
|---------|-----|-----|----|----|-----|-----|------|--|--|
| CPLSTN3 | 111 | 203 | 31 | 74 | 75  |     | 30.0 |  |  |
|         |     |     |    | 1  | 1.2 | 1.2 | 1.2  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer>0; Default = EID).                                                                                                                                                                                                  |
| Gi    | Grid point identification numbers of connection points. (Unique integers>0)                                                                                                                                                                                                               |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |
| TFLAG | Integer flag which specifies how Ti is used to define element thickness. (0, 1, or blank)                                                                                                                                                                                                 |
| Ti    | When TFLAG = 0 or blank, Ti overrides T on the PPLANE/PLPLANE if > 0.0; When TFLAG = 1, Ti is a multiplier on T from the PPLANE/PLPLANE if > 0.0. (Real > 0.0 or blank)                                                                                                                   |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.

2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. T1, T2, and T3 are optional. If Ti is blank, then it will be set equal to the value of T on the PPLANE or PLPLANE entry. If specified, Ti must be all equal, i.e., only constant thickness element is supported.
4. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.
5. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1222 CPLSTS4**  
**Plane Stress Quadrilateral Element Connection (SOL 601 only)**

**CPLSTS4** Plane Stress Quadrilateral Element Connection (SOL 601 only)

Defines a plane stress quadrilateral element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2   | 3   | 4  | 5     | 6  | 7  | 8     | 9  | 10 |
|---------|-----|-----|----|-------|----|----|-------|----|----|
| CPLSTS4 | EID | PID | G1 | G2    | G3 | G4 | THETA |    |    |
|         |     |     |    | TFLAG | T1 | T2 | T3    | T4 |    |

**Example:**

|         |     |     |    |    |     |     |      |     |  |
|---------|-----|-----|----|----|-----|-----|------|-----|--|
| CPLSTS4 | 111 | 203 | 31 | 74 | 75  | 32  | 30.0 |     |  |
|         |     |     |    |    | 0.8 | 0.8 | 0.8  | 0.8 |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer>0; Default = EID).                                                                                                                                                                                                  |
| Gi    | Grid point identification numbers of connection points. (Unique integers>0)                                                                                                                                                                                                               |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |
| TFLAG | Integer flag which specifies how Ti is used to define element thickness. (0, 1, or blank)                                                                                                                                                                                                 |
| Ti    | When TFLAG = 0 or blank, Ti overrides T on the PPLANE/PLPLANE if > 0.0; When TFLAG = 1, Ti is a multiplier on T from the PPLANE/PLPLANE if > 0.0. (Real > 0.0 or blank)                                                                                                                   |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.

2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. T1, T2, T3 and T4 are optional. If Ti is blank, then it will be set equal to the value of T on the PPLANE or PLPLANE entry. If specified, Ti must be all equal, i.e., only constant thickness element is supported.
4. Incompatible modes are used for this element. Incompatible modes may be turned off by specifying ICMODE=0 in the NXSTRAT entry.
5. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.
6. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1224 CPLSTS6**  
**Plane Stress Triangular Element Connection (SOL 601 only)**

**CPLSTS6** Plane Stress Triangular Element Connection (SOL 601 only)

Defines a plane stress triangular element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2   | 3   | 4     | 5     | 6  | 7  | 8  | 9  | 10 |
|---------|-----|-----|-------|-------|----|----|----|----|----|
| CPLSTN6 | EID | PID | G1    | G2    | G3 | G4 | G5 | G6 |    |
|         |     |     | THETA | TFLAG | T1 | T2 | T3 |    |    |

**Example:**

|         |     |   |      |    |     |     |     |    |  |
|---------|-----|---|------|----|-----|-----|-----|----|--|
| CPLSTN6 | 302 | 3 | 31   | 33 | 71  | 32  | 51  | 52 |  |
|         |     |   | 25.0 | 1  | 0.2 | 0.2 | 0.2 |    |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer>0; Default = EID).                                                                                                                                                                                                  |
| Gi    | Grid point identification number of connected points. (Unique integers>0)                                                                                                                                                                                                                 |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |
| TFLAG | Integer flag which specifies how Ti is used to define element thickness. (0, 1, or blank)                                                                                                                                                                                                 |
| Ti    | When TFLAG = 0 or blank, Ti overrides T on the PPLANE/PLPLANE if > 0.0; When TFLAG = 1, Ti is a multiplier on T from the PPLANE/PLPLANE if > 0.0. (Real > 0.0 or blank)                                                                                                                   |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.



**CPLSTS6 1225**

**Plane Stress Triangular Element Connection (SOL 601 only)**

2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. T1, T2, and T3 are optional. If Ti is blank, then it will be set equal to the value of T on the PPLANE or PLPLANE entry. If specified, Ti must be all equal, i.e., only constant thickness element is supported.
4. Grid points G1 through G6 must be numbered as shown in CTRIA6.
5. 6-node triangular elements may be converted to 7-node triangular elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry.
6. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.
7. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1226 CPLSTS8**  
**Plane Stress Quadrilateral Element Connection (SOL 601 only)**

**CPLSTS8** Plane Stress Quadrilateral Element Connection (SOL 601 only)

Defines a plane stress quadrilateral element for use in linear or nonlinear analysis.

**Format:**

| 1       | 2   | 3   | 4     | 5     | 6  | 7  | 8  | 9  | 10 |
|---------|-----|-----|-------|-------|----|----|----|----|----|
| CPLSTS8 | EID | PID | G1    | G2    | G3 | G4 | G5 | G6 |    |
|         | G7  | G8  | THETA | TFLAG | T1 | T2 | T3 | T4 |    |

**Example:**

|         |     |    |      |    |     |     |     |     |  |
|---------|-----|----|------|----|-----|-----|-----|-----|--|
| CPLSTS8 | 207 | 3  | 31   | 33 | 73  | 71  | 32  | 51  |  |
|         | 53  | 72 | 70.0 | 1  | 0.5 | 0.5 | 0.5 | 0.5 |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PPLANE or PLPLANE entry. (Integer>0; Default = EID).                                                                                                                                                                                                  |
| Gi    | Grid point identification number of connected points. (Unique integers>0)                                                                                                                                                                                                                 |
| THETA | Material property orientation angle in degrees. It is the angle between x-direction of the material coordinate system and x-direction of the element coordinate system (also x-direction of the basic coordinate system). THETA is ignored for hyperelastic elements. (Real; Default=0.0) |
| TFLAG | Integer flag which specifies how Ti is used to define element thickness. (0, 1, or blank)                                                                                                                                                                                                 |
| Ti    | When TFLAG = 0 or blank, Ti overrides T on the PPLANE/PLPLANE if > 0.0; When TFLAG = 1, Ti is a multiplier on T from the PPLANE/PLPLANE if > 0.0. (Real > 0.0 or blank)                                                                                                                   |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.

**CPLSTS8 1227**

**Plane Stress Quadrilateral Element Connection (SOL 601 only)**

2. The grid points must lie in the X-Z plane of the basic coordinate system.
3. Grid points G1 through G8 must be numbered as shown in CQUAD8.
4. T1, T2, T3 and T4 are optional. If Ti is blank, then it will be set equal to the value of T on the PPLANE or PLPLANE entry. If specified, Ti must be all equal, i.e., only constant thickness element is supported.
5. 8-node elements may be converted to 9-node elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry.
6. The reference coordinate system for the output of linear stress/strain is the material coordinate system when MAT8 is assigned to the element; otherwise it is the basic coordinate system. The reference coordinate system for the output of nonlinear stress/strain is the element coordinate system (which is the same as the basic coordinate system). The reference coordinate system for the output of hyperelastic stress/strain and element force is basic coordinate system.
7. For geometric nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.


**1228 CPYRAM**  
**Five-Sided Solid Element Connection**

**CPYRAM**      Five-Sided Solid Element Connection

Defines the connection of the five-sided solid element with five to thirteen grid points.

**Format:**

| 1      | 2   | 3   | 4  | 5   | 6   | 7   | 8   | 9  | 10 |
|--------|-----|-----|----|-----|-----|-----|-----|----|----|
| CPYRAM | EID | PID | G1 | G2  | G3  | G4  | G5  | G6 |    |
|        | G7  | G8  | G9 | G10 | G11 | G12 | G13 |    |    |

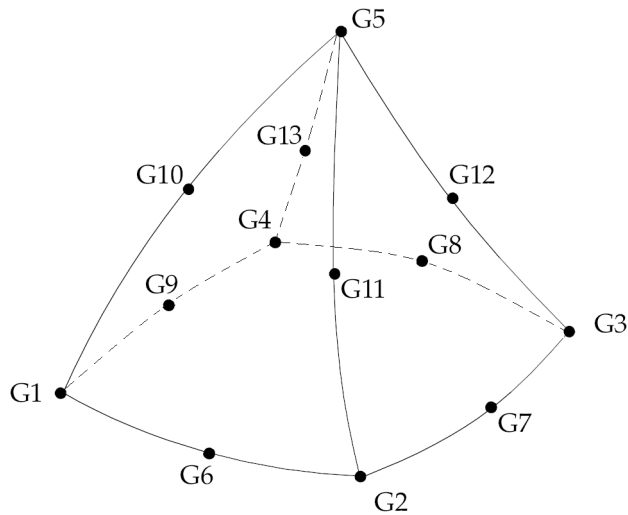

**Figure 13-10. CPYRAM Element Connection**

**Example:**

|        |     |     |    |    |    |    |    |    |  |
|--------|-----|-----|----|----|----|----|----|----|--|
| CPYRAM | 111 | 203 | 31 | 32 | 33 | 34 | 35 | 36 |  |
|        | 37  | 38  | 39 | 40 | 41 | 42 | 43 |    |  |

**Fields:**

| Field | Contents                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                           |
| PID   | Property identification number of a PSOLID or PLSOLID (SOL 601 only) entry. (Integer > 0; Default=EID) |

| <b>Field</b> | <b>Contents</b>                                                              |
|--------------|------------------------------------------------------------------------------|
| Gi           | Grid point identification numbers of connected points. (Unique integers > 0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Grid points G1 through G4 must be given in consecutive order about one quadrilateral face. The other four faces are triangles. G5 is the vertex and must be opposite with the quadrilateral face.
3. The edge points G6 to G13 are optional. Any or all of them may be deleted. If the ID of any edge connection point is left blank or set to zero, the equations of the element are adjusted to give correct results for the reduced number of connections. Corner grid points cannot be deleted. The element is an isoparametric element in all cases.
4. Components of stress are output in the material coordinate system.
5. The CPYRAM element coordinate system is the same as the basic coordinate system.
6. It is recommended that the edge grids be located within the middle third of the edge.
7. Only h-version formulation is available; p-version formulation is not supported.
8. The CPYRAM element does not support material nonlinear (including hyperelastic) with solutions 106 and 129. Only geometric nonlinear is supported with SOL 106 and 129.
9. By default, all eight edges of the element are considered straight unless any of G6 through G13 is specified.

**Remarks related to SOLs 601 and 701:**

1. For SOL 701, only elements with 5 grid points are allowed.
2. For SOL 601, when ELCV=1 is specified in NXSTRAT (see SOL 601 Remark 2 on CHEXA entry), 13-node CPYRAM elements will be converted to 14-node pyramid elements (1 additional node on the centroid of the quadrilateral face of the element).

**1230 CPYRAM**  
**Five-Sided Solid Element Connection**

3. For SOL 601, contact surfaces do not support element faces which are missing midside nodes on variable node CPYRAM and CTETRA elements.

**CQUAD** Fully Nonlinear Plane Strain Element

Defines a plane strain quadrilateral element with up to nine grid points for use in fully nonlinear (i.e., large strain and large rotation) hyperelastic analysis.

**Format:**

| 1     | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|-------|-----|-----|----|----|----|----|----|----|----|
| CQUAD | EID | PID | G1 | G2 | G3 | G4 | G5 | G6 |    |
|       | G7  | G8  | G9 |    |    |    |    |    |    |

**Example:**

|       |     |     |    |    |    |    |  |  |  |
|-------|-----|-----|----|----|----|----|--|--|--|
| CQUAD | 111 | 203 | 31 | 74 | 75 | 32 |  |  |  |
|-------|-----|-----|----|----|----|----|--|--|--|

**Fields:**

| Field             | Contents                                                                                                                    |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------|
| EID               | Element identification number. (Integer > 0)                                                                                |
| PID               | Property identification number of a PLPLANE entry. (Integer > 0)                                                            |
| G1, G2,<br>G3, G4 | Identification numbers of connected corner grid points. Required data for all four grid points. (Unique Integers > 0)       |
| G5, G6,<br>G7, G8 | Identification numbers of connected edge grid points. Optional data for any or all four grid points. (Integer ≥ 0 or blank) |
| G9                | Identification number of center grid point. Optional. (Integer ≥ 0 or blank)                                                |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element IDs of any kind.
2. Grid points G1 to G9 must be numbered as shown and must lie on a plane.
3. It is recommended that the edge points be located within the middle third of the edge.
4. Plot codes are specified under the CQUADFD element name in [“Item Codes”](#) .
5. Stresses and strains are output in the coordinate system identified by the CID field of the PLPLANE entry.

## 1232 CQUAD Fully Nonlinear Plane Strain Element

### Remarks related to SOL 601:

1. Only elements with 4, 8, or 9 grid points are allowed.
2. Stresses and strains are output in the basic coordinate system, i.e., CID field of the PLPLANE entry is assumed to be 0.
3. 8-node elements may be converted to 9-node elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry. The 9-node element is more effective in the analysis of incompressible rubber-like materials.

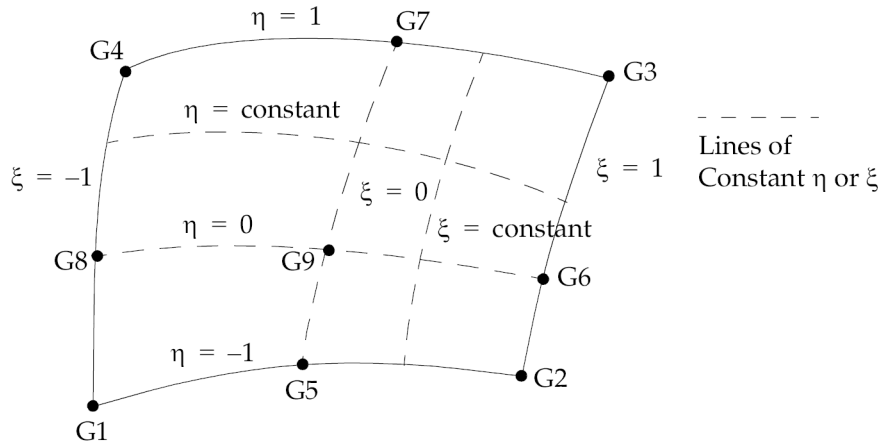


Figure 13-11. CQUAD Element Coordinate System



**CQUAD4**    Quadrilateral Plate Element Connection

Defines an isoparametric membrane-bending or plane strain quadrilateral plate element.

**Format:**

| 1      | 2   | 3     | 4  | 5  | 6  | 7  | 8                | 9     | 10 |
|--------|-----|-------|----|----|----|----|------------------|-------|----|
| CQUAD4 | EID | PID   | G1 | G2 | G3 | G4 | THETA<br>or MCID | ZOFFS |    |
|        |     | TFLAG | T1 | T2 | T3 | T4 |                  |       |    |


**Example:**

|        |     |     |      |      |      |      |     |     |  |
|--------|-----|-----|------|------|------|------|-----|-----|--|
| CQUAD4 | 111 | 203 | 31   | 74   | 75   | 32   | 2.6 | 0.3 |  |
|        |     | 1   | 1.77 | 2.04 | 2.09 | 1.80 |     |     |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                                                                                                    |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PSHELL, PCOMP, or PLPLANE entry. (Integer > 0; Default = EID)                                                                                                                                                                                                                                                                           |
| Gi    | Grid point identification numbers of connection points. (Integers > 0, all unique.)                                                                                                                                                                                                                                                                                         |
| THETA | Material property orientation angle in degrees. THETA is ignored for hyperelastic elements. See <a href="#">Figure 13-13</a> . (Real; Default = 0.0)                                                                                                                                                                                                                        |
| MCID  | Material coordinate system identification number. The x-axis of the material coordinate system is determined by projecting the x-axis of the MCID coordinate system (defined by the CORDij entry or zero for the basic coordinate system) onto the surface of the element. MCID is ignored for hyperelastic elements. (Integer ≥ 0; If blank, then THETA = 0.0 is assumed.) |


**1234 CQUAD4**  
**Quadrilateral Plate Element Connection**

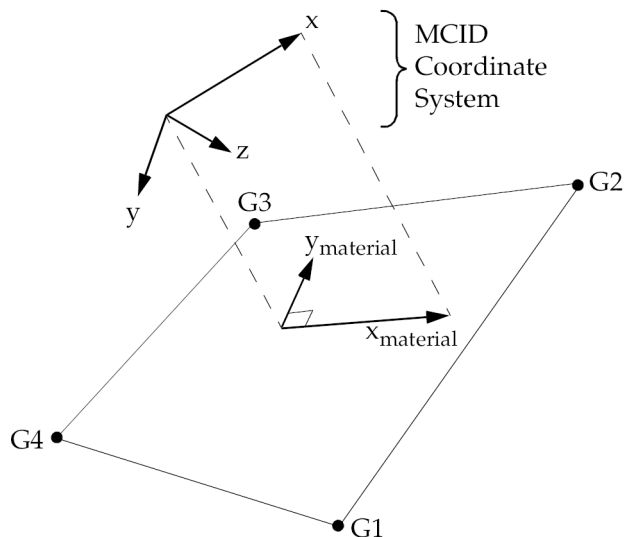

**Figure 13-12. MCID Coordinate System Definition**

- ZOFFS      Offset from the surface of grid points to the element reference plane. ZOFFS is ignored for hyperelastic elements. See Remarks 6 and 7.  
 (Real)
- TFLAG      Integer Flag which specifies how Ti is used to define membrane thickness of element. (0, 1, or blank)
- Ti          Membrane thickness of element at grid points G1 through G4 if TFLAG=0 or blank. If TFLAG=1, membrane thickness becomes a product of Ti and the thickness on the PSHELL card. Ti is ignored for

hyperelastic elements. (Real > 0.0 or blank. See Remark 4 . for the default.)

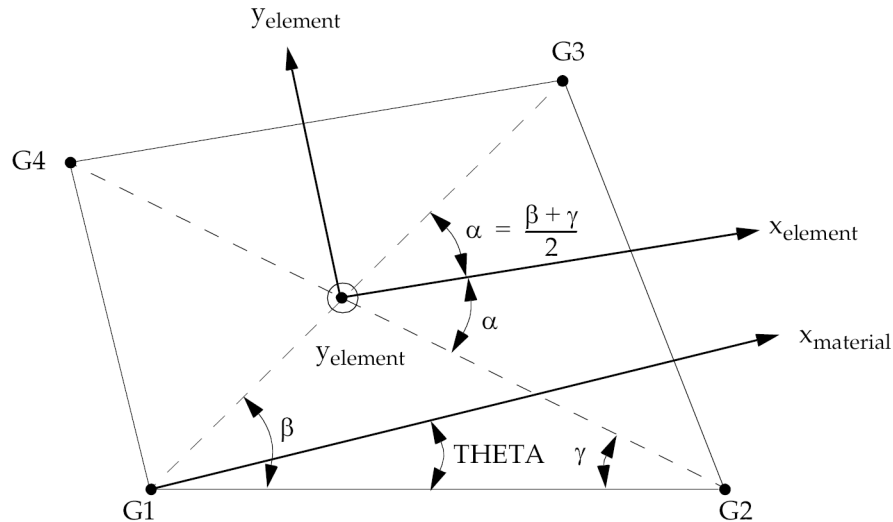

**Figure 13-13. CQUAD4 Element Geometry and Coordinate Systems**

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Grid points G1 through G4 must be ordered consecutively around the perimeter of the element.
3. All interior angles must be less than 180°.
4. The continuation is optional. If it is not supplied, then T1 through T4 will be set equal to the value of T on the PSHELL entry.
5. The reference coordinate system for the output of stress, strain and element force depends on the element type.
  - For CQUAD4 elements which are not p-elements and not hyperelastic, the reference coordinate system for output is the element coordinate system. For SOL 106 geometry nonlinear analysis, the nonlinear stresses are output in deformed element coordinate system.
  - For CQUAD4 elements referenced by a PSET or PVAL entry, the stresses, strains and element forces are output in the local tangent plane of the

## 1236 CQUAD4 Quadrilateral Plate Element Connection

element. The local tangents are oriented in a user defined direction which is uniform across a set of elements. By default, the local tangent x-direction is oriented in the positive x-direction of the basic coordinate system. See the Bulk Data entry, “OUTRCV” for user defined output coordinate systems.

- For hyperelastic elements, the stress and strain are output according to CID on the PLPLANE entry.
6. Elements may be offset from the connection points by means of ZOFFS. Other data, such as material matrices and stress fiber locations, are given relative to the reference plane. A positive value of ZOFFS implies that the element reference plane is offset a distance of ZOFFS along the positive z-axis of the element coordinate system. If the ZOFFS field is used, then both the MID1 and the MID2 fields must be specified on the PSHELL entry referenced by PID on the CQUAD4 entry.

ZOFFS should not be used when differential stiffness is calculated in solutions 105 and 200, and solutions 103, 107 - 112 using STATSUB, since the differential stiffness calculation does not include the offset vectors.

7. ZOFFS has the following caveats in nonlinear solutions 106 and 129:
  - For geometry nonlinear only, the differential stiffness calculation does not include the offset vectors. The exclusion of the offset in the differential stiffness will have an adverse effect on convergence, however, if the solution converges, the results will be correct. In a nonlinear solution, equilibrium (and convergence) is achieved when internal and external forces balance. The offset is correctly accounted for in the internal and external force calculations even though it is not accounted for in the differential stiffness.
  - ZOFFS should not be defined on elements which use MATS1 nonlinear material definitions.
  - ZOFFS is ignored for hyperelastic elements.
  - ZOFFS should not be used in nonlinear solutions 106 and 129 in combination with thermal loads.
8. For finite deformation hyperelastic analysis, the plot codes are given by the CQUADFD element name in “Item Codes”.
9. If a CQUAD4 element is referenced by a PSET or PVAL entry, then a p-version formulation is used and the element can have curved edges.
  - If a curved edge of a p-element is shared by an h-element CQUAD4, the geometry of the edge is ignored and set straight.

10. By default, all four edges of the element are considered straight unless the element is a p-element and the edge is associated to curved geometry with a FEEDGE or FEFACE entry.

**Remarks related to SOLs 601 and 701:**

1. ZOFFS is ignored.
2. Incompatible modes are used for this element if it is used as a shell element. Incompatible modes may be turned off by specifying ICMODE=0 in the NXSTRAT entry. For modeling shell elements, CQUAD4 is most effective.
3. Incompatible modes are not used for this element if it used as a plane strain element (SOL 601 only). The use of CQUAD or CQUAD8 to model 9-node or 8-node plane strain elements is recommended.
4. For both linear and nonlinear analysis, stress and strain results at grid points may be requested for single-ply elements by specifying STRESS(CORNER) case control command.
5. For geometry nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1238 CQUAD8**  
**Curved Quadrilateral Shell Element Connection**

**CQUAD8** Curved Quadrilateral Shell Element Connection

Defines a curved quadrilateral shell or plane strain element with eight grid points.

**Format:**

| 1      | 2     | 3   | 4  | 5  | 6  | 7  | 8                | 9     | 10 |
|--------|-------|-----|----|----|----|----|------------------|-------|----|
| CQUAD8 | EID   | PID | G1 | G2 | G3 | G4 | G5               | G6    |    |
|        | G7    | G8  | T1 | T2 | T3 | T4 | THETA<br>or MCID | ZOFFS |    |
|        | TFLAG |     |    |    |    |    |                  |       |    |

**Example:**

|        |     |    |       |       |       |      |     |     |  |
|--------|-----|----|-------|-------|-------|------|-----|-----|--|
| CQUAD8 | 207 | 3  | 31    | 33    | 73    | 71   | 32  | 51  |  |
|        | 53  | 72 | 0.125 | 0.025 | 0.030 | .025 | 30. | .03 |  |

**Fields:**

| Field             | Contents                                                                                                                                                                                                                                                                   |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID               | Element identification number. (Integer > 0)                                                                                                                                                                                                                               |
| PID               | Property identification number of a PSHELL, PCOMP, or PLPLANE entry. (Integer > 0)                                                                                                                                                                                         |
| G1, G2,<br>G3, G4 | Identification numbers of connected corner grid points. Required data for all four grid points. (Unique Integers > 0)                                                                                                                                                      |
| G5, G6,<br>G7, G8 | Identification numbers of connected edge grid points. Optional data for any or all four grid points. (Integer ≥ 0 or blank)                                                                                                                                                |
| Ti                | Membrane thickness of element at grid points G1 through G4 if TFLAG=0 or blank. If TFLAG=1, membrane thickness becomes a product of Ti and the thickness on the PSHELL card. Ti is ignored for hyperelastic elements. (Real > 0.0 or blank. See Remark 4 for the default.) |
| THETA             | Material property orientation angle in degrees. See <a href="#">Figure 13-14</a> . THETA is ignored for hyperelastic elements. (Real; Default = 0.0)                                                                                                                       |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MCID         | Material coordinate system identification number. The x-axis of the material coordinate system is determined by projecting the x-axis of the MCID coordinate system (defined by the CORDij entry or zero for the basic coordinate system) onto the surface of the element (see Remark 3). MCID is ignored for hyperelastic elements. (Integer $\geq 0$ ; If blank, then THETA = 0.0 is assumed.) |
| ZOFFS        | Offset from the surface of grid points to the element reference plane. See Remark 6. ZOFFS is ignored for hyperelastic elements. (Real)                                                                                                                                                                                                                                                          |
| TFLAG        | Integer Flag which specifies how Ti is used to define membrane thickness of element. (0, 1, or blank)                                                                                                                                                                                                                                                                                            |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element IDs of any kind.
2. Grid points G1 to G8 must be numbered as shown in [Figure 13-14](#).
3. The orientation of the material property coordinate system is defined locally at each interior integration point by THETA, which is the angle between  $x_{\text{material}}$  and the line of constant xi. THETA is calculated by projecting the x-axis of the MCID coordinate system onto the surface of the element. Since the shape of a CQUAD8 can vary from one integration point to the next, the direction of xi can also vary, causing the resulting material coordinate definition to vary. When using orthotropic or anisotropic materials which depend on consistent material coordinate directions, it is recommended to use the QUAD4 element.
4. T1, T2, T3 and T4 are optional. If they are not supplied, they will be set equal to the value of T on the PSHELL entry.
5. It is recommended that the midside grid points be located within the middle third of the edge. If the edge point is located at the quarter point, the program may fail with a divide-by-zero error, or the calculated stresses will be meaningless.
6. Elements may be offset from the connection points by means of the ZOFFS field. Other data, such as material matrices and stress fiber locations, are given relative to the reference plane. A positive value of ZOFFS implies that the element reference plane is offset a distance of ZOFFS along the positive z-axis of the element coordinate system. If the ZOFFS field is used, then both the MID1 and MID2 fields must be specified on the PSHELL entry referenced by PID.

## 1240 CQUAD8 Curved Quadrilateral Shell Element Connection



The specification of offset vectors gives erroneous results in solution sequences with linear buckling analysis, SOLs 105 and 200.

7. If all midside grid points are deleted, then the element will be excessively stiff and the transverse shear forces incorrect. A User Warning Message is printed, and a CQUAD4 element is recommended instead. If the element is hyperelastic, then it is processed identically to the hyperelastic CQUAD4 element.
8. For a description of the element coordinate system, see “Plate and Shell Elements” in the *NX Nastran Element Library*. Stresses and strains are output in the local coordinate system identified by  $x_l$  and  $y_l$  in [Figure 13-14](#). However, for hyperelastic elements, the stress and strain are output in the coordinate system identified by the CID field on the PLPLANE entry.
9. For hyperelastic elements the plot codes are specified under the CQUADFD element name in “[Item Codes](#)”.

### Remarks related to SOL 601:

1. Only elements with 4 or 8 grid points are allowed, i.e., either G5 to G8 are all specified or none are specified.
2. ZOFFS is ignored.
3. 8-node elements may be converted to 9-node elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry. As a plane strain element, the 9-node element is more effective in the analysis of incompressible media and inelastic materials, e.g., rubber-like materials, elasto-plastic materials, and materials with Poisson’s ratio close to 0.5. As a shell element, the 9-node element is also more effective than the 8-node shell, e.g., support of large strain.
4. In a nonlinear analysis, both linear and nonlinear stress/strain data blocks are output for CQUAD8 elements in the op2 file. Note that in a future release, the output of linear stress/strain data blocks for CQUAD8 elements may be discontinued for a nonlinear analysis.
5. For geometry nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.



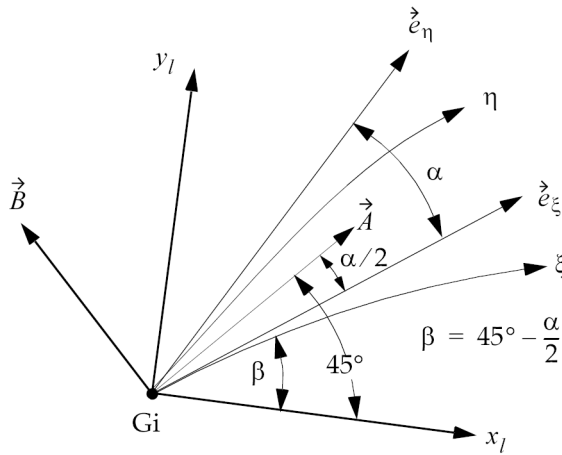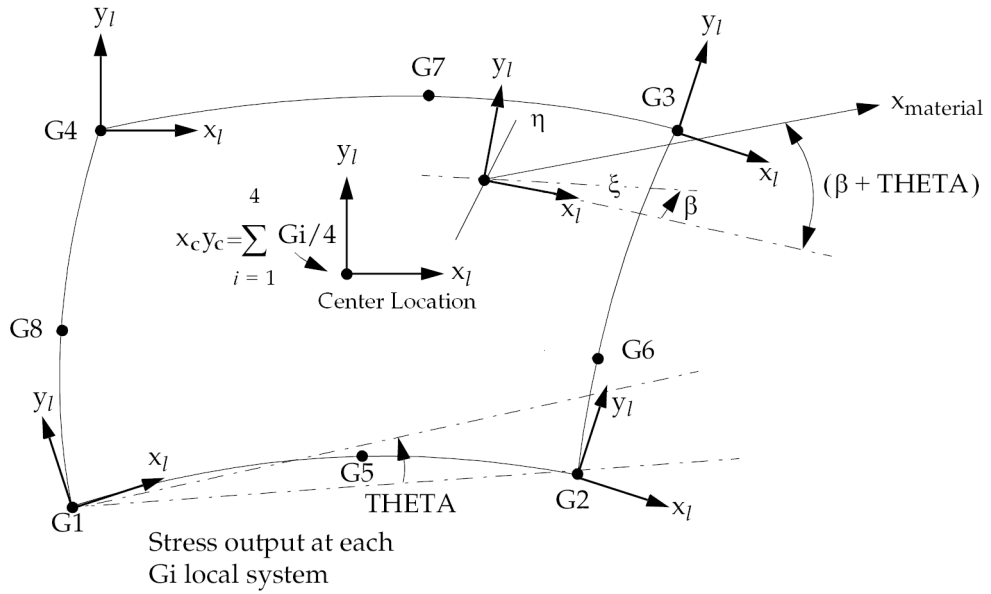

**Figure 13-14. CQUAD8 Element Geometry and Coordinate Systems**

where

$\vec{e}_\eta$  is tangent to  $h$  at  $G_i$

**1242 CQUAD8**  
**Curved Quadrilateral Shell Element Connection**

$\vec{e}_\xi$  is tangent to x at Gi

$\vec{A}$  is formed by bisection of  $\vec{e}_\eta$  and  $\vec{e}_\xi$

$\vec{B}$  and  $\vec{A}$  are perpendicular

$y_l$  is formed by bisection of  $\vec{A}$  and  $\vec{B}$

$x_l$  is perpendicular to  $y_l$

**CQUADR**      Quadrilateral Plate Element Connection

Defines an isoparametric membrane and bending quadrilateral plate element. This element is less sensitive to initial distortion and extreme values of Poisson's ratio than the CQUAD4 element. It is a companion to the CTRIAR element.

**Format:**

| 1      | 2   | 3     | 4  | 5  | 6  | 7  | 8                | 9     | 10 |
|--------|-----|-------|----|----|----|----|------------------|-------|----|
| CQUADR | EID | PID   | G1 | G2 | G3 | G4 | THETA<br>or MCID | ZOFFS |    |
|        |     | TFLAG | T1 | T2 | T3 | T4 |                  |       |    |

**Example:**

|        |    |     |      |      |      |      |     |  |  |
|--------|----|-----|------|------|------|------|-----|--|--|
| CQUADR | 82 | 203 | 31   | 74   | 75   | 32   | 2.6 |  |  |
|        |    |     | 1.77 | 2.04 | 2.09 | 1.80 |     |  |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                                                         |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                                                                                                                                                                                                     |
| PID   | Property identification number of a PSHELL or PCOMP entry. (Integer > 0; Default = EID).                                                                                                                                                                                                                                         |
| Gi    | Grid point identification numbers of connection points. (Integers > 0, all unique)                                                                                                                                                                                                                                               |
| THETA | Material property orientation angle in degrees. See <a href="#">Figure 13-16</a> . (Real; Default = 0)                                                                                                                                                                                                                           |
| MCID  | Material coordinate system identification number. The x-axis of the material coordinate system is determined by projecting the x-axis of the MCID coordinate system (defined by the CORDij entry or zero for the basic coordinate system) onto the surface of the element. (Integer ≥ 0; If blank, then THETA = 0.0 is assumed.) |
| ZOFFS | Offset from the surface of grid points to the element reference plane. See Remark 6. (Real)                                                                                                                                                                                                                                      |

1244 CQUADR  
Quadrilateral Plate Element Connection

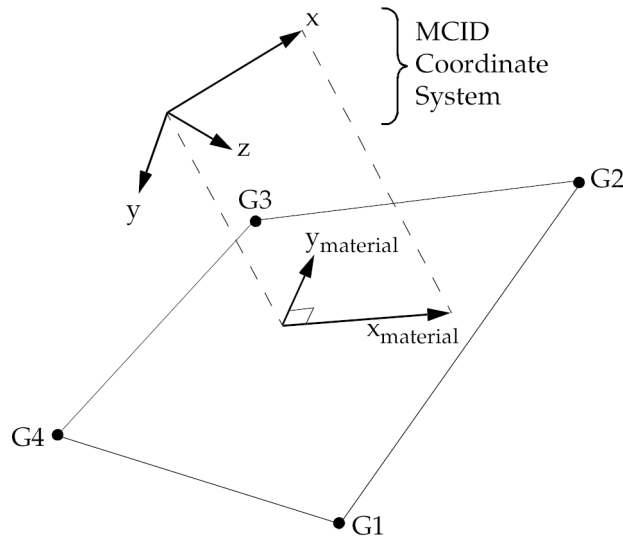


Figure 13-15. MCID Coordinate System Definition


|       |                                                                                                                                                                                                                                                                                   |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TFLAG | Integer Flag which specifies how $T_i$ is used to define membrane thickness of element (0, 1, or blank).                                                                                                                                                                          |
| $T_i$ | Membrane thickness of element at grid points G1 through G4 if TFLAG=0 or blank. If TFLAG=1, membrane thickness becomes a product of $T_i$ and the thickness on the PSHELL card. $T_i$ is ignored for hyperelastic elements. (Real > 0.0 or blank. See Remark 4. for the default.) |

Remarks:

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Grid points G1 through G4 must be ordered consecutively around the perimeter of the element.
3. All the interior angles must be less than  $180^\circ$ .
4. The continuation is optional. If it is not supplied, then T1 through T4 will be set equal to the value of T on the PSHELL entry.
5. Stresses and strains are output in the element coordinate system at the centroid unless the CORNER or CUBIC entry is specified on the STRESS case control

card. Specifying CORNER or CUBIC will result in stresses at grid points G1 through G4.

6. Elements may be offset from the connection points by means of ZOFFS. Other data, such as material matrices and stress fiber locations, are given relative to the reference plane. A positive value of ZOFFS implies that the element reference plane is offset a distance of ZOFFS along the positive z-axis of the element coordinate system. If the ZOFFS field is used, then the MID1 and MID2 fields must be specified on the PSHELL entry referenced by PID.
7. The rotational degrees-of-freedom normal to the element are active in the element formulation and must not be constrained unless at a boundary. Inaccurate results will be obtained if they are constrained.
8. For a static analysis, this element provides better answers for nonrectangular elements than the CQUAD4 element. It has not been fully implemented for other types of analysis such as nonlinear. See “Element Summary – Small Strain Elements” in the *NXNastran Element Library* for a list of supported capabilities.
9. The CTRIAR element is the triangular companion to the CQUADR element and should be used instead of CTRIA3 or CTRIA6.

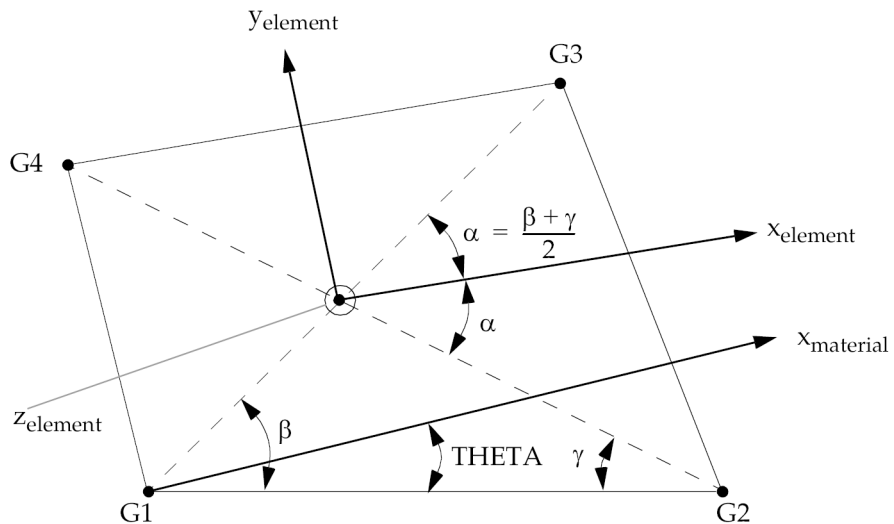

**Figure 13-16. CQUADR Element Geometry and Coordinate Systems**

**Remarks related to SOL 601:**

1. ZOFFs is ignored.

## 1246 CQUADR Quadrilateral Plate Element Connection

2. CQUADR can only be used in linear analysis. It is recommended that CQUAD4 be used instead of CQUADR in SOL 601 analysis.
3. For geometry nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

## CQUADX Fully Nonlinear Axisymmetric Element

Defines an axisymmetric quadrilateral element with up to nine grid points for use in fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis.

### Format:

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|----|----|----|----|----|----|----|
| CQUADX | EID | PID | G1 | G2 | G3 | G4 | G5 | G6 |    |
|        | G7  | G8  | G9 |    |    |    |    |    |    |

### Example:

|        |     |     |    |    |    |    |  |  |  |
|--------|-----|-----|----|----|----|----|--|--|--|
| CQUADX | 111 | 203 | 31 | 74 | 75 | 32 |  |  |  |
|--------|-----|-----|----|----|----|----|--|--|--|

### Fields:

| Field             | Contents                                                                                                                    |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------|
| EID               | Element identification number. (Integer > 0)                                                                                |
| PID               | Property identification number of a PLPLANE entry. (Integer > 0)                                                            |
| G1, G2,<br>G3, G4 | Identification numbers of connected corner grid points. Required data for all four grid points. (Unique Integers > 0)       |
| G5, G6,<br>G7, G8 | Identification numbers of connected edge grid points. Optional data for any or all four grid points. (Integer ≥ 0 or blank) |
| G9                | Identification number of center grid point. Optional. (Integer ≥ 0 or blank)                                                |

### Remarks:

1. Element identification numbers should be unique with respect to all other element IDs of any kind.
2.  $G_i$  must be numbered as shown in [Figure 13-17](#).
3. It is recommended that the edge points be located within the middle third of the edge.
4. Plot codes are specified under the CQUADXFD element name in “[Item Codes](#)”.
5. All  $G_i$  must lie on the x-y plane of the basic coordinate system. Stress and strain are output in the basic coordinate system.


**1248 CQUADX**  
**Fully Nonlinear Axisymmetric Element**

6. A concentrated load (e.g., FORCE entry) at  $G_i$  is divided by the radius to  $G_i$  and then applied as a force per unit circumferential length. For example, in order to apply a load of 100 N/m on the circumference at  $G_1$ , which is located at a radius of 0.5 m, then the magnitude specified on the static load entry must result in:

$$(100 \text{ N/m}) \cdot (0.5 \text{ m}) = 50 \text{ N}$$

**Remarks related to SOL 601:**

1. Only elements with 4, 8 or 9 grid points are allowed.
2. 8-node elements may be converted to 9-node elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry. The 9-node element is more effective in the analysis of incompressible rubber-like materials.

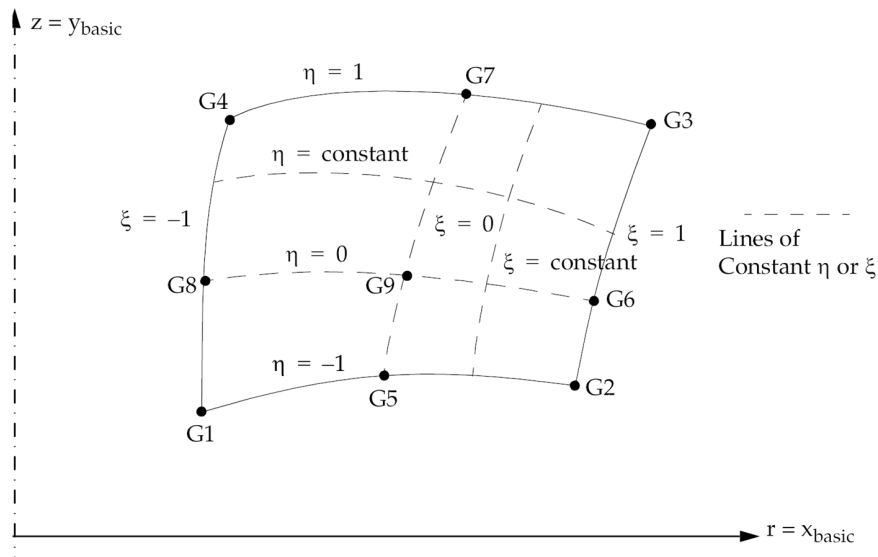

**Figure 13-17. CQUADX Element Coordinate System**



**CQUADX4** Axisymmetric Quadrilateral Element Connection

Defines an isoparametric and axisymmetric quadrilateral cross-section ring element for use in linear and fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|---------|-----|-----|----|----|----|----|----|---|----|
| CQUADX4 | EID | PID | G1 | G2 | G3 | G4 | TH |   |    |
|         |     |     |    |    |    |    |    |   |    |

**Example:**

|         |     |     |    |    |    |    |      |  |  |
|---------|-----|-----|----|----|----|----|------|--|--|
| CQUADX4 | 203 | 100 | 10 | 20 | 30 | 40 | 30.0 |  |  |
|         |     |     |    |    |    |    |      |  |  |

**Fields:**

| Field | Contents                                                                                                          |
|-------|-------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                      |
| PID   | Property identification number of a PSOLID or PLSOLID entry. (Integer > 0; Default=EID)                           |
| Gi    | Grid point identification numbers of connected points. (Unique integers > 0)                                      |
| TH    | Material property orientation angle in degrees. THETA is ignored for hyperelastic elements. (Real; Default = 0.0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the x-z plane of the basic coordinate system, with  $x = r \geq 0$ .
3. Material properties (if defined on a MAT3 entry) are given in the  $(r_m, z_m)$  coordinate system shown in Figure 13-19.
4. The initial element coordinate system is the basic coordinate system.

## 1250 CQUADX4 Axisymmetric Quadrilateral Element Connection

5. See [Remark 6](#) on the PSOLID entry for information on stress and strain output coordinate systems.
6. For hyperelastic element, the plot codes are specified under the CQUADX4FD element name in [Item Codes](#).
7. A concentrated load (e.g., FORCE entry) at  $G_i$  is divided by the radius to  $G_i$  and then applied as a force per unit circumferential length. For example, in order to apply a load of 100 N/m on the circumference at  $G_1$ , which is located at a radius of 0.5 m, then the magnitude specified on the static load entry must result in:

$$(100 \text{ N/m}) \cdot (0.5 \text{ m}) = 50 \text{ N}$$

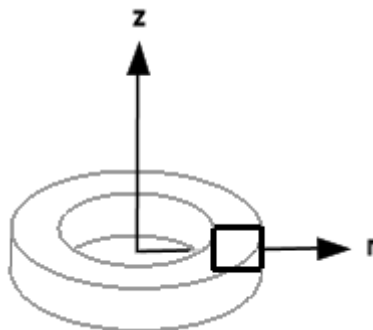


Figure 13-18. CQUADX4 Element Idealization

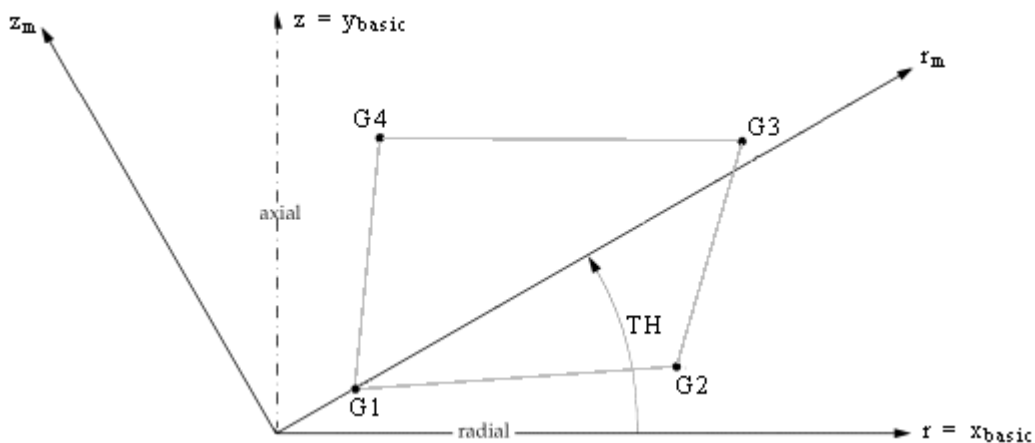


Figure 13-19. CQUADX4 Element Geometry and Coordinate Systems

**CQUADX8** Axisymmetric Quadrilateral Element Connection

Defines an isoparametric and axisymmetric quadrilateral cross-section ring element with midside nodes for use in linear and fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|-----|-----|----|----|----|----|----|----|----|
| CQUADX8 | EID | PID | G1 | G2 | G3 | G4 | G5 | G6 |    |
|         | G7  | G8  | TH |    |    |    |    |    |    |

**Example:**

|         |     |     |      |    |    |    |    |    |  |
|---------|-----|-----|------|----|----|----|----|----|--|
| CQUADX8 | 203 | 100 | 10   | 20 | 30 | 40 | 50 | 60 |  |
|         | 70  | 80  | 30.0 |    |    |    |    |    |  |

**Fields:**

| Field | Contents                                                                                                          |
|-------|-------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                      |
| PID   | Property identification number of a PSOLID or PLSOLID entry. (Integer > 0; Default=EID)                           |
| Gi    | Grid point identification numbers of connected points (midside grids cannot be eliminated). (Unique integers > 0) |
| TH    | Material property orientation angle in degrees. THETA is ignored for hyperelastic elements. (Real; Default = 0.0) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the x-z plane of the basic coordinate system, with  $x = r \geq 0$ . Grid points G1 through G8 must be numbered as shown in FIGURE 13-21.
3. Material properties (if defined on a MAT3 entry) are given in the  $(r_m, z_m)$  coordinate system shown in Figure 13-21.
4. The initial element coordinate system is the basic coordinate system.

## 1252 CQUADX8 Axisymmetric Quadrilateral Element Connection

5. See [Remark 6](#) on the PSOLID entry for information on stress and strain output coordinate systems.
6. For hyperelastic element, the plot codes are specified under the CQUADX8FD element name in [Item Codes](#).
7. A concentrated load (e.g., FORCE entry) at  $G_i$  is divided by the radius to  $G_i$  and then applied as a force per unit circumferential length. For example, in order to apply a load of 100 N/m on the circumference at  $G_1$ , which is located at a radius of 0.5 m, then the magnitude specified on the static load entry must result in:

$$(100 \text{ N/m}) \cdot (0.5 \text{ m}) = 50 \text{ N}$$

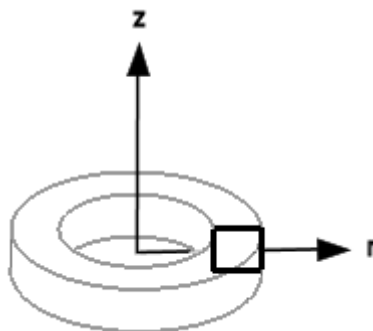


Figure 13-20. CQUADX8 Element Idealization

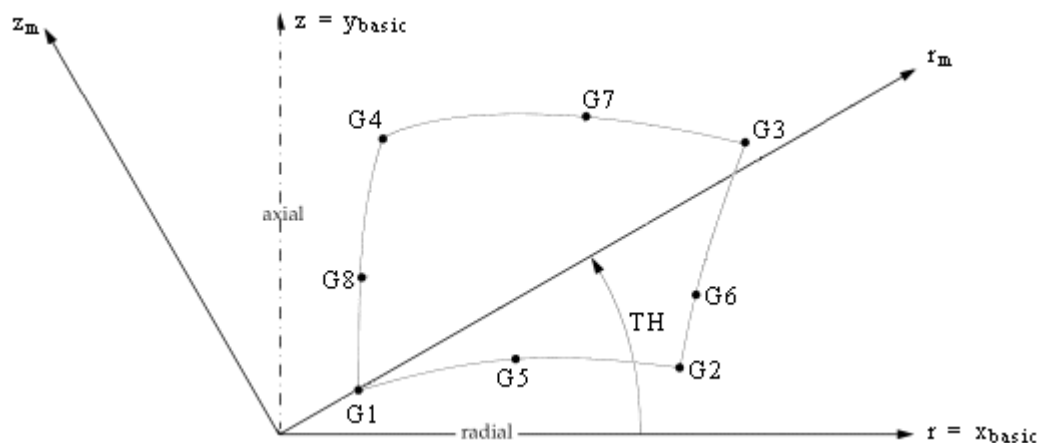


Figure 13-21. CQUADX8 Element Geometry and Coordinate Systems

## CRAC2D Two-Dimensional Crack Tip Element

Defines a two-dimensional crack tip element.

**Format:**

| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| CRAC2D | EID | PID | G1  | G2  | G3  | G4  | G5  | G6  |    |
|        | G7  | G8  | G9  | G10 | G11 | G12 | G13 | G14 |    |
|        | G15 | G16 | G17 | G18 |     |     |     |     |    |

**Example:**

|        |     |     |    |    |   |    |    |    |  |
|--------|-----|-----|----|----|---|----|----|----|--|
| CRAC2D | 114 | 108 | 2  | 5  | 6 | 8  | 7  | 11 |  |
|        | 12  | 14  | 16 | 17 |   | 20 | 22 |    |  |

**Fields:**

| Field | Contents                                                                                             |
|-------|------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                         |
| PID   | Property identification number of a PRAC2D entry. (Integer > 0)                                      |
| Gi    | Grid point identification numbers of connection points. (Integer ≥ 0, G11 through G18 may be blank.) |

**Remarks:**

- The following is a dummy element and requires the presence of one Bulk Data entry of the form:


|       |    |   |   |   |        |  |  |  |  |
|-------|----|---|---|---|--------|--|--|--|--|
| ADUM8 | 18 | 0 | 5 | 0 | CRAC2D |  |  |  |  |
|-------|----|---|---|---|--------|--|--|--|--|

- The element should be planar. Significant deviations will produce fatal errors.
- Grid points G1 through G10 are required while grid points G11 through G18 are optional for the quadrilateral form of the element.
- The stresses and stress intensity factors are calculated assuming that G2 and G10 are coincident. Deviations from this will produce erroneous results.
- For the symmetric half-crack option, grid points G1 through G7 are required while grid points G11 through G14 are optional. Grid points G8 through G10 and G15 through G18 must not be present for this option.


## 1254 CRAC2D

### Two-Dimensional Crack Tip Element

6. The ordering conventions for the full-crack and half-crack options are shown in [Figure 13-22](#).
7. The stress output is interpreted as described in “Two-Dimensional Crack Tip Element (CRAC2D)” in the *NX Nastran Element Library*.

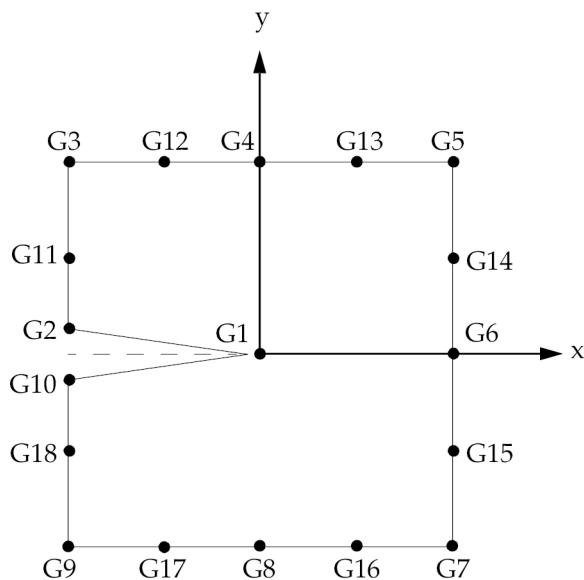

(a) Full Crack Option

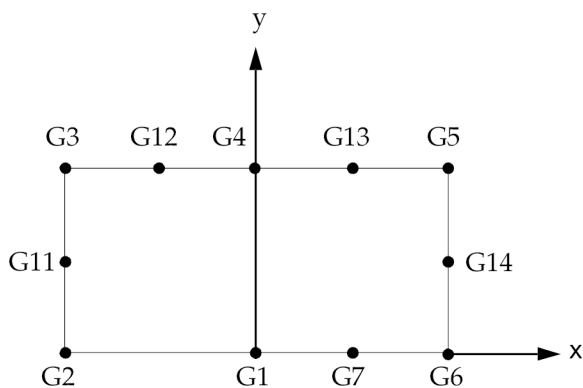

(b) Symmetric Half-Crack Option

Figure 13-22. CRAC2D Element Connection for Full and Symmetric Options

**1256 CRAC3D**  
**Three-Dimensional Crack Tip Element**

**CRAC3D** Three-Dimensional Crack Tip Element

Defines a three-dimensional crack tip element.

**Format:**

| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| CRAC3D | EID | PID | G1  | G2  | G3  | G4  | G5  | G6  |    |
|        | G7  | G8  | G9  | G10 | G11 | G12 | G13 | G14 |    |
|        | G15 | G16 | G17 | G18 | G19 | G20 | G21 | G22 |    |
|        | G23 | G24 | G25 | G26 | G27 | G28 | G29 | G30 |    |
|        | G31 | G32 | G33 | G34 | G35 | G36 | G37 | G38 |    |
|        | G39 | G40 | G41 | G42 | G43 | G44 | G45 | G46 |    |
|        | G47 | G48 | G49 | G50 | G51 | G52 | G53 | G54 |    |
|        | G55 | G56 | G57 | G58 | G59 | G60 | G61 | G62 |    |
|        | G63 | G64 |     |     |     |     |     |     |    |

**Example:**

|        |     |     |     |     |     |     |     |     |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|--|
| CRAC3D | 113 | 101 | 2   | 5   | 7   | 8   | 4   | 10  |  |
|        | 11  | 14  | 15  | 17  |     | 3   | 6   | 9   |  |
|        | 12  |     | 16  |     | 102 | 105 | 107 | 108 |  |
|        | 104 | 110 | 111 | 114 | 115 | 117 |     | 103 |  |
|        | 106 | 109 | 112 |     | 116 |     | 202 | 205 |  |
|        | 207 | 208 | 204 | 210 | 211 | 214 | 215 | 217 |  |
|        | 225 | 226 |     |     |     |     |     |     |  |

**Fields:**

| Field | Contents                                                              |
|-------|-----------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                          |
| PID   | Property identification number of a PRAC3D entry. (Integer > 0)       |
| Gi    | Grid point identification numbers of connection points. (Integer ≥ 0) |

**Remarks:**

1. The following is a dummy element and requires the presence of one Bulk Data entry of the form:



**CRAC3D 1257**  
**Three-Dimensional Crack Tip Element**

|       |    |   |   |   |        |  |  |  |  |
|-------|----|---|---|---|--------|--|--|--|--|
| ADUM9 | 64 | 0 | 6 | 0 | CRAC3D |  |  |  |  |
|-------|----|---|---|---|--------|--|--|--|--|

2. Element identification numbers should be unique with respect to all other element identification numbers.
3. This element, including grid point numbering conventions, is shown in [Figure 13-23](#) and [Figure 13-24](#). grid points G1 through G10, and G19 through G28 are required; midside and surface grid points G11 through G18, G29 through G36, and G37 through G64 are optional. Either all or none of grid points G37 through G46 should be present. A fatal error message will be issued for partial connectivity.
4. For the symmetric half-crack option grid points G1 through G7, and G19 through G25 are required, whereas grid points G11 through G14, G29 through G32, and G37 through G42 are optional. Grid points G8 through G10, G15 through G18, G26 through G28, G33 through G36, G43 through G46, G51 through G55, and G60 through G64 should not be specified to invoke this option.
5. It is recommended that both the faces (formed by grid points G1 through G18 and grid points G19 through G36) and the midplane (formed by grid points G37 through G46) be planar. It is also recommended that midside grid points G37 through G46 be located within the middle third of the edges.
6. The midside nodes on both the faces should be defined in pairs. For example, if grid point G11 is not defined, then grid point G29 should not be defined and vice versa.
7. The stresses and stress intensity factors are calculated with the assumptions that grid points G2 and G10, G20 and G28, and G38 and G46 are coincident. Deviation from this condition will produce erroneous results.
8. The stress output is interpreted as described in “Three-Dimensional Crack Tip Element (CRAC3D)” in the *NX Nastran Element Library*.

1258 CRAC3D  
Three-Dimensional Crack Tip Element



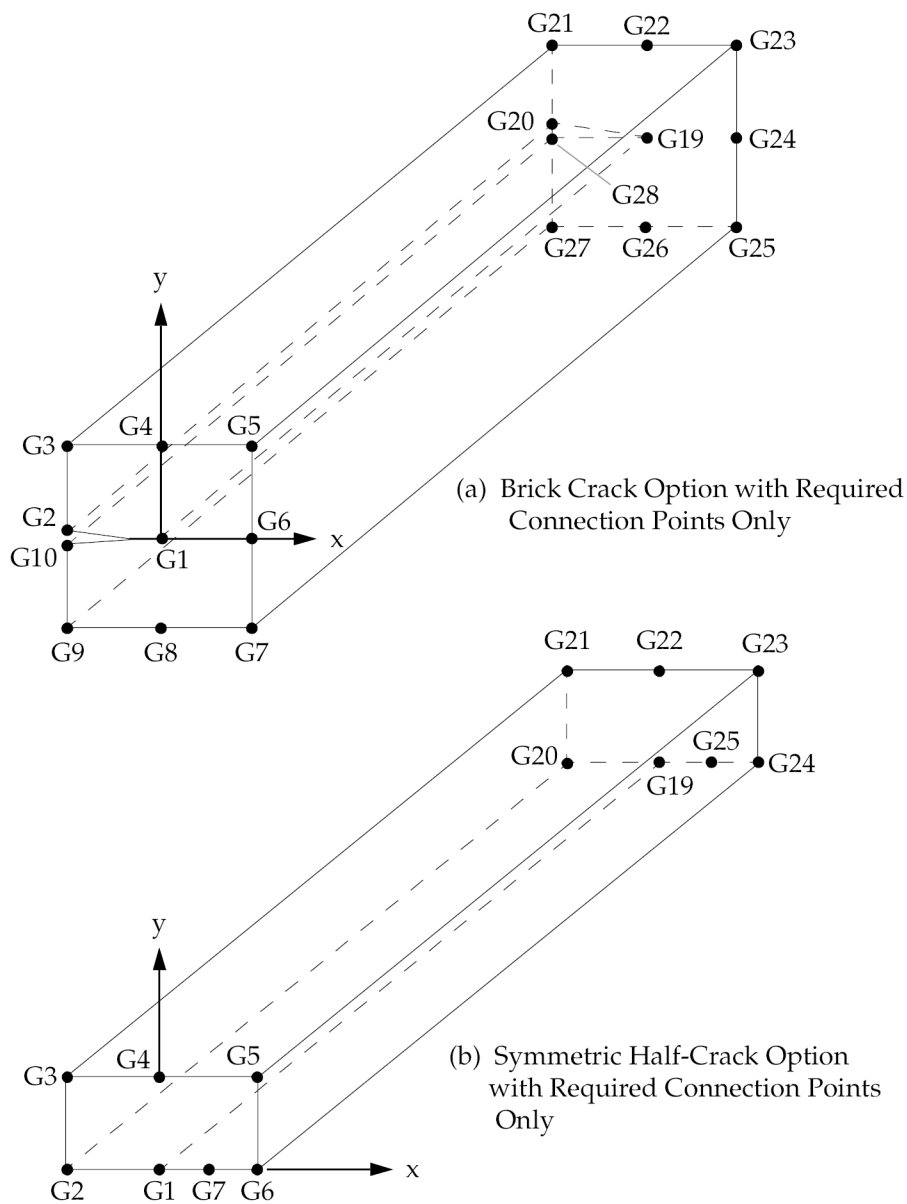


Figure 13-23. CRAC3D Solid Crack Tip Element with Required Connection Points Only

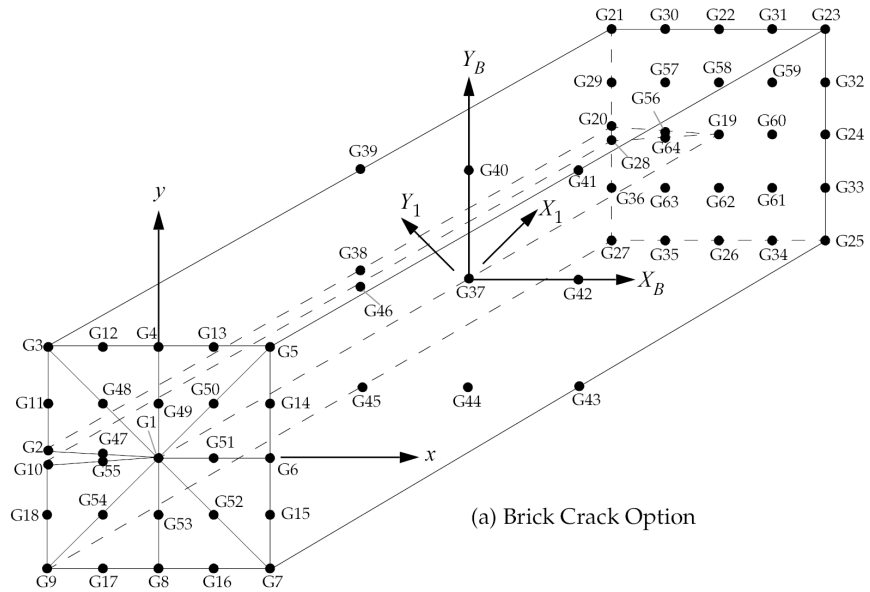

(a) Brick Crack Option

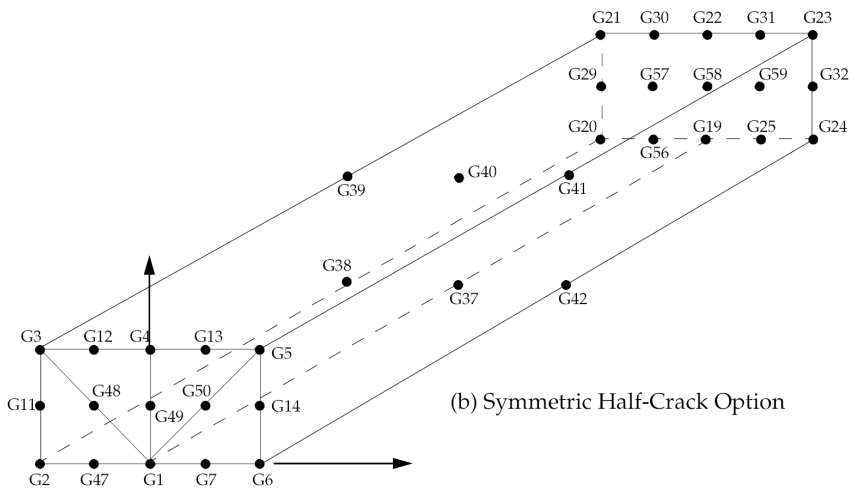

(b) Symmetric Half-Crack Option

Figure 13-24. CRAC2D Solid Crack Tip Element with All Connection Points

## 1260 CREEP Creep Characteristics

### CREEP Creep Characteristics

Defines creep characteristics based on experimental data or known empirical creep law. This entry will be activated if a MAT1, MAT2, or MAT9 entry with the same MID is used and the NLPARM entry is prepared for creep analysis (except for SOL 601). The creep formulation is principally suited for isotropic materials and, in general, when used with anisotropic materials may produce incorrect results. However, slightly anisotropic materials may produce acceptable results.

#### Format:

| 1     | 2    | 3  | 4   | 5    | 6     | 7     | 8     | 9      | 10 |
|-------|------|----|-----|------|-------|-------|-------|--------|----|
| CREEP | MID  | T0 | EXP | FORM | TIDKP | TIDCP | TIDCS | THRESH |    |
|       | TYPE | a  | b   | c    | d     | e     | f     | g      |    |

#### Example:

|       |     |         |       |         |        |        |        |     |  |
|-------|-----|---------|-------|---------|--------|--------|--------|-----|--|
| CREEP | 8   | 1100.   |       | CRLAW   |        |        |        |     |  |
|       | 121 | 6.985-6 | 2.444 | 7.032-4 | 0.1072 | 6.73-9 | 0.1479 | 3.0 |  |

#### Fields:

| Field                     | Contents                                                                                                                                                                          |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID                       | Material identification number of a MAT1, MAT2, or MAT9 entry. (Integer > 0)                                                                                                      |
| T0                        | Reference temperature at which creep characteristics are defined. See Remark 2 (Real; Default = 0.0).                                                                             |
| EXP                       | Temperature-dependent term, $e^{(-\Delta H/(R \cdot T_0))}$ , in the creep rate expression. See Remark 2 (0.0 < Real ≤ 1.0; Default = 1.0E-9).                                    |
| FORM                      | Form of the input data defining creep characteristics. (Character: "CRLAW" for empirical creep law, or "TABLE" for tabular input data of creep model parameters.)                 |
| TIDKP,<br>TIDCP,<br>TIDCS | Identification number of a TABLES1 entry, which defines the creep model parameters $K_p(s)$ , $C_p(s)$ , and $C_s(s)$ , respectively. See Remarks 3 through 5 (Integer > 0).      |
| THRESH                    | Threshold limit for creep process. Threshold stress under which creep does not occur is computed as THRESH multiplied by Young's modulus. (0.0 < Real < 1.0E-3; Default = 1.0E-5) |

| <b>Field</b> | <b>Contents</b>                                                                                                                         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| TYPE         | Identification number of the empirical creep law type. See Remark 1 (Integer: 111, 112, 121, 122, 211, 212, 221, 222, or 300).          |
| a through g  | Coefficients of the empirical creep law specified in TYPE. Continuation should not be specified if FORM = "TABLE". See Remark 1 (Real). |

**Remarks:**

Two classes of empirical creep law are available:

- Creep Law Class 1
- Creep Law Class 2

**1. Creep Law Class 1**

The first creep law class is expressed as:

$$\varepsilon^c(\sigma, t) = A(\sigma)[1 - e^{-R(\sigma)t}] + K(\sigma)t$$

**Equation 13-1.**

Parameters  $A(s)$ ,  $R(s)$ , and  $K(s)$  are specified in the following form, as recommended by the Oak Ridge National Laboratory:

| Parameter | Function 1              | Digit | Function 2 | Digit |
|-----------|-------------------------|-------|------------|-------|
| $A(s)$    | $as^b$                  | i=1   | $ae^{bs}$  | i=2   |
| $R(s)$    | $ce^{ds}$               | j=1   | $cs^d$     | j=2   |
| $K(s)$    | $e \cdot [\sinh(fs)]^g$ | k=1   | $ee^{fs}$  | k=2   |

TYPE=ijk where i, j, and k are digits equal to 1 or 2, according to the desired function in the table above. For example, TYPE=122 defines  $A(s) = as^b$ ,  $R(s) = cs^d$ , and  $K(s) = ee^{fs}$ .

**Creep law Class 2**

The second creep law class (TYPE=300) is expressed as:

## 1262 CREEP Creep Characteristics

$$\varepsilon^c(\sigma, t) = a\sigma^b t^d$$

### Equation 13-2.

where the values of b and d must be defined as follows:

$$1.0 < b < 8.0$$

and

$$0.2 < d < 2.0$$

The coefficient g should be blank if TYPE = 112, 122, 222, or 212 and c, e, f, and g should be blank if TYPE = 300. The coefficients a through g are dependent on the structural units; caution must be exercised to make these units consistent with the rest of the input data.

2. Creep law coefficients a through g are usually determined by least squares fit of experimental data, obtained under a constant temperature. This reference temperature at which creep behavior is characterized must be specified in the T0 field if the temperature of the structure is different from this reference temperature. The conversion of the temperature input (°F or °C) to °K (degrees Kelvin) must be specified in the PARAM,TABS entry as follows:

PARAM,TABS,273.16 (If Celsius is used.)

PARAM,TABS,459.69 (If Fahrenheit is used.)

When the correction for the temperature effect is required, the temperature distribution must be defined in the Bulk Data entries (TEMP, TEMPP1 and/or TEMPRB), which are selected by the Case Control command TEMP(LOAD) = SID within the subcase.

From the thermodynamic consideration, the creep rate is expressed as:

$$\dot{\varepsilon}^C = \dot{\varepsilon}_A(e^{-\Delta H/RT})$$

### Equation 13-3.

where:

$H\Delta$  = energy of activation

$R$  = gas constant (= 1.98 cal/mole °K)

$T$  = absolute temperature (°K)

$\dot{\varepsilon}_A$  = strain/sec per activation

If the creep characteristics are defined at temperature  $T_0$ , the creep rate at temperature  $T$  is corrected by a factor

$$\frac{\dot{\varepsilon}^c}{\dot{\varepsilon}_0^c} = \text{EXP} \left( \frac{T_0}{T} - 1 \right)$$

**Equation 13-4.**

where:

$\dot{\varepsilon}^c$  = corrected creep rate


$\dot{\varepsilon}_0^c$  = creep rate at  $T_0$

$\text{EXP} \left( \frac{T_0}{T} - 1 \right)$   
= correction factor

3. if the creep model parameters  $K_p$ ,  $C_p$ , and  $C_s$  are to be specified with FORM = "TABLE", then TABLES1 entries (with IDs that appear in TIDXX fields) must be provided in the Bulk Data Section. In this case, the continuation should not be specified.
4. Creep model parameters  $K_p$ ,  $C_p$ , and  $C_s$  represent parameters of the uniaxial rheological model as shown in [Figure 13-25](#).


Tabular values ( $X_i$ ,  $Y_i$ ) in the TABLES1 entry correspond to ( $s_i$ ,  $K_{pi}$ ), ( $s_i$ ,  $C_{pi}$ ), and ( $s_i$ ,  $C_{si}$ ) for the input of  $K_p$ ,  $C_p$ , and  $C_s$ , respectively. For linear viscoelastic materials, parameters  $K_p$ ,  $C_p$ , and  $C_s$  are constant and two values of  $s_i$  must be specified for the same value of  $K_{pi}$ ,  $C_{pi}$ , and  $C_{si}$ .

**1264 CREEP**  
**Creep Characteristics**

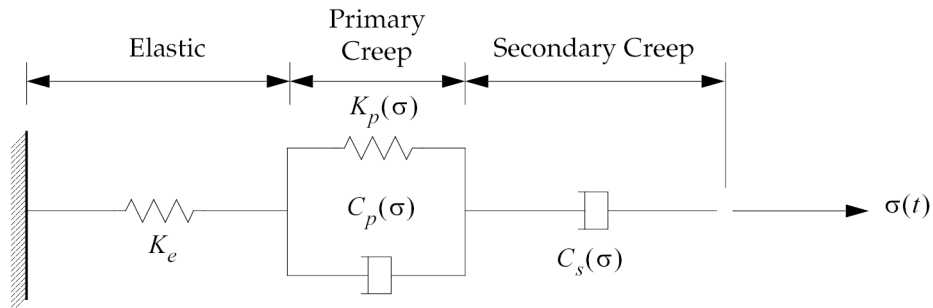


**Figure 13-25. CREEP Parameter Idealization**

Creep model parameters, as shown in [Figure 13-26](#) through [Figure 13-28](#) below, must have positive values. If the table look-up results in a negative value, the value will be reset to zero and a warning message (TABLE LOOK-UP RESULTS IN NEGATIVE VALUE OF CREEP MODEL PARAMETER IN ELEMENT ID=\*\*\*\*) will be issued.

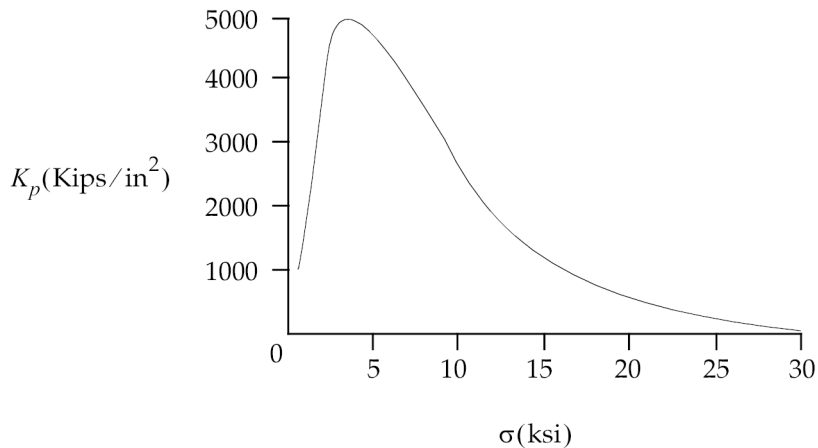


**Figure 13-26. \$K\_p\$ Versus \$\sigma\$ Example for CREEP**



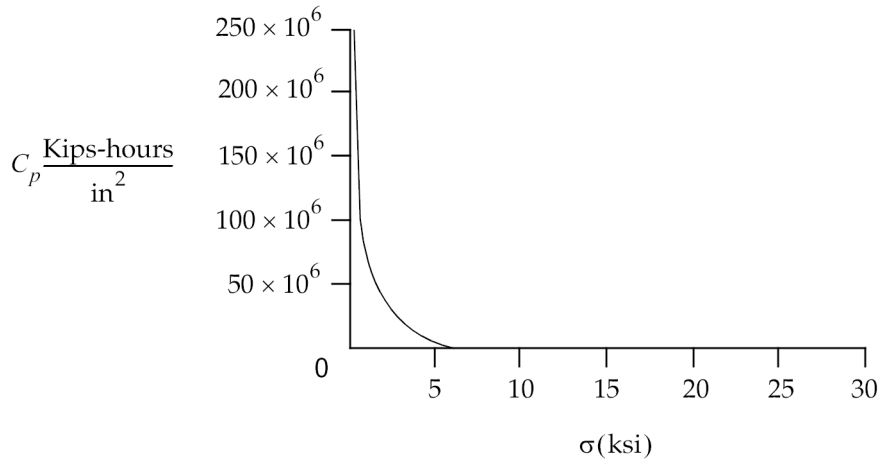

**Figure 13-27. C p Versus s Example for CREEP**

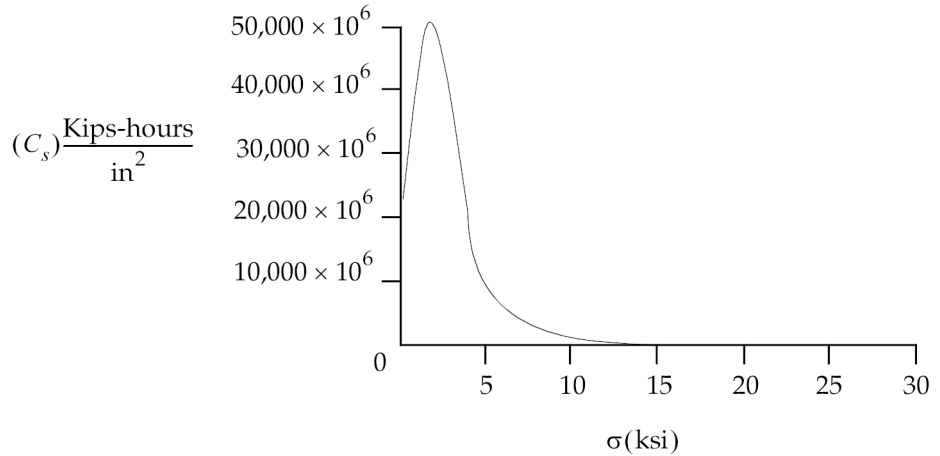

**Figure 13-28. C s Versus s Example for CREEP**

5. Creep analysis requires an initial static solution at  $t = 0$ , which can be obtained by specifying a subcase that requests an NLPARM entry with  $DT = 0.0$ .

**Remarks related to SOL 601:**

1. MID is restricted to the material identification number of a MAT1 entry. CREEP and MAT1 entries model an elastic-creep material with only elastic strain and creep strain effects.

## 1266 CREEP

### Creep Characteristics

2. Only FORM=CRLAW is allowed.
3. T0, EXP, TIDKP, TIDCP, TIDCS, and THRESH are ignored.
4. Only TYPE=300 and TYPE=222 are supported.
5. For TYPE=300, the coefficients a, b and d may be made temperature-dependent by the MATTC entry.

## CROD Rod Element Connection

Defines a tension-compression-torsion element.

### Format:

| 1    | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|------|-----|-----|----|----|---|---|---|---|----|
| CROD | EID | PID | G1 | G2 |   |   |   |   |    |

### Example:

|      |    |    |    |    |  |  |  |  |  |
|------|----|----|----|----|--|--|--|--|--|
| CROD | 12 | 13 | 21 | 23 |  |  |  |  |  |
|------|----|----|----|----|--|--|--|--|--|

### Fields:

| Field  | Contents                                                                       |
|--------|--------------------------------------------------------------------------------|
| EID    | Element identification number. (Integer > 0)                                   |
| PID    | Property identification number of a PROD entry. (Integer > 0; Default = EID)   |
| G1, G2 | Grid point identification numbers of connection points. (Integer > 0; G1 ≠ G2) |

### Remarks:

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. See [“CONROD”](#) for alternative method of rod definition.
3. Only one element may be defined on a single entry.

### Remarks related to SOLs 601 and 701:

CROD defines a truss element with no torsional stiffness, i.e., only axial force is transmitted by the element.

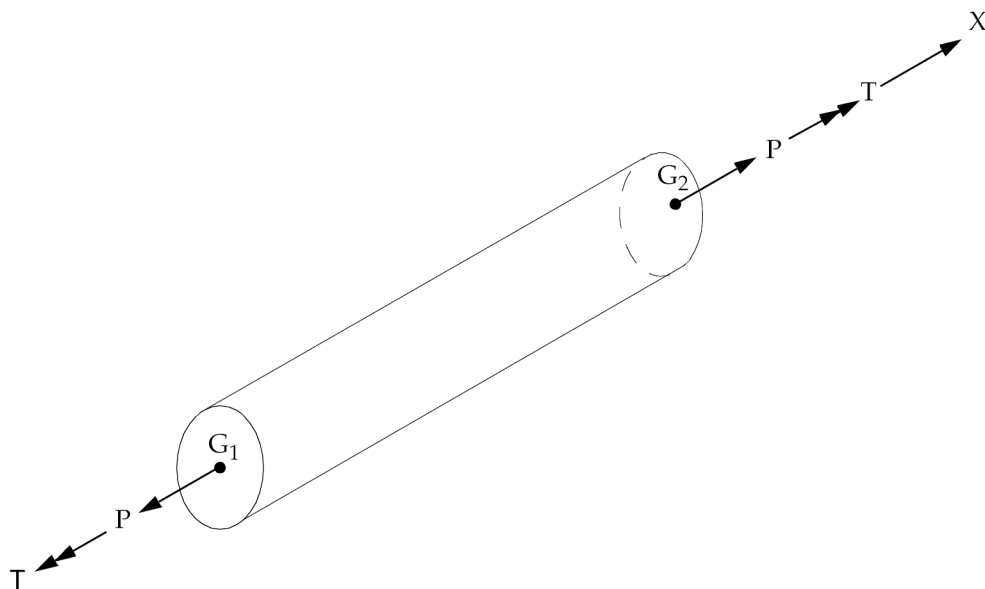


Figure 13-29. CROD Element Internal Forces and Moments

**CSET** Free Boundary Degrees-of-Freedom

Defines analysis set (a-set) degrees-of-freedom to be free (c-set) during component modes calculations.

**Format:**

| 1    | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|------|-----|----|-----|----|-----|----|-----|----|----|
| CSET | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

**Example:**

|      |     |   |   |    |   |    |  |  |  |
|------|-----|---|---|----|---|----|--|--|--|
| CSET | 124 | 1 | 5 | 23 | 6 | 16 |  |  |  |
|------|-----|---|---|----|---|----|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                     |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                                    |
| CI    | Component numbers. (Integer zero or blank for scalar points, or any unique combination of the integers 1 through 6 for grid points with no embedded blanks.) |

**Remarks:**

1. CSET and BNDFREE entries are equivalent.
2. If there are no CSET<sub>i</sub> or BSET<sub>i</sub> entries present, all a-set degrees-of-freedom are considered fixed during component modes analysis. If there are only BSET<sub>i</sub> entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BSET<sub>i</sub> and CSET<sub>i</sub> entries present, the c-set degrees-of-freedom are defined by the CSET<sub>i</sub> entries, and any remaining a-set points are placed in the b-set.
3. Degrees-of-freedom specified on this entry form members of the mutually exclusive c-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.

**1270 CSET**  
**Free Boundary Degrees-of-Freedom**

- If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**CSET1 1271**  
**Free Boundary Degrees-of-Freedom, Alternate Form of CSET Entry**

**CSET1** Free Boundary Degrees-of-Freedom, Alternate Form of CSET Entry

Defines analysis set (a-set) degrees-of-freedom to be free (c-set) during component modes calculations.

**Format:**

| 1     | 2   | 3   | 4      | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|--------|-----|-----|-----|-----|-----|----|
| CSET1 | C   | ID1 | ID2    | ID3 | ID4 | ID5 | ID6 | ID7 |    |
|       | ID8 | ID9 | -etc.- |     |     |     |     |     |    |

**Example:**

|       |     |   |   |   |   |   |    |     |  |
|-------|-----|---|---|---|---|---|----|-----|--|
| CSET1 | 124 | 1 | 5 | 7 | 6 | 9 | 12 | 122 |  |
|       | 127 |   |   |   |   |   |    |     |  |

**Alternate Formats and Example:**

|       |   |     |        |     |  |  |  |  |  |
|-------|---|-----|--------|-----|--|--|--|--|--|
| CSET1 | C | ID1 | "THRU" | ID2 |  |  |  |  |  |
| CSET1 | 3 | 6   | THRU   | 32  |  |  |  |  |  |

|       |  |       |  |  |  |  |  |  |  |
|-------|--|-------|--|--|--|--|--|--|--|
| CSET1 |  | "ALL" |  |  |  |  |  |  |  |
| CSET1 |  | ALL   |  |  |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                    |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C     | Component number. (Integer zero or blank for scalar points, or any unique combination of the Integers 1 through 6 for grid points with no embedded blanks.) |
| IDI   | Grid or scalar point identification number. (Integer > 0; For THRU option, ID1 < ID2)                                                                       |

**Remarks:**

1. CSET1 and BDNDFREE1 entries are equivalent.
2. If there are no CSETi or BSETi entries present, all a-set degrees-of-freedom are considered fixed during component modes analysis. If there are only BSETi entries present, any a-set degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both BSETi and CSETi entries present, the

## 1272 CSET1

### Free Boundary Degrees-of-Freedom, Alternate Form of CSET Entry

c-set degrees-of-freedom are defined by the CSET<sub>i</sub> entries, and any remaining a-set points are placed in the b-set.

3. Degrees-of-freedom specified on this entry form members of the mutually exclusive c-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.
  - If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.



**CSHEAR** Shear Panel Element Connection

Defines a shear panel element.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|-----|-----|----|----|----|----|---|---|----|
| CSHEAR | EID | PID | G1 | G2 | G3 | G4 |   |   |    |

**Example:**

|        |   |   |   |   |   |   |  |  |  |
|--------|---|---|---|---|---|---|--|--|--|
| CSHEAR | 3 | 6 | 1 | 5 | 3 | 7 |  |  |  |
|--------|---|---|---|---|---|---|--|--|--|

**Fields:**

| Field | Contents                                                                                    |
|-------|---------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                |
| PID   | Property identification number of a PSHEAR entry. (Integer > 0;<br>Default = EID)           |
| Gi    | Grid point identification numbers of connection points. (Integer > 0;<br>G1 ≠ G2 ≠ G3 ≠ G4) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Grid points G1 through G4 must be ordered consecutively around the perimeter of the element.
3. All interior angles must be less than 180°.

1274 CSHEAR  
Shear Panel Element Connection

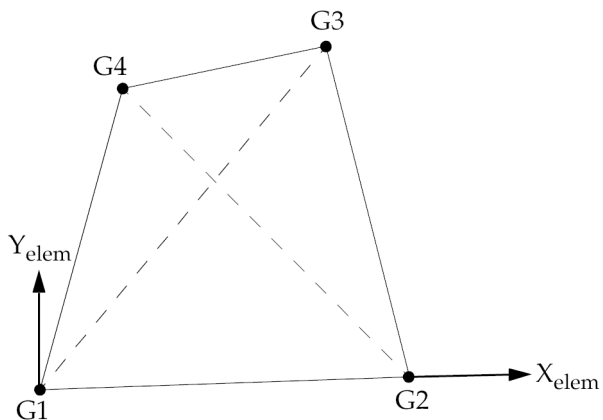


Figure 13-30. CSHEAR Element Connection and Coordinate System

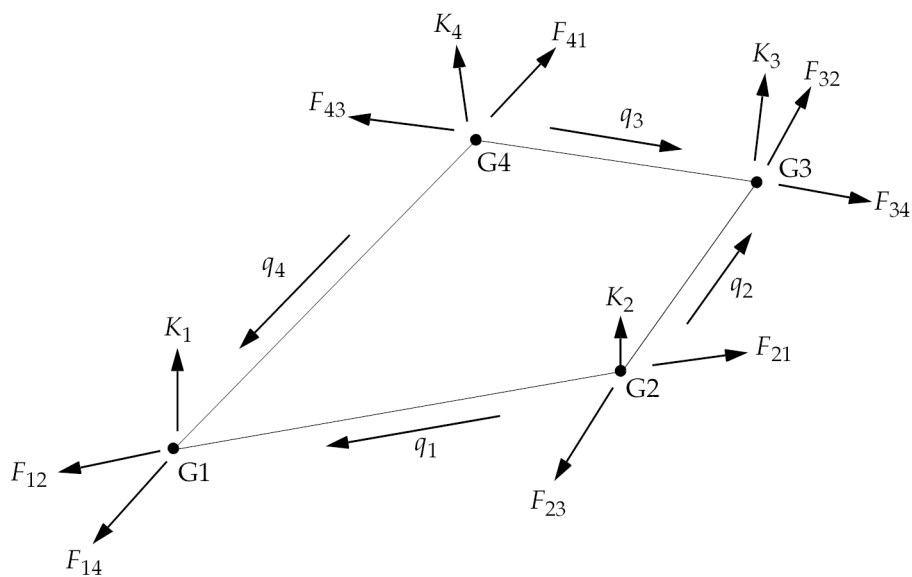


Figure 13-31. CSHEAR Element Corner Forces and Shear Flows

**CSLOT3**      Three Point Slot Element Connection

Defines an element connecting three points that solves the wave equation in two dimensions. Used in the acoustic cavity analysis for the definition of evenly spaced radial slots.

**Format:**

| 1      | 2   | 3    | 4    | 5    | 6 | 7   | 8 | 9 | 10 |
|--------|-----|------|------|------|---|-----|---|---|----|
| CSLOT3 | EID | IDS1 | IDS2 | IDS3 |   | RHO | B | M |    |

**Example:**

|        |     |   |   |   |  |       |  |   |  |
|--------|-----|---|---|---|--|-------|--|---|--|
| CSLOT3 | 100 | 1 | 3 | 2 |  | 3.0-3 |  | 6 |  |
|--------|-----|---|---|---|--|-------|--|---|--|

**Fields:**

| Field            | Contents                                                                                                     |
|------------------|--------------------------------------------------------------------------------------------------------------|
| EID              | Element identification number. (Integer > 0)                                                                 |
| IDS <sub>i</sub> | Identification number of connected GRIDS points. (Integer > 0)                                               |
| RHO              | Fluid density in mass units. (Real > 0.0; Default is the value of RHOD on the AXSLOT entry.)                 |
| B                | Fluid bulk modulus. (Real ≥ 0.0; Default is the value of BD on the AXSLOT entry.)                            |
| M                | Number of slots in circumferential direction. (Integer ≥ 0; Default is the value of MD on the AXSLOT entry.) |

**Remarks:**

1. CSLOT3 is allowed only if an AXSLOT entry is also present.
2. This element identification number (EID) must be unique with respect to all other fluid or structural elements.
3. If RHO, B, or M are blank, then the RHOD, BD, or MD fields on the AXSLOT entry must be specified.
4. This element generates three plot elements, connecting points IDS1 to IDS2, IDS2 to IDS3, and IDS3 to IDS1.
5. If B=0.0, then the slot is considered to be an incompressible fluid.

**1276 CSLOT3**  
**Three Point Slot Element Connection**

6. If  $M=0$ , then no matrices for CSLOT3 elements are generated.

## CSLOT4      Four Point Slot Element Connection

Defines an element connecting four points that solves the wave equation in two dimensions. Used in acoustic cavity analysis for the definition of evenly spaced radial slots.

**Format:**

| 1      | 2   | 3    | 4    | 5    | 6    | 7   | 8 | 9 | 10 |
|--------|-----|------|------|------|------|-----|---|---|----|
| CSLOT4 | EID | IDS1 | IDS2 | IDS3 | IDS4 | RHO | B | M |    |

**Example:**

|        |     |   |   |   |   |  |       |   |  |
|--------|-----|---|---|---|---|--|-------|---|--|
| CSLOT4 | 101 | 1 | 3 | 2 | 4 |  | 6.2+4 | 3 |  |
|--------|-----|---|---|---|---|--|-------|---|--|

**Fields:**

| Field            | Contents                                                                                                     |
|------------------|--------------------------------------------------------------------------------------------------------------|
| EID              | Element identification number. (Integer > 0)                                                                 |
| IDS <sub>i</sub> | Identification number of connected GRIDS points. (Integer > 0)                                               |
| RHO              | Fluid density in mass units. (Real > 0.0; Default is the value of RHOD on the AXSLOT entry.)                 |
| B                | Fluid bulk modulus. (Real ≥ 0.0; Default is the value of BD on the AXSLOT entry.)                            |
| M                | Number of slots in circumferential direction. (Integer ≥ 0; Default is the value of MD on the AXSLOT entry.) |

**Remarks:**

1. This entry is allowed only if an AXSLOT entry is also present.
2. This element identification number (EID) must be unique with respect to all other fluid or structural elements.
3. If RHO, B, or M are blank, then the RHOD, BD, or MD fields on the AXSLOT entry must be specified.
4. This element generates four plot elements connecting points IDS1 to IDS2, IDS2 to IDS3, IDS3 to IDS4, and IDS4 to IDS1.
5. If B = 0.0, then the slot is considered to be an incompressible fluid.

**1278 CSLOT4**  
**Four Point Slot Element Connection**

6. If  $M = 0$ , then no matrices for CSLOT4 elements are generated.

**CSSCHD** Aerodynamic Control Surface Schedule Input

Defines a scheduled control surface deflection as a function of Mach number and angle of attack.

**Format:**

| 1      | 2   | 3     | 4      | 5     | 6     | 7 | 8 | 9 | 10 |
|--------|-----|-------|--------|-------|-------|---|---|---|----|
| CSSCHD | SID | AESID | LALPHA | LMACH | LSCHD |   |   |   |    |

**Example:**

|        |   |      |    |    |    |  |  |  |  |
|--------|---|------|----|----|----|--|--|--|--|
| CSSCHD | 5 | ELEV | 12 | 15 | 25 |  |  |  |  |
|--------|---|------|----|----|----|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                                                                              |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID    | Set identification number. (Integer > 0)                                                                                                                                              |
| AESID  | ID of an AESURF Bulk Data entry to which the schedule is being attached.                                                                                                              |
| LALPHA | ID of an AEFACF Bulk Data entry containing a list of angles of attack (in radians) at which schedule information is provided. (Integer > 0, Default = no angle information provided.) |
| LMACH  | ID of an AEFACF Bulk Data entry containing a list of Mach numbers at which schedule information is provided. (Integer > 0, default = no Mach information provided.)                   |
| LSCHD  | ID of an AEFACF Bulk Data entry which contains the scheduling information. See Remarks 4 and 5 (Integer > 0, no Default).                                                             |

**Remarks:**

- Control system schedules must be selected with the Case Control command CSSCHD = SID.
- The AESID cannot appear on an AELINK or TRIM Bulk Data entry for the same subcase.
- The control surface deflection is computed using a linear interpolation for the Mach number provided on the associated TRIM entry and the angle of attack derived as part of the trim calculation.

## 1280 CSSCHD Aerodynamic Control Surface Schedule Input

4. The LSCHD data are provided as a list of deflections (in radians) as a function of Mach numbers and angles of attack. If there are NMACH Mach numbers and NALPHA angles of attack, the first NALPHA deflections are for the first Mach number, the next NALPHA are for the second Mach number, and so on, until the last NALPHA deflections are for the final Mach number.
5. if LALPHA is blank, LSCHD contains NMACH deflections to define the Mach schedule. If LMACH is blank, LSCHD contains NALPHA deflections to define the angle of attack schedule.
6. LALPHA and LMACH cannot be simultaneously blank. If LALPHA or LMACH are not blank, at least two values of angle of attack or Mach number must be defined in order to perform interpolation.
7. If the Mach number or angle of attack is outside the range specified by the tabulated values, the value at the table end is used. That is, data are not extrapolated.



**CSUPER**      Secondary Superelement Connection

Defines the grid or scalar point connections for identical or mirror image superelements or superelements from an external source. These are all known as secondary superelements.

**Format:**

| 1      | 2    | 3    | 4      | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|------|------|--------|-----|-----|-----|-----|-----|----|
| CSUPER | SSID | PSID | GP1    | GP2 | GP3 | GP4 | GP5 | GP6 |    |
|        | GP7  | GP8  | -etc.- |     |     |     |     |     |    |

**Example:**

|        |        |    |   |   |   |    |  |  |  |
|--------|--------|----|---|---|---|----|--|--|--|
| CSUPER | 120003 | 21 | 3 | 6 | 4 | 10 |  |  |  |
|--------|--------|----|---|---|---|----|--|--|--|

**Fields:**

| Field | Contents                                                                                                                       |
|-------|--------------------------------------------------------------------------------------------------------------------------------|
| SSID  | Coded identification number for secondary superelement. See Remark 1 . (Integer > 0)                                           |
| PSID  | Identification number for referenced primary superelement. See Remark 2 . (Integer > 0 or blank)                               |
| GPi   | Grid or scalar point identification numbers of the exterior points of the secondary superelement. See Remark 3 . (Integer > 0) |

**Remarks:**

- The value of SSID is written in the form XXX0000 + n, where n is the referenced secondary superelement identification number and n must be less than 10000 and XXX is a displacement component sign reversal code as follows:

The sign reversal code specifies the displacement component(s) normal to the plane of the mirror through which the reflection is to be made

|               |                                                                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blank<br>or 0 | No reversal for identical superelement. If PSID is preceded by a minus sign and there is no xxx code on SSID, then a z-reversal mirror is generated. |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------|

## 1282 CSUPER Secondary Superelement Connection

|     |                         |                  |
|-----|-------------------------|------------------|
| 1   | x-reversal              | Mirror Images    |
| 2   | y-reversal              |                  |
| 3   | z-reversal}             |                  |
| 12  | x and y-reversal        | Identical Images |
| 23  | y and z-reversal        |                  |
| 31  | z and x-reversal}       |                  |
| 123 | x, y, and<br>z-reversal | Mirror Images    |

2. If PSID = 0 or blank, the superelement boundary matrices are obtained from an external source (such as a database or external file). See also PARAM, EXTOUT.

If PSID  $\neq$  0, the secondary superelement is identical to, or is a mirror image of, a primary superelement.

3. For identical or mirror image superelements, the grid point IDs, GPI, may appear in any order. However, if they are not in the same order as the external GRIDS of the primary superelement, then the SEQSEP entry is also required. In case of external superelements, the GRID IDs must be in the order that the terms in the associated matrices occur in.
4. Image superelements and their primaries must be congruent. The identical or mirror image superelement must have the same number of exterior grid points as its primary superelement. The exterior grid points of the image superelement must have the same relative location to each other as do the corresponding points of the primary superelement. The global coordinate directions of each exterior grid point of the image superelement must have the same relative alignment as those of the corresponding grid points of the primary superelement. If congruency is not satisfied because of round-off, then the tolerance may be adjusted with PARAM,CONFAC or DIAG 37.
5. For superelements from an external source, please refer to PARAMS EXTDRE,EXTDROUT, EXTDRUNT, EXTOUT,, and EXTUNIT.

**CSUPEXT**      Superelement Exterior Point Definition

Assigns exterior points to a superelement.

**Format:**

| 1       | 2    | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|---------|------|-----|-----|-----|-----|-----|-----|-----|----|
| CSUPEXT | SEID | GP1 | GP2 | GP3 | GP4 | GP5 | GP6 | GP7 |    |

**Example:**

|         |   |     |     |     |  |  |  |  |  |
|---------|---|-----|-----|-----|--|--|--|--|--|
| CSUPEXT | 2 | 147 | 562 | 937 |  |  |  |  |  |
|---------|---|-----|-----|-----|--|--|--|--|--|

**Alternate Format and Example:**

|         |      |     |        |     |  |  |  |  |  |
|---------|------|-----|--------|-----|--|--|--|--|--|
| CSUPEXT | SEID | GP1 | “THRU” | GP2 |  |  |  |  |  |
|---------|------|-----|--------|-----|--|--|--|--|--|

|         |   |       |      |       |  |  |  |  |  |
|---------|---|-------|------|-------|--|--|--|--|--|
| CSUPEXT | 5 | 12006 | THRU | 12050 |  |  |  |  |  |
|---------|---|-------|------|-------|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Identification number of a primary superelement. (Integer > 0)                                                                                         |
| GPi   | Grid or scalar point identification number in the downstream superelement or residual structure. (Integer > 0 or “THRU”; for “THRU” option, GP1 < GP2) |

**Remarks:**

1. Grid or scalar points are connected (that is, are exterior) to a superelement only if they are connected by structural, rigid, or plot elements. MPC entries are not regarded as elements. This entry is a means of providing connectivity for this purpose.
2. Open sets are allowed with the “THRU” option.
3. Scalar points may be interior to the residual structure (SEID = 0) only.
4. This entry may be applied only to the primary superelements. The CSUPER entry is used for secondary superelements (identical image, mirror image, and external superelements).

**1284 CTETRA**  
**Four-Sided Solid Element Connection**

**CTETRA**      Four-Sided Solid Element Connection

Defines the connections of the four-sided solid element with four to ten grid points.

**Format:**


| 1      | 2   | 3   | 4  | 5   | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|----|-----|----|----|----|----|----|
| CTETRA | EID | PID | G1 | G2  | G3 | G4 | G5 | G6 |    |
|        | G7  | G8  | G9 | G10 |    |    |    |    |    |

**Example:**

|        |     |    |   |    |    |   |     |     |  |
|--------|-----|----|---|----|----|---|-----|-----|--|
| CTETRA | 112 | 2  | 3 | 15 | 14 | 4 | 103 | 115 |  |
|        | 5   | 16 | 8 | 27 |    |   |     |     |  |

**Fields:**

| Field | Contents                                                                   |
|-------|----------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0; Required)                     |
| PID   | Property identification number of a PSOLID or PLSOLID entry. (Integer > 0) |
| Gi    | Identification numbers of connected grid points. (Integer > 0 or blank)    |

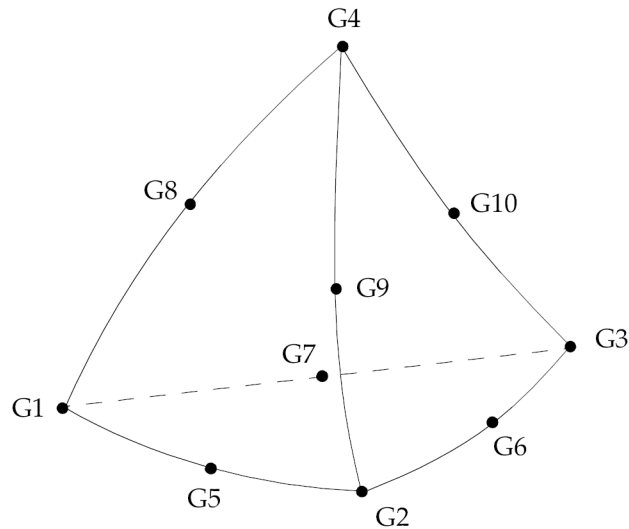


**Figure 13-32. CTETRA Element Connection**

**Remarks:**

1. Element ID numbers must be unique with respect to all other element ID numbers.
2. The topology of the diagram must be preserved, i.e., G1, G2, G3 define a triangular face; G1, G8, and G4 are on the same edge, etc.
3. The edge points, G5 to G10, are optional. Any or all of them may be deleted. If the ID of any edge connection point is left blank or set to zero, the equations of the element are adjusted to give correct results for the reduced number of connections. Corner grid points cannot be deleted. The element is an isoparametric element in all cases.
4. Components of stress are output in the material coordinate system. See remark 6 on the PSOLID bulk entry for hyperelastic and nonlinear exceptions.
5. For nonhyperelastic elements, the element coordinate system is derived from the three vectors R, S, and T, which join the midpoints of opposite edges.  
R vector joins midpoints of edges G1-G2 and G3-G4.  
S vector joins midpoints of edges G1-G3 and G2-G4.  
T vector joins midpoints of edges G1-G4 and G2-G3.

## 1286 CTETRA Four-Sided Solid Element Connection

The origin of the coordinate system is located at G1. The element coordinate system is chosen as close as possible to the R, S, and T vectors and points in the same general direction. (Mathematically speaking, the coordinate system is computed in such a way that, if the R, S, and T vectors are described in the element coordinate system, a 3x3 positive definite symmetric matrix would be produced.)

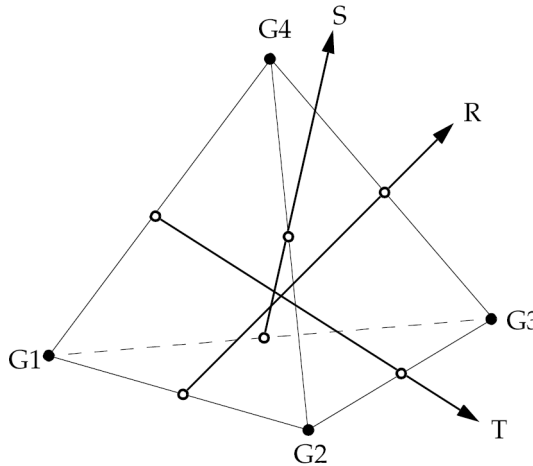

**Figure 13-33. CTETRA Element R, S, and T Vectors**

6. It is recommended that the edge points be located within the middle third of the edge.
7. For hyperelastic elements, the plot codes are specified under the CTETRAFD element name in “Item Codes”.
8. If a CTETRA element is referenced by a PSET or PVAL entry, then p-version formulation is used and the element can have curved edges.
  - If a curved edge of a p-element is shared by an h-element without midside nodes, the geometry of the edge is ignored and set straight.
  - Elements with midside nodes cannot be p-elements and edges with midside nodes cannot be shared by p-elements.
9. By default, all of the six edges of the element are considered straight unless:
  - For p-elements, there is an FEEDGE or FEFACE entry that contains the two grids of any edge of this element. In this case, the geometry of the edge is used in the element.

- For h-elements, any of G5 through G10 are specified.

**Remarks related to SOLs 601 and 701:**

1. For SOL 701, only elements with 4 grid points are allowed.
2. For SOL 601, when ELCV=1 is specified in NXSTRAT (see Remark 2 (SOL 601) in the CHEXA entry), 10-node CTETRA elements will be converted to 11-node elements (with 1 additional node at the centroid of the element).
3. For SOL 601, contact surfaces do not support element faces which are missing midside nodes on variable node CPYRAM and CTETRA elements.

**1288 CTRAX3**  
**Axisymmetric Triangular Element Connection**

**CTRAX3** Axisymmetric Triangular Element Connection

Defines an isoparametric and axisymmetric triangular cross-section ring element for use in linear and fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|--------|-----|-----|----|----|----|----|---|---|----|
| CTRAX3 | EID | PID | G1 | G2 | G3 | TH |   |   |    |
|        |     |     |    |    |    |    |   |   |    |

**Example:**

|        |     |     |    |    |    |      |  |  |  |
|--------|-----|-----|----|----|----|------|--|--|--|
| CTRAX3 | 203 | 100 | 10 | 20 | 30 | 30.0 |  |  |  |
|        |     |     |    |    |    |      |  |  |  |

**Fields:**

| Field | Contents                                                                                                          |
|-------|-------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                      |
| PID   | Property identification number of a PSOLID or PLSOLID entry. (Integer > 0; Default=EID)                           |
| Gi    | Grid point identification number of connected points. (Unique integers > 0)                                       |
| TH    | Material property orientation angle in degrees. THETA is ignored for hyperelastic elements. (Real; Default = 0.0) |


**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the x-z plane of the basic coordinate system, with  $x = r \geq 0$ .
3. Material properties (if defined on a MAT3 entry) are given in the  $(r_m, z_m)$  coordinate system shown in Figure 13-35.
4. The initial element coordinate system is the basic coordinate system.




5. See [Remark 6](#) on the PSOLID entry for information on stress and strain output coordinate systems.
6. For hyperelastic element, the plot codes are specified under the CTRAX3FD element name in [Item Codes](#).
7. A concentrated load (e.g., FORCE entry) at  $G_i$  is divided by the radius to  $G_i$  and then applied as a force per unit circumferential length. For example, in order to apply a load of 100 N/m on the circumference at  $G_1$ , which is located at a radius of 0.5 m, then the magnitude specified on the static load entry must result in:

$$(100 \text{ N/m}) \cdot (0.5 \text{ m}) = 50 \text{ N}$$

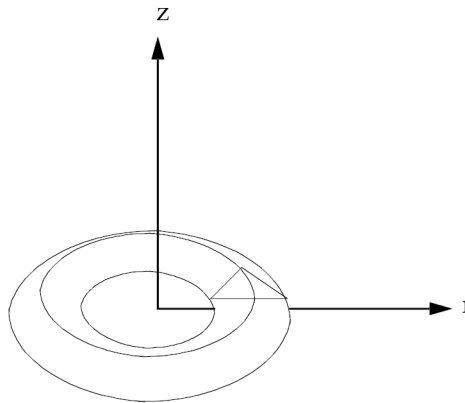

**Figure 13-34. CTRAX3 Element Idealization**

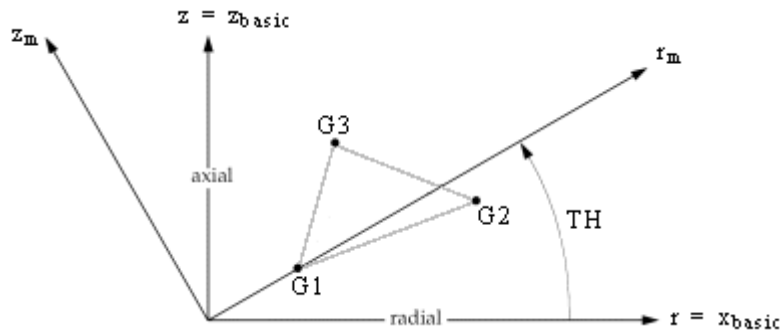

**Figure 13-35. CTRAX3 Element Geometry and Coordinate Systems**

## 1290 CTRAX6 Axisymmetric Triangular Element Connection

### CTRAX6 Axisymmetric Triangular Element Connection

Defines an isoparametric and axisymmetric triangular cross-section ring element with midside nodes for use in linear and fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis.

#### Format:

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|----|----|----|----|----|----|----|
| CTRAX6 | EID | PID | G1 | G2 | G3 | G4 | G5 | G6 |    |
|        | TH  |     |    |    |    |    |    |    |    |

#### Example:

|        |      |     |    |    |    |    |    |    |  |
|--------|------|-----|----|----|----|----|----|----|--|
| CTRAX6 | 203  | 100 | 10 | 20 | 30 | 40 | 50 | 60 |  |
|        | 30.0 |     |    |    |    |    |    |    |  |

#### Fields:


| Field | Contents                                                                                                          |
|-------|-------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                      |
| PID   | Property identification number of a PSOLID or PLSOLID entry. (Integer > 0; Default=EID)                           |
| Gi    | Grid point identification numbers of connected points (midside grids cannot be eliminated). (Unique integers > 0) |
| TH    | Material property orientation angle in degrees. THETA is ignored for hyperelastic elements. (Real; Default = 0.0) |

#### Remarks:


1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The grid points must lie in the x-z plane of the basic coordinate system, with  $x = r \geq 0$ . Grid points G1 through G6 must be numbered as shown in FIGURE 13-37.
3. Material properties (if defined on a MAT3 entry) are given in the  $(r_m, z_m)$  coordinate system shown in Figure 13-37.
4. The initial element coordinate system is the basic coordinate system.

5. See [Remark 6](#) on the PSOLID entry for information on stress and strain output coordinate systems.
6. For hyperelastic element, the plot codes are specified under the CTRAX6FD element name in [Item Codes](#).
7. A concentrated load (e.g., FORCE entry) at  $G_i$  is divided by the radius to  $G_i$  and then applied as a force per unit circumferential length. For example, in order to apply a load of 100 N/m on the circumference at  $G_1$ , which is located at a radius of 0.5 m, then the magnitude specified on the static load entry must result in:

$$(100 \text{ N/m}) \cdot (0.5 \text{ m}) = 50 \text{ N}$$

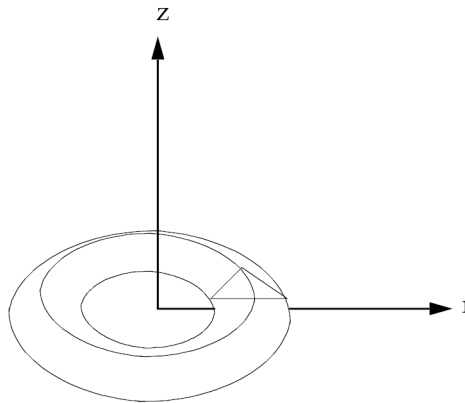

**Figure 13-36. CTRAX6 Element Idealization**

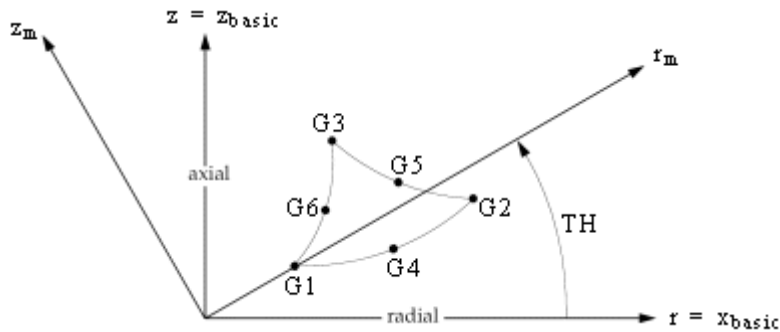

**Figure 13-37. CTRAX6 Element Geometry and Coordinate Systems**

## 1292 CTRIA3 Triangular Plate Element Connection

### CTRIA3 Triangular Plate Element Connection

Defines an isoparametric membrane-bending or plane strain triangular plate element.

#### Format:


| 1      | 2   | 3     | 4  | 5  | 6  | 7                | 8     | 9 | 10 |
|--------|-----|-------|----|----|----|------------------|-------|---|----|
| CTRIA3 | EID | PID   | G1 | G2 | G3 | THETA<br>or MCID | ZOFFS |   |    |
|        |     | TFLAG | T1 | T2 | T3 |                  |       |   |    |

#### Example:

|        |     |     |      |      |      |     |      |  |  |
|--------|-----|-----|------|------|------|-----|------|--|--|
| CTRIA3 | 111 | 203 | 31   | 74   | 75   | 3.0 | 0.98 |  |  |
|        |     |     | 1.77 | 2.04 | 2.09 |     |      |  |  |

#### Fields:


| Field | Contents                                                                                                                                                                                                                                                                                                                                                                    |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                                                                                                                                                                                                                                                |
| PID   | Property identification number of a PSHELL, PCOMP or PLPLANE entry. (Integer > 0; Default = EID)                                                                                                                                                                                                                                                                            |
| Gi    | Grid point identification numbers of connection points. (Integers > 0, all unique)                                                                                                                                                                                                                                                                                          |
| THETA | Material property orientation angle in degrees. THETA is ignored for hyperelastic elements. (Real; Default = 0.0)                                                                                                                                                                                                                                                           |
| MCID  | Material coordinate system identification number. The x-axis of the material coordinate system is determined by projecting the x-axis of the MCID coordinate system (defined by the CORDij entry or zero for the basic coordinate system) onto the surface of the element. MCID is ignored for hyperelastic elements. (Integer ≥ 0; if blank, then THETA = 0.0 is assumed.) |

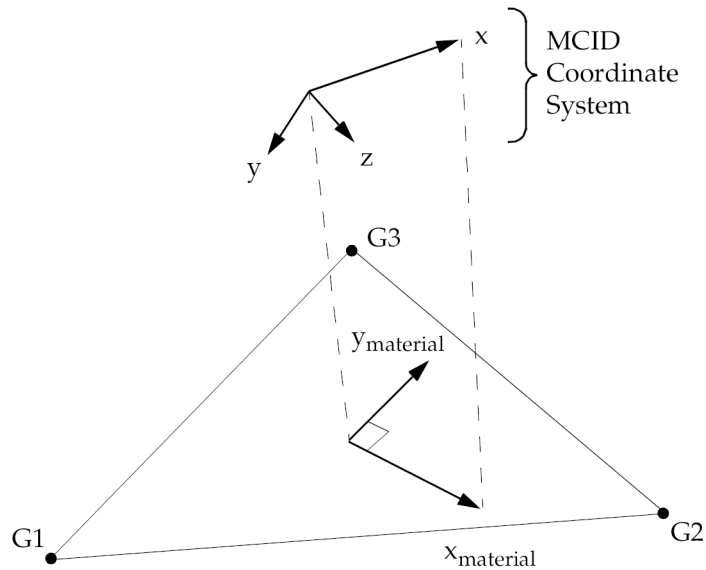

**Figure 13-38. MCID Coordinate System Definition**

- ZOFFS**      Offset from the surface of grid points to the element reference plane. See Remarks 3 and 4. ZOFFS is ignored for hyperelastic elements. (Real)
- TFLAG**      Integer Flag which specifies how  $T_i$  is used to define membrane thickness of element (0, 1, or blank).
- $T_i$**           Membrane thickness of element at grid points G1 through G4 if  $TFLAG=0$  or blank. If  $TFLAG=1$ , membrane thickness becomes a product of  $T_i$  and the thickness on the PSHELL card.  $T_i$  is ignored for hyperelastic elements. (Real > 0.0 or blank. See Remark 2 for default.)

## 1294 CTRIA3 Triangular Plate Element Connection

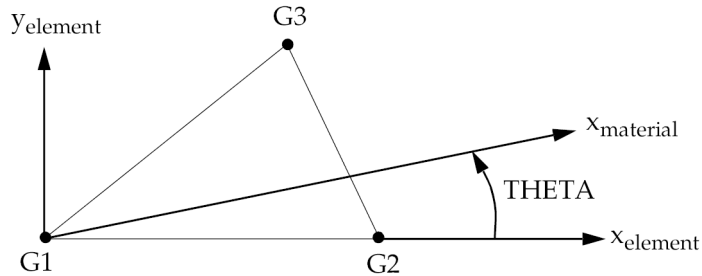

**Figure 13-39. CTRIA3 Element Geometry and Coordinate Systems**

### Remarks:

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The continuation is optional. If it is not supplied, then T1 through T3 will be set equal to the value of T on the PSHELL entry.
3. Elements may be offset from the connection points by means of the ZOFFS field. Other data, such as material matrices and stress fiber locations, are given relative to the reference plane. A positive value of ZOFFS implies that the element reference plane is offset a distance of ZOFFS along the positive Z-axis of the element coordinate system. If the ZOFFS field is used, then both the MID1 and MID2 fields must be specified on the PSHELL entry referenced by PID.

ZOFFS should not be used when differential stiffness is calculated in solutions 105 and 200, and solutions 103, 107 - 112 using STATSUB, since the differential stiffness calculation does not include the offset vectors.

4. ZOFFS has the following caveats in nonlinear solutions 106 and 129:
  - For geometry nonlinear only, the differential stiffness calculation does not include the offset vectors. The exclusion of the offset in the differential stiffness will have an adverse effect on convergence, however, if the solution converges, the results will be correct. In a nonlinear solution, equilibrium (and convergence) is achieved when internal and external forces balance. The offset is correctly accounted for in the internal and external force calculations even though it is not accounted for in the differential stiffness.
  - ZOFFS should not be defined on elements which use MATS1 nonlinear material definitions.
  - ZOFFS is ignored for hyperelastic elements.

- ZOFFS should not be used in nonlinear solutions 106 and 129 in combination with thermal loads.
5. The reference coordinate system for the output of stress, strain and element force depends on the element type.
    - For CTRIA3 elements which are not p-elements and not hyperelastic, the reference coordinate system for output is the element coordinate system. For SOL 106 geometry nonlinear analysis, the nonlinear stresses are output in deformed element coordinate system.
    - For CTRIA3 elements referenced by a PSET or PVAL entry, the stresses, strains and element forces are output in the local tangent plane of the element. The local tangents are oriented in a user defined direction which is uniform across a set of elements. By default, the local tangent x-direction is oriented in the positive x-direction of the basic coordinate system.
    - For hyperelastic elements, the stress and strain are output according to CID on the PLPLANE entry.
  6. For hyperelastic elements, the plot codes are specified under the CTRIAFD element name in “[Item Codes](#)”.
  7. SYSTEM(218), alias T3SKEW, allows the user to control the minimum vertex angle for TRIA3 elements at which USER WARNING MESSAGE 5491 is issued. The default value is 10.0 degrees.
  8. If a CTRIA3 element is referenced by a PSET or PVAL entry, then a p-version formulation is used and the element can have curved edges.
    - If a curved edge of a p-element is shared by an h-element CTRIA3, the geometry of the edge is ignored and set straight.
  9. By default, all of the three edges of the element are considered straight unless the element is a p-element and the edges are associated to curved geometry with FEEDGE or FEFACE Bulk Data entries.

**Remarks related to SOLs 601 and 701:**

1. ZOFFS is ignored.
2. For geometry nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

**1296 CTRIA6**  
**Curved Triangular Shell Element Connection**

**CTRIA6** Curved Triangular Shell Element Connection

Defines a curved triangular shell element or plane strain with six grid points.

**Format:**

| 1      | 2                | 3     | 4  | 5  | 6  | 7     | 8  | 9  | 10 |
|--------|------------------|-------|----|----|----|-------|----|----|----|
| CTRIA6 | EID              | PID   | G1 | G2 | G3 | G4    | G5 | G6 |    |
|        | THETA<br>or MCID | ZOFFS | T1 | T2 | T3 | TFLAG |    |    |    |


**Example:**

|        |     |     |      |      |      |    |    |    |  |
|--------|-----|-----|------|------|------|----|----|----|--|
| CTRIA6 | 302 | 3   | 31   | 33   | 71   | 32 | 51 | 52 |  |
|        | 45  | .03 | .020 | .025 | .025 |    |    |    |  |

**Fields:**

| Field      | Contents                                                                                                                                                                                                                                                                                                                                                                    |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID        | Element Identification number. (Integer > 0)                                                                                                                                                                                                                                                                                                                                |
| PID        | Property identification number of PSHELL, PCOMP, or PLPLANE entry. (Integer > 0)                                                                                                                                                                                                                                                                                            |
| G1, G2, G3 | Identification numbers of connected corner grid points. (Unique Integers > 0)                                                                                                                                                                                                                                                                                               |
| G4, G5, G6 | Identification number of connected edge grid points. Optional data for any or all three points. (Integer ≥ 0 or blank)                                                                                                                                                                                                                                                      |
| THETA      | Material property orientation angle in degrees. THETA is ignored for hyperelastic elements. (Real; Default = 0.0)                                                                                                                                                                                                                                                           |
| MCID       | Material coordinate system identification number. The x-axis of the material coordinate system is determined by projecting the x-axis of the MCID coordinate system (defined by the CORDij entry or zero for the basic coordinate system) onto the surface of the element. MCID is ignored for hyperelastic elements. (Integer ≥ 0; if blank, then THETA = 0.0 is assumed.) |



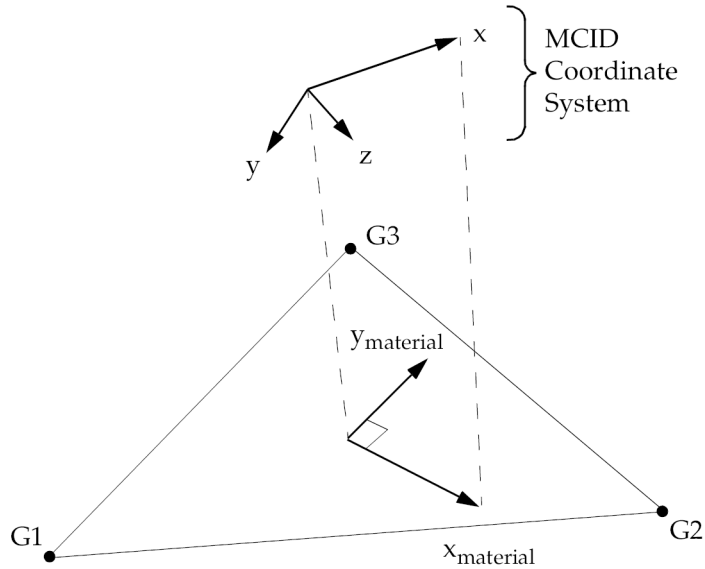

**Figure 13-40. MCID Coordinate System Definition**

|       |                                                                                                                                                                                                                                                                              |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ZOFFS | Offset from the surface of grid points to the element reference plane; see Remark 6. ZOFFS is ignored for hyperelastic elements. (Real)                                                                                                                                      |
| TFLAG | Integer Flag which specifies how $T_i$ is used to define membrane thickness of element. (0, 1, or blank)                                                                                                                                                                     |
| $T_i$ | Membrane thickness of element at grid points G1 through G4 if TFLAG=0 or blank. If TFLAG=1, membrane thickness becomes a product of $T_i$ and the thickness on the PSHELL card. $T_i$ is ignored for hyperelastic elements. (Real > 0.0 or blank. See Remark 4 for default.) |

**Remarks:**


1. Element identification numbers should be unique with respect to all other element IDs.
2. Grid points G1 through G6 must be numbered as shown in [Figure 13-41](#).
3. The orientation of the material property coordinate system is defined locally at each interior integration point by THETA, which is the angle between  $x_{\text{material}}$  and the line of constant  $h$ .

## 1298 CTRIA6 Curved Triangular Shell Element Connection

4. T1, T2, and T3 are optional. If not supplied, they will be set equal to the value of T on the PSHELL entry.
5. It is recommended that the midside grid points be located within the middle third of the edge.
6. Elements may be offset from the connection points by means of the ZOFFS field. Other data, such as material matrices and stress fiber locations, are given relative to the reference plane. A positive value of ZOFFS implies that the element reference plane is offset a distance of ZOFFS along the positive z-axis of the element coordinate system. If the ZOFFS field is used, then both the MID1 and MID2 fields must be specified on the PSHELL entry referenced by PID.

The specification of offset vectors gives erroneous results in solution sequences with linear buckling analysis, SOLs 105 and 200.

7. If all midside grid points are deleted, then the element will be excessively stiff and the transverse shear forces will be incorrect. A User Warning Message is printed. A CTRIA3 element entry is recommended instead. If the element is hyperelastic, then the element is processed identically to the hyperelastic CTRIA3 element.
8. For a description of the element coordinate system, see “Plate and Shell Elements” in the *NX Nastran Element Library*. Stresses and strains are output in the local coordinate system identified by  $x_l$  and  $y_l$  in [Figure 13-41](#). For hyperelastic elements, stresses and strains are output in the coordinate system defined by the CID field on the PLPLANE entry.

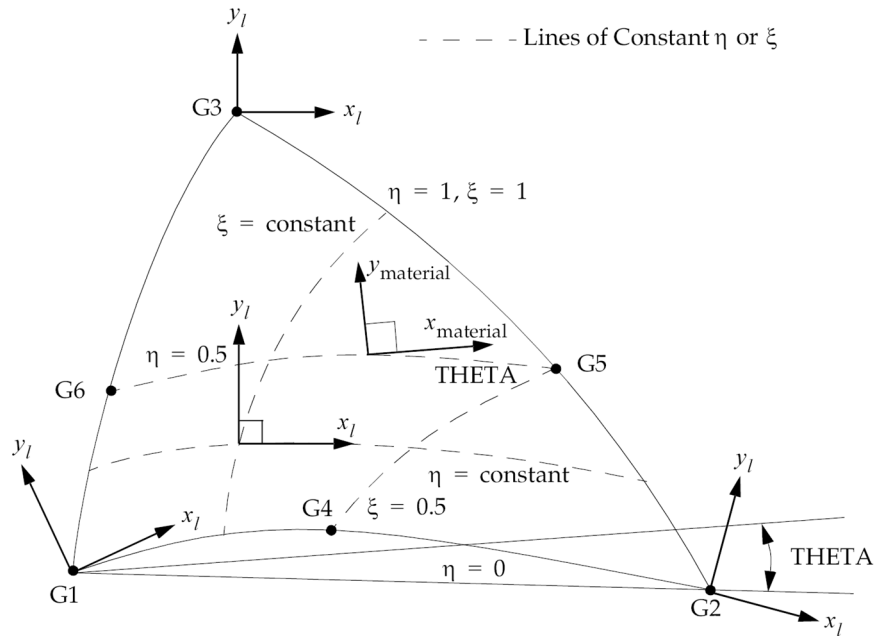

**Figure 13-41. CTRIA6 Element Geometry and Coordinate Systems**

9. For hyperelastic elements, the plot codes are specified under the CTRIAFD element name in “Item Codes”.

**Remarks related to SOL 601:**

1. Only elements with 3 or 6 grid points are allowed.
2. ZOFFS is ignored.
3. When used as a plane strain element, ELCV=1 in the NXSTRAT entry will convert a 6-node triangular element to a 7-node triangular element (with 1 additional node at the centroid of the element).
4. In a nonlinear analysis, both linear and nonlinear stress/strain data blocks are output for CTRIA6 elements in the op2 file. Note that in a future release, the output of linear stress/strain data blocks for CTRIA6 elements may be discontinued for a nonlinear analysis.
5. For geometry nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

## 1300 CTRIAR Triangular Plate Element Connection

### CTRIAR Triangular Plate Element Connection

Defines an isoparametric membrane-bending triangular plate element. It is a companion to the CQUADR element.

#### Format:


| 1      | 2   | 3     | 4  | 5  | 6  | 7                | 8     | 9 | 10 |
|--------|-----|-------|----|----|----|------------------|-------|---|----|
| CTRIAR | EID | PID   | G1 | G2 | G3 | THETA<br>or MCID | ZOFFS |   |    |
|        |     | TFLAG | T1 | T2 | T3 |                  |       |   |    |

#### Example:

|        |     |     |      |      |      |     |  |  |  |
|--------|-----|-----|------|------|------|-----|--|--|--|
| CTRIAR | 111 | 203 | 31   | 74   | 75   | 3.0 |  |  |  |
|        |     |     | 1.77 | 2.04 | 2.09 |     |  |  |  |

#### Fields:

| Field      | Contents                                                                                                                                                                                                                                                                                                                         |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID        | Element identification number. (Integer > 0)                                                                                                                                                                                                                                                                                     |
| PID        | Property identification number of a PSHELL or PCOMP entry. (Integer > 0; Default = EID)                                                                                                                                                                                                                                          |
| G1, G2, G3 | Grid point identification numbers of connection points. (Integers > 0, all unique)                                                                                                                                                                                                                                               |
| THETA      | Material property orientation angle in degrees. (Real; Default = 0.0)                                                                                                                                                                                                                                                            |
| ZOFFS      | Offset from the surface of grid points to the element reference plane. See Remark 6. (Real)                                                                                                                                                                                                                                      |
| MCID       | Material coordinate system identification number. The x-axis of the material coordinate system is determined by projecting the x-axis of the MCID coordinate system (defined by the CORDij entry or zero for the basic coordinate system) onto the surface of the element. (Integer ≥ 0; if blank, then THETA = 0.0 is assumed.) |

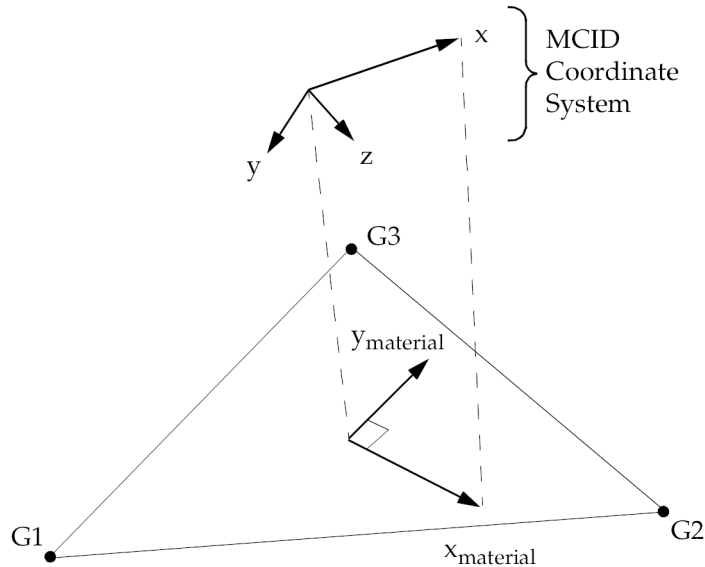

**Figure 13-42. MCID Coordinate System Definition**

|       |                                                                                                                                                                                                                                                                                  |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TFLAG | Integer Flag which specifies how $T_i$ is used to define membrane thickness of element. (0, 1, or blank)                                                                                                                                                                         |
| $T_i$ | Membrane thickness of element at grid points G1 through G4 if TFLAG=0 or blank. If TFLAG=1, membrane thickness becomes a product of $T_i$ and the thickness on the PSHELL card. $T_i$ is ignored for hyperelastic elements. (Real > 0.0 or blank. See Remark 2 for the default.) |

**Remarks:**


1. Element identification numbers should be unique with respect to all other element identification numbers.
2. The continuation is optional. If it is not supplied, then T1 through T3 will be set equal to the value of T on the PSHELL entry.
3. Stresses and strains are output in the element coordinate system at the centroid unless the CORNER or CUBIC entry is specified on the STRESS card. Specifying CORNER or CUBIC will result in stresses at grid points G1 through G4.

## 1302 CTRIAR Triangular Plate Element Connection

4. The rotational degrees-of-freedom normal to the element are active in the element formulation and must not be constrained unless at a boundary. If they are constrained, then inaccurate results will be obtained.
5. This element is intended as a companion to the CQUADR element. It has not been fully implemented for other types of analysis such as nonlinear. See “Element Summary – Small Strain Elements” in the *NX Nastran Element Library* for a list of supported capabilities.
6. Elements may be offset from the connection points by means of the ZOFFS field. Other data, such as material matrices and stress fiber locations, are given relative to the reference plane. A positive value of ZOFFS implies that the element reference plane is offset a distance of ZOFFS along the positive z-axis of the element coordinate system. If the ZOFFS field is used, then both the MID1 and MID2 fields must be specified on the PSHELL entry referenced by PID.

### Remarks related to SOL 601:

1. ZOFFS is ignored.
2. CTRIAR can only be used in linear analysis. It is recommended that CTRIA3 be used instead of CTRIAR in SOL 601 analysis.

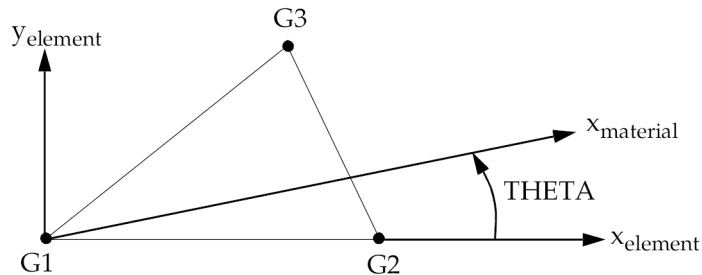

**Figure 13-43. CTRIAR Element Geometry and Coordinate Systems**

3. For geometry nonlinear analysis, the nonlinear stresses are written in undeformed element coordinate system.

## CTRIAX Fully Nonlinear Axisymmetric Element

Defines an axisymmetric triangular element with up to 6 grid points for use in fully nonlinear (i.e., large strain and large rotations) hyperelastic analysis.

### Format:

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|----|----|----|----|----|----|----|
| CTRIAX | EID | PID | G1 | G2 | G3 | G4 | G5 | G6 |    |

### Example:

|        |     |     |    |    |    |  |  |  |  |
|--------|-----|-----|----|----|----|--|--|--|--|
| CTRIAX | 111 | 203 | 31 | 74 | 75 |  |  |  |  |
|--------|-----|-----|----|----|----|--|--|--|--|

### Fields:

| Field      | Contents                                                                                                                     |
|------------|------------------------------------------------------------------------------------------------------------------------------|
| EID        | Element identification number. (Integer > 0)                                                                                 |
| PID        | Property identification number of a PLPLANE entry. (Integer > 0)                                                             |
| G1, G2, G3 | Identification numbers of connected corner grid points. Required data for all three grid points. (Unique Integers > 0)       |
| G4, G5, G6 | Identification numbers of connected edge grid points. Optional data for any or all three grid points. (Integer ≥ 0 or blank) |

### Remarks:


1. Element identification numbers must be unique with respect to all other element IDs of any kind.
2.  $G_i$  must be numbered as shown in [Figure 13-44](#).
3. It is recommended that the edge points be located within the middle third of the edge.
4. The plot codes are specified under the CTRIAXFD element name in [“Item Codes”](#).
5. The grid points of the axisymmetric element must lie on the x-y plane of the basic coordinate system. Stress and strain are output in the basic coordinate system.
6. A concentrated load (e.g., FORCE entry) at  $G_i$  is divided by the radius to  $G_i$  and then applied as a force per unit circumferential length. For example, in order to apply a load of 100 N/m on the circumference at  $G_1$ , which is located at a radius of 0.5 m, the magnitude specified on the static load entry must result in:

**1304 CTRIAX**  
Fully Nonlinear Axisymmetric Element

$$(100 \text{ N/m}) \cdot (0.5 \text{ m}) = 50 \text{ N}$$

**Remarks related to SOL 601:**

1. Only elements with 3 or 6 grid points are allowed.
2. 6-node elements may be converted to 7-node elements (with 1 additional node at the centroid of the element) by specifying ELCV=1 in the NXSTRAT entry. The 7-node element is more effective in the analysis of incompressible rubber-like materials.

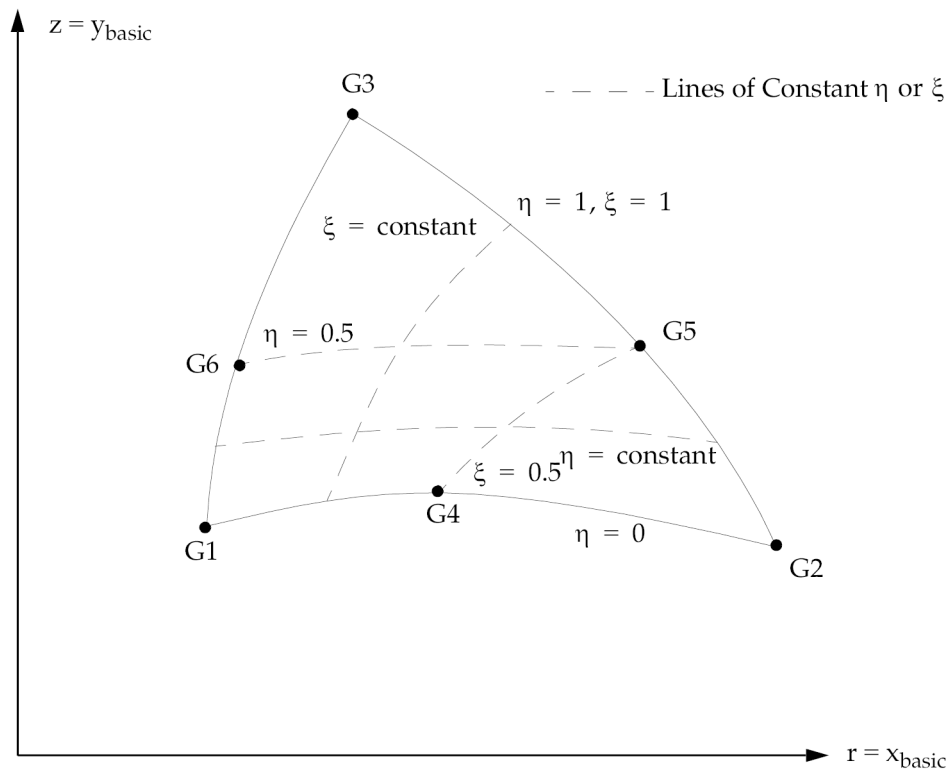

**Figure 13-44. CTRIAX Element Coordinate System**



**CTRIAX6** Axisymmetric Triangular Element Connection

Defines an isoparametric and axisymmetric triangular cross section ring element with midside grid points.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|-----|-----|----|----|----|----|----|----|----|
| CTRIAX6 | EID | MID | G1 | G2 | G3 | G4 | G5 | G6 |    |
|         | TH  |     |    |    |    |    |    |    |    |

**Example:**

|         |     |     |    |    |    |    |    |    |  |
|---------|-----|-----|----|----|----|----|----|----|--|
| CTRIAX6 | 22  | 999 | 10 | 11 | 12 | 21 | 22 | 32 |  |
|         | 9.0 |     |    |    |    |    |    |    |  |

**Fields:**

| Field | Contents                                                                                                 |
|-------|----------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                             |
| MID   | Material identification number. (Integer > 0)                                                            |
| Gi    | Grid point identification numbers of connected points. (unique integers > 0, or blank for deleted nodes) |
| TH    | Material property orientation angle in degrees. (Real; Default = 0.0)                                    |


**Remarks:**

1. The grid points must lie in the x-z plane of the basic coordinate system, with  $x = r \geq 0$ . The grid points must be listed consecutively beginning at a vertex and proceeding around the perimeter in either direction. Corner grid points G1, G3, and G5 must be present. Any or all edge grid points G2, G4, or G6 may be deleted. Note that the alternate corner-edge grid point pattern is different from the convention used on the CTRIA6 element.
2. For structural problems, the MID may refer to a MAT1 or MAT3 entry.
3. The continuation is optional.
4. CTRIA6 does not support strain output.


## 1306 CTRIAX6 Axisymmetric Triangular Element Connection

5. Material properties (if defined on a MAT3 entry) and stresses are given in the  $(r_m, z_m)$  coordinate system shown in [Figure 13-46](#).
6. A concentrated load (e.g., FORCE entry) at  $G_i$  is divided by the  $2\pi$  times the radius to  $G_i$  and then applied as a force per unit circumferential length. For example, in order to apply a load of 100 N/m on the circumference at  $G_1$  (which is located at a radius of 0.5 m), the magnitude of the load specified on the static load entry must result in:

$$(100 \text{ N/m}) \cdot 2\pi \cdot (0.5 \text{ m}) = 314.159 \text{ N}$$

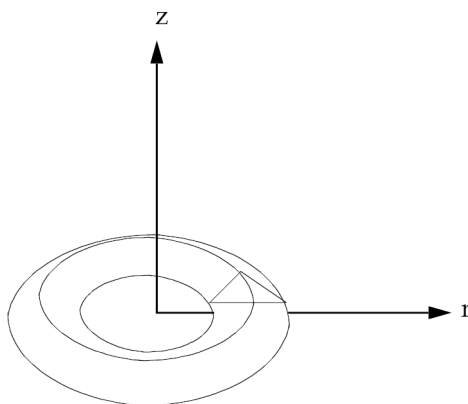

**Figure 13-45. CTRIAX6 Element Idealization**

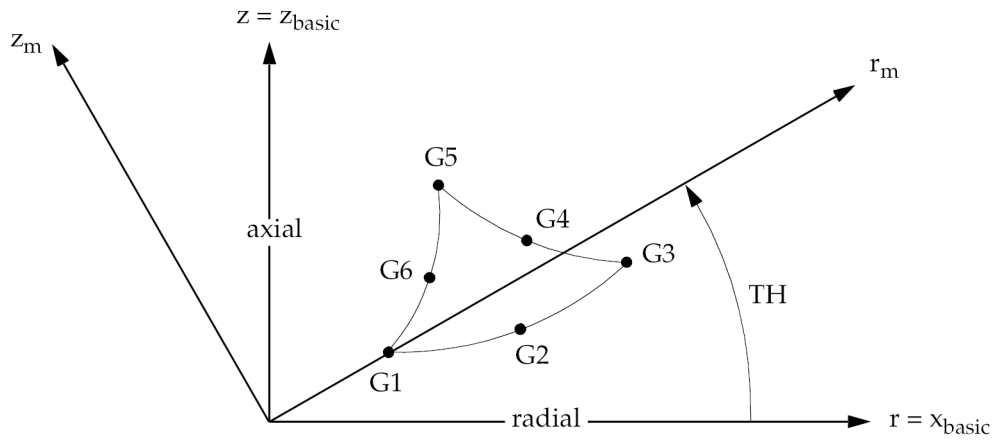

**Figure 13-46. CTRIAX6 Element Geometry and Coordinate Systems**

## 1308 CTUBE

Tube Element Connection

### CTUBE Tube Element Connection

Defines a tension-compression-torsion tube element.

#### Format:

| 1     | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|-------|-----|-----|----|----|---|---|---|---|----|
| CTUBE | EID | PID | G1 | G2 |   |   |   |   |    |

#### Example:

|       |    |    |    |    |  |  |  |  |  |
|-------|----|----|----|----|--|--|--|--|--|
| CTUBE | 12 | 13 | 21 | 23 |  |  |  |  |  |
|-------|----|----|----|----|--|--|--|--|--|

#### Fields:

| Field  | Contents                                                                         |
|--------|----------------------------------------------------------------------------------|
| EID    | Element identification number. (Integer > 0)                                     |
| PID    | Property identification number of a PTUBE entry. (Integer > 0;<br>Default = EID) |
| G1, G2 | Grid point identification numbers of connection points. (Integer > 0; G1 ≠ G2)   |

#### Remarks:

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Only one tube element may be defined on a single entry.

**CVISC**      Viscous Damper Connection

Defines a viscous damper element.

**Format:**

| 1     | 2   | 3   | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|-------|-----|-----|----|----|---|---|---|---|----|
| CVISC | EID | PID | G1 | G2 |   |   |   |   |    |

**Example:**

|       |    |      |    |    |  |  |  |  |  |
|-------|----|------|----|----|--|--|--|--|--|
| CVISC | 21 | 6327 | 29 | 31 |  |  |  |  |  |
|-------|----|------|----|----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                       |
|--------|--------------------------------------------------------------------------------|
| EID    | Element identification number. (Integer > 0)                                   |
| PID    | Property identification number of a PVISC entry. (Integer > 0; Default = EID)  |
| G1, G2 | Grid point identification numbers of connection points. (Integer > 0; G1 ≠ G2) |

**Remarks:**

1. Element identification numbers should be unique with respect to all other element identification numbers.
2. Only one viscous damper element may be defined on a single entry.

**1310 CWELD**  
Weld or Fastener Element Connection

**CWELD** Weld or Fastener Element Connection

Defines a weld or fastener connecting two surface patches or points.

**ELPAT Format: (See Remark 2)**

| 1     | 2     | 3     | 4  | 5       | 6  | 7  | 8 | 9 | 10 |
|-------|-------|-------|----|---------|----|----|---|---|----|
| CWELD | EWID  | PWID  | GS | "ELPAT" | GA | GB |   |   |    |
|       | SHIDA | SHIDB |    |         |    |    |   |   |    |
|       | XS    | YS    | ZS |         |    |    |   |   |    |

**ELPAT Example:**

|       |    |    |     |       |  |  |  |  |  |
|-------|----|----|-----|-------|--|--|--|--|--|
| CWELD | 7  | 29 | 233 | ELPAT |  |  |  |  |  |
|       | 15 | 28 |     |       |  |  |  |  |  |

**PARTPAT Format: (See Remark 2)**

| 1     | 2    | 3    | 4  | 5         | 6  | 7  | 8 | 9 | 10 |
|-------|------|------|----|-----------|----|----|---|---|----|
| CWELD | EWID | PWID | GS | "PARTPAT" | GA | GB |   |   |    |
|       | PIDA | PIDB |    |           |    |    |   |   |    |
|       | XS   | YS   | ZS |           |    |    |   |   |    |

**PARTPAT Example:**

|       |     |     |     |         |  |  |  |  |  |
|-------|-----|-----|-----|---------|--|--|--|--|--|
| CWELD | 8   | 30  | 133 | PARTPAT |  |  |  |  |  |
|       | 101 | 201 |     |         |  |  |  |  |  |

**GRIDID Format: (See Remark 3)**

| 1     | 2    | 3    | 4   | 5        | 6   | 7   | 8     | 9   | 10 |
|-------|------|------|-----|----------|-----|-----|-------|-----|----|
| CWELD | EWID | PWID | GS  | "GRIDID" | GA  | GB  | SPTYP |     |    |
|       | GA1  | GA2  | GA3 | GA4      | GA5 | GA6 | GA7   | GA8 |    |
|       | GB1  | GB2  | GB3 | GB4      | GB5 | GB6 | GB7   | GB8 |    |
|       | XS   | YS   | ZS  |          |     |     |       |     |    |

**GRIDID Example:**

|       |    |    |     |        |    |    |    |    |  |
|-------|----|----|-----|--------|----|----|----|----|--|
| CWELD | 7  | 29 | 233 | GRIDID |    |    | QT |    |  |
|       | 15 | 28 | 31  | 35     | 46 | 51 | 55 | 60 |  |
|       | 3  | 5  | 8   |        |    |    |    |    |  |

**ELEMID Format: (See Remark 4)**

|       |       |       |    |          |  |  |  |  |  |
|-------|-------|-------|----|----------|--|--|--|--|--|
| CWELD | EWID  | PWID  | GS | "ELEMID" |  |  |  |  |  |
|       | SHIDA | SHIDB |    |          |  |  |  |  |  |
|       | XS    | YS    | ZS |          |  |  |  |  |  |

**ELEMID Example:**

|       |    |    |     |        |  |  |  |  |  |
|-------|----|----|-----|--------|--|--|--|--|--|
| CWELD | 3  | 28 | 354 | ELEMID |  |  |  |  |  |
|       | 15 | 16 |     |        |  |  |  |  |  |

**ALIGN Format: (See Remark 5)**

|       |      |      |  |         |    |    |  |  |  |
|-------|------|------|--|---------|----|----|--|--|--|
| CWELD | EWID | PWID |  | "ALIGN" | GA | GB |  |  |  |
|-------|------|------|--|---------|----|----|--|--|--|

**ALIGN Example:**

|       |   |    |  |       |     |     |  |  |  |
|-------|---|----|--|-------|-----|-----|--|--|--|
| CWELD | 7 | 29 |  | ALIGN | 103 | 259 |  |  |  |
|-------|---|----|--|-------|-----|-----|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                 |
|--------------|---------------------------------------------------------------------------------|
| EWID         | CWELD element identification number. See Remark 6. (Integer > 0)                |
| PWID         | Property identification number of a PWELD entry. (Integer > 0)                  |
| "ELPAT"      | Designates the input format as "ELPAT". See Remark 2. (Character; No default)   |
| "PARTPAT"    | Designates the input format as "PARTPAT". See Remark 2. (Character; No default) |
| "GRIDID"     | Designates the input format as "GRIDID". See Remark 3. (Character; No default)  |
| "ELEMID"     | Designates the input format as "ELEMID". See Remark 4. (Character; No default)  |
| "ALIGN"      | Designates the input format as "ALIGN". See Remark 5. (Character; No default)   |

## 1312 CWELD Weld or Fastener Element Connection

| Field    | Contents                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GA, GB   | Grid identification numbers used to define the location of the connector on surface patch A and surface patch B, respectively when format is “ELPAT”, “PARTPAT”, “ELEMID”, or GRIDID. When format is “ALIGN”, GA and GB are required, and they must be vertex nodes of shell elements. See Remark 1. (Integer > 0 or blank)                                                                                                        |
| GS       | Grid point identification number used to define the end locations of the connector when GA/GB are undefined. The specific meaning of GS depends on whether it is used to define a location on a shell element patch when format is “ELPAT”, “PARTPAT”, “ELEMID”, or “GRIDID”, or is used to define a point location when the format is “ELEMID”, or “GRIDID”. See Remarks 1–6 for format specific definitions of GS. (Integer > 0) |
| XS,YS,ZS | Defines the location of the connector on a shell element patch when format is “ELPAT”, “PARTPAT”, “ELEMID”, or “GRIDID”, and when GA,/GB and GS are all undefined. See Remark 1. (Integer > 0)                                                                                                                                                                                                                                     |
| PIDA     | The physical property identification number of a PSHELL bulk data entry used to define surface patch A when format is “PARTPAT”. (Integer > 0)                                                                                                                                                                                                                                                                                     |
| PIDB     | The physical property identification number of a PSHELL bulk data entry used to define surface patch B when format is “PARTPAT”. (Integer > 0)                                                                                                                                                                                                                                                                                     |
| SHIDA    | The shell element identification number used to define surface patch A when format is “ELPAT” or “ELEMID”. (Integer > 0)                                                                                                                                                                                                                                                                                                           |
| SHIDB    | The shell element identification number used to define surface patch B when format is “ELPAT” or “ELEMID”.(Integer > 0)                                                                                                                                                                                                                                                                                                            |
| SPTYP    | String indicating the type of surface patches A and B when format is “GRIDID”. SPTYP=“QQ”, “TT”, “QT”, “TQ”, “Q” or “T”. Indicates quadrilateral (“Q”) or triangular (“T”) surface patch. See Remark 3. (Character)                                                                                                                                                                                                                |
| GAi      | Grid identification numbers defining surface patch A when format is “GRIDID”. GA1 to GA3 are required. See Remark 3. (Integer > 0)                                                                                                                                                                                                                                                                                                 |
| GBi      | Grid identification numbers defining surface patch B when format is “GRIDID”. See Remark 3. (Integer > 0)                                                                                                                                                                                                                                                                                                                          |



**Remarks:**

1. GA/GB, or GS, or XS/YS/ZS, in that order of precedence, determine the location(s) of the CWELD connection on surface patches A and/or B, when format is “ELPAT”, “PARTPAT”, “ELEMID”, or “GRIDID”. The connection location on patch A is a specification of grid point GA, or a projection of GS or XS/YS/ZS normal to surface patch A. The location on patch B is a specification of grid point GB, or a projection of GS or XS/YS/ZS normal to surface patch B. When GS or XS/YS/ZS are used, a normal projection must exist in order to define a valid connection element. GS or XS/YS/ZS do not need to lie on either surface patch A or B. If GS or XS/YS/ZS are used to define the connection location, grid points are internally created at the connection location with an id, starting with the value specified on PARAM, OSWPPT.
2. If the “ELPAT” format is used, the shell element selected on SHIDA along with those connected and the shell element specified on the SHIDB along with those connected will create shell element patches A and B, respectively. The “PARTPAT” format works similarly, except that the shell elements for patches A and B are selected with the PSHELL property ID specified on PIDA and PIDB, respectively. See Figure 47.

For both “ELPAT” and “PARTPAT”, shell element patches A and B are connected together with a weld of diameter D specified on the PWELD bulk entry. The centers of the weld connection GA and GB on patches A and B are determined as described in remark 1. Virtual grid points GA1-GA4 on patch A and GB1-GB4 on patch B are created at the corners of a square having an area equivalent to a circle using the diameter D. See Figure 48. The points on each patch are connected together using constraint equations represented by the dashed green lines in Figure 49. The diameter of the CWELD should be entered such that all  $GA_i$  and  $GB_i$  locations are either within the element in which GA and GB are projected onto, or an element directly adjacent. For example, if any  $GA_i$  location is within the gray area in Figure 49, CWELD creation may fail. Parameters on the [SWLDPRM](#) bulk entry can be used to adjust tolerances and defaults when CWELD creation fails.

1314 CWELD  
Weld or Fastener Element Connection



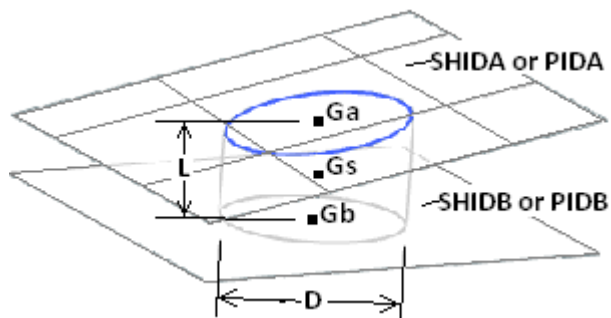


Figure 13-47. Patch-to-Patch Connection Defined with Format ELPAT or PARTPAT

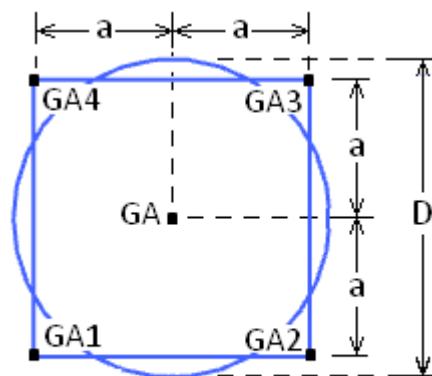

$$a = \sqrt{\pi} \frac{D}{4}$$

Figure 13-48. GA<sub>i</sub> and GB<sub>i</sub> Locations with Format ELPAT or PARTPAT

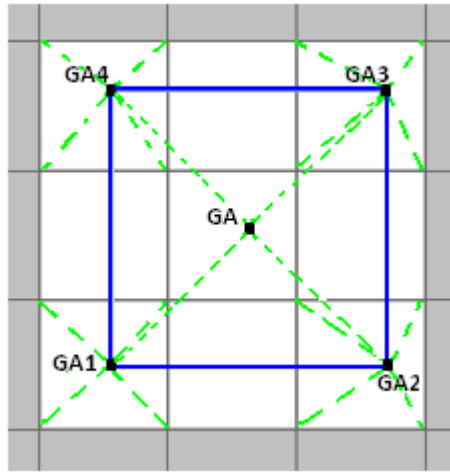


**Figure 13-49. Weld Connections with Format ELPAT or PARTPAT**

3. The format “GRIDID” defines either a point to element face or an element face to element face connection. For the point to element face connection, you must define GS and  $GA_i$ . Then it is assumed that GS is a shell vertex grid and  $GA_i$  are grids describing an element face. For the element face to element face connection, you must define GS,  $GA_i$  and  $GB_i$ . Then  $GA_i$  describes the first element face and  $GB_i$  the second element face.

$GA_i$  are required for the “GRIDID” format. At least 3 and at most 8 grid IDs may be specified for  $GA_i$  and  $GB_i$ , respectively. Triangular and quadrilateral element definition sequences apply for the order of  $GA_i$  and  $GB_i$ , see [Figure 13-50](#). Missing midside nodes are allowed. The envelop that is defined by the grids must represent a valid finite element shape, and not just a string of grids. The envelop may encapsulate more than one finite element.

**1316 CWELD**  
**Weld or Fastener Element Connection**

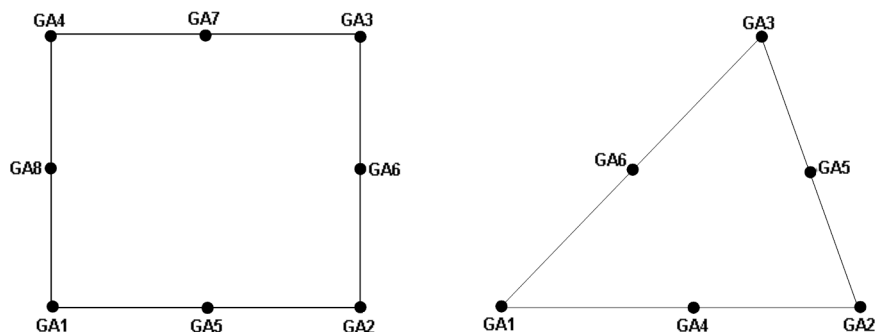


**Figure 13-50. Quadrilateral and Triangular Surface Patches Defined with Format GRIDID**

SPTYP defines the type of surface patches to be connected. SPTYP is required for the “GRIDID” format to identify quadrilateral or triangular patches. Allowable combinations are:

| SPTYP | Description                                                                                                           |
|-------|-----------------------------------------------------------------------------------------------------------------------|
| QQ    | Connects a quadrilateral surface patch A (Q4 to Q8) with a quadrilateral surface patch B (Q4 to Q8).                  |
| QT    | Connects a quadrilateral surface patch A (Q4 to Q8) with a triangular surface patch B (T3 to T6).                     |
| TT    | Connects a triangular surface patch A (T3 to T6) with a triangular surface patch B (T3 to T6).                        |
| TQ    | Connects a triangular surface patch A (T3 to T6) with a quadrilateral surface patch B (Q4 to Q8).                     |
| Q     | Connects the shell vertex grid GS with a quadrilateral surface patch A (Q4 to Q8) if surface patch B is not specified |
| T     | Connects the shell vertex grid GS with a triangular surface patch A (T3 to T6) if surface patch B is not specified    |

- The “ELEMID” format defines a point to patch connection, GS to SHIDA or a patch to patch connection, SHIDA to SHIDB.
- The “ALIGN” format defines a point to point connection. GA and GB are required, and they must be vertex nodes of shell elements. GA and GB are not required for the other formats.

6. CWELD defines a flexible connection between two surface patches, between a point and a surface patch, or between two shell vertex grid points. See [Figure 13-51](#) through [Figure 13-53](#).

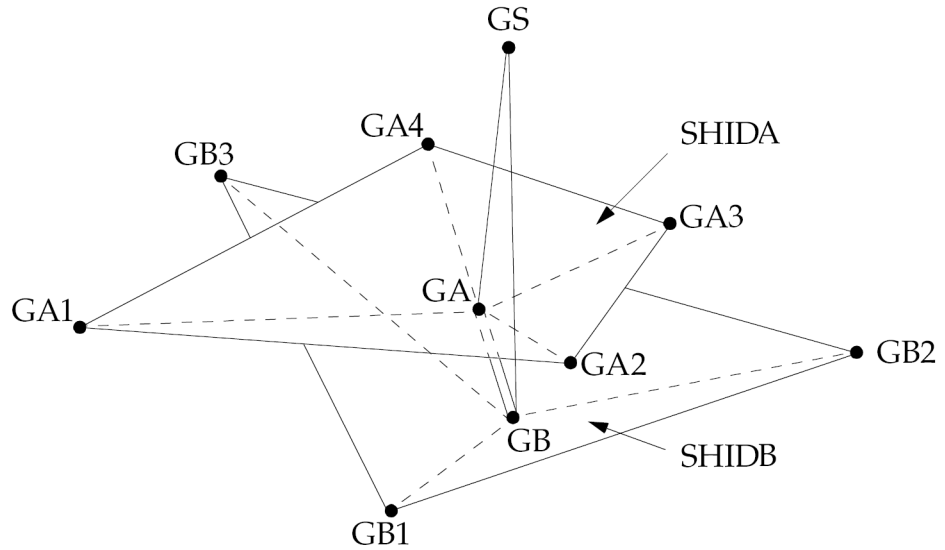

**Figure 13-51. Patch-to-Patch Connection Defined with Format GRIDID or ELEMID**

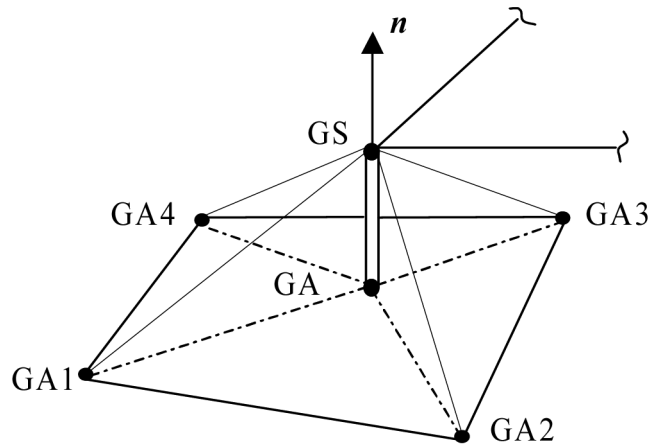


Figure 13-52. Point-to-Patch Connection Defined with Format GRIDID or ELEMID


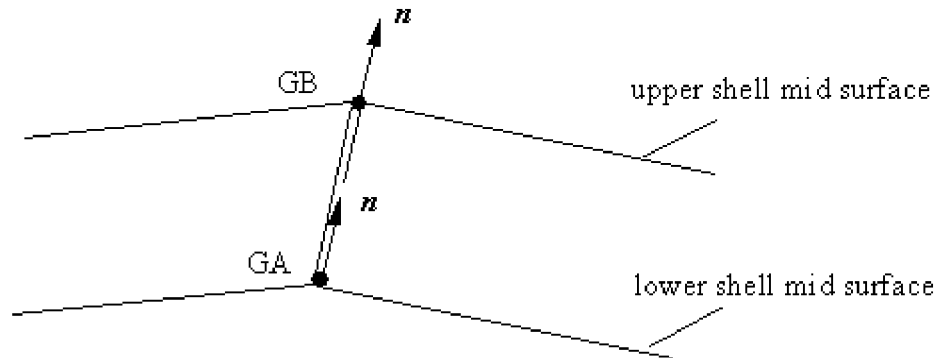


Figure 13-53. Point-to-Point Connection Defined with Format ALIGN

7. Forces and moments are output in the element coordinate system. The element x-axis is in the direction of GA to GB, see Figure 13-54. If zero length (GA and GB are coincident), the x-axis will be defined by the normal from shell A. The element y-axis is perpendicular to the element x-axis and is lined up with the closest axis of the basic coordinate system. The element z-axis is the cross product of the element x- and y-axis. The output of the forces and moments including the sign convention is the same as in the CBAR element.

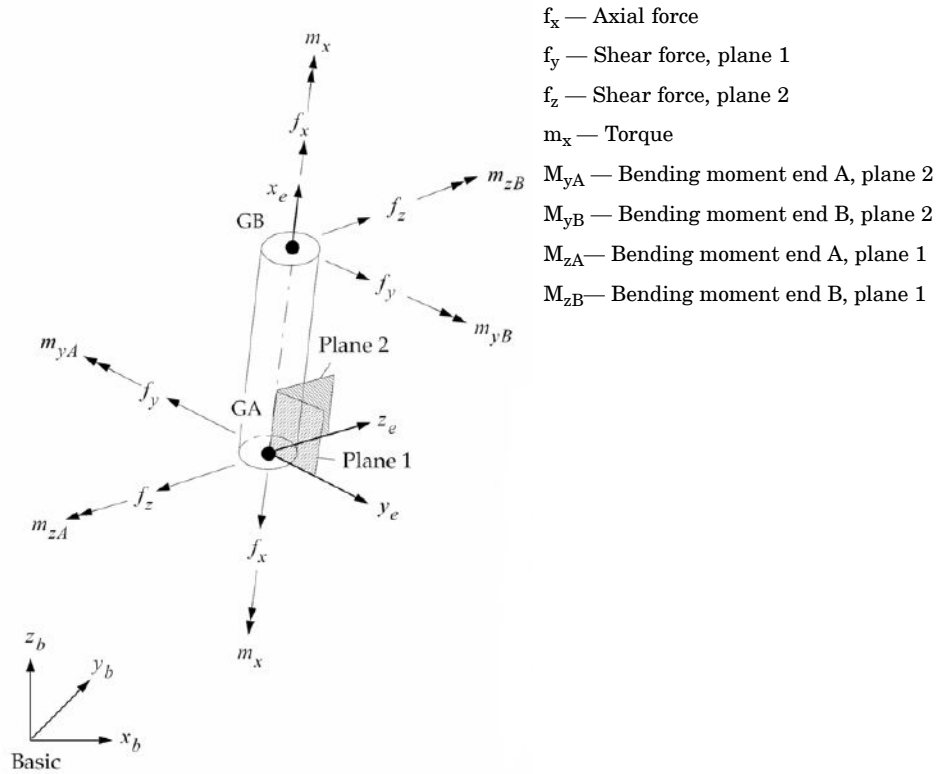

**Figure 13-54. Element Coordinate System and Sign Convention of Element Forces**

8. When the format is ELPAT or PARTPAT and GA and GB are specified, the displacements for these grids will be printed/stored as specified in the case control. If these points are not specified, the displacements will only be written to the .f06 file with grid numbers generated as follows:  
 Grid ID = 1000000 + 10\*(cweld ID) + (end ID)  
 where the end ID is 1 or 2 for the two ends.  
 The new grid ID's are only used for labeling the displacement output and do not exist in the analysis or internal tables. This displacement result is not written to the .op2 or punch file.

## 1320 CYAX Grid Points on Axis of Symmetry

### CYAX Grid Points on Axis of Symmetry

Lists grid points that lie on the axis of symmetry in cyclic symmetry analysis.

#### Format:

| 1    | 2  | 3   | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|------|----|-----|--------|----|----|----|----|----|----|
| CYAX | G1 | G2  | G3     | G4 | G5 | G6 | G7 | G8 |    |
|      | G9 | G10 | -etc.- |    |    |    |    |    |    |

#### Example:

|      |    |     |      |     |     |    |  |  |  |
|------|----|-----|------|-----|-----|----|--|--|--|
| CYAX | 27 | 152 | THRU | 160 | 192 | 11 |  |  |  |
|------|----|-----|------|-----|-----|----|--|--|--|

#### Fields:

| Field | Contents                                                                         |
|-------|----------------------------------------------------------------------------------|
| Gi    | A list of grid points on the axis of symmetry. (Integer > 0 or Character "THRU") |

#### Remarks:

1. The displacement coordinate system (see CD field on the GRID entry) for a grid point lying on the axis of symmetry must be a rectangular system with the z-component of motion aligned with the axis of symmetry. The positive axis of symmetry is defined so that the azimuthal angle from positive side 1 to side 2 of a segment is in the same direction as the angle from T1 to T2 for the axis point. This is consistent with the left- or right-hand rule.
2. If the dihedral symmetry option (STYPE = "DIH" on the CYSYM entry) is selected, the y-axis must be perpendicular to side 1.
3. Grid points lying on the axis of symmetry may be constrained by SPCs but not by MPCs. If the number of segments is three or more, SPCs must be applied to both components 1 and 2 or to neither, and SPCs must be applied to both components 4 and 5 or to neither in order to satisfy symmetry. In addition, the degrees-of-freedom (not constrained by SPCs, if any) at these grid points must be in the analysis set (a-set). If all degrees-of-freedom of grid points on the axis of symmetry are constrained by SPCs (including heat transfer, where there is only one degree-of-freedom), the grid point should not be listed on the CYAX entry.
4. Grid points lying on the axis of symmetry must not be defined on side 1 or on side 2 by means of a CYJOIN entry.



5. The word "THRU" must not appear in fields 2 or 9.

## 1322 CYJOIN Cyclic Symmetry Boundary Points

### CYJOIN Cyclic Symmetry Boundary Points

Defines the boundary points of a segment in cyclic symmetry problems.

#### Format:

| 1      | 2    | 3  | 4  | 5      | 6  | 7  | 8  | 9  | 10 |
|--------|------|----|----|--------|----|----|----|----|----|
| CYJOIN | SIDE | C  | G1 | G2     | G3 | G4 | G5 | G6 |    |
|        | G7   | G8 | G9 | -etc.- |    |    |    |    |    |

#### Example:

|        |    |      |    |   |    |      |    |    |  |
|--------|----|------|----|---|----|------|----|----|--|
| CYJOIN | 1  | T2   | 7  | 9 | 16 | THRU | 33 | 64 |  |
|        | 72 | THRU | 89 |   |    |      |    |    |  |

#### Fields:

| Field | Contents                                                                                                                                     |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------|
| SIDE  | Side identification. (Integer 1 or 2)                                                                                                        |
| C     | Type of coordinate system used on boundaries of dihedral or axisymmetry problems. See Remark 3. (Character: "T1", "T2", "T3", "R", "C", "S") |
| Gi    | Grid or scalar point identification numbers. (Integer > 0 or Character "THRU")                                                               |

#### Remarks:

1. CYJOIN entries are used only for cyclic symmetry problems. The CYSYM entry must be used to specify rotational, dihedral, or axisymmetry.
2. For rotational or axisymmetry problems, there must be one logical entry for SIDE = 1 and one for SIDE = 2. The two lists specify grid points to be connected; therefore, both lists must have the same length.
3. For dihedral problems, side 1 refers to the boundary between segments and side 2 refers to the middle of a segment. For dihedral and/or AXI type of symmetry, the grid point degree-of-freedom that is normal to the boundary must be specified in field 3 as "T1", "T2", or "T3". ("R", rectangular, and "C", cylindrical, are the same as "T2" while "S", spherical, is the same as "T3"). For scalar and extra points with one degree-of-freedom, these should be specified as blank, "T2", or "T3" if they are to have the same sign, and "T1", if the two connected points are to be opposite in sign.

4. All components of displacement at boundary points are connected to adjacent segments except those constrained by SPCi, MPC, or OMITi entries.
5. The points on the axis of symmetry of the model, defined in the CYAX entry must not be defined as a side 1 or side 2 point by means of this entry.
6. The word “THRU” may not appear in fields 4 or 9 of the parent entry and fields 2 or 9 of the continuation entries.
7. All grid points that are implicitly or explicitly referenced must be defined.
8. For rotational and axisymmetry problems, the displacement coordinate systems must be consistent between sides 1 and 2. This is best satisfied by the use of a spherical or cylindrical coordinate system.

## 1324 CYSUP Fictitious Supports for Cyclic Symmetry

### CYSUP Fictitious Supports for Cyclic Symmetry

Defines fictitious supports for cyclic symmetry analysis.

#### Format:

| 1     | 2   | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-------|-----|---|---|---|---|---|---|---|----|
| CYSUP | GID | C |   |   |   |   |   |   |    |

#### Example:

|       |    |      |  |  |  |  |  |  |  |
|-------|----|------|--|--|--|--|--|--|--|
| CYSUP | 16 | 1245 |  |  |  |  |  |  |  |
|-------|----|------|--|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                                                                         |
|-------|--------------------------------------------------------------------------------------------------|
| GID   | Grid point identification number. (Integer > 0)                                                  |
| C     | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks.) |

#### Remarks:

- Components of motion defined on this entry may not appear on SPC, SPC1, OMIT, OMIT1 entries, or in rigid elements or multipoint constraints as dependent degrees-of-freedom.
- Supports are applied at the grid point identified in field 2 to prevent rigid body motions in static analysis, or to define rigid body modes in eigenvalue analysis. All degrees-of-freedom should be at a single grid point. In other words, there can only be one such supported grid point in the model. The supports are applied only to the cyclic components of order  $k=0$  or  $k=1$ . In order to satisfy conditions of symmetry, certain restrictions are placed on the location of the grid point and the orientation of its displacement coordinate system, as shown in the following table:

|                                            |     |          |     |     |          |
|--------------------------------------------|-----|----------|-----|-----|----------|
| Symmetry Option (STYPE on the CYSYM entry) | ROT | ROT      | DIH | DIH | DIH      |
| Number of Segments, N                      | 2   | $\geq 3$ | 1   | 2   | $\geq 3$ |

|                                                        |                    |             |        |             |             |
|--------------------------------------------------------|--------------------|-------------|--------|-------------|-------------|
| Location of Grid Point                                 | See Note C.        | See Note D. | Side 1 | Side 1      | Side 1      |
| Special Restrictions on Displacement Coordinate System | See Notes A and E. | See Note B. | None   | See Note A. | See Note B. |

**Note**

- a. T3 axis must be parallel to axis of symmetry.
  - b. The displacement coordinate system at the referenced grid point must be cylindrical with the z-axis along the axis of symmetry.
  - c. Any location except on side 2.
  - d. Any location except on the axis of symmetry or on side 2.
  - e. If the grid point is on the axis of symmetry, the displacement coordinate system must be rectangular.
3. If the number of segments, N, is 1 (in the case of DIH symmetry) or 2 (in the case of ROT or AXI symmetry), it is important that the rotational components referenced in field 3 be elastically connected to the structure. If  $N \geq 2$  (in the case of DIH symmetry) or  $N \geq 3$  (in the case of ROT or AXI symmetry), it is not important, because in this case the supports for rigid body rotation are actually applied to translational motions.
  4. if  $N \geq 3$ , supports will be applied to both the 1 and 2 (inplane-translational) components, if either is referenced, and to both the 4 and 5 (out-of-plane rotational) components, if either is referenced. If component 6 is supported, component 2 should not appear on OMIT or OMIT1 entries.
  5. The restrictions noted in Remarks 2 and 4 are related to symmetry requirements. For  $N \geq 3$ , symmetry requires that the supports be symmetrical (or antisymmetrical), with respect to any plane passing through the axis of symmetry. For the DIH options,  $N = 1$  and  $N = 2$ , symmetry requires that the supports be symmetrical (or antisymmetrical) with respect to the plane(s) of symmetry. For the ROT option,  $N = 2$ , symmetry requires that a support be either parallel or perpendicular to the axis of symmetry.
  6. GID must be a grid point and not a scalar point.

## 1326 CYSYM Cyclic Symmetry Parameters

### CYSYM Cyclic Symmetry Parameters

Defines parameters for cyclic symmetry analysis.

#### Format:

| 1     | 2    | 3     | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-------|------|-------|---|---|---|---|---|---|----|
| CYSYM | NSEG | STYPE |   |   |   |   |   |   |    |

#### Example:

|       |   |     |  |  |  |  |  |  |  |
|-------|---|-----|--|--|--|--|--|--|--|
| CYSYM | 6 | ROT |  |  |  |  |  |  |  |
|-------|---|-----|--|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                           |
|-------|----------------------------------------------------|
| NSEG  | Number of segments. (Integer > 0)                  |
| STYPE | Symmetry type. (Character: "ROT", "DIH", or "AXI") |

#### Remarks:

1. STYPE = "AXI" is a special case of STYPE = "ROT" used to model axisymmetric structures.
2. If STYPE = "AXI", then all grid points must lie on side 1, side 2, or the axis. Also, plate elements with midside grid points may not be defined. See "Cyclic Symmetry" in the *NX Nastran User's Guide*.

Chapter

# 14 Bulk Data Entries D—E

Bulk data entries DAREA—EXTRN

## 1328 DAREA Load Scale Factor

### DAREA Load Scale Factor

Defines scale (area) factors for static and dynamic loads. In dynamic analysis, DAREA is used in conjunction with RLOADi and TLOADi entries.

#### Format:

| 1     | 2   | 3  | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|-------|-----|----|----|----|----|----|----|---|----|
| DAREA | SID | P1 | C1 | A1 | P2 | C2 | A2 |   |    |

#### Example:

|       |   |   |   |     |    |   |      |  |  |
|-------|---|---|---|-----|----|---|------|--|--|
| DAREA | 3 | 6 | 2 | 8.2 | 15 | 1 | 10.1 |  |  |
|-------|---|---|---|-----|----|---|------|--|--|

#### Fields:

| Field | Contents                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------|
| SID   | Identification number. (Integer>0)                                                                         |
| Pi    | Grid, extra, or scalar point identification number. (Integer>0)                                            |
| Ci    | Component number. (Integer 1 through 6 for grid point; blank or 0 for extra or scalar point) See Remark 3. |
| Ai    | Scale factor. (Real)                                                                                       |

#### Remarks:

- One or two scale factors may be defined on a single entry.
- Refer to RLOAD1, RLOAD2, TLOAD1, TLOAD2, or ACSRCE entries for the formulas that define the scale factor Ai in dynamic analysis.
- Component numbers refer to the displacement coordinate system defined with the CD field on the GRID entry.
- In dynamic analysis, DAREA entries may be used with LSEQ Bulk Data entries if LOADSET is specified in Case Control. The LSEQ and static load entries will be used to internally generate DAREA entries.
- If DAREA is referenced by a GUST entry, Pi must be defined. However, it is only used if selected through a DLOAD Case Control command. WG from the GUST entry is used instead of Ai when requested via a GUST entry.



6. All DAREA entries corresponding to all grid and scalar points are automatically converted internally by the program to equivalent FORCE/MOMENT/SLOAD entries (as appropriate) if there are no LSEQ Bulk Data entries. The DAREA entries can only be used in static analysis if there are no LSEQ Bulk Data entries.
7. In superelement analysis, DAREA may be used to specify loads not only on the interior points of the residual, but also on the interior points of upstream superelements if there are no LSEQ Bulk Data entries.

## 1330 DCONADD Design Constraint Set Combination

### DCONADD      Design Constraint Set Combination

Defines the design constraints for a subcase as a union of DCONSTR entries.

#### Format:

| 1       | 2    | 3      | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|---------|------|--------|-----|-----|-----|-----|-----|-----|----|
| DCONADD | DCID | DC1    | DC2 | DC3 | DC4 | DC5 | DC6 | DC7 |    |
|         | DC8  | -etc.- |     |     |     |     |     |     |    |

#### Example:

|         |    |   |    |  |  |  |  |  |  |
|---------|----|---|----|--|--|--|--|--|--|
| DCONADD | 10 | 4 | 12 |  |  |  |  |  |  |
|---------|----|---|----|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                                 |
|-------|----------------------------------------------------------|
| DCID  | Design constraint set identification number. (Integer>0) |
| DCi   | DCONSTR entry identification number. (Integer>0)         |

#### Remarks:

1. The DCONADD entry is selected by a DESSUB or DESGLB Case Control command.
2. All DCi must be unique from other DCi.

## DCONSTR Design Constraints

Defines design constraints.

### Format:

| 1       | 2    | 3   | 4                 | 5                 | 6     | 7      | 8 | 9 | 10 |
|---------|------|-----|-------------------|-------------------|-------|--------|---|---|----|
| DCONSTR | DCID | RID | LALLOW<br>or LTID | UALLOW<br>or UTID | LOWFQ | HIGHFQ |   |   |    |

### Examples:

|         |    |   |      |  |  |  |  |  |  |
|---------|----|---|------|--|--|--|--|--|--|
| DCONSTR | 10 | 4 | 1.25 |  |  |  |  |  |  |
|---------|----|---|------|--|--|--|--|--|--|

|         |     |     |      |      |  |  |  |  |  |
|---------|-----|-----|------|------|--|--|--|--|--|
| DCONSTR | 300 | 101 | -0.5 | 5.53 |  |  |  |  |  |
| DCONSTR | 300 | 201 | 11   | 12   |  |  |  |  |  |
| DCONSTR | 300 | 207 | 11   | 5.53 |  |  |  |  |  |

### Fields:

| Field             | Contents                                                                                                                                                          |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DCID              | Design constraint set identification number. (Integer>0)                                                                                                          |
| RID               | DRESPi entry identification number. (Integer>0)                                                                                                                   |
| LALLOW<br>or LTID | Lower bound on the response quantity (Real) or TABLEDi ID (Integer) (Default = -1.0E20). See Remark 4.<br><br>See also Remarks 8 and 9 on DRESP1 Bulk Data entry. |
| UALLOW<br>or UTID | Upper bound on the response quantity (Real) or TABLEDi ID (Integer) (Default = 1.0E20). See Remark 4.<br><br>See also Remarks 8 and 9 on DRESP1 Bulk Data entry.  |
| LOWFQ             | Low end of frequency range in Hz. See Remark 9. (Real ≥ 0.0, Default = 0.0)                                                                                       |
| HIGHFQ            | High end of frequency range in Hz (Real ≥ LOWFQ, Default = 1.0E+20). See Remark 9.                                                                                |

### Remarks:

1. The DCONSTR entry may be selected in the Case Control section by the DESSUB or DESGLB command.

## 1332 DCONSTR Design Constraints

2. DCID may be referenced by the DCONADD Bulk Data entry.
3. For a given DCID, the associated RID can be referenced only once.
4. If LALLOW and/or UALLOW are defined as real values, they are interpreted as constant.

If defined as integers, they are interpreted as the ID of a TABLED1, TABLED2, TABLED3, or TABLED4 bulk entry which defines the bound as a function of frequency. When spawning multiple constraints over a frequency set from a single DCONSTR input, the program loops over the frequencies in the frequency set to determine the corresponding bound for each frequency.

5. The units of LALLOW and UALLOW must be consistent with the referenced response defined on the DRESPI entry. If RID refers to an “EIGN” response, then the imposed bounds must be expressed in the units of the eigenvalues, (radian/time)<sup>2</sup>. If RID refers to a “FREQ” response, then the imposed bounds must be expressed in cycles/time.
6. LALLOW and UALLOW are unrelated to the stress limits specified on the MATi entry.
7. For selection of DOT as the optimizer (the default), the constraints are computed as follows:

$$g = (\text{LALLOW} - r) / \text{GNORM} \quad \text{for lower bound constraints}$$

$$g = (r - \text{UALLOW}) / \text{GNORM} \quad \text{for upper bound constraints}$$

where

$$\text{GNORM} = \begin{cases} |\text{LALLOW}| & \text{for lower bounds if } |\text{LALLOW}| > \text{GSCAL} \\ |\text{UALLOW}| & \text{for upper bounds if } |\text{UALLOW}| > \text{GSCAL} \\ \text{GSCAL} & \text{otherwise} \end{cases}$$

GSCAL is specified on the DOPTPRM entry. (Default = 0.001)

If the alternate optimizer, Analytic Design System, is selected, then a true normalization is performed, and the normalized constraint values always vary between -1.0 and +1.0 in a symmetric manner. Due to the method of normalization employed with the use of this optimizer, there is no need to account for a small denominator. Note also that the “Maximum Value of Constraint” column in the “Summary of Design Cycle History” table in the f06 file will also contain different values based on which optimizer is selected. The normalization for the Analytic Design System follows the below expressions:

If a bound is sandwiched between zero and r:

$$g=(LALLOW-r) / |r| \quad \text{or} \quad g=(r-UALLOW) / |r|$$

Otherwise:

$$g=(LALLOW-r) / |2*LALLOW-r| \quad \text{or} \quad g=(r-UALLOW) / |2*UALLOW-r|$$

The only special case gives a constraint value of 0.0, thus no difficulties arise with a zero denominator.

8. As Remark 7 indicates, when DOT is selected as the optimizer, small values of UALLOW and LALLOW require special processing and should be avoided. Bounds of exactly zero are particularly troublesome. This can be avoided by using a DRESP2 entry that offsets the constrained response from zero.
9. LOWFQ and HIGHFQ fields are functional only for DRESP1 response types with the “FR” or “PSD” prefixes, for example FRDISP or PSDVELO. The bounds provided in LALLOW and UALLOW are applicable to a response only when the value of the response of the forcing frequency falls between the LOWFQ and HIGHFQ. If the ATTB field of the DRESP1 entry is not blank, LOWFQ and HIGHFQ are ignored.

**1334 DDVAL**  
**Discrete Design Variable Values**

**DDVAL** Discrete Design Variable Values

Define real, discrete design variable values for discrete variable optimization.

**Format:**

| 1     | 2  | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10 |
|-------|----|-------|-------|-------|-------|-------|-------|-------|----|
| DDVAL | ID | DVAL1 | DVAL2 | DVAL3 | DVAL4 | DVAL5 | DVAL6 | DVAL7 |    |

**Alternate Format:**

|       |    |       |        |      |      |     |  |  |  |
|-------|----|-------|--------|------|------|-----|--|--|--|
| DDVAL | ID | DVAL1 | “THRU” | DVAL | “BY” | INC |  |  |  |
|-------|----|-------|--------|------|------|-----|--|--|--|

The Continuation Entry formats may be used more than once and in any order. They may also be used with either format above.

**Continuation Entry Format 1:**

|  |       |       |        |        |        |  |  |  |  |
|--|-------|-------|--------|--------|--------|--|--|--|--|
|  | DVAL8 | DVAL9 | DVAL10 | DVAL11 | -etc.- |  |  |  |  |
|--|-------|-------|--------|--------|--------|--|--|--|--|

**Continuation Entry Format 2::**

|  |       |        |       |      |     |  |  |  |  |
|--|-------|--------|-------|------|-----|--|--|--|--|
|  | DVAL8 | “THRU” | DVAL9 | “BY” | INC |  |  |  |  |
|--|-------|--------|-------|------|-----|--|--|--|--|

**Example:**

| 1     | 2   | 3    | 4   | 5   | 6    | 7   | 8   | 9 | 10 |
|-------|-----|------|-----|-----|------|-----|-----|---|----|
| DDVAL | 110 | 0.1  | 0.2 | 0.3 | 0.5  | 0.6 | 0.4 |   |    |
|       | 07  | thru | 1.0 | by  | 0.05 |     |     |   |    |
|       | 1.5 | 2.0  |     |     |      |     |     |   |    |

**Fields:**

| Field | Contents                                                     |
|-------|--------------------------------------------------------------|
| ID    | Unique discrete value set identification number. (Integer>0) |
| DVALi | Discrete values. (Real, or “THRU” or “BY”)                   |
| INC   | Discrete value increment. (Real)                             |

**Remarks:**

- DDVAL entries must be referenced by a DESVAR entry in the DDVAL field (field 8).

2. Trailing fields on a DDVAL record can be left blank if the next record is of type DVAL<sub>i</sub> “THRU” DVAL<sub>j</sub> “BY” INC. Also fields 7 - 9 must be blank when the type DVAL<sub>i</sub> “THRU” DVAL<sub>j</sub> “BY” INC is used in fields 2 - 6 and fields 8 - 9 must be blank when the type DVAL<sub>i</sub> “THRU” DVAL<sub>j</sub> “BY” INC is used in fields 3 - 7 for the first record. Embedded blanks are not permitted in other cases.
3. The DVAL<sub>i</sub> sequence can be random.
4. The format DVAL<sub>i</sub> “THRU” DVAL<sub>j</sub> “BY” INC defines a list of discrete values, e.g., DVAL<sub>i</sub>, DVAL<sub>i</sub>+INC, DVAL<sub>i</sub>+2.0\*INC, ..., DVAL<sub>j</sub>. The last discrete DVAL<sub>j</sub> is always included, even if the range is not evenly divisible by INC.

## 1336 DEFORM Static Element Deformation

### DEFORM      Static Element Deformation

Defines enforced axial deformation for one-dimensional elements for use in statics problems.

#### Format:

| 1      | 2   | 3    | 4  | 5    | 6  | 7    | 8  | 9 | 10 |
|--------|-----|------|----|------|----|------|----|---|----|
| DEFORM | SID | EID1 | D1 | EID2 | D2 | EID3 | D3 |   |    |

#### Example:

|        |   |     |     |     |      |  |  |  |  |
|--------|---|-----|-----|-----|------|--|--|--|--|
| DEFORM | 1 | 535 | .05 | 536 | -.10 |  |  |  |  |
|--------|---|-----|-----|-----|------|--|--|--|--|

#### Fields:

| Field | Contents                                                   |
|-------|------------------------------------------------------------|
| SID   | Deformation set identification number. (Integer>0)         |
| EIDi  | Element number. (Integer>0)                                |
| Di    | Deformation. (Real; positive value represents elongation.) |

#### Remarks:

1. The referenced element must be one-dimensional (CROD, CONROD, CTUBE, CBAR, CBEAM).
2. Deformation sets must be selected in the Case Control Section with DEFORM = SID.
3. One to three enforced element deformations may be defined on a single entry.
4. The DEFORM entry, when called by the DEFORM Case Control command, is applicable to linear static, inertia relief, differential stiffness, and buckling (Solutions 101, 105, 114, and 200) and will produce fatal messages in other solution sequences. Use SPCD to apply enforced displacements in solution sequences for which DEFORM does not apply.



**DEFUSET** Degree-of-Freedom Set Name Definition

Defines new names for degree-of-freedom sets.

**Format:**

| 1       | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10 |
|---------|------|------|------|------|------|------|------|------|----|
| DEFUSET | OLD1 | NEW1 | OLD2 | NEW2 | OLD3 | NEW3 | OLD4 | NEW4 |    |

**Example:**

|         |    |   |    |   |    |   |  |  |  |
|---------|----|---|----|---|----|---|--|--|--|
| DEFUSET | U2 | X | U4 | Y | U3 | Z |  |  |  |
|---------|----|---|----|---|----|---|--|--|--|

**Fields:**

| Field | Contents                                   |
|-------|--------------------------------------------|
| OLDi  | Default set name. (One to four characters) |
| NEWi  | New set name. (One to four characters)     |

**Remarks:**

1. From one to four set names may be specified on a single entry.
2. OLDi must refer to any of the set names given in [“Degree-of-Freedom Sets”](#). It is recommended that OLDi refer only to the set names U1 through U6. If sets PA or PS are referenced, a user fatal message is issued.
3. All NEWi names must be unique with respect to all other set names.
4. The DEFUSET entry is optional since default set names exist for all displacement sets.
5. The DEFUSET entry must be present in the Bulk Data Section in all restarts.
6. The user defined degree-of-freedom sets U1 – U9 are created with the USET and USET1 bulk entries. Be aware that the user defined sets U2 - U8 are used by NX Nastran in some special cases. You may use U2 – U8 as long as it doesn’t conflict with these cases. See [“User Defined Degree-of-Freedom Sets”](#) for the list of these special cases.

**1338 DELAY**  
Dynamic Load Time Delay

**DELAY**      Dynamic Load Time Delay

Defines the time delay term  $t$  in the equations of the dynamic loading function.

**Format:**

| 1     | 2   | 3  | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|-------|-----|----|----|----|----|----|----|---|----|
| DELAY | SID | P1 | C1 | T1 | P2 | C2 | T2 |   |    |

**Example:**

|       |   |    |   |      |   |   |     |  |  |
|-------|---|----|---|------|---|---|-----|--|--|
| DELAY | 5 | 21 | 6 | 4.25 | 7 | 6 | 8.1 |  |  |
|-------|---|----|---|------|---|---|-----|--|--|

**Fields:**

| Field | Contents                                                                                            |
|-------|-----------------------------------------------------------------------------------------------------|
| SID   | Identification number of the DELAY entry. (Integer>0)                                               |
| Pi    | Grid, extra, or scalar point identification number. (Integer>0)                                     |
| Ci    | Component number. (Integer 1 through 6 for grid point, blank or 0 for extra point or scalar point.) |
| Ti    | Time delay $t$ for designated point $P_i$ and component $C_i$ . (Real)                              |

**Remarks:**

1. One or two dynamic load time delays may be defined on a single entry.
2. SID must also be specified on a RLOAD1, RLOAD2, TLOAD1, TLOAD2, or ACSRCE entry. See those entry descriptions for the formulas that define the manner in which the time delay  $t$  is used.
3. A DAREA and/or LSEQ entry should be used to define a load at  $P_i$  and  $C_i$ .
4. In superelement analysis, DELAY entries may only be applied to loads on points in the residual structure.

**DEQATN** Design Equation Definition

Defines one or more equations for use in design sensitivity or p-element analysis.

**Format:**

|        |      |                  |   |   |   |   |   |   |    |  |
|--------|------|------------------|---|---|---|---|---|---|----|--|
| 1      | 2    | 3                | 4 | 5 | 6 | 7 | 8 | 9 | 10 |  |
| DEQATN | EQID | EQUATION         |   |   |   |   |   |   |    |  |
|        |      | EQUATION (Cont.) |   |   |   |   |   |   |    |  |

**Example:**

|        |    |                                                                     |  |
|--------|----|---------------------------------------------------------------------|--|
| DEQATN | 14 | F1 (A, B, C, D, R) = A + B · C - (D ** 3 + 10.0) + sin (PI (1 · R)) |  |
|        |    | + A**2/ (B - C) ; F = A + B - F1 · D                                |  |

**Fields:**

| Field    | Contents                                           |
|----------|----------------------------------------------------|
| EQID     | Unique equation identification number. (Integer>0) |
| EQUATION | Equation(s). See Remarks. (Character)              |

**Remarks:**

- EQUATION is a single equation or a set of nested equations and is specified in fields 3 through 9 on the first entry and may be continued on fields 2 through 9 on the continuation entries. On the continuation entries, no commas can appear in columns 1 through 8. All data in fields 2 through 9 must be specified in columns 9 through 72. The large-field format is not allowed.

A single equation has the following format:

variable-1 (x1, x2, ..., xn)=expression-1

A set of nested equations is separated by semicolons and has the format:

variable-1 (x1, x2, ..., xn)=expression-1;  
 variable-2=expression-2;  
 variable-3=expression-3;  
 etc.  
 variable-m=expression-m

Expression-i is a collection of constants, real variables, and real functions, separated by operators, and must produce a single real value. (x1, x2, ...,

## 1340 DEQATN Design Equation Definition

xn) is the list of all the variable names (except variable-i) that appear in all expressions. Variable-i may be used in subsequent expressions. The last equation, variable-m=expression-m, provides the value that is returned to the Bulk Data entry that references EQID; e.g., DRESP2. The example above represents the following mathematical equations:

$$F1 = A + B \cdot C - (D^3 + 10) + \sin(\text{PI}(1 \cdot R)) + \frac{A^2}{B - C}$$

$$F = A + B + F1 \cdot D$$

where SIN and PI are intrinsic functions. See Remark 4 .

2. EQUATION may contain embedded blanks. EQUATION must contain less than 32,000 nonblank characters. If more characters are required for use with a DRESP2 entry, the DRESP2 can be divided into two or more DRESP2 entries with a master DRESP2 referencing subsequent DRESP2s.
3. The syntax of the expressions follows FORTRAN language standards. The allowable arithmetic operations are shown in Table 14-1 in the order of execution precedence. Parenthesis are used to change the order of precedence. Operations within parentheses are performed first with the usual order of precedence being maintained within the parentheses.

| Operator | Operation                                                   | Sample Expressions | Interpreted As |
|----------|-------------------------------------------------------------|--------------------|----------------|
| -, +     | Negative or Positive immediately preceded by exponentiation | X * * -Y           | X * * (-Y)     |
| * *      | Exponentiation                                              | -X * * Y           | (-X * * Y)     |
| -, +     | Negative or Positive                                        | -X-Y               | (-X)-Y         |
| *, /     | Multiplication or Division                                  | X * Y-Z            | (X * Y)-Z      |
| +, -     | Addition or Subtraction                                     | X+Y                | X+Y            |

4. The expressions may contain intrinsic functions. Table 14-2 contains the format and descriptions of functions that may appear in the expressions. The use of functions that may be discontinuous must be used with caution because they can cause discontinuous derivatives. These are ABS, DIM, MAX, MIN, and MOD. For examples and further details see the *NX Nastran DMAP Programmer's Guide*.

| <b>Table 14-2. DEQATN Entry Functions</b>                   |                                       |                                                                                            |
|-------------------------------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------------|
| <b>Format</b>                                               | <b>Description</b>                    | <b>Mathematical Expressions</b>                                                            |
| ABS(x)                                                      | absolute value                        | $ x $                                                                                      |
| ACOS(x)                                                     | arccosine                             | $\cos^{-1} x$                                                                              |
| ACOSH(x)                                                    | hyperbolic arccosine                  | $\cosh^{-1} x$                                                                             |
| ASIN(x)                                                     | arcsine                               | $\sin^{-1} x$                                                                              |
| ASINH(x)                                                    | hyperbolic arcsine                    | $\sinh^{-1} x$                                                                             |
| ATAN(x)                                                     | arctangent                            | $\tan^{-1} x$                                                                              |
| ATAN2(x,y)                                                  | arctangent of quotient                | $\tan^{-1} (x/y)$                                                                          |
| ATANH(x)                                                    | hyperbolic arctangent                 | $\tanh^{-1} x$                                                                             |
| ATANH2(x,y)                                                 | hyperbolic arctangent of quotient     | $\tanh^{-1} (x/y)$                                                                         |
| AVG(X <sub>1</sub> , X <sub>2</sub> , ..., X <sub>n</sub> ) | average                               | $\frac{1}{n} \sum_{i=1}^n X_i$                                                             |
| COS(x)                                                      | cosine                                | $\cos x$                                                                                   |
| COSH(x)                                                     | hyperbolic cosine                     | $\cosh x$                                                                                  |
| DB(P, PREF)                                                 | sound pressure in decibel             | $20.0 \cdot \log\left(\frac{P}{PREF}\right)$                                               |
| DBA(P, PREF, F)                                             | sound pressure in decibel (perceived) | $20.0 \cdot \log\left(\frac{P}{PREF}\right) + 10.0 \cdot \log(Ta1) + 10.0 \cdot \log(Ta2)$ |
| DIM(x,y)                                                    | positive difference                   | $x - \text{MIN}(x,y)$                                                                      |

**1342 DEQATN**  
Design Equation Definition

| <b>Table 14-2. DEQATN Entry Functions</b>  |                               |                                                                                    |
|--------------------------------------------|-------------------------------|------------------------------------------------------------------------------------|
| <b>Format</b>                              | <b>Description</b>            | <b>Mathematical Expressions</b>                                                    |
| EXP(x)                                     | exponential                   | $e^x$                                                                              |
| INVDB(DB, PREF)                            | inverse Db                    | $10^{\left(\frac{DB}{20.0} + \log PREF\right)}$                                    |
| INVDBA(DBA, PREF, F)                       | inverse Dba                   | $10^{\left(\frac{DBA - 10.0 \cdot \log(Ta1) - 10.0 \cdot \log(Ta2)}{20.0}\right)}$ |
| LOG(x)                                     | natural logarithm             | $\log_e x$                                                                         |
| LOG10(x)                                   | common logarithm              | $\log_{10} x$                                                                      |
| LOGX(x,y)                                  | base x logarithm              | $\log_x y$                                                                         |
| MAX(x <sub>1</sub> , x <sub>2</sub> , ...) | maximum                       | maximum of x <sub>1</sub> , etc.                                                   |
| MIN(x <sub>1</sub> , x <sub>2</sub> , ...) | minimum                       | minimum of x <sub>1</sub> , etc.                                                   |
| MOD(x,y)                                   | remainder (modulo)            | $x - y \cdot (\text{INT}(x / y))$                                                  |
| PI(x)                                      | multiples of pi (π)           | $x \cdot \pi$                                                                      |
| RSS(X <sub>1</sub> , ..., X <sub>n</sub> ) | square root of sum of squares | $\sqrt{\sum_{i=1}^n X_i^2}$                                                        |
| SIN(x)                                     | sine                          | $\sin x$                                                                           |
| SINH(x)                                    | hyperbolic sine               | $\sinh x$                                                                          |
| SQRT(x)                                    | square root                   | $\sqrt{x}$                                                                         |

| <b>Table 14-2. DEQATN Entry Functions</b>  |                    |                                 |
|--------------------------------------------|--------------------|---------------------------------|
| <b>Format</b>                              | <b>Description</b> | <b>Mathematical Expressions</b> |
| SSQ(X <sub>1</sub> , ..., X <sub>n</sub> ) | sum of squares     | $\sum_{i=1}^n X_i^2$            |
| SUM(X <sub>1</sub> , ..., X <sub>n</sub> ) | summation          | $\sum_{i=1}^n X_i$              |
| TAN(x)                                     | tangent            | tan x                           |
| TANH(x)                                    | hyperbolic tangent | tanh x                          |

X<sub>1</sub>, X<sub>2</sub>, ..., X<sub>n</sub>,P = structure responses or acoustic pressure

PREF = reference pressure

F = forcing frequency

DB = acoustic pressure in Decibel

DBA = perceived acoustic pressure in Decibel

$$T_{a1} = \frac{K3 \cdot F^4}{(F^2 + P2^2)(F^2 + P3^2)}$$

$$T_{a2} = \frac{K1 \cdot F^4}{(F^2 + P1^2)^2 (F^2 + P4^2)^2}$$

K1 = 2.242882e+16

K3 = 1.562339

P1 = 20.598997

P2 = 107.65265

## 1344 DEQATN Design Equation Definition

$$P3 = 737.86223$$

$$P4 = 12194.22$$

5. If the DEQATN entry is referenced by the:
  - DVPREL2 entry, then  $X_i$  represents the DVIDj and LABLk fields.
  - DRESP2 entry, then  $X_i$  represents the DVIDj, LABLk, NRm, Gp, DPIPq, DCICr, DMIMs, DPI2Pt, DCI2Cu, DMI2Mv, and NRRw fields in that order.
  - GMLOAD, GMBC, or TEMPF entries, then
    - $X_1$  represents x in the basic coordinate system,
    - $X_2$  represents y in the basic coordinate system, and
    - $X_3$  represents z in the basic coordinate system.
  - GMCURV entry, then
    - $X_1$  represents line parameter u.
  - GMSURF entry, then
    - $X_1$  represents surface parameter u and
    - $X_2$  represents surface parameter v.
6. If the DEQATN entry is referenced by the GMLOAD, GMBC, TEMPF, GMCURV, or GMSURF entries and your computer has a short word length (e.g., 32 bits/word), then EQUATION is processed with double precision and constants may be specified in double precision; e.g., 1.2D0. If your machine has a long word length (e.g., 64 bits/word) then EQUATION is processed in single precision and constants must be specified in single precision; e.g., 1.2.
7. The DMAP logical operators NOT, AND, OR, XOR, and XQV cannot be used as  $X_i$  names.
8. Input errors on the DEQATN entry often result in poor messages. Substituting a “[” for a parenthesis or violating the restriction against large field format are examples. Known messages are UFM 215, SFM 233 and UFM 5199. If any of these messages are encountered then, review the DEQATN entry input.
9. Intrinsic functions MAX and MIN are limited to <100 arguments. If more arguments are desired, the functions may be concatenated.
10. Arithmetic is carried out using the type of the input data. For example, in the expression:



$$X = A^{**}(1/2)$$

both values in the exponent are integers so that the value returned for the exponent is calculated using integer arithmetic or  $1/2 = 0$ . In this case  $1/2$  should be replaced by  $(.5)$ .

**1346 DESVAR**  
Design Variable

**DESVAR** Design Variable

Defines a design variable for design optimization.

**Format:**

| 1      | 2  | 3     | 4     | 5   | 6   | 7     | 8     | 9 | 10 |
|--------|----|-------|-------|-----|-----|-------|-------|---|----|
| DESVAR | ID | LABEL | XINIT | XLB | XUB | DELXV | DDVAL |   |    |

**Example:**

|        |   |       |      |     |      |     |  |  |  |
|--------|---|-------|------|-----|------|-----|--|--|--|
| DESVAR | 2 | BARA1 | 35.0 | 10. | 100. | 0.2 |  |  |  |
|--------|---|-------|------|-----|------|-----|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID    | Unique design variable identification number. (Integer>0)                                                                                                  |
| LABEL | User-supplied name for printing purposes. (Character)                                                                                                      |
| XINIT | Initial value. (Real, $XLB \leq XINIT \leq XUB$ )                                                                                                          |
| XLB   | Lower bound. (Real, Default = $-1.0E+20$ )                                                                                                                 |
| XUB   | Upper bound. (Real, Default = $+1.0E+20$ )                                                                                                                 |
| DELXV | Fractional change allowed for the design variable during approximate optimization. (Real>0.0; for Default see Remark 2 . )                                 |
| DDVAL | ID of a DDVAL entry that provides a set of allowable discrete values. (Blank or Integer>0; Default=blank for continuous design variables. See Remark 3 . ) |

**Remarks:**

1. DELXV can be used to control the change in the design variable during one optimization cycle.
2. If DELXV is blank, the default is taken from the specification of the DELX parameter on the DOPTPRM entry. If DELX is not specified, then the default is 1.0.
3. If the design variable is to be discrete (Integer>0 in DDVAL field), and if either of the XLB and/or XUB bounds are wider than those given by the discrete list of values on the corresponding DDVAL entry, XLB and/or XUB will be replaced by the minimum and maximum discrete values.

4. See also bulk data input for DVCREL1, DVCREL2, DVGEOM, DVGRID, DVMREL1, DVMREL2, DVPREL1, DVPREL2 in regard to associating the design variables with structural quantities.
5. When associating design variables with structural quantities by way of the bulk data listed in Remark 4, it is useful to scale the design variables so as to make all design variables the same order of magnitude as far as possible, for purposes of healthier optimization. For example, Young's modulus and material density values are usually orders of magnitude apart, and if design variables were associated with each of these, the derivative for the first may end up being numerically negligible as compared to the second. By scaling the design variables properly, you can ensure that the effect of a given design variable does not get disregarded during optimization.

**1348 DIVERG**  
Divergence Analysis Data

**DIVERG** Divergence Analysis Data

Defines Mach numbers (m) for a divergence analysis in SOLs 144 and 200.

**Format:**

| 1      | 2   | 3     | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-------|--------|----|----|----|----|----|----|
| DIVERG | SID | NROOT | M1     | M2 | M3 | M4 | M5 | M6 |    |
|        | M7  | M8    | -etc.- |    |    |    |    |    |    |

**Example:**

|        |    |   |    |    |    |  |  |  |  |
|--------|----|---|----|----|----|--|--|--|--|
| DIVERG | 70 | 2 | .5 | .8 | .9 |  |  |  |  |
|--------|----|---|----|----|----|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                |
|-------|---------------------------------------------------------------------------------------------------------|
| SID   | Unique set identifier. (Integer>0)                                                                      |
| NROOT | Number of divergence roots that are to be output and their eigenvectors printed. (Integer; Default = 1) |
| Mi    | Mach number. (Real $\geq$ 0.0)                                                                          |

**Remarks:**

1. The DIVERG entry is referenced in Case Control by "DIVERG = SID".
2. The NROOT lowest divergence dynamic pressures are printed. If there are fewer than NROOT pressures, all available dynamic pressures are printed.
3. Mi values must be distinct.
4. A blank Mach number field terminates the input.

**DLINK** Multiple Design Variable Linking

Relates one design variable to one or more other design variables.

**Format:**

| 1     | 2    | 3     | 4      | 5     | 6    | 7  | 8    | 9  | 10 |
|-------|------|-------|--------|-------|------|----|------|----|----|
| DLINK | ID   | DDVID | C0     | CMULT | IDV1 | C1 | IDV2 | C2 |    |
|       | IDV3 | C3    | -etc.- |       |      |    |      |    |    |

**Example:**

|       |    |     |     |      |   |     |   |      |  |
|-------|----|-----|-----|------|---|-----|---|------|--|
| DLINK | 10 | 2   | 0.1 | 0.33 | 2 | 2.0 | 6 | -1.0 |  |
|       | 8  | 7.0 |     |      |   |     |   |      |  |

**Fields:**

| Field | Contents                                                       |
|-------|----------------------------------------------------------------|
| ID    | Unique identification number. (Integer>0)                      |
| DDVID | Dependent design variable identification number. (Integer>0)   |
| C0    | Constant term. (Real; Default = 0.0)                           |
| CMULT | Constant multiplier. (Real; Default = 1.0)                     |
| IDVi  | Independent design variable identification number. (Integer>0) |
| Ci    | Coefficient i corresponding to IDVi. (Real)                    |

**Remarks:**

1. DLINK defines the relationship

$$DDVID = C0 + CMULT \sum_i C_i \cdot IDV_i$$

2. This capability provides a means of linking physical design variables such as element thicknesses to nonphysical design variables such as the coefficients of interpolating functions.
3. CMULT provides a simple means of scaling the Ci. For example if Ci = 1/7, 2/7, 4/7, etc. is desired, then CMULT = 1/7 and Ci = 1, 2, 4, etc., may be input.

## 1350 **DLINK** Multiple Design Variable Linking

4. An independent IDVi must not occur on the same DLINK entry more than once.
5. ID is for user reference only.
6. If a design variable is specified as dependent on one DLINK entry, then it cannot be specified as independent on another DLINK entry.

**DLOAD**      Dynamic Load Combination or Superposition

Defines a dynamic loading condition for frequency response or transient response problems as a linear combination of load sets defined via RLOAD1 or RLOAD2 entries for frequency response or TLOAD1 or TLOAD2 entries for transient response.

**Format:**

| 1     | 2   | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|-------|-----|----|--------|----|----|----|----|----|----|
| DLOAD | SID | S  | S1     | L1 | S2 | L2 | S3 | L3 |    |
|       | S4  | L4 | -etc.- | *  |    |    |    |    |    |

**Example:**

|       |      |     |     |   |      |   |     |   |  |
|-------|------|-----|-----|---|------|---|-----|---|--|
| DLOAD | 17   | 1.0 | 2.0 | 6 | -2.0 | 7 | 2.0 | 8 |  |
|       | -2.0 | 9   |     |   |      |   |     |   |  |

**Fields:**

| Field | Contents                                                                                          |
|-------|---------------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer>0)                                                       |
| S     | Scale factor. (Real)                                                                              |
| Si    | Scale factors. (Real)                                                                             |
| Li    | Load set identification numbers of RLOAD1, RLOAD2, TLOAD1, TLOAD2, and ACSRC entries. (Integer>0) |

**Remarks:**

- Dynamic load sets must be selected in the Case Control section with DLOAD = SID.
- The load vector being defined by this entry is given by

$$\{P\} = S \sum_i S_i \{P_i\}$$

- Each Li must be unique from any other Li on the same entry.
- SID must be unique from all TLOADi and RLOADi entries.

## 1352 DLOAD

### Dynamic Load Combination or Superposition

5. Nonlinear transient load sets (NOLINi entries) may not be specified on DLOAD entries. NOLINi entries are selected separately in the Case Control section by the NONLINEAR command.
6. A DLOAD entry may not reference a set identification number defined by another DLOAD entry.
7. TLOAD1 and TLOAD2 loads may be combined only through the use of the DLOAD entry.
8. RLOAD1 and RLOAD2 loads may be combined only through the use of the DLOAD entry.

#### Remarks related to SOLs 601 and 701:

1. DLOAD may be used in a nonlinear static or transient analysis to combine time-dependent loads.
2. Li can only be the load set identification numbers of TLOAD1 entries.
3. Both LOAD and DLOAD can be used in the same analysis to define some loads with constant magnitude and some time-dependent loads.



**DMI** Direct Matrix Input

Defines matrix data blocks. Generates a matrix of the following form:

$$[\text{NAME}] = \begin{bmatrix} X_{11} & X_{12} & \dots & X_{1n} \\ X_{21} & X_{22} & \dots & X_{2n} \\ \cdot & \cdot & \cdot & \cdot \\ X_{m1} & \dots & \dots & X_{mn} \end{bmatrix}$$

where the elements  $X_{ij}$  may be real ( $X_{ij} = A_{ij}$ ) or complex ( $X_{ij} = A_{ij} + iB_{ij}$ ). The matrix is defined by a single header entry and one or more column entries. Only one header entry is required. A column entry is required for each column with nonzero elements.

**Header Entry Format:**

| 1   | 2    | 3   | 4    | 5   | 6    | 7 | 8 | 9 | 10 |
|-----|------|-----|------|-----|------|---|---|---|----|
| DMI | NAME | "0" | FORM | TIN | TOUT |   | M | N |    |

**Column Entry Format for Real Matrices:**

|     |         |   |        |         |           |  |        |    |  |
|-----|---------|---|--------|---------|-----------|--|--------|----|--|
| DMI | NAME    | J | I1     | A(I1,J) | A(I1+1,J) |  | -etc.- | I2 |  |
|     | A(I2,J) |   | -etc.- |         |           |  |        |    |  |

**Column Entry Format for Complex Matrices:**

|     |      |         |         |         |         |           |           |        |  |
|-----|------|---------|---------|---------|---------|-----------|-----------|--------|--|
| DMI | NAME | J       | I1      | A(I1,J) | B(I1,J) | A(I1+1,J) | B(I1+1,J) | -etc.- |  |
|     | I2   | A(I2,J) | B(I2,J) | -etc.-  |         |           |           |        |  |

**Example of a Real Matrix:**

|     |     |   |   |    |    |    |   |   |  |
|-----|-----|---|---|----|----|----|---|---|--|
| DMI | BBB | 0 | 2 | 1  | 1  |    | 4 | 2 |  |
| DMI | BBB | 1 | 1 | 1. | 3. | 5. |   |   |  |
| DMI | BBB | 2 | 2 | 6. | 4  | 8. |   |   |  |

$$\text{BBB} = \begin{bmatrix} 1.0 & 0.0 \\ 3.0 & 6.0 \\ 5.0 & 0.0 \\ 0.0 & 8.0 \end{bmatrix}$$

## 1354 DMI Direct Matrix Input

### Example of a Complex Matrix:

|     |     |     |   |     |     |     |     |     |  |
|-----|-----|-----|---|-----|-----|-----|-----|-----|--|
| DMI | QQQ | 0   | 2 | 3   | 3   |     | 4   | 2   |  |
| DMI | QQQ | 1   | 1 | 1.0 | 2.0 | 3.0 | 0.0 | 3   |  |
|     | 5.0 | 6.0 |   |     |     |     |     |     |  |
| DMI | QQQ | 2   | 2 | 6.0 | 7.0 | 4   | 8.0 | 9.0 |  |

$$[QQQ] = \begin{bmatrix} 1.0 + 2.0i & , & 0.0 + 0.0i \\ 3.0 + 0.0i & , & 6.0 + 7.0i \\ 5.0 + 6.0i & , & 0.0 + 0.0i \\ 0.0 + 0.0i & , & 8.0 + 9.0i \end{bmatrix}$$

### Fields:

| Field | Contents                                                                                                                                                                                                                                                                                                                                                                    |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME  | Name of the matrix. See Remark 1. NAME is used to reference the data block in the DMAP sequence. (One to eight alphanumeric characters, the first of which must be alphabetic.)                                                                                                                                                                                             |
| FORM  | Form of matrix. (Integer) <ul style="list-style-type: none"> <li>1 = Square matrix (not symmetric)</li> <li>2 = General rectangular matrix</li> <li>3 = Diagonal matrix (M=number of rows, N = 1)</li> <li>4 = Lower triangular factor</li> <li>5 = Upper triangular factor</li> <li>6 = Symmetric matrix</li> <li>8 = Identity matrix (M=number of rows, N = M)</li> </ul> |
| TIN   | Type of matrix being input. (Integer) <ul style="list-style-type: none"> <li>1 = Real, single precision (one field used per element)</li> <li>2 = Real, double precision (one field used per element)</li> <li>3 = Complex, single precision (two fields used per element)</li> <li>4 = Complex, double precision (two fields used per element)</li> </ul>                  |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                   |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TOUT         | Type of matrix being output. (Integer)<br>0 = Set by precision cell<br>1 = Real, single precision<br>2 = Real, double precision<br>3 = Complex, single precision<br>4 = Complex, double precision |
| M            | Number of rows in NAME. (Integer>0)                                                                                                                                                               |
| N            | Number of columns in NAME. Except for FORM 3 and 8. (Integer>0)                                                                                                                                   |
| “0”          | Indicates the header entry.                                                                                                                                                                       |
| J            | Column number of NAME. (Integer>0)                                                                                                                                                                |
| I1, I2, etc. | Row number of NAME, which indicates the beginning of a group of nonzero elements in the column. See Remark 13. (Integer>0)                                                                        |
| A(Ix,J)      | Real part of the element (see TIN). (Real)                                                                                                                                                        |
| B(Ix,J)      | Imaginary part of the element (see TIN). (Real)                                                                                                                                                   |

**Remarks:**

1. In order to use the DMI feature, the user must write a DMAP, or make alterations to a solution sequence that includes the DMIIN module. See the *NX Nastran DMAP Programmer's Guide*. All rules governing the use of data blocks in DMAP sequences apply.
2. The total number of DMIs and DTIs may not exceed 1000.
3. Field 3 of the header entry must contain an integer of zero (0).
4. For symmetric matrices, the entire matrix must be input.
5. Only nonzero terms need be entered.
6. Leading and trailing zeros in a column do not have to be entered. However, a blank field between nonzero fields on this entry is not equivalent to a zero. If

## 1356 DMI Direct Matrix Input

a zero input is required, the appropriate type zero must be entered (i.e., 0.0 or 0.0D0).

7. Complex input must have both the real and imaginary parts entered if either part is nonzero; i.e., the zero component must be input explicitly.
8. If A(Ix,J) is followed by “THRU” in the next field and an integer row number “IX” after the THRU, then A(Ix,J) will be repeated in each row through IX. The “THRU” must follow an element value. For example, the entries for a real matrix RRR would appear as follows:

| 1   | 2    | 3 | 4  | 5       | 6    | 7  | 8  | 9       | 10 |
|-----|------|---|----|---------|------|----|----|---------|----|
| DMI | NAME | J | I1 | A(I1,J) |      |    | I1 | A(I2,J) |    |
| DMI | RRR  | 1 | 2  | 1.0     | THRU | 10 | 12 | 2.0     |    |

These entries will cause the first column of the matrix RRR to have a zero in row 1, the values 1.0 in rows 2 through 10, a zero in row 11, and 2.0 in row 12.

9. Each column must be a single logical entry. The terms in each column must be specified in increasing row number order.
10. The “FORM” options 4, 5, and 8 are nonstandard forms and may be used only in conjunction with the modules indicated in [Table 14-3](#).

| FORM | Matrix Description      | Modules |     |        |       |
|------|-------------------------|---------|-----|--------|-------|
|      |                         | ADD     | FBS | MATPRN | MPYAD |
| 4    | Lower Triangular Factor |         | X   | X      |       |
| 5    | Upper Triangular Factor |         | X   | X      |       |
| 8    | Identity                | X       | X   | X      | X     |

11. Form 3 matrices are converted to Form 6 matrices, which may be used by any module.
12. Form 7 matrices may not be defined on this entry.
13. I1 must be specified. I2, etc. are not required if their matrix elements follow the preceding element in the next row of the matrix. For example, in the column entry for column 1 of QQQ, neither I2 nor I3 is specified.
14. The DMIG entry is more convenient for matrices with rows and columns that are referenced by grid or scalar point degrees-of-freedom.

**DMIAX** Direct Matrix Input for Axisymmetric Analysis

Defines axisymmetric (fluid or structure) related direct input matrix terms.

The matrix is defined by a single header entry and one or more column entries. Only one header entry is required. A column entry is required for each column with nonzero elements.

**Header Entry Format:**

| 1     | 2    | 3   | 4   | 5   | 6    | 7 | 8 | 9 | 10 |
|-------|------|-----|-----|-----|------|---|---|---|----|
| DMIAX | NAME | "0" | IFO | TIN | TOUT |   |   |   |    |

**Column Entry Format:**

|       |      |    |    |        |    |  |  |  |  |
|-------|------|----|----|--------|----|--|--|--|--|
| DMIAX | NAME | GJ | CJ | NJ     |    |  |  |  |  |
|       | G1   | C1 | N1 | A1     | B1 |  |  |  |  |
|       | G2   | C2 |    | -etc.- |    |  |  |  |  |

**Example:**

|       |      |    |   |        |        |  |  |  |  |
|-------|------|----|---|--------|--------|--|--|--|--|
| DMIAX | B2PP | 0  | 1 | 34     |        |  |  |  |  |
| DMIAX | B2PP | 32 |   |        |        |  |  |  |  |
|       | 1027 | 3  |   | 4.25+6 | 2.27+3 |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                             |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME  | Name of the matrix. See Remark 2. (One to eight alphanumeric characters, the first of which is alphabetic.)                                                          |
| IFO   | Form of matrix. (Integer)<br>1 = Square matrix<br>2 = General rectangular matrix<br>6 = Symmetric matrix                                                             |
| TIN   | Type of matrix being input. (Integer)<br>1 = Real, single precision (one field used per element)<br>3 = Complex, single precision. (two fields are used per element) |

## 1358 DMIAX Direct Matrix Input for Axisymmetric Analysis

| Field  | Contents                                                                                                                                                                                          |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TOUT   | Type of matrix that will be created: (Integer)<br>1 = Real, single precision<br>2 = Real, double precision<br>3 = Complex, single precision<br>4 = Complex, double precision                      |
| GJ, Gi | Grid, scalar, RINGFL fluid point, PRESPT pressure point, FREEPT free surface displacement, or extra point identification number. (Integer>0)                                                      |
| CJ, Ci | Component number for a GJ or Gi grid point ( $0 \leq \text{Integer} \leq 6$ ; Blank or zero if GJ or Gi is a scalar, fluid, or extra point.)                                                      |
| NJ, Ni | Harmonic number of a RINGFL point. Must be blank if a point type other than RINGFL is used. A negative number implies the “sine” series; a positive number implies the “cosine” series. (Integer) |
| Ai, Bi | Real and imaginary parts of matrix element; row (Gi, Ci, Ni) column (GJ, CJ, NJ). If the matrix is real (TIN = 1), then Bi must be blank.                                                         |

### Remarks:

1. This entry is allowed only if an AXIF entry is also present.
2. Matrices defined on this entry may be used in dynamics by selection with the Case Control commands  $K2PP = \text{NAME}$ ,  $B2PP = \text{NAME}$ , or  $M2PP = \text{NAME}$  for  $[K^2_{pp}]$ ,  $[B^2_{pp}]$ , or  $[M^2_{pp}]$ , respectively. See “Dynamic Reduction and Component Mode Synthesis in SubDMAP SEMR3” in the *NX Nastran User’s Guide*.
3. Field 3 or the header entry must contain an integer 0.
4. For symmetric matrices, either the upper or the lower triangle terms may be specified, but not both.
5. Only nonzero terms need be entered.

**DMIG** Direct Matrix Input at Points

Defines direct input matrices related to grid, extra, and/or scalar points. The matrix is defined by a single header entry and one or more column entries. A column entry is required for each column with nonzero elements.

**Header Entry Format:**

| 1    | 2    | 3   | 4   | 5   | 6    | 7     | 8 | 9    | 10 |
|------|------|-----|-----|-----|------|-------|---|------|----|
| DMIG | NAME | "0" | IFO | TIN | TOUT | POLAR |   | NCOL |    |

**Column Entry Format:**

|      |      |    |    |    |        |    |    |    |  |
|------|------|----|----|----|--------|----|----|----|--|
| DMIG | NAME | GJ | CJ |    | G1     | C1 | A1 | B1 |  |
|      | G2   | C2 | A2 | B2 | -etc.- |    |    |    |  |

**Example:**

|      |      |    |        |    |    |   |      |      |  |
|------|------|----|--------|----|----|---|------|------|--|
| DMIG | STIF | 0  | 1      | 3  | 4  |   |      |      |  |
| DMIG | STIF | 27 | 1      |    | 2  | 3 | 3.+5 | 3.+3 |  |
|      | 2    | 4  | 2.5+10 | 0. | 50 |   | 1.0  | 0.   |  |

**Fields:**

| Field | Contents                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------|
| NAME  | Name of the matrix. See Remark 1. (One to eight alphanumeric characters, the first of which is alphabetic.)                               |
| IFO   | Form of matrix input. IFO = 6 must be specified for matrices selected by the K2GG, M2GG, B2GG, and K42GG Case Control commands. (Integer) |
|       | 1 = Square                                                                                                                                |
|       | 9 or 2 = Rectangular                                                                                                                      |
|       | 6 = Symmetric                                                                                                                             |

## 1360 DMIG Direct Matrix Input at Points

| Field  | Contents                                                                                                                                                                                                                                                                                                    |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TIN    | Type of matrix being input. (Integer)<br>1 = Real, single precision (One field is used per element.)<br>2 = Real, double precision (One field is used per element.)<br>3 = Complex, single precision (Two fields are used per element.)<br>4 = Complex, double precision (Two fields are used per element.) |
| TOUT   | Type of matrix that will be created: (Integer)<br>0 = Set by precision system cell (Default)<br>1 = Real, single precision<br>2 = Real, double precision<br>3 = Complex, single precision<br>4 = Complex, double precision                                                                                  |
| POLAR  | Input format of Ai, Bi. (Integer=blank or 0 indicates real, imaginary format; Integer>0 indicates amplitude, phase format.)                                                                                                                                                                                 |
| NCOL   | Number of columns in a rectangular matrix. Used only for IFO = 9. See Remarks 5. and 6. (Integer>0)                                                                                                                                                                                                         |
| GJ     | Grid, scalar or extra point identification number for a column index. (Integer>0)                                                                                                                                                                                                                           |
| CJ     | Component number for a grid point GJ. (0<Integer ≤ 6; blank or zero if GJ is a scalar or extra point.)                                                                                                                                                                                                      |
| Gi     | Grid, scalar, or extra point identification number for a row index. (Integer>0)                                                                                                                                                                                                                             |
| Ci     | Component number for Gi for a grid point. (0<CJ ≤ 6 ; blank or zero if Gi is a scalar or extra point.)                                                                                                                                                                                                      |
| Ai, Bi | Real and imaginary (or amplitude and phase) parts of a matrix element. If the matrix is real (TIN = 1 or 2), then Bi must be blank. (Real)                                                                                                                                                                  |



**Remarks:**

1. Matrices defined on this entry may be used in dynamics by selection in the Case Control with K2PP = NAME, or B2PP = NAME, or M2PP = NAME for  $[K_{pp}]$ ,  $[B_{pp}]$ , or  $[M_{pp}]$ , respectively. Matrices may also be selected for all solution sequences with K2GG = NAME, or B2GG = NAME, or M2GG = NAME, or K42GG = NAME. The g-set matrices are added to the structural matrices before constraints are applied, while p-set matrices are added in dynamics after constraints are applied. Load matrices may be selected by P2G = NAME for dynamic and superelement analyses.
2. The header entry containing IFO, TIN and TOUT is required. Each nonnull column is started with a GJ, CJ pair. The entries for each row of that column follows. Only nonzero terms need be entered. The terms may be input in arbitrary order. A GJ, CJ pair may be entered more than once, but input of an element of the matrix more than once will produce a fatal message.
3. Field 3 of the header entry must contain an integer 0.
4. For symmetric matrices (IFO = 6), a given off-diagonal element may be input either below or above the diagonal. While upper and lower triangle terms may be mixed, a fatal message will be issued if an element is input both below and above the diagonal.
5. The recommended format for rectangular matrices requires the use of NCOL and IFO = 9. The number of columns in the matrix is NCOL. (The number of rows in all DMIG matrices is always either p-set or g-set size, depending on the context.) The GJ term is used for the column index. The CJ term is ignored.
6. If NCOL is not used for rectangular matrices, two different conventions are available:
  - If IFO = 9, GJ and CJ will determine the sorted sequence, but will otherwise be ignored; a rectangular matrix will be generated with the columns submitted being in the 1 to N positions, where N is the number of logical entries submitted (not counting the header entry).
  - If IFO = 2, the number of columns of the rectangular matrix will be equal to the index of the highest numbered non-null column (in internal sort). Trailing null columns of the g- or p-size matrix will be truncated.
7. The matrix names must be unique among all DMIGs.
8. TIN should be set consistent with the number of decimal digits required to read the input data adequately. For a single-precision specification on a short-word machine, the input will be truncated after about eight decimal digits, even when more digits are present in a double-field format. If more digits are needed, a

## 1362 DMIG

### Direct Matrix Input at Points

double precision specification should be used instead. However, note that a double precision specification requires a “D” type exponent even for terms that do not need an exponent. For example, unity may be input as 1.0 in single precision, but the longer form 1.0D0 is required for double precision.

9. On long-word machines, almost all matrix calculations are performed in single precision and on short-word machines, in double precision. It is recommended that DMIG matrices also follow these conventions for a balance of efficiency and reliability. The recommended value for TOUT is 0, which instructs the program to inspect the system cell that measures the machine precision at run time and sets the precision of the matrix to the same value. TOUT = 0 allows the same DMIG input to be used on any machine. If TOUT is contrary to the machine type specified (for example, a TOUT of 1 on a short-word machine), unreliable results may occur.
10. If any DMIG entry is changed or added on restart then a complete re-analysis is performed. Therefore, DMIG entry changes or additions are not recommended on restart.

**DMIG,UACCEL** Direct Matrix Input of Enforced Static Acceleration

Defines rigid body accelerations in the basic coordinate system.

**Format:**

| 1    | 2      | 3   | 4   | 5   | 6  | 7  | 8  | 9    | 10 |
|------|--------|-----|-----|-----|----|----|----|------|----|
| DMIG | UACCEL | "0" | "9" | TIN |    |    |    | NCOL |    |
| DMIG | UACCEL | L   |     |     | G1 | C1 | X1 |      |    |
|      | G2     | C2  | X2  |     | G3 | C3 | X3 |      |    |

**Example:**

|      |        |   |   |   |   |   |       |   |  |
|------|--------|---|---|---|---|---|-------|---|--|
| DMIG | UACCEL | 0 | 9 | 1 |   |   |       | 4 |  |
| DMIG | UACCEL | 2 |   |   | 2 | 3 | 386.4 |   |  |
| DMIG | UACCEL | 3 |   |   | 2 | 4 | 3.0   |   |  |
| DMIG | UACCEL | 4 |   |   | 2 | 6 | 1.0   |   |  |

**Fields:**

| Field | Contents                                                                                                                                                                       |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TIN   | Type of matrix being input. (Integer 1 or 2)<br><br>1 = Real, single precision. (one field is used per element)<br>2 = Real, double precision. (one field is used per element) |
| NCOL  | Number of columns. See Remark 2 . (Integer>0; Default is the number of columns specified)                                                                                      |
| L     | Load sequence number. (Integer>0)                                                                                                                                              |
| Gi    | Grid point identification number of a single reference point. (Integer>0)                                                                                                      |
| Ci    | Component number for Gi in the basic coordinate system. See Remark 4 . (0<Integer ≤ 6)                                                                                         |
| Xi    | Value of enforced acceleration term in the basic coordinate system. (Real)                                                                                                     |

## 1364 DMIG,UACCEL

### Direct Matrix Input of Enforced Static Acceleration

#### Remarks:

1. DMIG,UACCEL is an optional entry when PARAM,INREL,-1 is specified in SOLs 101 or 200. If DMIG,UACCEL is present, the loads applied to the structure are the sum of the conventional applied loads plus the inertia loads resulting from the rigid body accelerations defined on this entry. If it is not present, conventional inertia relief calculations are performed.
2. The load sequence number interpretation depends on the value of the NCOL field. The recommended method is to set it equal to the number of loading conditions. The load sequence number L is then the sequence number of the subcase to which the applied acceleration will be applied.
3. The grid point identification number listed on Gi defines a single grid point on the model where loads will be applied to cause the enforced acceleration state. Gi must also appear on a SUPORT Bulk Data entry and a PARAM,GRDPNT entry. In superelement analysis, it must be a residual structure point exterior to all superelements.
4. The Xi value is the enforced acceleration at grid point Gi. The translation and rotation components are in consistent units and will be applied in the basic coordinate system regardless of the displacement coordinate system specified for Gi (CD field on GRID entry).
5. Only nonzero terms need be entered.
6. See the *NX Nastran User's Guide* for the theoretical basis of inertia relief with superelements.
7. If any DMIG entry is changed or added on restart then a complete re-analysis is performed. Therefore, DMIG entry changes or additions are not recommended on restart.

Direct Matrix Input at js-Set of the Aerodynamic Mesh

**DMIJ** Direct Matrix Input at js-Set of the Aerodynamic Mesh

Defines direct input matrices related to collation degrees of freedom (js-set) of aerodynamic mesh points for CAERO1, CAERO3, CAERO4 and CAERO5 and for the slender body elements of CAERO2. These include W2GJ, FA2J and input pressures and downwashes associated with AEPRESS and AEDW entries. The matrix is described by a single header entry and one or more column entries. A column entry is required for each column with nonzero elements. For entering data for the interference elements of a CAERO2, use DMIJI or DMI.

**Header Entry Format:**

| 1    | 2    | 3   | 4   | 5   | 6    | 7     | 8 | 9    | 10 |
|------|------|-----|-----|-----|------|-------|---|------|----|
| DMIJ | NAME | "0" | IFO | TIN | TOUT | POLAR |   | NCOL |    |

**Column Entry Format:**

|      |      |    |    |    |        |    |    |    |  |
|------|------|----|----|----|--------|----|----|----|--|
| DMIJ | NAME | GJ | CJ |    | G1     | C1 | A1 | B1 |  |
|      | G2   | C2 | A2 | B2 | -etc.- |    |    |    |  |

**Example:**

|      |       |   |    |   |   |   |    |   |  |
|------|-------|---|----|---|---|---|----|---|--|
| DMIJ | ALPH1 | 0 | 9  | 2 | 0 |   |    | 1 |  |
| DMIJ | ALPH1 | 1 | 1  |   | 1 | 1 | .1 |   |  |
|      | 2     | 1 | .1 |   |   |   |    |   |  |

**Fields:**

**Field Contents**

NAME Name of the matrix. See Remark 1 . (One to eight alphanumeric characters, the first of which is alphabetic.)

IFO Form of matrix being input. (Integer)

1 = Square

9 or 2 = Rectangular

6 = Symmetric

**1366 DMIJ**  
**Direct Matrix Input at js-Set of the Aerodynamic Mesh**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                             |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TIN          | Type of matrix being input. (Integer)<br>1 = Real, single precision (one field s used per element)<br>2 = Real, double precision (one field used per element)<br>3 = Complex, single precision (two fields used per element)<br>4 = Complex, double precision (two fields used per element) |
| TOUT         | Type of matrix being created: (Integer)<br>0 = Set by precision system cell (Default)<br>1 = Real, single precision<br>2 = Real, double precision<br>3 = Complex, single precision<br>4 = Complex, double precision                                                                         |
| POLAR        | Input format of Ai, Bi. (Integer = blank or 0 indicates real, imaginary format. Integer>0 indicates magnitude, phase format.)                                                                                                                                                               |
| NCOL         | Number of columns in a rectangular matrix. Used only for IFO = 9. (Integer>0)                                                                                                                                                                                                               |
| GJ           | Grid, scalar or extra point identification number for a column index. (Integer>0)                                                                                                                                                                                                           |
| CJ           | Component number for grid point GJ. (0<Integer ≤ 6; blank or zero if GJ is a scalar or extra point.)                                                                                                                                                                                        |
| Gi           | Grid, scalar, or extra point identification number for a row index. (Integer>0)                                                                                                                                                                                                             |
| Ci           | Component number for Gi for a grid point. (0<CJ ≤6; blank or zero if Gi is a scalar or extra point.)                                                                                                                                                                                        |
| Ai, Bi       | Real and imaginary (or amplitude and phase) parts of a matrix element. If the matrix is real (TIN = 1 or 2), then Bi must be blank. (Real)                                                                                                                                                  |

**Remarks:**

1. Matrices defined on this entry are referenced in static aeroelastic analysis by reference on AEDW and/or AEPRESS entries. In that paradigm, a single column is required. Also, DMIJ may also be used for the W2GJ and FA2J entries. Again, a single column is required. If both DMI and DMIJ are specified for W2GJ or FA2J, the DMI entry will be used. DMI may NOT be used for AEDW and AEPRESS.
2. The js-set DOFs for each aerodynamic theory are limited to the six-DOF paradigm (3 translations and 3 rotations). However, particular DOFs are permanently SPC'd based on the theory's ability to support those degrees of freedom. Unlike the DMIG entry, DMIJ data will be partitioned to the j-set, not reduced. No warnings are issued about truncated data. The j-set DOFs for each aerodynamic element/grid are highly method dependent. The following data define the known set, but the j-set definition is somewhat arbitrary in the general (external aerodynamics) paradigm.

| Entry Type | COMP |   |   |   |   |
|------------|------|---|---|---|---|
|            | 1    | 2 | 3 | 5 | 6 |
| CAERO1     |      |   | X |   |   |
| CAERO2-Y   |      | X |   |   |   |
| CAERO2-Z   |      |   | X |   |   |
| CAERO2-ZY  |      | X | X |   |   |

3. The header entry containing IFO, TIN and TOUT is required. Each nonnull column is started with a GJ, CJ pair. The entries for each row of that column then follow. Only nonzero terms need be entered. The terms may be input in arbitrary order. A GJ, CJ pair may be entered more than once, but the input of an element of the matrix more than once results in a fatal message.
4. Field 3 of the header entry must contain an integer 0.
5. For symmetric matrices (very rare in the j-set) (IFO=6), a given off-diagonal element may be input either below or above the diagonal. While upper and lower triangle terms may be mixed, a fatal message will be issued if an element is input both above and below the diagonal.
6. The recommended format for rectangular matrices requires the use of NCOL and IFO = 9. The number of columns in the matrix is NCOL. (The number of rows in all DMIJ matrices is always the js-set size—the union of the j-set and the permanently SPC'd partition.) The GJ term is used for the column index. the CJ term is ignored.

## 1368 DMIJ

### Direct Matrix Input at js-Set of the Aerodynamic Mesh

7. If NCOL is not used for rectangular matrices, two different conventions are available:
  - If IFO = 9, GJ and CJ will determine the sorted sequence, but will otherwise be ignored; a rectangular matrix will be generated with the columns submitted being in the 1 to N positions, where N is the number of logical entries submitted (not counting the header entry).
  - If IFO = 2, the number of columns of the rectangular matrix will be equal to the index of the highest numbered nonnull column (in internal sort). Training null columns of the js-size matrix will be truncated.
8. The matrix names must be unique among all DMIJ.
9. TIN should be consistent with the number of decimal digits required to read the input data adequately. For a single precision specification on a short word machine, the input will be truncated after about eight decimal digits, even when more digits are present in a double field format. If more digits are needed, a double precision specification should be used instead. However, not that a double precision specification requires a “D” type exponent even for terms that do not need an exponent. For example, unity may be input as 1.0 in single precision, but the longer form 1.0D0 is required for double precision.
10. On long word machines, almost all matrix calculations are performed in single precision and, on short word machines, in double precision. It is recommended that DMIJ matrices also follow these conventions for a balance of efficiency and reliability. The recommended value for TOUT is 0, which instructs the program to inspect the system cell that measures the machine precision at run time and sets the precision of the matrix to the same value. TOUT = 0 allows the same DMIJ input to be used on any machine. If TOUT is contrary to the machine type specified, unreliable results may occur.
11. If any DMIJ entry is changed or added on restart then a complete reanalysis is performed. Therefore, DMIJ entry changes or additions are not recommended on restart.



Direct Matrix Input at js-Set of the Interference Body

**DMIJI** Direct Matrix Input at js-Set of the Interference Body

Defines direct input matrices related to collation degrees of freedom (js-set) of aerodynamic mesh points for the interference elements of CAERO2. These include W2GJ, FA2J and input pressures and downwashes associated with AEPRESS and AEDW entries. The matrix is described by a single header entry and one or more column entries. A column entry is required for each column with nonzero elements. For entering data for the slender elements of a CAERO2 or a CAERO1, 3, 4 or 5 use DMIJ or DMI.

**Header Entry Format:**

| 1     | 2    | 3   | 4   | 5   | 6    | 7     | 8 | 9    | 10 |
|-------|------|-----|-----|-----|------|-------|---|------|----|
| DMIJI | NAME | "0" | IFO | TIN | TOUT | POLAR |   | NCOL |    |

**Column Entry Format:**

|      |      |    |    |    |        |    |    |    |  |
|------|------|----|----|----|--------|----|----|----|--|
| DMIJ | NAME | GJ | CJ |    | G1     | C1 | A1 | B1 |  |
|      | G2   | C2 | A2 | B2 | -etc.- |    |    |    |  |

**Example:**

|       |       |   |    |   |   |   |    |   |  |
|-------|-------|---|----|---|---|---|----|---|--|
| DMIJI | ALPH1 | 0 | 9  | 2 | 0 |   |    | 1 |  |
| DMIJI | ALPH1 | 1 | 1  |   | 1 | 1 | .1 |   |  |
|       | 2     | 1 | .1 |   |   |   |    |   |  |

**Fields:**

| Field | Contents                                                                                                     |
|-------|--------------------------------------------------------------------------------------------------------------|
| NAME  | Name of the matrix. See Remark 1 . (One to eight alphanumeric characters, the first of which is alphabetic.) |
| IFO   | Form of matrix being input. (Integer)<br>1 = Square<br>9 or 2 = Rectangular<br>6 = Symmetric                 |

**1370 DMIJI**  
**Direct Matrix Input at js-Set of the Interference Body**

| <b>Field</b>  | <b>Contents</b>                                                                                                                                                                                                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TIN           | Type of matrix being input. (Integer)<br>1 = Real, single precision (one field is used per element)<br>2 = Real, double precision (one field is used per element)<br>3 = Complex, single precision (two fields used per element)<br>4 = Complex, double precision (two fields used per element) |
| TOUT          | Type of matrix being created. (Integer)<br>0 = Set by precision system cell (Default)<br>1 = Real, single precision<br>2 = Real, double precision<br>3 = Complex, single precision<br>4 = Complex, double precision                                                                             |
| POLAR         | Input format of $A_i$ , $B_i$ . (Integer = blank or 0 indicates real, imaginary format. Integer > 0 indicated magnitude, phase format.)                                                                                                                                                         |
| NCOL          | Number of columns in a rectangular matrix. Used only for IFO = 9. (Integer > 0)                                                                                                                                                                                                                 |
| GJ            | Grid, scalar or extra point identification number for a column index. (Integer > 0)                                                                                                                                                                                                             |
| CJ            | Component number for grid point GJ. ( $0 < \text{Integer} \leq 6$ ; blank or zero if GJ is a scalar or extra point.)                                                                                                                                                                            |
| Gi            | Grid, scalar, or extra point identification number for a row index. (Integer > 0)                                                                                                                                                                                                               |
| Ci            | Component number for $G_i$ for a grid point. ( $0 < \text{CJ} \leq 6$ ; blank or zero if $G_i$ is a scalar or extra point.)                                                                                                                                                                     |
| $A_i$ , $B_i$ | Real and imaginary (or amplitude and phase) parts of a matrix element. If the matrix is real (TIN = 1 or 2), then $B_i$ must be blank. (Real)                                                                                                                                                   |

**Remarks:**

1. Matrices defined on this entry are referenced in static aeroelastic analysis by reference on AEDW and/or AEPRESS entries. In that paradigm, a single column is required. DMI may NOT be used for AEDW and AEPRESS.
2. The js-set DOFs for each aerodynamic theory are limited to the six-DOF paradigm (3 translations and 3 rotations). However, particular DOFs are permanently SPC'd based on the theory's ability to support those degrees of freedom. Unlike the DMIG entry, DMIJI data will be partitioned to the j-set, not reduced. No warnings are issued about truncated data. The j-set DOFs for each aerodynamic element/grid are highly method dependent. The following data define the known set, but the j-set definition is somewhat arbitrary in the general (external aerodynamics) paradigm.

| Entry Type | COMP |   |   |   |   |
|------------|------|---|---|---|---|
|            | 1    | 2 | 3 | 5 | 6 |
| CAERO2-Y   |      | X |   |   |   |
| CAERO2-Z   |      |   | X |   |   |
| CAERO2-ZY  |      | X | X |   |   |

3. The header entry containing IFO, TIN and TOUT is required. Each nonnull column is started with a GJ, CJ pair. The entries for each row of that column then follow. Only nonzero terms need be entered. The terms may be input in arbitrary order. A GJ, CJ pair may be entered more than once, but the input of an element of the matrix more than once results in a fatal message.
4. Field 3 of the header entry must contain an integer 0.
5. For symmetric matrices (very rare in the j-set!) (IFO=6), a given off-diagonal element may be input either below or above the diagonal. While upper and lower triangle terms may be mixed, a fatal message will be issued if an element is input both above and below the diagonal.
6. The recommended format for rectangular matrices requires the use of NCOL and IFO = 9. The number of columns in the matrix is NCOL. (The number of rows in all **DMIJI** matrices is always the js-set size—the union of the j-set and the permanently SPC'd partition.) The GJ term is used for the column index. The CJ term is ignored.
7. If NCOL is not used for rectangular matrices, two different conventions are available:

## 1372 DMIJI

### Direct Matrix Input at js-Set of the Interference Body

- If IFO = 9, GJ and CJ will determine the sorted sequence, but will otherwise be ignored; a rectangular matrix will be generated with the columns submitted being in the 1 to N positions, where N is the number of logical entries submitted (not counting the header entry).
  - If IFO = 2, the number of columns of the rectangular matrix will be equal to the index of the highest numbered nonnull column (in internal sort). Trailing null columns of the js-size matrix will be truncated.
8. The matrix names must be unique among all DMIJI.
  9. TIN should be consistent with the number of decimal digits required to read the input data adequately. For a single precision specification on a short word machine, the input will be truncated after about eight decimal digits, even when more digits are present in a double field format. If more digits are needed, a double precision specification should be used instead. However, note that a double precision specification requires a "D" type exponent even for terms that do not need an exponent. For example, unity may be input as 1.0 in single precision, but the longer form 1.0D0 is required for double precision.
  10. On long word machines, almost all matrix calculations are performed in single precision and, on short word machines, in double precision. It is recommended that DMIJ matrices also follow these conventions for a balance of efficiency and reliability. The recommended value for TOUT is 0, which instructs the program to inspect the system cell that measures the machine precision at run time and sets the precision of the matrix to the same value. TOUT = 0 allows the same DMIJI input to be used on any machine. If TOUT is contrary to the machine type specified, unreliable results may occur.
  11. If any DMIJ entry is changed or added on restart then a complete reanalysis is performed. Therefore, DMIJ entry changes or additions are not recommended on restart.

**DMIK** Direct Matrix Input at ks-Set of the Aerodynamic Mesh

Defines direct input matrices related to physical (displacement) degrees of freedom (ks-set) of aerodynamic grid points. These include WKK, WTFAC and input forces associated with AEFORCE entries. The matrix is described by a single header entry and one or more column entries. A column entry is required for each column with nonzero elements.

**Header Entry Format:**

| 1    | 2    | 3   | 4   | 5   | 6    | 7     | 8 | 9    | 10 |
|------|------|-----|-----|-----|------|-------|---|------|----|
| DMIK | NAME | "0" | IFO | TIN | TOUT | POLAR |   | NCOL |    |

**Column Entry Format:**

|      |      |    |    |    |        |    |    |    |  |
|------|------|----|----|----|--------|----|----|----|--|
| DMIK | NAME | GJ | CJ |    | G1     | C1 | A1 | B1 |  |
|      | G2   | C2 | A2 | B2 | -etc.- |    |    |    |  |

**Example:**

|      |       |   |     |   |   |   |     |   |  |
|------|-------|---|-----|---|---|---|-----|---|--|
| DMIK | ALPH1 | 0 | 9   | 2 | 0 |   |     | 1 |  |
| DMIK | ALPH1 | 1 | 1   |   | 1 | 1 | 1.0 |   |  |
|      | 2     | 1 | 1.0 |   |   |   |     |   |  |

**Fields:**

**Field Contents**

**NAME** Name of the matrix. See Remark 1 . (One to eight alphanumeric characters, the first of which is alphabetic.)

**IFO** Form of matrix being input. (Integer)

1 = Square

9 or 2 = Rectangular

6 = Symmetric

## 1374 DMIK Direct Matrix Input at ks-Set of the Aerodynamic Mesh

| Field         | Contents                                                                                                                                                                                                                                                                                                |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TIN           | Type of matrix being input. (Integer)<br>1 = Real, single precision (One field is used per element)<br>2 = Real, double precision (One field is used per element)<br>3 = Complex, single precision (Two fields are used per element)<br>4 = Complex, double precision (Two fields are used per element) |
| TOUT          | Type of matrix being created: (Integer)<br>0 = Set by precision system cell (Default)<br>1 = Real, single precision<br>2 = Real, double precision<br>3 = Complex, single precision<br>4 = Complex, double precision                                                                                     |
| POLAR         | Input format of $A_i$ , $B_i$ . (Integer = blank or 0 indicates real, imaginary format. Integer>0 indicated magnitude, phase format.)                                                                                                                                                                   |
| NCOL          | Number of columns in a rectangular matrix. Used only for IFO = 9. (Integer>0)                                                                                                                                                                                                                           |
| GJ            | Grid, scalar or extra point identification number for column index. (Integer>0)                                                                                                                                                                                                                         |
| CJ            | Component number for grid point GJ. ( $0 < \text{Integer} \leq 6$ ; blank or zero if GJ is a scalar or extra point.)                                                                                                                                                                                    |
| Gi            | Grid, scalar, or extra point identification number for row index. (Integer>0)                                                                                                                                                                                                                           |
| Ci            | Component number for $G_i$ for a grid point. ( $0 < \text{CJ} \leq 6$ ; blank or zero if $G_i$ is a scalar or extra point.)                                                                                                                                                                             |
| $A_i$ , $B_i$ | Real and imaginary (or amplitude and phase) parts of a matrix element. If the matrix is real (TIN = 1 or 2), then $B_i$ must be blank. (Real)                                                                                                                                                           |

Direct Matrix Input at ks-Set of the Aerodynamic Mesh

Remarks:

1. Matrices defined on this entry are referenced in static aeroelastic analysis by reference on AEFORCE entries. In that paradigm, a single column is required. Also, DMIK may also be used for the WKK and WTFACE entries. If both DMI and DMIK are specified for WKK or WTFACE, the DMI entry will be used. DMI may NOT be used for AEFORCE.
2. The ks-set DOFs for each aerodynamic theory are limited to the six-DOF paradigm (3 translations and 3 rotations). However, particular DOFs are permanently SPC'd based on the theory's ability to support those degrees of freedom. Unlike the DMIG entry, DMIK data will be partitioned to the k-set, not reduced. No warnings are issued about truncated data. The k-set DOFs for each aerodynamic element/grid are highly method dependent. The following data define the known set, but the j-set definition is somewhat arbitrary in the general (external aerodynamics) paradigm.

| Entry Type | COMP |   |   |   |   |
|------------|------|---|---|---|---|
|            | 1    | 2 | 3 | 5 | 6 |
| CAERO1     |      |   | X | X |   |
| CAERO2-Y   |      | X |   | X |   |
| CAERO2-Z   |      |   | X |   | X |
| CAERO2-ZY  |      | X | X | X | X |

3. The header entry containing IFO, TIN and TOUT is required. Each nonnull column is started with a GJ, CJ pair. The entries for each row of that column then follow. Only nonzero terms need be entered. The terms may be input in arbitrary order. A GJ, CJ pair may be entered more than once, but the input of an element of the matrix more than once results in a fatal message.
4. Field 3 of the header entry must contain an integer 0.
5. For symmetric matrices (IFO=6), a given off-diagonal element may be input either below or above the diagonal. While upper and lower triangle terms may be mixed, a fatal message will be issued if an element is input both above and below the diagonal.
6. The recommended format for rectangular matrices requires the use of NCOL and IFO = 9. The number of columns in the matrix is NCOL. (The number of rows in all DMIK matrices is always the ks-set size—the union of the k-set and the permanently SPC'd partition). The GJ term is used for the column index. The CJ term is ignored.

## 1376 DMIK

### Direct Matrix Input at ks-Set of the Aerodynamic Mesh

7. If NCOL is not used for rectangular matrices, two different conventions are available:
  - If IFO = 9, GJ and CJ will determine the sorted sequence, but will otherwise be ignored; a rectangular matrix will be generated with the columns submitted being in the 1 to N positions, where N is the number of logical entries submitted (not counting the header entry).
  - If IFO = 2, the number of columns of the rectangular matrix will be equal to the index of the highest numbered nonnull column (in internal sort). Training null columns of the js-size matrix will be truncated.
8. The matrix names must be unique among all DMIK
9. TIN should be consistent with the number of decimal digits required to read the input data adequately. For a single precision specification on a short word machine, the input will be truncated after about eight decimal digits, even when more digits are present in a double field format. If more digits are needed, a double precision specification should be used instead. However, not that a double precision specification requires a “D” type exponent even for terms that do not need an exponent. For example, unity may be input as 1.0 in single precision, but the longer form 1.0D0 is required for double precision.
10. On long word machines, almost all matrix calculations are performed in single precision and, on short word machines, in double precision. It is recommended that DMIK matrices also follow these conventions for a balance of efficiency and reliability. The recommended value for TOUT is 0, which instructs the program to inspect the system cell that measures the machine precision at run time and sets the precision of the matrix to the same value. TOUT = 0 allows the same DMIK input to be used on any machine. If TOUT is contrary to the machine type specified, unreliable results may occur.
11. If any DMIK entry is changed or added on restart then a complete reanalysis is performed. Therefore, DMIK entry changes or additions are not recommended on restart.



## DOPTPRM    Design Optimization Parameters

Overrides default values of parameters used in design optimization.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| DOPTPRM  | PARAM1   | VAL1     | PARAM2   | VAL2     | PARAM3   | VAL3     | PARAM4   | VAL4     |           |
|          | PARAM5   | VAL5     | -etc.-   |          |          |          |          |          |           |

**Example:**

|         |        |   |        |    |  |  |  |  |  |
|---------|--------|---|--------|----|--|--|--|--|--|
| DOPTPRM | IPRINT | 5 | DESMAX | 10 |  |  |  |  |  |
|---------|--------|---|--------|----|--|--|--|--|--|

**Fields:**

**Field                    Contents**

PARAMi    Name of the design optimization parameter. Allowable names are given in [Table 14-4](#). (Character)

VALi        Value of the parameter. (Real or Integer) See [Table 14-4](#).

**Remarks:**

1. Only one DOPTPRM entry is allowed in the Bulk Data Section.

| <b>Table 14-4. PARAMi Names and Descriptions</b> |                                                                                                                                                                                                                          |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                                      | <b>Description , Type, and Default Value</b>                                                                                                                                                                             |
| APRCOD                                           | Approximation method to be used. 1 = Direct Linearization; 2=Mixed Method based on response type; 3 = Convex Linearization. APRCOD = 1 is recommended for shape optimization problems. (Integer 1, 2, or 3; Default = 2) |
| CONV1                                            | Relative criterion to detect convergence. If the relative change in objective between two optimization cycles is less than CONV1, then optimization is terminated. (Real>0.0; Default = 0.001)                           |

**1378 DOPTPRM**  
**Design Optimization Parameters**

| <b>Table 14-4. PARAMi Names and Descriptions</b> |                                                                                                                                                                                                                                  |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                                      | <b>Description , Type, and Default Value</b>                                                                                                                                                                                     |
| CONV2                                            | Absolute criterion to detect convergence. If the absolute change in objective between two optimization cycles is less than CONV2, then optimization is terminated. (Real>0.0; Default = 1.0E-20)                                 |
| CONVDV                                           | Relative convergence criterion on design variables. (Real>0.0; Default = 0.001)                                                                                                                                                  |
| CONVPR                                           | Relative convergence criterion on properties. (Real>0.0; Default = 0.001)                                                                                                                                                        |
| CT                                               | Constraint tolerance. Constraint is considered active if current value is greater than CT. (Real<0.0; Default = -0.03)                                                                                                           |
| CTMIN                                            | Constraint is considered violated if current value is greater than CTMIN.(Real>0.0; Default = 0.003)                                                                                                                             |
| DABOBJ                                           | Maximum absolute change in objective between ITRMOP consecutive iterations (see ITRMOP) to indicate convergence at optimizer level. F0 is the initial objective function value. (Real>0.0; Default = MAX[0.001*ABS(F0), 0.0001]) |
| DELB                                             | Relative finite difference move parameter. (Real>0.0; Default = 0.0001)                                                                                                                                                          |
| DELOBJ                                           | Maximum relative change in objective between ITRMOP consecutive iterations to indicate convergence at optimizer level. (Real>0.0; Default = 0.001)                                                                               |
| DELP                                             | Fractional change allowed in each property during any optimization design cycle. This provides constraints on property moves. (Real>0.0; Default = 0.2)                                                                          |
| DELX                                             | Fractional change allowed in each design variable during any optimization cycle. (Real>0.0; Default = 1.0) See DXMIN for absolute minimum change allowed per cycle for design variables.                                         |
| DESMAX                                           | Maximum number of design cycles (not including FSD cycle) to be performed. (Integer ≥ 0; Default = 5)                                                                                                                            |

| <b>Table 14-4. PARAMi Names and Descriptions</b> |                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                                      | <b>Description , Type, and Default Value</b>                                                                                                                                                                                                                                                                            |
| DISBEG                                           | Design cycle ID for discrete variable processing initiation. Discrete variable processing analysis is carried out for every design cycle after DISBEG. (Integer $\geq$ 0, default = 0=the last design cycle) If fully stressed design (FSD), then discrete variable processing can start only after the last FSD cycle. |
| DISCOD                                           | Discrete Processing Method: (Integer 1, 2, 3 or 4; Default = 1)<br>1: Design of Experiments<br>2: Conservative Discrete Design<br>3: Rounding up to the nearest design variable<br>4: Rounded off to the nearest design variable                                                                                        |
| DOBJ1                                            | Relative change in objective attempted on the first optimization iteration. Used to estimate initial move in the one-dimensional search. Updated as the optimization progresses. (Real $>$ 0.0; Default = 0.1)                                                                                                          |
| DOBJ2                                            | Absolute change in objective attempted on the first optimization iteration. (Real $>$ 0.0; Default = 0.2*(F0))                                                                                                                                                                                                          |
| DPMIN                                            | Minimum move limit imposed. (Real $>$ 0.0; Default = 0.01)                                                                                                                                                                                                                                                              |
| DX1                                              | Maximum relative change in a design variable attempted on the first optimization iteration. Used to estimate the initial move in the one dimensional search. Updated as the optimization progresses. (Real $>$ 0.0; Default = 0.01)                                                                                     |
| DX2                                              | Absolute change in a design variable attempted on the first optimization iteration. (Real $>$ 0.0; Default = 0.2*MAX[X(I)])                                                                                                                                                                                             |
| DXMIN                                            | Minimum absolute limit on design variable move (Real $>$ 0.0; Default = 0.05). See DELX for allowable relative change per cycle in design variables.                                                                                                                                                                    |
| FSDALP                                           | Relaxation parameter applied in Fully Stressed Design (Real, 0.0 $<$ FSDALP $\leq$ 1.0, Default = 0.9)                                                                                                                                                                                                                  |

**1380 DOPTPRM**  
**Design Optimization Parameters**

| <b>Table 14-4. PARAMi Names and Descriptions</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                                      | <b>Description , Type, and Default Value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| FSDMAX                                           | Specifies the number of Fully Stressed Design Cycles that are to be performed (Integer, Default = 0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| GMAX                                             | Maximum constraint violation allowed at the converged optimum. (Real>0.0; Default = 0.005)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| GSCAL                                            | Constraint normalization factor. See Remarks under the DSCREEN and DCONSTR entries. (Real>0.0; Default = 0.001)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| IGMAX                                            | If IGMAX = 0, only gradients of active and violated constraints are calculated. If IGMAX>0, up to NCOLA gradients are calculated including active, violated, and near active constraints. (Integer≥0; Default = 0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| IPRINT                                           | <p>Print control during approximate optimization phase.</p> <p>Increasing values represent increasing levels of optimizer information. (0 ≤ Integer ≤ 7; Default = 0)</p> <p>0 no output (Default)</p> <p>1 internal optimization parameters, initial information, and results</p> <p>2 same as 1, plus objective function and design variables at each iterations</p> <p>3 same as 2, plus constraint values and identification of critical constraints</p> <p>4 same as 3, plus gradients</p> <p>5 same as 4, plus search direction</p> <p>6 same as 5, plus scaling factors and miscellaneous search information</p> <p>7 same as 6, plus one dimensional search information</p> |
| IPRNT1                                           | If IPRNT1 = 1, print scaling factors for design variable vector. (Integer 0 or 1; Default = 0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| <b>Table 14-4. PARAMi Names and Descriptions</b> |                                                                                                                                                                                                            |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                                      | <b>Description , Type, and Default Value</b>                                                                                                                                                               |
| IPRNT2                                           | If IPRNT2 = 1, print miscellaneous search information. If IPRNT2 = 2, turn on print during one-dimensional search process. (Warning: This may lead to excessive output.) (Integer 0, 1, or 2; Default = 0) |
| ISCAL                                            | Design variables are rescaled every ISCAL iterations. Set ISCAL = -1 to turn off scaling. (Integer; Default=NDV (number of design variables))                                                              |
| ITMAX                                            | Maximum number of iterations allowed at optimizer level during each design cycle. (Integer; Default = 40)                                                                                                  |
| ITRMOP                                           | Number of consecutive iterations for which convergence criteria must be satisfied to indicate convergence at the optimizer level. (Integer; Default = 2)                                                   |
| ITRMST                                           | Number of consecutive iterations for which convergence criteria must be met at the optimizer level to indicate convergence in the Sequential Linear Programming Method. (Integer>0; Default = 2)           |
| IWRITE                                           | FORTTRAN unit for print during approximate optimization phase. Default value for IWRITE is set to the FORTTRAN unit for standard output. (Integer>0, Default=6 or value of SYSTEM(2).)                     |
| JPRINT                                           | Sequential Linear Programming subproblem print. If JPRINT>0, IPRINT is turned on during the approximate linear subproblem. (Default = 0)                                                                   |
| JTMAX                                            | Maximum number of iterations allowed at the optimizer level for the Sequential Linear Programming Method. This is the number of linearized subproblems solved. (Integer≥0; Default = 20)                   |
| JWRITE                                           | If JWRITE>0, file number on which iteration history will be written. (Integer>0; Default = 0)                                                                                                              |

**1382 DOPTPRM**  
**Design Optimization Parameters**

| <b>Table 14-4. PARAMi Names and Descriptions</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                                      | <b>Description , Type, and Default Value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| METHOD                                           | <p>DOT Optimization Method*: (Integer 1, 2, or 3; Default = 1)</p> <p>1: Modified Method of Feasible Directions. (Default)</p> <p>2: Sequential Linear Programming</p> <p>3: Sequential Quadratic Programming</p> <p>* For Siemens-ADS (Analytic Design System), all selections will automatically revert to a proprietary, linear programming based algorithm. To request the Siemens-ADS optimizer, system cell 425 in Table 1-1 of the NASTRAN Statement section should be set to 1.</p>                     |
| P1                                               | <p>Determines the design cycles in which output is printed. (Integer <math>\geq 0</math>; Default = 0)</p> <p>Initial results are always printed prior to the first approximate optimization. If an optimization task is performed, final results are always printed for the final analysis unless PARAM,SOFTEXT,YES is specified. These two sets of print are not controllable.</p> <p>n: Print at every n-th design cycle.</p>                                                                                |
| P2                                               | <p>Items to be printed at the design cycles defined by P1 (Integer; Default = 1)</p> <p>0: No print.</p> <p>1: Print objective and design variables. (Default)</p> <p>2: Print properties.</p> <p>4: Print constraints.</p> <p>8: Print responses.</p> <p>16: Print weight as a function of a material ID (note that this is not a design quantity so that only inputs to the approximate design are available).</p> <p>n: Sum of desired items. For example, P2 = 10 means print properties and responses.</p> |

| <b>Table 14-4. PARAMi Names and Descriptions</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                                      | <b>Description , Type, and Default Value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| P2RSET                                           | ID of a SET1 bulk entry listing constrained responses to be printed if retained (the SET1 lists DRESPI ID numbers). The default is to print all retained constrained responses. Constrained responses are those responses referenced directly or indirectly by a DCONSTR bulk entry. Retained constrained responses are the constrained responses which the software determines to be relevant in a design cycle in terms of being critical in driving the optimization process. |
| PLVIOL                                           | Flag for handling of property limit violation. By default, the job will terminate with a user fatal message if the property derived from design model (DVPRELi, DVMRELi, DVCRELi) exceeds the property limits. Setting PLVIOL to a non-zero number will cause the program to issue a user warning message by ignoring the property limits violation and proceed with the analysis. (Integer; Default=0)                                                                          |
| PTOL                                             | Maximum tolerance on differences allowed between the property values on property entries and the property values calculated from the design variable values on the DESVAR entry (through DVPRELi relations). PTOL is provided to trap ill-posed design models. (The minimum tolerance may be specified on user parameter DPEPS. See <a href="#">“Parameters”</a> ) (Real>0.0; Default = 1.0E+35)                                                                                 |
| STPSCL                                           | Scaling factor for shape finite difference step sizes, to be applied to all shape design variables. (Real>0.0; Default = 1.0)                                                                                                                                                                                                                                                                                                                                                    |

**1384 DPHASE**  
Dynamic Load Phase Lead

**DPHASE**      Dynamic Load Phase Lead

Defines the phase lead term  $q$  in the equation of the dynamic loading function.

**Format:**

| 1      | 2   | 3  | 4  | 5   | 6  | 7  | 8   | 9 | 10 |
|--------|-----|----|----|-----|----|----|-----|---|----|
| DPHASE | SID | P1 | C1 | TH1 | P2 | C2 | TH2 |   |    |

**Example:**

|        |   |    |   |     |   |   |     |  |  |
|--------|---|----|---|-----|---|---|-----|--|--|
| DPHASE | 4 | 21 | 6 | 2.1 | 8 | 6 | 7.2 |  |  |
|--------|---|----|---|-----|---|---|-----|--|--|

**Fields:**

| Field | Contents                                                                                           |
|-------|----------------------------------------------------------------------------------------------------|
| SID   | Identification number of DPHASE entry. (Integer>0)                                                 |
| Pi    | Grid, extra, or scalar point identification number. (Integer>0)                                    |
| Ci    | Component number. (Integers 1 through 6 for grid points; zero or blank for extra or scalar points) |
| THi   | Phase lead $q$ in degrees. (Real)                                                                  |

**Remarks:**

1. One or two dynamic load phase lead terms may be defined on a single entry.
2. SID must be referenced on a RLOADi entry. Refer to the RLOAD1 or RLOAD2 entry for the formulas that define how the phase lead  $q$  is used.
3. A DAREA and/or LSEQ entry should be used to define a load at Pi and Ci.
4. In superelement analysis, DPHASE entries may only be applied to loads on points in the residual structure.



## DRESP1 Design Response Quantities

Defines a set of structural responses that is used for the objective and/or design constraints, or for sensitivity analysis purposes.

### Format:

| 1      | 2    | 3     | 4     | 5      | 6      | 7    | 8    | 9    | 10 |
|--------|------|-------|-------|--------|--------|------|------|------|----|
| DRESP1 | ID   | LABEL | RTYPE | PTYPE  | REGION | ATTA | ATTB | ATT1 |    |
|        | ATT2 | ATT3  | ATT4  | -etc.- |        |      |      |      |    |

|        |     |     |        |      |   |   |  |     |  |
|--------|-----|-----|--------|------|---|---|--|-----|--|
| DRESP1 | 1   | DX1 | STRESS | PROD | 2 | 3 |  | 102 |  |
|        | 103 |     |        |      |   |   |  |     |  |

### Fields:

| Field                | Contents                                                                                                                                                                                                                                                                                                                                                       |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID                   | Unique entry identifier. (Integer>0)                                                                                                                                                                                                                                                                                                                           |
| LABEL                | User-defined label. (Character)                                                                                                                                                                                                                                                                                                                                |
| RTYPE                | Response type. See <a href="#">Table 14-5</a> . (Character)                                                                                                                                                                                                                                                                                                    |
| PTYPE                | Element flag (PTYPE = "ELEM") or property entry name. Used with element type responses (stress, strain, force, etc.) to identify the property type, since property entry IDs are not unique across property types (Character: "ELEM", "PBAR", "PSHELL", "PCOMP", etc.). PTYPE = RANDPS ID when RTYPE = "PSDDISP" or "PSDVELO" or "PSDACCL". See also Remark 6. |
| REGION               | Region identifier for constraint screening. See Remark 10. for defaults. (Integer>0)                                                                                                                                                                                                                                                                           |
| ATTA                 | Response attribute. See <a href="#">Table 14-5</a> . See Remark 7. (Integer>0, or Blank if specified)                                                                                                                                                                                                                                                          |
| ATTB                 | Response attribute. See <a href="#">Table 14-5</a> . (Integer>0 or Real>0.0 or Character or Blank)                                                                                                                                                                                                                                                             |
| ATTi<br>(i=1,2,3...) | List of response attributes. See <a href="#">Table 14-5</a> . (Integer>0, or Blank if specified)                                                                                                                                                                                                                                                               |

**1386 DRESP1**  
**Design Response Quantities**

| <b>Table 14-5. Design Response Attributes</b> |                                                       |                                                                         |                                                                        |
|-----------------------------------------------|-------------------------------------------------------|-------------------------------------------------------------------------|------------------------------------------------------------------------|
| <b>Response Type<br/>(RTYPE)</b>              | <b>Response Attributes</b>                            |                                                                         |                                                                        |
|                                               | <b>ATTA (Integer&gt;0, or<br/>Blank if specified)</b> | <b>ATTB (Integer&gt;0 or<br/>Real&gt;0.0 or Character<br/>or Blank)</b> | <b>ATTi (i=1,2,3...)<br/>(Integer&gt;0, or Blank<br/>if specified)</b> |
| WEIGHT                                        | Row Number<br>(1 ≤ ROW ≤ 6)<br>See Remark 25.         | Column Number<br>(Integer)<br>(1 ≤ COL ≤ 6)                             | SEIDi or All or blank                                                  |
| VOLUME                                        | Blank                                                 | Blank                                                                   | SEIDi or ALL                                                           |
| EIGN<br>See Remark 18.                        | Normal Modes Mode<br>Number                           | Approximation Code<br>(Integer 1 or 2)<br>See Remark 19.                | Blank                                                                  |
| CEIG                                          | Complex Eigenvalue<br>Mode Number                     | ALPHA or OMEGA<br>(Character)<br>(Default=ALPHA)<br>See Remark 22.      | Blank                                                                  |
| FREQ<br>See Remark 18.                        | Normal Modes Mode<br>Number                           | Approximation Code<br>(Integer 1 or 2)<br>See Remark 19.                | Blank                                                                  |
| LAMA                                          | Buckling Mode<br>Number                               | Approximation Code<br>(Integer 1 or 2)<br>See Remark 19.                | Blank                                                                  |
| DISP                                          | Displacement<br>Component                             | Blank                                                                   | Grid ID(s)<br>See Remark 27.                                           |
| STRAIN                                        | Strain Item Code<br>See Remark 1.                     | Blank                                                                   | Property entry PID(s)<br>See Remark 6.                                 |
| ESE                                           | Strain Energy Item<br>Code<br>See Remark 21.          | Blank                                                                   | Property entry PID(s)<br>See Remark 6.                                 |
| STRESS                                        | Stress Item Code<br>See Remark 1.                     | Blank                                                                   | Property entry PID(s)<br>See Remark 6.                                 |
| FORCE                                         | Force Item Code<br>See Remark 1.                      | Blank                                                                   | Property entry PID(s)<br>See Remark 6.                                 |
| SPCFORCE                                      | SPC Force<br>Component                                | Blank                                                                   | Grid ID(s)<br>See Remark 27.                                           |
| CSTRAIN<br>See Remark 2.                      | Strain Item Code<br>See Remark 1.                     | LAMINA Number<br>(Integer>0; Default =<br>1)                            | PCOMP Property entry<br>PID(s)<br>See Remark 6.                        |
| CSTRESS<br>See Remark 2.                      | Stress Item Code<br>See Remark 1.                     | LAMINA Number<br>(Integer>0; Default =<br>1)                            | PCOMP Property entry<br>PID(s)<br>See Remark 6.                        |

| <b>Table 14-5. Design Response Attributes</b> |                                                   |                                                                                       |                                                            |
|-----------------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------|
| Response Type<br>(RTYPE)                      | Response Attributes                               |                                                                                       |                                                            |
|                                               | ATTA (Integer>0, or<br>Blank if specified)        | ATTB (Integer>0 or<br>Real>0.0 or Character<br>or Blank)                              | ATTi (i=1,2,3...)<br>(Integer>0, or Blank<br>if specified) |
| CFailure<br>See Remark 2.                     | Failure Criterion<br>Item Code                    | LAMINA Number<br>(Integer>0; Default =<br>1)                                          | PCOMP Property entry<br>PID(s)<br>See Remark 6.            |
| FRACCL                                        | Acceleration<br>Component<br>See Remarks 8 and 9. | Frequency Value<br>(Blank, Real>0.0 or<br>Character)<br>See Remarks 15 and<br>20.     | Grid ID(s)<br>See Remark 27.                               |
| FRDISP                                        | Displacement<br>Component<br>See Remarks 8 and 9. | Frequency Value<br>(Blank, Real>0.0 or<br>Character)<br>See Remarks 15 and<br>20.     | Grid ID(s)<br>See Remark 27.                               |
| PRES                                          | Acoustic Pressure<br>Component                    | Frequency Value<br>(Real>0.0)<br>See Remark 15.                                       | Grid ID(s)<br>See Remark 27.                               |
| FRFORC                                        | Force Item Code<br>See Remark 1.                  | Frequency Value<br>(Blank or Real>0.0<br>or Character)<br>See Remarks 15 and<br>20 .  | Property entry PID(s)<br>See Remark 6.                     |
| FRSPCF                                        | SPC Force<br>Component<br>See Remarks 8 and 9.    | Frequency Value<br>(Blank, Real>0.0 or<br>Character)<br>See Remarks 15 and<br>20.     | Grid ID(s)<br>See Remark 27.                               |
| FRSTRE                                        | Stress Item Code<br>See Remark 1.                 | Frequency Value.<br>(Blank or Real>0.0 or<br>Character)<br>See Remarks 15 and<br>20 . | Property entry PID(s)<br>See Remark 6.                     |
| FRVELO                                        | Velocity Component<br>See Remarks 8 and 9.        | Frequency Value.<br>(Blank, Real>0.0 or<br>Character)<br>See Remarks 15 and<br>20.    | Grid ID(s)<br>See Remark 27.                               |

**1388 DRESP1**  
**Design Response Quantities**

**Table 14-5. Design Response Attributes**

| Response Type<br>(RTYPE)               | Response Attributes                     |                                                                              |                                                         |
|----------------------------------------|-----------------------------------------|------------------------------------------------------------------------------|---------------------------------------------------------|
|                                        | ATTA (Integer>0, or Blank if specified) | ATTB (Integer>0 or Real>0.0 or Character or Blank)                           | ATTi (i=1,2,3...)<br>(Integer>0, or Blank if specified) |
| PSDDISP<br>See Remarks 26, 28, 29, 30. | Displacement Component<br>See Remark 8. | Frequency Value.<br>(Blank, Real>0.0 or Character)<br>See Remarks 15 and 20. | Grid ID(s)<br>See Remark 27.                            |
| PSDVELO<br>See Remarks 26, 28, 29, 30. | Velocity Component<br>See Remark 8.     | Frequency Value.<br>(Blank, Real>0.0 or Character)<br>See Remarks 15 and 20. | Grid ID(s)<br>See Remark 27.                            |
| PSDACCL<br>See Remarks 26, 28, 29, 30. | Acceleration Component<br>See Remark 8. | Frequency Value.<br>(Blank, Real>0.0 or Character)<br>See Remarks 15 and 20. | Grid ID(s)<br>See Remark 27.                            |
| RMSDISP<br>See Remarks 26, 30.         | Displacement Component<br>See Remark 8. | RANDPS ID<br>(Integer>0)                                                     | Grid ID(s)<br>See Remark 27.                            |
| RMSVELO<br>See Remarks 26, 30.         | Velocity Component<br>See Remark 8.     | RANDPS ID<br>(Integer>0)                                                     | Grid ID(s)<br>See Remark 27.                            |
| RMSACCL<br>See Remarks 26, 30.         | Acceleration Component<br>See Remark 8. | RANDPS ID<br>(Integer>0)                                                     | Grid ID(s)<br>See Remark 27.                            |
| TDISP                                  | Displacement Component                  | Time Value (Blank, Real>0.0, or Character)<br>See Remarks 16 and 20.         | Grid ID(s)<br>See Remark 27.                            |
| TVELO                                  | Velocity Component                      | Time Value (Blank, Real>0.0, or Character)<br>See Remarks 16 and 20.         | Grid ID(s)<br>See Remark 27.                            |
| TACCL                                  | Acceleration Component                  | Time Value (Blank, Real>0.0, or Character)<br>See Remarks 16 and 20.         | Grid ID(s)<br>See Remark 27.                            |

| <b>Table 14-5. Design Response Attributes</b> |                                            |                                                                               |                                                            |
|-----------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------|------------------------------------------------------------|
| Response Type<br>(RTYPE)                      | Response Attributes                        |                                                                               |                                                            |
|                                               | ATTA (Integer>0, or<br>Blank if specified) | ATTB (Integer>0 or<br>Real>0.0 or Character<br>or Blank)                      | ATTi (i=1,2,3...)<br>(Integer>0, or Blank<br>if specified) |
| TSPCF                                         | SPC Force<br>Component                     | Time Value. (Blank,<br>Real>0.0, or Character)<br>See Remarks 16 and<br>20.   | Grid ID(s)<br>See Remark 27.                               |
| TSTRE                                         | Stress Item Code<br>See Remark 1.          | Time Value. (Blank or<br>Real>0.0 or Character)<br>See Remarks 16 and<br>20 . | Property entry PID(s)<br>See Remark 6.                     |
| TFORC                                         | Force Item Code<br>See Remark 1.           | Time Value. (Blank or<br>Real>0.0 or Character)<br>See Remarks 16 and<br>20 . | Property entry PID(s)<br>See Remark 6.                     |
| TRIM                                          | AESTAT or AESURF<br>Entry ID               | Blank                                                                         | Blank                                                      |
| STABDER                                       | AESTAT or AESURF<br>Entry ID               | Restraint Flag.<br>(Integer 0 or 1)<br>See Remark 13.                         | Component                                                  |
| FLUTTER                                       | Blank                                      | Blank                                                                         | See Remark 14.                                             |

**Remarks:**

1. Stress, strain, and force item codes can be found in “[Item Codes](#)”. For stress or strain item codes that have dual meanings, such as von Mises or maximum shear, the option specified in the Case Control Section will be used; i.e., STRESS(VONM) or STRESS(MAXS). Note that item codes may vary depending on whether CENTER or CORNER is chosen with the relevant output request in case control.
2. RTYPE = “CSTRESS”, “CSTRAIN”, and “CFAILURE” are used only with the PCOMP entry. “CSTRESS” and “CSTRAIN” item codes are described under Table 1 (Element Stress/Strain Item Codes) in “[Item Codes](#)”. “CFAILURE” item codes are described under Table 2 (Element Force Item Codes) in “[Item Codes](#)”. Only force item codes that refer to failure indices of direct stress and interlaminar shear stress are valid.

The CFAILURE response type requires the following specifications on the applicable entries:

## 1390 DRESP1 Design Response Quantities

- Failure theory in the FT field on PCOMP entry.
  - Allowable bonding shear stress in the SB field on PCOMP entry.
  - Stress limits in the ST, SC, and SS fields on all MATi entries.
3. ATTB is used only for responses of composite laminae, dynamics, complex eigenvalue, and stability derivatives. For other responses, this field must be blank.
  4. All grids associated with a DRESP1 entry are considered to be in the same region for screening purposes. Only up to NSTR displacement constraints (see DSCREEN entry) per group per load case will be retained in the design optimization phase.
  5. DRESP1 identification numbers must be unique with respect to DRESP2 and DRESP3 identification numbers.
  6. If PTYPE = "ELEM", the ATTi correspond to element identification numbers.
  7. If RTYPE = "DISP", "TDISP", "TVELO", "TACCL", "TSPCF", "TFORC" or "TSTRE", multiple component numbers (any unique combination of the digits 1 through 6 with no embedded blanks) may be specified on a single entry. Multiple response components may not be used on any other response types.
  8. For grid frequency response type DRESP1, i.e. those starting with "FR", "RMS", or "PSD", only one component number may be specified in the ATTA field. Numbers 1 through 6 correspond to real (or magnitude) components and 7 through 12 imaginary (or phase) components. If more than one component for the same grid is desired, then a separate entry is required.

Note that, in case the response is used for a constraint, the choice of response computation format (real/imaginary vs. magnitude/phase) will affect constraint values. See also Remark 9.

9. Real/imaginary representation is the default for complex response types. Magnitude/phase representation must be requested by the corresponding Case Control command; e.g., D $\text{ISP}$ (PHASE) = ALL.
10. REGION is used for constraint screening. The NSTR field on DSCREEN entries gives the maximum number of constraints retained for each region per load case.  
  
IF RTYPE = "WEIGHT", "VOLUME", "LAMA", "EIGN" or "FREQ", no REGION identification number should be specified. For all other responses, if the REGION field is left blank, the default specified in [Table 14-6](#) is used. Usually, the default value is appropriate.

If the REGION field is not blank, all the responses on this entry as well as all responses on other DRESP1 entries that have the same RTYPE and REGION identification number will be grouped into the same region.

**Table 14-6. Default Regions for Design Sensitivity Response Types**

| Response Type | Default Region                                                                     |
|---------------|------------------------------------------------------------------------------------|
| WEIGHT        | No region                                                                          |
| VOLUME        | No region                                                                          |
| LAMA          | No region                                                                          |
| EIGN          | No region                                                                          |
| FREQ          | No region                                                                          |
| DISP          | One region per DRESP1 entry                                                        |
| FRDISP        | One region per DRESP1 entry                                                        |
| PRES          | One region per DRESP1 entry                                                        |
| SPCFORCE      | One region per DRESP1 entry                                                        |
| FRVELO        | One region per DRESP1 entry                                                        |
| FRACCL        | One region per DRESP1 entry                                                        |
| FRSPCF        | One region per DRESP1 entry                                                        |
| TDISP         | One region per DRESP1 entry                                                        |
| TVELO         | One region per DRESP1 entry                                                        |
| TACCL         | One region per DRESP1 entry                                                        |
| TSPCF         | One region per DRESP1 entry                                                        |
| FLUTTER       | One region per DRESP1 entry                                                        |
| OTHER         | One region per PROPERTY entry. If PTYPE = "ELEM", then one region per DRESP1 entry |

11. REGION is valid only among the same type of responses. Responses of different types will never be grouped into the same region, even if they are assigned the same REGION identification number by the user.
12. If RTYPE = "WEIGHT" or "VOLUME", field ATTi = "ALL" implies total weight/volume of all superelements except external superelements.

## 1392 DRESP1 Design Response Quantities

13. RTYPE = "STABDER" identifies a stability derivative response. ATTB is the restraint flag for the stability derivative. ATTB = 0 means unrestrained, and ATTB = 1 means restrained. For example, ATTA = 4000, ATTB = 0, and ATT1 = 3 reference the unrestrained  $C_z$  derivative for the AESTAT (or AESURF) entry ID = 4000.
14. RTYPE = "FLUTTER" identifies a set of damping responses. The set is specified by ATTi:
  - ATT1 = Identification number of a SET1 entry that specifies a set of modes.
  - ATT2 = Identification number of an FLFACT entry that specifies a list of densities.
  - ATT3 = Identification number of an FLFACT entry that specifies a list of Mach numbers.
  - ATT4 = Identification number of an FLFACT entry that specifies a list of velocities.

If the flutter analysis is type PKNL, it is necessary to put PKNL in the PTYPE field of this entry.
15. For RTYPE = "FRDISP", "FRVELO", "FRACCL", "FRSPCF", "FRFORC", "FRSTRE", "PSDDISP", "PSDVELO", and "PSDACCL", a real value for ATTB specifies a frequency value in cycles per unit time. If ATTB is specified, then the responses are evaluated at the closest frequency selected by the OFREQ command. The default for ATTB is all frequencies selected by the OFREQ command. See Remark 20 . for additional ATTB options.
16. For RTYPE = "TDISP", "TVELO", "TACCL", "TSPCF", "TFORC", and "TSTRE", ATTB specifies a time value. If ATTB is specified, then the responses are evaluated at the closest time selected by the OTIME command. The default for ATTB is all time steps selected by the OTIME command.
17. Intermediate station responses on CBAR elements due to PLOAD1 and/or CBARAO entries may not be defined on the DRESP1 entry.
18. RTYPE = "EIGN" refers to normal modes response in terms of eigenvalue (radian/time)\*\*2 while RTYPE = "FREQ" refers to normal modes response in terms of natural frequency or units of cycles per unit time.
19. For RTYPE = LAMA, EIGN or FREQ, the response approximation used for optimization can be individually selected using the ATTB field. (Approximation Code = 1 = direct linearization, = 2 = Inverse Linearization).
20. Character input for ATTB is available for RTYPE of FRDISP, FRVELO, FRACCL, FRSPCF, PSDDISP, PSDVELO, PSDACCL, TDISP, TVELO, TACCL,



TSPCF, FRFORC, FRSTRE, TFORC, and TSTRE. The character input represents a mathematical function and the options for character input are SUM, AVG, SSQ, RSS, MAX and MIN. The expression of mathematical function is shown as follows:

$$\text{SUM}(X_1, X_2, \dots, X_n) = \sum_{i=1}^n X_i$$

$$\text{AVG}(X_1, X_2, \dots, X_n) = \sum_{i=1}^n X_i / n$$

$$\text{SSQ}(X_1, X_2, \dots, X_n) = \sum_{i=1}^n X_i^2$$

$$\text{RSS}(X_1, X_2, \dots, X_n) = \sqrt{\sum_{i=1}^n X_i^2}$$

MAX (X<sub>1</sub>, X<sub>2</sub>, ..., X<sub>n</sub>) = Largest value among X<sub>i</sub> (i=1 to n)

MIN (X<sub>1</sub>, X<sub>2</sub>, ..., X<sub>n</sub>) = Smallest value among X<sub>i</sub> (i=1 to n)

where X<sub>i</sub> is the response for a forcing frequency. For example

DRESP1,10,DX1,FRSTRE,ELEM,,3,AVG,10

yields a response which is equal to the average stress for element 10. The average is done by first adding up the component 3 stress of element 10 for all forcing frequencies (all time steps for transient response), and then dividing by the number of forcing frequencies. Note that the response computed is considered as type 2 response. **Therefore, if referenced on a DRESP2, the ID of such DRESP1 (ATTB with character input) must be listed following the DRESP2 keyword.**

Such DRESP1 may only be referenced from a DRESP2 (not from a DRESP3), and may only be nested one level. That is, the referencing DRESP2 may not be referenced further from another DRESP2 or a DRESP3.

(Important note: If any such integrated response DRESP1 is in error or intentionally referred to as DRESP1 from within a DRESP2 or DRESP3, the program will spawn multiple responses over the frequency set, or, for the objective function, take only the value corresponding to the first frequency in the set, not the integrated response, whether or not the DRESP1 is DRSPAN related.)

## 1394 DRESP1 Design Response Quantities

21. Element strain energy item codes can be found in [“Element Strain Energy Item Codes”](#) . Only element strain energy and element strain energy density can be referenced on a DRESP1 entry.
22. For RTYPE=CEIG, the allowable character inputs are ALPHA (for the real component) and OMEGA (for the imaginary component), with ALPHA being the default.
23. For RTYPE=RMSDISP, RMSVELO, or RMSACCL the ATTB specifies the appropriate RANDPS ID.
24. Input other than 1 or 7 of ATTA field, acoustic pressure component, for PRES response type will be reset to 1 (if less than 7) or 7 (if greater than 7 and less than 13).
25. Design response weight is obtained from Grid Point Weight Generator for a reference point GRDPNT (see parameter GRDPNT). If GRDPNT is either not defined, equal to zero, or not a defined grid point, the reference point is taken as the origin of the basic coordinate system. Fields ATTA and ATTB refer to the row and column numbers of the rigid body weight matrix, which is partitioned as follows:

$$[W] = \begin{bmatrix} W_x & W_{12} & W_{13} & W_{14} & W_{15} & W_{16} \\ W_{21} & W_y & W_{23} & W_{24} & W_{25} & W_{26} \\ W_{31} & W_{32} & W_z & W_{34} & W_{35} & W_{36} \\ W_{41} & W_{42} & W_{43} & I_x & W_{45} & W_{46} \\ W_{51} & W_{52} & W_{53} & W_{54} & I_y & W_{56} \\ W_{61} & W_{62} & W_{63} & W_{64} & W_{65} & I_z \end{bmatrix} 6 \times 6$$

The default values of ATTA and ATTB are 3, which specifies weight in the Z direction. The first field of ATTi: ATT1 = “ALL” implies total weight of all superelements except external superelements. When the ATTi fields contain SEIDi, each SEIDi refers to a superelement identification number. SEIDi= “0” refers to the residual superelement. The default for this first field of ATTi, ATT1, is blank which is equivalent to “ALL”.

26. PSD and RMS type DRESP1 responses are meaningful only for those random loading frequency response analysis subcases listed in the RANDPS bulk data referred to by the relevant RANDOM ID.
27. Multiple grid point IDs in the ATT<sub>i</sub> fields are supported.
28. Since PSD type DRESP1 responses are a summation over the sets of relevant subcases correlated in the RANDPS bulk data, a constraint on a PSD type DRESP1 response should be specified only in the lead subcase of such a batch of subcases. Any PSD response specified otherwise will be ignored. For example, if the subcases referred to by RANDPS ID=75 are (3,3); (4,4); (5,5); and (3,5), where the last two numbers indicate cross-correlation among two subcases, any PSD response for this particular RANDPS ID should be placed in subcase 3, as that is the lead subcase.
29. If a PSD type response is to appear in a DRESP2 or DRESP3 response together with responses from other subcases, it should then be assigned to the lead subcase defined in item 28 above by an appropriate DRSPAN case control command and a related set.
30. Models with superelements will either ignore any RMS and PSD type DRESP1 design responses, or will fail in the presence of such DRESP1.

**1396 DRESP2**  
**Design Equation Response Quantities**

**DRESP2** Design Equation Response Quantities

Defines equation responses that are used for the objective and/or design constraints, or for sensitivity analysis purposes.

**Format:**

| 1      | 2         | 3       | 4            | 5       | 6       | 7       | 8       | 9       | 10 |
|--------|-----------|---------|--------------|---------|---------|---------|---------|---------|----|
| DRESP2 | ID        | LABEL   | EQID or FUNC | REGION  |         |         |         |         |    |
|        | “DESVAR”  | DVID1   | DVID2        | DVID3   | DVID4   | DVID5   | DVID6   | DVID7   |    |
|        |           | DVID8   | -etc.-       |         |         |         |         |         |    |
|        | “DTABLE”  | LABL1   | LABL2        | LABL3   | LABL4   | LABL5   | LABL6   | LABL7   |    |
|        |           | LABL8   | -etc.-       |         |         |         |         |         |    |
|        | “DFRFNC”  | DFRFID1 | DFRFID2      | DFRFID3 | DFRFID4 | DFRFID5 | DFRFID6 | DFRFID7 |    |
|        |           | DFRFID8 | -etc.-       |         |         |         |         |         |    |
|        | “DRESP1”  | NR1     | NR2          | NR3     | NR4     | NR5     | NR6     | NR7     |    |
|        |           | NR8     | -etc.-       |         |         |         |         |         |    |
|        | “DNODE”   | G1      | C1           | G2      | C2      | G3      | C3      |         |    |
|        |           | G4      | C4           | etc.    |         |         |         |         |    |
|        | “DVPREL1” | DPIP1   | DPIP2        | DPIP3   | DPIP4   | DPIP5   | DPIP6   | DPIP7   |    |
|        |           | DPIP8   | DPIP9        | -etc.-  |         |         |         |         |    |
|        | “DVCREL1” | DCIC1   | DCIC2        | DCIC3   | DCIC4   | DCIC5   | DCIC6   | DCIC7   |    |
|        |           | DCIC8   | DCIC9        | -etc.-  |         |         |         |         |    |
|        | “DVMREL1” | DMIM1   | DMIM2        | DMIM3   | DMIM4   | DMIM5   | DMIM6   | DMIM7   |    |
|        |           | DMIM8   | DMIM9        | -etc.-  |         |         |         |         |    |
|        | “DVPREL2” | DPI2P1  | DPI2P2       | DPI2P3  | DPI2P4  | DPI2P5  | DPI2P6  | DPI2P7  |    |
|        |           | DPI2P8  | DPI2P9       | -etc.-  |         |         |         |         |    |
|        | “DVCREL2” | DCI2C1  | DCI2C2       | DCI2C3  | DCI2C4  | DCI2C5  | DCI2C6  | DCI2C7  |    |
|        |           | DCI2C8  | DCI2C9       | -etc.-  |         |         |         |         |    |
|        | “DVMREL2” | DMI2M1  | DMI2M2       | DMI2M3  | DMI2M4  | DMI2M5  | DMI2M6  | DMI2M7  |    |
|        |           | DMI2M8  | DMI2M9       | -etc.-  |         |         |         |         |    |
|        | “DRESP2”  | NRR1    | NRR2         | NRR3    | NRR4    | NRR5    | NRR6    | NRR7    |    |
|        |           | NRR8    | -etc.-       |         |         |         |         |         |    |

**Example:**

|        |        |       |   |   |   |   |     |     |  |
|--------|--------|-------|---|---|---|---|-----|-----|--|
| DRESP2 | 1      | LBUCK | 5 | 3 |   |   |     |     |  |
|        | DESVAR | 101   | 3 | 4 | 5 | 1 | 205 | 209 |  |

**DRESP2 1397**  
**Design Equation Response Quantities**

|  |         |     |     |     |    |    |    |   |  |
|--|---------|-----|-----|-----|----|----|----|---|--|
|  |         | 201 |     |     |    |    |    |   |  |
|  | DTABLE  | PI  | YM  | L   |    |    |    |   |  |
|  | DRESP1  | 14  | 1   | 4   | 22 | 6  | 33 | 2 |  |
|  | DNODE   | 14  | 1   | 4   | 1  | 22 | 3  |   |  |
|  |         | 2   | 1   | 43  | 1  |    |    |   |  |
|  | DVPREL1 | 101 | 102 |     |    |    |    |   |  |
|  | DVCREL1 | 201 | 202 |     |    |    |    |   |  |
|  | DVMREL1 | 301 |     |     |    |    |    |   |  |
|  | DVPREL2 | 401 | 402 |     |    |    |    |   |  |
|  | DVCREL2 | 501 |     |     |    |    |    |   |  |
|  | DVMREL2 | 601 | 602 | 603 |    |    |    |   |  |
|  | DRESP2  | 50  | 51  |     |    |    |    |   |  |

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID           | Unique identification number. (Integer>0)                                                                                                                                                                                                                     |
| LABEL        | User-defined label. (Character)                                                                                                                                                                                                                               |
| EQID         | DEQATN entry identification number. (Integer>0)                                                                                                                                                                                                               |
| FUNC         | Function to be applied to the arguments. See Remark 8. (Character)                                                                                                                                                                                            |
| REGION       | Region identifier for constraint screening. See Remark 5. (Integer>0)                                                                                                                                                                                         |
| “DESVAR”     | Flag indicating DESVAR entry identification numbers. (Character)                                                                                                                                                                                              |
| DVIDi        | DESVAR entry identification number. (Integer>0)                                                                                                                                                                                                               |
| “DTABLE”     | Flag indicating that the labels for the constants in a DTABLE entry follow. (Character)                                                                                                                                                                       |
| LABLj        | Label for a constant in the DTABLE entry. (Character)                                                                                                                                                                                                         |
| “DFRFNC”     | Flag indicating DFRFNC ID numbers to be found in DTI, DFRFNC table records.                                                                                                                                                                                   |
| DFRFIDi      | ID number for a DFRFNC record in the DTI, DFRFNC table. Usually there will be a single DFRFNC ID entry here. However, as long there is a match in the number of frequencies for which the DRESP2 is to be evaluated, there may be multiple DFRFNC ID numbers. |

## 1398 DRESP2

### Design Equation Response Quantities

| Field    | Contents                                                                     |
|----------|------------------------------------------------------------------------------|
| “DRESP1” | Flag indicating DRESP1 entry identification numbers. (Character)             |
| NRk      | DRESP1 entry identification number. (Integer>0)                              |
| “DNODE”  | Flag indicating grid point and component identification numbers. (Character) |
| Gm       | Identification number for any grid point in the model. (Integer>0)           |
| Cm       | Component number of grid point Gm. ( $1 \leq \text{Integer} \leq 3$ )        |
| DVPREL1  | Flag indicating DVPREL1 entry identification number. (Character)             |
| DPIPi    | DVPREL1 entry identification number. (Integer>0)                             |
| DVCREL1  | Flag indicating DVCREL1 entry identification number. (Character)             |
| DCICi    | DVCREL1 entry identification number. (Integer>0)                             |
| DVMREL1  | Flag indicating DVPREL2 entry identification number. (Character)             |
| DMIMi    | DVMREL1 entry identification number. (Integer>0)                             |
| DVPREL2  | Flag indicating DVPREL2 entry identification number. (Character)             |
| DPI2Pi   | DVPREL2 entry identification number. (Integer>0)                             |
| DVCREL2  | Flag indicating DVCREL2 entry identification number. (Character)             |
| DCI2Ci   | DVCREL2 entry identification number. (Integer>0)                             |
| DVMREL2  | Flag indicating DVMREL2 entry identification number. (Character)             |
| DMI2Mi   | DVMREL2 entry identification number. (Integer>0)                             |
| DRESP2   | Flag indicating other DRESP2 entry identification number. (Character)        |
| NRRk     | DRESP2 entry identification number. (Integer>0)                              |

#### Remarks:

1. DRESP2 entries may only reference DESVAR, DTABLE, DRESP1, DNODE, DVPREL1, DVCREL1, DVMREL1, DVPREL2, DVCREL2, and DVMREL2 entries. They may also reference other DRESP2 entries. However, a DRESP2 entry cannot reference itself directly or recursively.

## DRESP2 1399 Design Equation Response Quantities

2. Referenced DRESP1 entries cannot span analysis types or superelements, except when such DRESP1 are specified in DRSPAN referenced sets, in which case they may span subcases and analysis types (see also Remark 11 below, and Remark 9 of Case Control command DRSPAN).
3. DRESP2 entries must have unique identification numbers with respect to DRESP1 and DRESP3 entries.
4. The “DESVAR”, “DTABLE”, “DFRFNC”, “DRESP1”, “DNODE”, “DVPREL1”, “DVCREL1” and “DVMREL1”, “DVPREL2”, “DVCREL2”, “DVMREL2”, and “DRESP2” flags in field 2 must appear in the order given above. Any of these words, along with the identification numbers associated with them, may be omitted if they are not involved in this DRESP2 relationship. However, at least one of these twelve types of arguments must exist.
5. The REGION field follows the same rules as for the DRESP1 entries. DRESP1, DRESP2, and DRESP3 responses will never be contained in the same region, even if they are assigned the same REGION identification number. The default is to put all responses referenced by one DRESP2 entry in the same region.
6. The variables identified by DVIDi, LABLj, NRk, the Gm, Cm pairs, DPIPi, DCICm, DMIMn, DPI2Po, DCI2Cp, DMI2Mq, and NRRu are assigned (in that order) to the variable names (x1, x2, x3, etc.) specified in the left-hand side of the first equation on the DEQATN entry referenced by EQID. In the example below,

DESVARs 101 and 3 are assigned to arguments A and B.DTABLEs PI and YM are assigned to arguments C and D.Grid 14, Component 1 is assigned to argument R.

|        |        |                                              |    |   |  |  |  |  |  |
|--------|--------|----------------------------------------------|----|---|--|--|--|--|--|
| DRESP2 | 1      | LBUCK                                        | 5  | 3 |  |  |  |  |  |
|        | DESVAR | 101                                          | 3  |   |  |  |  |  |  |
|        | DTABLE | PI                                           | YM |   |  |  |  |  |  |
|        | DNODE  | 14                                           | 1  |   |  |  |  |  |  |
| DEQATN | 5      | F1(A, B, C, D, R)=A+B*C-(D**3+10.0)+sin(C*R) |    |   |  |  |  |  |  |

7. (Gm, Cm) can refer to any grid component and is no longer limited to a designed grid component.
8. The FUNC attributes can be used in place of the EQID and supports the functions shown in the following table:

| Function | Description              |
|----------|--------------------------|
| AVG      | Average of the arguments |

## 1400 DRESP2 Design Equation Response Quantities

| Function | Description                                            |
|----------|--------------------------------------------------------|
| SSQ      | Sum of the squares of the arguments                    |
| RSS      | Square root of the sum of the squares of the arguments |
| MAX      | The largest value of the argument list                 |
| MIN      | The smallest value of the argument list                |

When EQID has character input, the DEQATN entry is no longer needed. The functions are applied to all arguments on the DRESP2 regardless of the type.

- The number of arguments of a DEQATN can be more than the number of values defined on the DRESP2 if the DRESP1s referenced have RTYPE with 'FR' prefix. Arguments are still positional. The extra arguments in the DEQATN must appear at the end of the argument list. The discrepancy is resolved internally with the forcing frequency(ies) associated with DRESP1s. An example is shown as follows:

|        |        |                                      |        |  |  |   |     |      |  |  |
|--------|--------|--------------------------------------|--------|--|--|---|-----|------|--|--|
| DRESP1 | 10     | FDISP1                               | FRDISP |  |  | 1 | 10. | 1001 |  |  |
| DRESP1 | 20     | FDISP2                               | FRDISP |  |  | 1 | 20. | 1001 |  |  |
| DRESP2 | 30     | AVGFD                                | 100    |  |  |   |     |      |  |  |
|        | DRESP1 | 10                                   | 20     |  |  |   |     |      |  |  |
| DEQATN | 100    | AVG(D1,D2,F1,F2) = (D1/F1+D2/F2)*0.5 |        |  |  |   |     |      |  |  |

In the above example, the DEQATN has two more additional terms than have been defined on the DRESP2. The first additional term is the forcing frequency (in hertz) of the first DRESP1 ID on the DRESP2. The second additional term is the forcing frequency of second DRESP1 ID in the list. When all DRESP1s involved have the same frequency, the user is not required to name all the additional terms in the argument list of DEQATN.

- The DRESP1 IDs listed under a DRESP2 response may only point to DRESP1s with the same number of responses, in case the DRESP1s are spawned for multiple frequencies or time steps.
- When referenced DRESP2 entries are in fact DRESP1 that are mathematical functions (integrated responses) described in Remark 20 for DRESP1, they may again span subcases and analysis types, if specified in DRSPAN referenced sets.



## DRESP3 Externally Computed Design Responses

Defines SOL 200 design responses to be evaluated in an external user-supplied program. The differences from the DRESP2 data are indicated in bold. Such responses are then used for the objective and/or design constraints, or for sensitivity analysis purposes.

**Format:**

| 1             | 2         | 3             | 4                                                         | 5           | 6       | 7       | 8       | 9       | 10 |
|---------------|-----------|---------------|-----------------------------------------------------------|-------------|---------|---------|---------|---------|----|
| <b>DRESP3</b> | ID        | LABEL         | <b>GROUP</b>                                              | <b>TYPE</b> | REGION  |         |         |         |    |
|               | “DESVAR”  | DVID1         | DVID2                                                     | DVID3       | DVID4   | DVID5   | DVID6   | DVID7   |    |
|               |           | DVID8         | -etc.-                                                    |             |         |         |         |         |    |
|               | “DTABLE”  | LABL1         | LABL2                                                     | LABL3       | LABL4   | LABL5   | LABL6   | LABL7   |    |
|               |           | LABL8         | -etc.-                                                    |             |         |         |         |         |    |
|               | “DFRFNC”  | DFRFID1       | DFRFID2                                                   | DFRFID3     | DFRFID4 | DFRFID5 | DFRFID6 | DFRFID7 |    |
|               |           | DFRFID8       | -etc.-                                                    |             |         |         |         |         |    |
|               | “DRESP1”  | NR1           | NR2                                                       | NR3         | NR4     | NR5     | NR6     | NR7     |    |
|               |           | NR8           | -etc.-                                                    |             |         |         |         |         |    |
|               | “DNODE”   | G1            | C1                                                        | G2          | C2      | G3      | C3      |         |    |
|               |           | G4            | C4                                                        | etc.        |         |         |         |         |    |
|               | “DVPREL1” | DPIP1         | DPIP2                                                     | DPIP3       | DPIP4   | DPIP5   | DPIP6   | DPIP7   |    |
|               |           | DPIP8         | DPIP9                                                     | -etc.-      |         |         |         |         |    |
|               | “DVCREL1” | DCIC1         | DCIC2                                                     | DCIC3       | DCIC4   | DCIC5   | DCIC6   | DCIC7   |    |
|               |           | DCIC8         | DCIC9                                                     | -etc.-      |         |         |         |         |    |
|               | “DVMREL1” | DMIM1         | DMIM2                                                     | DMIM3       | DMIM4   | DMIM5   | DMIM6   | DMIM7   |    |
|               |           | DMIM8         | DMIM9                                                     | -etc.-      |         |         |         |         |    |
|               | “DVPREL2” | DPI2P1        | DPI2P2                                                    | DPI2P3      | DPI2P4  | DPI2P5  | DPI2P6  | DPI2P7  |    |
|               |           | DPI2P8        | DPI2P9                                                    | -etc.-      |         |         |         |         |    |
|               | “DVCREL2” | DCI2C1        | DCI2C2                                                    | DCI2C3      | DCI2C4  | DCI2C5  | DCI2C6  | DCI2C7  |    |
|               |           | DCI2C8        | DCI2C9                                                    | -etc.-      |         |         |         |         |    |
|               | “DVMREL2” | DMI2M1        | DMI2M2                                                    | DMI2M3      | DMI2M4  | DMI2M5  | DMI2M6  | DMI2M7  |    |
|               |           | DMI2M8        | DMI2M9                                                    | -etc.-      |         |         |         |         |    |
|               | “DRESP2”  | NRR1          | NRR2                                                      | NRR3        | NRR4    | NRR5    | NRR6    | NRR7    |    |
|               |           | NRR8          | -etc.-                                                    |             |         |         |         |         |    |
|               | “USRDATA” | <b>String</b> | <b>(user defined format for any use in the evaluator)</b> |             |         |         |         |         |    |
|               |           | -etc.-        |                                                           |             |         |         |         |         |    |

## 1402 DRESP3 Externally Computed Design Responses

### Example:

|        |         |          |          |      |    |    |     |     |  |
|--------|---------|----------|----------|------|----|----|-----|-----|--|
| DRESP3 | 32      | OBJ1     | OBJ1GRP  | REG1 |    |    |     |     |  |
|        | DESVAR  | 1        | 3        | 4    | 5  | 1  | 205 | 209 |  |
|        |         | 201      |          |      |    |    |     |     |  |
|        | DTABLE  | PI       | YM       | L    |    |    |     |     |  |
|        | DRESP1  | 14       | 1        | 4    | 22 | 6  | 33  | 2   |  |
|        | DNODE   | 14       | 1        | 4    | 1  | 22 | 3   |     |  |
|        |         | 2        | 1        | 43   | 1  |    |     |     |  |
|        | DVPREL1 | 101      | 102      |      |    |    |     |     |  |
|        | DVCREL1 | 201      | 202      |      |    |    |     |     |  |
|        | DVMREL1 | 301      |          |      |    |    |     |     |  |
|        | DVPREL2 | 401      | 402      |      |    |    |     |     |  |
|        | DVCREL2 | 501      |          |      |    |    |     |     |  |
|        | DVMREL2 | 601      | 602      | 603  |    |    |     |     |  |
|        | DRESP2  | 50       | 51       |      |    |    |     |     |  |
|        | USRDATA | 102,ABCD | EF,(X-Y) |      |    |    |     |     |  |

### Fields:

| Field    | Contents                                                                                                                  |
|----------|---------------------------------------------------------------------------------------------------------------------------|
| ID       | Unique identification number. (Integer>0)                                                                                 |
| LABEL    | User-defined label which is referenced by a constraint bulk data entry or by the objective function. (Character)          |
| GROUP    | Selects a specific external response routine. (Character) See Remark 2.                                                   |
| TYPE     | Refers to a specific user-created response calculation type in the external function evaluator. See Remark 3. (Character) |
| REGION   | Region identifier for constraint screening. See Remark 5. (Integer>0)                                                     |
| “DESVAR” | Flag indicating DESVAR entry identification numbers. (Character)                                                          |
| DVIDi    | DESVAR entry identification number. (Integer>0)                                                                           |
| “DTABLE” | Flag indicating that the labels for the constants in a DTABLE entry follow. (Character)                                   |
| LABLj    | Label for a constant in the DTABLE entry. (Character)                                                                     |

**DRESP3 1403**  
**Externally Computed Design Responses**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                               |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “DFRFNC”     | Flag indicating DFRFNC ID numbers to be found in DTI, DFRFNC table records.                                                                                                                                                                                   |
| DFRFIDi      | ID number for a DFRFNC record in the DTI, DFRFNC table. Usually there will be a single DFRFNC ID entry here. However, as long there is a match in the number of frequencies for which the DRESP3 is to be evaluated, there may be multiple DFRFNC ID numbers. |
| “DRESP1”     | Flag indicating DRESP1 entry identification numbers. (Character)                                                                                                                                                                                              |
| NRk          | DRESP1 entry identification number. (Integer>0)                                                                                                                                                                                                               |
| “DNODE”      | Flag indicating grid point and component identification numbers. (Character)                                                                                                                                                                                  |
| Gm           | Identification number for any grid point in the model. (Integer>0)                                                                                                                                                                                            |
| Cm           | Component number of grid point Gm. ( $1 \leq \text{Integer} \leq 3$ )                                                                                                                                                                                         |
| DVPREL1      | Flag indicating DVPREL1 entry identification number. (Character)                                                                                                                                                                                              |
| DPIPi        | DVPREL1 entry identification number. (Integer>0)                                                                                                                                                                                                              |
| DVCREL1      | Flag indicating DVCREL1 entry identification number. (Character)                                                                                                                                                                                              |
| DCiCi        | DVCREL1 entry identification number. (Integer>0)                                                                                                                                                                                                              |
| DVMREL1      | Flag indicating DVPREL2 entry identification number. (Character)                                                                                                                                                                                              |
| DMiMi        | DVMREL1 entry identification number. (Integer>0)                                                                                                                                                                                                              |
| DVPREL2      | Flag indicating DVPREL2 entry identification number. (Character)                                                                                                                                                                                              |
| DPI2Pi       | DVPREL2 entry identification number. (Integer>0)                                                                                                                                                                                                              |
| DVCREL2      | Flag indicating DVCREL2 entry identification number. (Character)                                                                                                                                                                                              |
| DCI2Ci       | DVCREL2 entry identification number. (Integer>0)                                                                                                                                                                                                              |
| DVMREL2      | Flag indicating DVMREL2 entry identification number. (Character)                                                                                                                                                                                              |
| DMI2Mi       | DVMREL2 entry identification number. (Integer>0)                                                                                                                                                                                                              |
| DRESP2       | Flag indicating DRESP2 entry identification number. (Character)                                                                                                                                                                                               |
| NRrk         | DRESP2 entry identification number. (Integer>0)                                                                                                                                                                                                               |

## 1404 DRESP3

### Externally Computed Design Responses

| Field | Contents |
|-------|----------|
|-------|----------|

“USRDATA” Flag indicating user input data (Character).

#### Remarks:

1. DRESP3 entries must have unique identification numbers with respect to DRESP1 and DRESP2 entries.
2. The “GROUP” field must reference the group defined on a FMS CONNECT statement.
3. The “TYPE” field is used to select one type of response evaluation, since more than one option can exist in the external user-created routine.
4. The “DESVAR”, “DTABLE”, “DFRFNC”, “DRESP1”, “DNODE”, “DVPREL1”, “DVCREL1” and “DVMREL1”, “DVPREL2”, “DVCREL2”, “DVMREL2”, “DRESP2”, and USRDATA flags in field 2 must appear in the order given above. Any of these words, along with the identification numbers associated with them, may be omitted if they are not involved in this DRESP3 relationship. However, at least one of these types of arguments must exist.
5. The REGION field is used with the DSCREEN bulk entry in the constraint screening process as discussed in the section titled “Constraint Regionalization and Deletion” in chapter one of the book *NX Nastran Design and Optimization User’s Guide*. If REGION is defined, all responses which share the REGION id and have the same response type will be evaluated together according to the DSCREEN bulk entry which also has the same response type.

The REGION field follows the same rules as for the DRESP1 and DRESP2 entries. DRESP1, DRESP2 or DRESP3 responses will never be contained in the same region, even if they are assigned the same REGION identification number. The default is to put all responses referenced by one DRESP3 entry in the same region.

6. The string input for USRDATA is limited to 32000 characters.
7. The DRESP1 IDs listed under a DRESP3 response may only point to DRESP1s with the same number of responses, in case the DRESP1s are spawned for multiple frequencies or time steps.
8. Template Fortran subroutines are provided for DRESP3, together with NX Nastran, wherein the user can modify these subroutines and add, if necessary, new called subroutines to complete a customized external program. More information is supplied with the template subroutines as to the data they receive by way of the DRESP3 bulk data. The external program can then be built using

the files provided for this purpose. While the default name for this external program will be dr3serv, the user can modify the build file to change this to a desired name.

9. The external program described in Remark 8 is referenced by way of three entities: a) the CONNECT statement in the data file, which provides an alias for the path name, b) a separate file which resolves this alias by providing the corresponding path name, and c) the “nastran” statement which refers to this separate file by the gmconn option (i.e. gmconn = filename).
10. Referenced DRESP1 entries cannot span analysis types or superelements, except when such DRESP1 are specified in DRSPAN referenced sets, in which case they may span subcases and analysis types (see also Remark 9 of Case Control command DRSPAN).
11. DRESP1 that are mathematical functions described in Remark 20 for DRESP1 may not be referenced by DRESP3.
12. For further information, refer to Version 5.1 Release Guide and to the CONNECT File Management statement.

**1406 DSCONS**  
Design Constraint

**DSCONS**      Design Constraint

Defines a design constraint in design sensitivity analysis (original DSA). See the *NX Nastran User's Guide*.

**Format:**

| 1      | 2     | 3     | 4    | 5  | 6    | 7     | 8   | 9     | 10 |
|--------|-------|-------|------|----|------|-------|-----|-------|----|
| DSCONS | DSCID | LABEL | TYPE | ID | COMP | LIMIT | OPT | LAMNO |    |

**Example:**

|        |    |        |      |   |   |     |     |   |  |
|--------|----|--------|------|---|---|-----|-----|---|--|
| DSCONS | 21 | G101DX | DISP | 4 | 1 | .06 | MAX | 6 |  |
|--------|----|--------|------|---|---|-----|-----|---|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                           |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DSCID | Design constraint identification number. Must be unique for all DSCONS entries. (Integer>0)                                                                                                                                                                                                        |
| LABEL | Label assigned to the constraint in the output. (Character)                                                                                                                                                                                                                                        |
| TYPE  | Type of constraint. (Character):<br><br>DISP = Displacement<br>STRESS = Element stress<br>FORCE = Element force<br>CSTR = Lamina stress in elements for composites<br>CFOR = Failure index for a lamina in element for composites<br>LAMA = Eigenvalue or buckling load factor<br>FREQ = Frequency |
| ID    | Identification number of constraint; i.e., grid ID, element ID, or mode number. (Integer>0)                                                                                                                                                                                                        |
| COMP  | Component/item to be constrained. COMP is not used for buckling and normal modes. (Integer ≥ 0)                                                                                                                                                                                                    |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | <p>For grid points, use 1, 2, 3, 4, 5, and 6, which correspond to T1, T2, T3, R1, R2, and R3, respectively.</p> <p>For scalar points, a value of 0, 1, or blank may be used.</p> <p>For elements, refer to “<a href="#">Item Codes</a>” for tables of element stress and force item codes.</p>                                                                                                                                                                                        |
| LIMIT        | Value of limit. (Real; Default = 0.0)                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| OPT          | <p>Constraint (y) equation option. (Character: “MAX” or “MIN”; Default is “MAX”).</p> <p>If OPT is MAX, then:</p> $\psi = \frac{\text{response} - \text{LIMIT}}{ \text{LIMIT} } \quad (\text{if } \text{LIMIT} \neq 0)$ $\psi = \text{response} \quad (\text{if } \text{LIMIT} = 0)$ <p>If OPT is MIN, then:</p> $\psi = \frac{\text{LIMIT} - \text{response}}{ \text{LIMIT} } \quad (\text{if } \text{LIMIT} \neq 0)$ $\psi = - \text{response} \quad (\text{if } \text{LIMIT} = 0)$ |
| LAMNO        | Layer number in the laminate for which the constraint is applicable. (Integer, Default = 1)                                                                                                                                                                                                                                                                                                                                                                                           |

**Remarks:**

1. DSCONS entries must be selected with the SET2 Case Control command.
2. DSCONS is used only for design sensitivity and not for optimization.
3. DSCONS is used only in design sensitivity analysis (original DSA), described in the *NX Nastran User's Guide*.

## 1408 DSCREEN Design Constraint Screening Data

### DSCREEN Design Constraint Screening Data

Defines screening data for constraint deletion.

#### Format:

| 1       | 2     | 3   | 4    | 5 | 6 | 7 | 8 | 9 | 10 |
|---------|-------|-----|------|---|---|---|---|---|----|
| DSCREEN | RTYPE | TRS | NSTR |   |   |   |   |   |    |

#### Example:

|         |        |      |   |  |  |  |  |  |  |
|---------|--------|------|---|--|--|--|--|--|--|
| DSCREEN | STRESS | -0.7 | 2 |  |  |  |  |  |  |
|---------|--------|------|---|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                                                                                        |
|-------|-----------------------------------------------------------------------------------------------------------------|
| RTYPE | Response type for which the screening criteria apply. See <a href="#">Table 14-7</a> and Remark 3 . (Character) |
| TRS   | Truncation threshold. (Real; Default = -0.5)                                                                    |
| NSTR  | Maximum number of constraints to be retained per region per load case. See Remark 3 . (Integer>0; Default = 20) |

#### Remarks:

1. Displacement and displacement derivative constraints associated with one particular load case are grouped by the specification of DRESP1 entries. From each group, a maximum of NSTR constraints are retained per load case.

**Table 14-7. Default Region Specifications for RTYPE**

| RTYPE    | Default Region Specification | RTYPE  | Default Region Specification |
|----------|------------------------------|--------|------------------------------|
| DISP     | DRESP1                       | FRVELO | DRESP1                       |
| STRESS   | Property ID                  | FRACCL | DRESP1                       |
| STRAIN   | Property ID                  | FRSTRE | Property ID                  |
| ESE      | Property ID                  | FRFORC | Property ID                  |
| FORCE    | Property ID                  | FRSPC  | DRESP1                       |
| SPCFORCE | DRESP1                       | TACCL  | DRESP1                       |



**Table 14-7. Default Region Specifications for RTYPE**

| RTYPE    | Default Region Specification |  | RTYPE | Default Region Specification |
|----------|------------------------------|--|-------|------------------------------|
| EQUA     | DRESP2                       |  | TDISP | DRESP1                       |
| CSTRESS  | Property ID                  |  | TVELO | DRESP1                       |
| CSTRAIN  | Property ID                  |  | TSTRE | Property ID                  |
| CFAILURE | Property ID                  |  | TFORC | Property ID                  |
| FLUTTER  | DRESP1                       |  | TSPC  | DRESP1                       |
| FRDISP   | DRESP1                       |  |       |                              |

2. Stress-strain constraints are grouped by the property; i.e., all elements belonging to the set of PIDs specified under ATTi on a DRESPi entry are regarded as belonging to the same region. In superelement sensitivity analysis, if the property (PID) is defined in more than one superelement, then separate regions are defined. A particular stress constraint specification may be applied to many elements in a region generating many stress constraints, but only up to NSTR constraints per load case will be retained.
3. If RTYPE = “WEIGHT”, “VOLUME”, “EIGN”, “FREQ”, “LAMA”, “TRIM”, or “STABDER” then NSTR is unlimited and must be left blank. TRS is available for all response types.
4. If a certain type of constraint exists but no corresponding DSCREEN entry is specified, all the screening criteria used for this type of constraint will be furnished by the default values.
5. Constraints can be retained only if they are greater than TRS. See the Remarks under the “**DCONSTR**” entry for a definition of constraint value.
6. Constraint screening is applied to each superelement.

## 1410 DTABLE

Table Constants

### DTABLE Table Constants

Defines a table of real constants that are used in equations (see DEQATN entry).

**Format:**

| 1      | 2     | 3     | 4     | 5     | 6      | 7     | 8     | 9     | 10 |
|--------|-------|-------|-------|-------|--------|-------|-------|-------|----|
| DTABLE | LABL1 | VALU1 | LABL2 | VALU2 | LABL3  | VALU3 | LABL4 | VALU4 |    |
|        | LABL5 | VALU5 | LABL6 | VALU6 | -etc.- |       |       |       |    |

**Example:**

|        |    |       |   |      |   |       |   |     |  |
|--------|----|-------|---|------|---|-------|---|-----|--|
| DTABLE | PI | 3.142 | H | 10.1 | E | 1.0E6 | T | 0.1 |  |
|        | G  | 5.5E5 | B | 100. |   |       |   |     |  |

**Fields:**

| Field | Contents |
|-------|----------|
|-------|----------|

|       |                                     |
|-------|-------------------------------------|
| LABLi | Label for the constant. (Character) |
|-------|-------------------------------------|

|       |                               |
|-------|-------------------------------|
| VALUi | Value of the constant. (Real) |
|-------|-------------------------------|

**Remarks:**

1. Only one DTABLE entry may be specified in the Bulk Data Section.
2. LABLi are referenced by the LABi on the DVPREL2, DRESP2, or DRESP3 entries.

**DTI** Direct Table Input

Defines table data blocks.

**Format:**

| 1   | 2    | 3    | 4      | 5   | 6      | 7        | 8  | 9  | 10 |
|-----|------|------|--------|-----|--------|----------|----|----|----|
| DTI | NAME | "0"  | T1     | T2  | T3     | T4       | T5 | T6 |    |
|     | V01  | V02  | -etc.- |     |        |          |    |    |    |
| DTI | NAME | IREC | V1     | V2  | V3     | V4       | V5 | V6 |    |
|     | V7   | V8   | V9     | V10 | -etc.- | "ENDREC" |    |    |    |

**Example: (The first logical entry is the header entry.)**

|     |     |      |     |    |      |       |        |   |  |
|-----|-----|------|-----|----|------|-------|--------|---|--|
| DTI | XXX | 0    | 3   | 4  | 4096 |       | 1      | 0 |  |
|     | 1.2 | 2.3  |     |    |      |       |        |   |  |
| DTI | XXX | 1    | 2.0 | -6 | ABC  | 6.000 | -1     | 2 |  |
|     | 4   | -6.2 | 2.9 | 1  | DEF  | -1    | ENDREC |   |  |

**Fields:**

| Field    | Contents                                                                                                                                                    |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME     | Any character string that will be used in the DMAP sequence to reference the data block. See Remark 1. (Character; the first character must be alphabetic.) |
| Ti       | Trailer values. (Integer $\geq 0$ ; Default = 32767)                                                                                                        |
| IREC     | Record number. (Integer > 0)                                                                                                                                |
| V0i, Vi  | Value. (Integer, Real, Character or blank)                                                                                                                  |
| "ENDREC" | Flags the end of the string of values (V0i or Vi) that constitute record IREC. (Character)                                                                  |

**Remarks:**

1. The user defines the data block and therefore must write a DMAP (or ALTER a solution sequence), which includes the DTIIN modules, in order to use the DTI feature. See the *NX Nastran DMAP Programmer's Guide*. All of the rules governing the use of data blocks in DMAP sequences apply.
2. All fields following ENDREC must be blank.

## 1412 DTI

### Direct Table Input

3. The entry using IREC = 0 is called the header entry and is an optional entry. The values T1 through T6 go to a special record called the trailer. Other values on the optional continuation go to the header record. If the header entry or the trailer is not specified, T1 through T6 = 32767. On this entry, "ENDREC" may be used only if there is at least one continuation.
4. In addition to the optional header entry, there must be one logical entry for each record in the table. Null records require no entries.
5. "ENDREC" is used to input blank values at the end of a record. If "ENDREC" is not specified, the string for a record ends with the last nonblank field.
6. The maximum number of DMI and DTI data blocks is 1000.
7. If  $T_i$  is not an integer, a machine-dependent error will be issued that may be difficult to interpret.

**DTI,DFRFNC 1413**  
**Frequency function input for use in DRESP2 & DRESP3**

**DTI,DFRFNC**      Frequency function input for use in DRESP2 & DRESP3

Provides a way to input functions of frequency so that they can be automatically looped over when spawning multiple responses over the frequency set when using DRESP2 or DRESP3. Such functions can be, for example, frequency dependent DRESP1 response bounds. More than one such function can be entered in sequence.

**Format:**

| 1   | 2      | 3    | 4   | 5     | 6      | 7  | 8  | 9  | 10 |
|-----|--------|------|-----|-------|--------|----|----|----|----|
| DTI | DFRFNC | "0"  |     |       |        |    |    |    |    |
| DTI | DFRFNC | IREC | FID | FTYPE | V1     | V2 | V3 | V4 |    |
|     | V5     | V6   | V7  | V8    | -etc.- |    |    |    |    |

**Example:**

|     |        |       |       |          |       |       |        |       |  |
|-----|--------|-------|-------|----------|-------|-------|--------|-------|--|
| DTI | DFRFNC | 0     |       |          |       |       |        |       |  |
| DTI | DFRFNC | 1     | 325   | LISTING  | 0.036 | 0.038 | 0.0395 | 0.043 |  |
|     |        | 0.049 | 0.054 |          |       |       |        |       |  |
| DTI | DFRFNC | 2     | 513   | EQUATION | 750   |       |        |       |  |
| DTI | DFRFNC | 3     | 517   | EQUATION | 755   |       |        |       |  |
| DTI | DFRFNC | 4     | 647   | CONSTANT | 12.34 |       |        |       |  |
| DTI | DFRFNC | 5     | 116   | INCRMENT | 3.0   | 0.2   |        |       |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                                                             |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IREC  | Logical DFRFNC record number. The first DTI,DFRFNC record should be 0, and unreferenced. Each later DTI,DFRFNC record should point to a separate DFRFNC ID (FID).                                                                                                                                                                    |
| FID   | The ID of the DFRFNC record as referenced from a DRESP2 or DRESP3 type response.                                                                                                                                                                                                                                                     |
| FTYPE | DFRFNC function input format type. There are currently four different ways of inputting DFRFNC function values: CONSTANT; EQUATION; INCRment; LISTing. (It is sufficient to enter the first four letters as shown by capitals here). The format of the rest of the data for each DFRFNC record depends on the FTYPE for that record. |

## 1414 DTI,DFRFNC

### Frequency function input for use in DRESP2 & DRESP3

| Field | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| V1    | <p>For FTYPE = CONS, V1 is the constant real value of the function.</p> <p>For FTYPE = EQUA, V1 is the ID (EQID) of the equation by which the function values are to be computed, with the frequency values in the relevant frequency set being the only variable in the equation. Thus, the equation loops over the frequencies in the relevant frequency set, and computes the corresponding DFRFNC function value for each frequency in the set.</p> <p>For FTYPE = INCR, V1 is the starting value of the incrementation, i.e. the value of the frequency function corresponding to the first frequency in the relevant frequency set.</p> <p>For FTYPE = LIST, V1 is the first value of the frequency function, i.e. the value of the frequency function corresponding to the first frequency in the relevant frequency set.</p> |
| V2    | <p>For FTYPE = INCR, V2 is the value of the increment by which the function of the frequency will change. The program automatically increments the function value for the actual number of frequencies in the relevant frequency set.</p> <p>For FTYPE = LIST, V2 is the value of the frequency function corresponding to the second frequency in the relevant frequency set.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Vi    | <p>These are currently valid only for FTYPE = LIST. Vi corresponds to the value of the frequency function corresponding to the ith frequency in the frequency set.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

#### Remarks:

1. As DTI type table data makes no check on the validity of the data, the user should exercise care in input. It is anticipated that this input will be replaced or paralleled by bulk data input DFRFNC in the future.
2. When a DFRFNC ID is referenced by a DRESP2 or DRESP3 type bulk data, this is normally to enable the spawning of multiple DRESP2 or DRESP3 data over the relevant frequency set. Such spawning of multiple responses is triggered by nested DRESP1 data within the DRESP2 or DRESP3, where such DRESP1 responses are spawned over the frequency set by leaving the ATTB field blank in the DRESP1 input.
3. DFRFNC normally should not be used for cases where multiple DRESP2 or DRESP3 responses are not going to be spawned over the relevant frequency set. Simple table input of a constant value is sufficient in these cases.

4. Normally, the relevant frequency set is determined by the subcase which indirectly references the DRESP2 or DRESP3 response in question. However, for DRESP2 or DRESP3 responses which contain DRSPAN related DRESP1 responses spawned over one or more frequency sets, it is required that the referenced frequency sets for the subcases to which these DRESP1 belong have the same number of frequencies. If the FTYPE = EQUA option is used, the frequency values will be picked up from the frequency set belonging to the last subcase to be analyzed in the relevant DRSPAN domain.

## 1416 DTI,ESTDATA Superelement Estimation Data Overrides

### DTI,ESTDATA Superelement Estimation Data Overrides

Provides override data for time and space estimation for superelement processing operations.

#### Format:

| 1   | 2       | 3   | 4   | 5   | 6      | 7 | 8 | 9 | 10 |
|-----|---------|-----|-----|-----|--------|---|---|---|----|
| DTI | ESTDATA | "0" |     |     |        |   |   |   |    |
|     | kd1     | vd1 | kd2 | vd2 | -etc.- |   |   |   |    |

The next entries are repeated for any superelement for which estimate data overrides are desired. IREC must be incremented by 1.

| DTI | ESTDATA | IREC | SEFLAG | SEID | k1 | v1 | k2 | v2 |  |
|-----|---------|------|--------|------|----|----|----|----|--|
|     | k3      | v3   | -etc.- |      |    |    |    |    |  |

#### Example:

|     |         |     |    |    |    |     |    |     |  |
|-----|---------|-----|----|----|----|-----|----|-----|--|
| DTI | ESTDATA | 0   |    |    |    |     |    |     |  |
|     | NOMASS  | -1  |    |    |    |     |    |     |  |
| DTI | ESTDATA | 1   | SE | 10 | C1 | 5.5 | C3 | 4.5 |  |
|     | C7      | 7.3 |    |    |    |     |    |     |  |

#### Fields:

| Field  | Contents                                                                                                               |
|--------|------------------------------------------------------------------------------------------------------------------------|
| kdi    | Keyword for estimation parameter. (Character from <a href="#">Table 14-8</a> .)                                        |
| vdi    | Value assigned to the estimation parameter kdi. (The type given in <a href="#">Table 14-8</a> .)                       |
| IREC   | Record number beginning with 1. (Integer>0)                                                                            |
| SEFLAG | SEFLAG = "SE" or "SEID" indicates the next field containing a superelement identification number. (Character)          |
| SEID   | Superelement identification number. (Integer>0)                                                                        |
| ki     | Keyword for override of estimation parameter for indicated superelement. (Character from <a href="#">Table 14-8</a> .) |
| vi     | Value for keyword ki. (Type depends on ki as shown in the <a href="#">Table 14-8</a> .)                                |



**Table 14-8. DTI,ESTDATA Input Parameter Descriptions**

| Input Parameters |           |                  |             | Meaning and Comments                                                                                     |
|------------------|-----------|------------------|-------------|----------------------------------------------------------------------------------------------------------|
| Keyword          | Type      | Default Value    | Math Symbol |                                                                                                          |
| CRMS*            | Real      | -1.0             | C           | Number of active columns in $[K_{00}]$ .                                                                 |
| FCRMS*           | Real      | 0.10             |             | If $FCRMS \leq 0.0$ , FCRMS is used ( <i>c/o</i> ).                                                      |
| C1               | Real      | 6.0              | $c_1$       | Average number of degrees-of-freedom per grid point in o-set.                                            |
| C3               | Real      | 8.0              | $c_3$       | Average number of connections per grid point.                                                            |
| C4               | Real      | 0.15             | $c_4$       | I/O time (seconds) per block transferred.                                                                |
| C5               | Real      | 6.0              | $c_5$       | Average number of effective degrees-of-freedom per grid point in a-set.                                  |
| C6               | Real      | 1.2              | $c_6$       | Total CPU factor.                                                                                        |
| C7               | Real      | 6.0              | $c_7$       | Number of equivalent KGG data blocks for space estimation.                                               |
| WF               | Real      | -1.0             | W           | If $WF \leq 0.0$ then use available working storage in units of single-precision words.                  |
| NOMASS           | Integer   | 1                |             | If $NOMASS \neq 1$ then exclude mass terms from estimates.                                               |
| TSEX             | Real      | 0.5 (min)        |             | Threshold limit for CPU.                                                                                 |
| SSEX             | Real      | 50.0(blocks)     |             | Threshold limit for space.                                                                               |
| TWALLX           | Real      | 5.0 (min)        |             | Threshold limit for wall time.                                                                           |
| BUFSIZ           | Integer   | Machine Buffsize | B           | Buffsize.                                                                                                |
| ML               | Real      | MachineLoop Time | M           | Arithmetic time for the multiply/add loop. See the <i>NX Nastran Installation and Operations Guide</i> . |
| CONIO            | Integer   | MachineI/O ratio |             | I/O count/CPU equivalence                                                                                |
| PREC             | Integer   | 1 or 2           |             | Machine Word Length (1 = long, 2 = short).                                                               |
| NLOADS           | Integer   | 1                | $N_L$       | Number of loading conditions                                                                             |
| SETYPE           | Character | "T"              |             | Superelement type (T = Tip)                                                                              |
| CMAX             | Real      | -1.0             | $C_{max}$   | Maximum bandwidth                                                                                        |

**Parameters Obtained from SEMAP**

NGI                      Number of interior grid points.

## 1418 DTI,ESTDATA Superelement Estimation Data Overrides

|     |                                 |
|-----|---------------------------------|
| NPE | Number of exterior grid points. |
| NS  | Number of scalar points         |
| NE  | Number of elements.             |

### Derived Parameters

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| $O = C1 \cdot NG1$                | Size of o-set.                      |
| $A = C5(NPE - NS) + NS$           | Size of a-set.                      |
| $T = \text{BUFFSIZE}/\text{PREC}$ | Number of matrix terms in a buffer. |

### Estimation Equations

For each superelement, estimates of CPU time and disk space are made using the following equations.

| Table 14-9. Equations Used for CPU Time and Disk Space Estimate |             |                                                                              |
|-----------------------------------------------------------------|-------------|------------------------------------------------------------------------------|
| Printout Symbol                                                 | Math Symbol | Equations                                                                    |
| TD                                                              | $T_1$       | $T_1 = 1/2 \cdot M \cdot O \cdot C^2$                                        |
| TFBS                                                            | $T_2$       | $T_2 = 2 \cdot M \cdot C \cdot O \cdot a$                                    |
| TMAA                                                            | $T_3$       | $T_3 = M \cdot O \cdot a^2$ (set to 0.0 if NOMASS $\neq$ +1)                 |
| TSE                                                             | $T_{SE}$    | $T_{SE} = C_6(T_1 + T_2 + T_3)$                                              |
| SLOO                                                            | $S_1$       | $S_1 = O \cdot C \cdot \frac{\text{PREC}}{b}$                                |
| SGO                                                             | $S_2$       | $S_2 = O \cdot a \cdot \frac{\text{PREC}}{B}$                                |
| SKGG                                                            | $S_3$       | $S_3 = 36(NG_i + NG_e - NS)(c_3 + 1.0) \left( \frac{\text{PREC}}{B} \right)$ |
| SSE                                                             | $S_{SE}$    | $S_{SE} = S_1 + S_2 + c_7 \cdot S_3$                                         |

| <b>Table 14-9. Equations Used for CPU Time and Disk Space Estimate</b> |                    |                                                                                                             |
|------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Printout Symbol</b>                                                 | <b>Math Symbol</b> | <b>Equations</b>                                                                                            |
| PASSES                                                                 | $p$                | $\text{FBS passes} = p = a \cdot O \cdot \frac{\text{PREC}}{WF}$                                            |
| BKSTRN                                                                 | $BT$               | Blocks Transferred = $BT = 2 \cdot p \cdot S_1 + S_2 + p \cdot S_2$ (Last term omitted if NOMASS $\neq$ +1) |
| TWALL                                                                  | $T_W$              | Wall Time = $T_W = T_{SE} + c_4 \cdot BT$                                                                   |

**Remarks:**

1. In the superelement solution sequences, this data is stored automatically.
2. The header record continuation entries are optional if no global override data is to be specified. In this case, the complete header entry is optional.
  - Active column data can come from one of several places. The value for CRMS is determined as follows:
    - RMS from the entry when IREC>0 and field 4 is “SE”.
    - RMS from entries with IREC = 0.
    - Computed bandwidth when PARAM,OLDSEQ is specified.
    - If FCRMS is specified when IREC>0 and field 4 is “SE”, then CRMS = FCRMS · O.
    - If FCRMS is specified when IREC = 0, then CRMS = FCRMS · O.
    - CRMS = 0.1 · O.
3. If CMAX is not specified, then it is defaulted to CRMS.
4. In the example above, mass terms are excluded for all superelements and new values are given for parameters C1, C3, and C7 for Superelement 10 only.
5. The estimates for TSEX, SSEX, and TWALLX are not printed unless at least one estimate exceeds the threshold.

## 1420 DTI,INDTA Stress, Strain and/or Force Sort/Filter Item Code Override

### DTI,INDTA Stress, Strain and/or Force Sort/Filter Item Code Override

Specifies or overrides default item codes for the sorting and filtering of element stresses, strains, and forces.

#### Format:

| 1   | 2     | 3   | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-----|-------|-----|---|---|---|---|---|---|----|
| DTI | INDTA | "0" |   |   |   |   |   |   |    |

To specify/override items for a sort of stress quantities:

|     |       |     |    |    |    |    |          |  |  |
|-----|-------|-----|----|----|----|----|----------|--|--|
| DTI | INDTA | "1" | B1 | C1 | B2 | C2 | "ENDREC" |  |  |
|-----|-------|-----|----|----|----|----|----------|--|--|

To specify/override items for a sort of force quantities:

|     |       |     |    |    |    |    |          |  |  |
|-----|-------|-----|----|----|----|----|----------|--|--|
| DTI | INDTA | "2" | B1 | C1 | B2 | C2 | "ENDREC" |  |  |
|-----|-------|-----|----|----|----|----|----------|--|--|

#### Example:

|     |       |   |  |  |  |  |  |  |  |
|-----|-------|---|--|--|--|--|--|--|--|
| DTI | INDTA | 0 |  |  |  |  |  |  |  |
|-----|-------|---|--|--|--|--|--|--|--|

To specify/override items for a sort of stress quantities:

|     |       |   |    |    |    |    |        |  |  |
|-----|-------|---|----|----|----|----|--------|--|--|
| DTI | INDTA | 1 | 64 | 18 | 75 | 18 | ENDREC |  |  |
|-----|-------|---|----|----|----|----|--------|--|--|

To specify/override items for a sort of force quantities:

|     |       |   |    |   |   |   |        |  |  |
|-----|-------|---|----|---|---|---|--------|--|--|
| DTI | INDTA | 2 | 34 | 2 | 2 | 4 | ENDREC |  |  |
|-----|-------|---|----|---|---|---|--------|--|--|

#### Fields:

| Field | Contents                                                                                                                                                                                                    |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bi    | Element type identification number. See the table in <a href="#">"Item Codes"</a> for allowable values. (Integer>0)                                                                                         |
| Ci    | Item code identification number for the stress, strain, or force quantity on which the sort or filter is to be performed. See the table in the <a href="#">"Item Codes"</a> for allowable values. (Integer) |

#### Remarks:

1. This table is recognized only in SOLs 101, 103, 105, 106, 108, 109, 111, 112, 114, 115, 144, 153, and for stress quantities only. One or more of the user parameters S1, S1G, or S1M must be specified with a value greater than or equal to zero in

order to request sorting and/or filtering. See user parameter S1 in “Parameters” . In order to sort force or strain quantities, a DMAP Alter is required.

2. If the Ci value is -1, the element type will be suppressed on the output file. An example of this feature could be as follows: If an element type is to be sorted on two different values and output twice, this can be accomplished by two calls to the STRSORT module with two unique DTI tables. However, other element types will be printed twice. This additional print can be suppressed by setting their sort codes to -1.
3. [Table 14-10](#) lists the elements currently that are sortable. In addition, the element type identification number, the default stress output quantity, and the associated stress code identification numbers are provided. If this entry is not specified, then the stresses are sorted based on the default quantity given in [Table 14-10](#).

The following should be noted:

- The element type identification number is used internally by the program to differentiate element types.
- The stress code identification number is merely the word number in the standard printed output for the stress quantity of interest. For example, the thirteenth word of stress output for the CHEXA element is the octahedral shear stress. For this element type, the element identification number and the grid point ID each count as a separate word. Stress codes for the elements are tabulated in “Item Codes” .
- By default, stress sorting for the membrane and plate elements will be performed on the Hencky-von Mises stress. For maximum shear stress, the STRESS (MAXS) Case Control command should be specified.

| <b>Table 14-10. Sortable Elements</b> |                        |                                                          |                       |
|---------------------------------------|------------------------|----------------------------------------------------------|-----------------------|
| Element                               | Element Type ID Number | Default Stress Output Quantity and Identification Number |                       |
|                                       |                        | Quantity                                                 | Stress Code ID Number |
| CBAR                                  | 34                     | Maximum stress at end B                                  | 14                    |
| CBEAM                                 | 2                      | Maximum stress at end B                                  | 108                   |
| CBEND                                 | 69                     | Maximum stress at end B                                  | 20                    |
| CONROD                                | 10                     | Axial stress                                             | 2                     |
| CELAS1                                | 11                     | Stress                                                   | 2                     |
| CELAS2                                | 12                     | Stress                                                   | 2                     |
| CELAS3                                | 13                     | Stress                                                   | 2                     |
| CHEXA                                 | 67                     | Hencky-von Mises or Octahedral stress                    | 13                    |

**1422 DTI,INDTA**  
**Stress, Strain and/or Force Sort/Filter Item Code Override**

| <b>Table 14-10. Sortable Elements</b> |                               |                                                                 |                              |
|---------------------------------------|-------------------------------|-----------------------------------------------------------------|------------------------------|
| <b>Element</b>                        | <b>Element Type ID Number</b> | <b>Default Stress Output Quantity and Identification Number</b> |                              |
|                                       |                               | <b>Quantity</b>                                                 | <b>Stress Code ID Number</b> |
| CQUAD4                                | 33                            | Maximum shear or Hencky-von Mises stress at $Z_2$               | 17                           |
| CQUAD4*                               | 144                           | Maximum shear or Hencky-von Mises stress at $Z_2$               | 19                           |
| CQUAD8                                | 64                            | Maximum shear or Hencky-von Mises stress at $Z_2$               | 19                           |
| CQUADR                                | 82                            | Maximum shear or Hencky-von Mises stress at $Z_2$               | 19                           |
| CPENTA                                | 68                            | Octahedral stress                                               | 13                           |
| CROD                                  | 1                             | Axial stress                                                    | 2                            |
| CSHEAR                                | 4                             | No default                                                      | —                            |
| CTETRA                                | 39                            | No default                                                      | —                            |
| CTRIA3                                | 74                            | Maximum shear or Hencky-von Mises stress at $Z_2$               | 17                           |
| CTRIA6                                | 75                            | Maximum shear or Hencky-von Mises stress at $Z_2$               | 19                           |
| CTRIAR                                | 70                            | Maximum shear or Hencky-von Mises stress at $Z_2$               | 19                           |
| CTRIAX6                               | 53                            | No default                                                      | —                            |
| CTUBE                                 | 3                             | Axial stress                                                    | 2                            |

\* CORNER output

**DTI,SETREE**      Superelement Tree Definition

Defines a superelement tree that determines the superelement processing order.

**Format:**

| 1   | 2      | 3       | 4     | 5       | 6      | 7       | 8     | 9       | 10 |
|-----|--------|---------|-------|---------|--------|---------|-------|---------|----|
| DTI | SETREE | "1"     | SEUP1 | SEDOWN1 | SEUP2  | SEDOWN2 | SEUP3 | SEDOWN3 |    |
|     | SEUP4  | SEDOWN4 | SEUP5 | SEDOWN5 | -etc.- |         |       |         |    |

**Example:**

|     |        |    |    |    |   |    |   |    |  |
|-----|--------|----|----|----|---|----|---|----|--|
| DTI | SETREE | 1  | 1  | 14 | 2 | 14 | 3 | 14 |  |
|     | 4      | 14 | 14 | 0  |   |    |   |    |  |

**Fields:**

**Field                      Contents**

SEUP<sub>i</sub>                      Identification number of the superelement upstream from SEDOWN<sub>i</sub>. (Integer>0)


SEDOWN<sub>i</sub>                  Identification number of the superelement into which SEUP<sub>i</sub> is assembled. (Integer ≥ 0)

**Remarks:**

1. SETREE entries or the DTI,SETREE entry are required for multi-level superelement configurations.
2. If an DTI,SETREE entry is provided, then SETREE entries are not required.
3. If both SETREE entries and a DTI,SETREE entry exist, then the DTI,SETREE entry will be ignored.
4. Superelements not referenced on the SETREE or DTI,SETREE entry will have the residual structure as their downstream superelement.
5. If this entry is not present, the superelement tree and the processing order are determined automatically.
6. A superelement identification may appear only once in a SEUP<sub>i</sub> field.
7. On restart, if a superelement identification does not appear in a SEUP<sub>i</sub> field, its matrices will not be assembled, even though they may be present in the database.

## 1424 DTI,SETREE Superelement Tree Definition

8. See the *NX Nastran Superelement User's Guide* for a description of user-designated trees.
9. This entry is stored in the database automatically. Once stored, the Bulk Data entry may be removed from the input file.
10. In the example above, the following superelement tree is defined:



**Figure 14-1. Sample Superelement Tree**



**DTI,SPECSEL**      Response Spectra Input Correlation Table

Correlates spectra lines specified on TABLED1 entries with damping values.

**Format:**

| 1   | 2       | 3     | 4    | 5     | 6    | 7     | 8      | 9     | 10 |
|-----|---------|-------|------|-------|------|-------|--------|-------|----|
| DTI | SPECSEL | RECNO |      | TYPE  | TID1 | DAMP1 | TID2   | DAMP2 |    |
|     | TID3    | DAMP3 | TID4 | DAMP4 | TID5 | DAMP5 | -etc.- |       |    |

**Example:**

|     |         |   |     |   |   |     |   |     |  |
|-----|---------|---|-----|---|---|-----|---|-----|--|
| DTI | SPECSEL | 1 |     | A | 1 | .02 | 2 | .04 |  |
|     |         | 3 | .06 |   |   |     |   |     |  |
| DTI | SPECSEL | 3 |     | V | 4 | .01 |   |     |  |

**Fields:**

| Field | Contents                                                                                        |
|-------|-------------------------------------------------------------------------------------------------|
| RECNO | Spectrum number. (Integer>0)                                                                    |
| TYPE  | Type of spectrum. (Character: "A" for acceleration, "V" for velocity, or "D" for displacement.) |
| TIDi  | TABLED1 entry identification number. (Integer>0)                                                |
| DAMPi | Damping value assigned to TIDi. (Real)                                                          |

**Remarks:**

1. The RECNO is the number of the spectrum defined by this entry. It is referenced on DLOAD Bulk Data entries.
2. The TIDi, DAMPi pairs list the TABLED1 entry, which defines a line of the spectrum and the damping value assigned to it. The damping value is in the units of fraction of critical damping.
3. This entry is placed in the database automatically. Once stored, the Bulk Data entry may be removed from the input file.

**1426 DTI,SPSEL**  
**Response Spectra Generation Correlation Table**

**DTI,SPSEL**      Response Spectra Generation Correlation Table

Correlates output requests with frequency and damping ranges.

**Format:**

| 1   | 2     | 3     | 4     | 5      | 6  | 7  | 8  | 9  | 10 |
|-----|-------|-------|-------|--------|----|----|----|----|----|
| DTI | SPSEL | RECNO | DAMPL | FREQ1  | G1 | G2 | G3 | G4 |    |
|     | G5    | G6    | G7    | -etc.- |    |    |    |    |    |

**Example:**

|     |       |    |   |   |    |    |    |    |  |
|-----|-------|----|---|---|----|----|----|----|--|
| DTI | SPSEL | 1  | 2 | 1 | 11 | 12 |    |    |  |
| DTI | SPSEL | 2  | 4 | 3 | 1  | 7  | 11 | 12 |  |
|     | 13    | 14 |   |   |    |    |    |    |  |

**Fields:**

| Field | Contents                                                                                                                  |
|-------|---------------------------------------------------------------------------------------------------------------------------|
| DAMPL | Identification number of the FREQ, FREQ1, or FREQ2 Bulk Data entry that specifies the list of damping values. (Integer>0) |
| FREQ1 | Identification number of the FREQi Bulk Data entry that specifies the list of frequencies. (Integer>0)                    |
| Gi    | Grid point number where response spectra will be calculated. (Integer>0)                                                  |
| RECNO | Record number of spectra to be generated. (Sequential integer beginning with 1.)                                          |

**Remarks:**

1. This table is used in SOLs 109, and 112.
2. Damping values are in the units of fraction of critical damping.
3. Output of response spectra requires the use of the XYPLOT...SPECTRA(RECNO)/Gi... command, where Gi is restricted to the grid points listed on the (RECNO) record of this entry.
4. See the *NX Nastran User's Guide* for example problems using this feature.

**DTI,SPSEL 1427**

**Response Spectra Generation Correlation Table**

5. The SPSEL table is stored in the database automatically in SOLs 109 and 112. Once stored, the Bulk Data entry may be removed from the input file.

**1428 DTI,UNITS**  
**Specifies the system of units.**

**DTI,UNITS** Specifies the system of units.

Specifies the system of units.

**Format:**

|          |          |          |          |          |          |          |             |          |           |
|----------|----------|----------|----------|----------|----------|----------|-------------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b>    | <b>9</b> | <b>10</b> |
| DTI      | UNITS    | "1"      | MASS     | FORCE    | LENGTH   | TIME     | TEMPERATURE |          |           |

**Example:**

|     |       |   |    |   |   |   |   |  |  |
|-----|-------|---|----|---|---|---|---|--|--|
| DTI | UNITS | 1 | KG | N | M | S | F |  |  |
|-----|-------|---|----|---|---|---|---|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MASS         | <p>Defines the mass units</p> <p>Acceptable mass inputs are:</p> <p>KG - kilogram</p> <p>LBM – pound-mass (0.45359237 kg)</p> <p>SLUG – slug (14.5939029372 kg)</p> <p>GRAM – gram (1E-3 kg)</p> <p>OZM – ounce-mass (0.02834952 kg)</p> <p>KLBM – kilo pound-mass (1000 lbm) (453.59237 kg)</p> <p>MGG – megagram (1E3 kg)</p> <p>MG – milligram (1E-6 kg)</p> <p>MCG – microgram (1E-9 kg)</p> <p>NG – nanogram (1E-12 kg)</p> <p>UTON – U.S. ton (907.18474 kg)</p> <p>SLI – slinch (175.1268352 kg)</p> |

| <b>Field</b>  | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FORCE</b>  | <p>Defines the force units</p> <p>Acceptable force inputs are:</p> <p>N – Newton</p> <p>LBF – pound-force (4.44822161526 N)</p> <p>KGF – kilograms-force (9.80665 N)</p> <p>OZF – ounce-force (0.2780139 N)</p> <p>DYNE – dyne (1E-5 N)</p> <p>KN – kilonewton (1E3 N)</p> <p>KLBF – kilo pound-force (1000 lbf) (4448.22161526 N)</p> <p>MN – millinewton (1E-3 N)</p> <p>MCN – micronewton (1E-6 N)</p> <p>NN – nanonewton (1E-9 N)</p> <p>CN – centinewton<sup>1</sup> (1E-2 N)</p> <p>P – poundal<sup>1</sup> (0.138254954 N)</p> |
| <b>LENGTH</b> | <p>Defines the length units</p> <p>Acceptable length inputs are:</p> <p>M – meter</p> <p>KM – kilometer (1E3 m)</p> <p>CM – centimeter (1E-2 m)</p> <p>MM – millimeter (1E-3 m)</p> <p>MI – mile (1609.344 m)</p> <p>FT – foot (0.3048 m)</p> <p>IN – inch (25.4E-3 m)</p> <p>MCM – micrometer (1E-6 m)</p> <p>NM – nanometer (1E-9 m)</p> <p>A – Angstrom (1E-10 m)</p> <p>YD – yard (0.9144 m)</p> <p>ML – mil (25.4E-6 m)</p>                                                                                                      |

**1430 DTI,UNITS**  
Specifies the system of units.

| <b>Field</b>      | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <hr/> <b>TIME</b> | <hr/> <b>MCI – microinch (25.4E-9 m)</b><br>Defines the time units<br><br>Acceptable time inputs are:<br><br>S – second<br><br>H – hour (3600.0 sec)<br><br>MIN-minute (60.0 sec)<br><br>MS – millisecond (1E-3 sec)<br><br>MCS – microsecond (1E-6 sec)<br><br>NS – nanosecond (1E-9 sec)<br><br>D – day (86.4E3 sec) <hr/> <b>TEMPERATURE</b> Defines the temperature units <sup>2</sup><br><br>Acceptable temperature inputs are:<br><br>F – Fahrenheit<br><br>R – Rankin<br><br>C – Celsius<br><br>K – Kelvin <hr/> |

<sup>1</sup>: not supported by MNF

<sup>2</sup>: not supported by MNF or RFI

**Remarks:**

1. Since DTI,UNITS determines all units for the MNF and RFI, the units defined in WTMASS, which are important for units consistency in NX Nastran, are ignored in the output to these files. For example, if the model mass is kilograms, force in Newtons, length in meters, and time in seconds, then WTMASS would equal 1 ensuring that NX Nastran works with the consistent set of kg, N, and m. The units written to the MNF or RFI would be: “DTI,UNITS,1,KG,N,M,S”.

**DVAR**      Design Variable

Defines a design variable for design sensitivity analysis (original DSA).

**Format:**

| 1    | 2    | 3      | 4      | 5    | 6    | 7    | 8    | 9    | 10 |
|------|------|--------|--------|------|------|------|------|------|----|
| DVAR | BID  | LABEL  | DELTAB | VID1 | VID2 | VID3 | VID4 | VID5 |    |
|      | VID6 | -etc.- |        |      |      |      |      |      |    |

**Example:**

|      |    |        |     |   |   |   |   |   |  |
|------|----|--------|-----|---|---|---|---|---|--|
| DVAR | 10 | LFDOOR | .01 | 2 | 4 | 5 | 6 | 9 |  |
|      | 10 |        |     |   |   |   |   |   |  |

**Fields:**

| Field  | Contents                                                                                                                                       |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------|
| BID    | Design variable identification number. Must be unique for all DVAR. (Integer>0)                                                                |
| LABEL  | Label used to describe variable in output. (Character)                                                                                         |
| DELTAB | The change in the dimensionless design variable B to be used in the calculation of the design sensitivity coefficients. (Real; Default = 0.02) |
| VIDi   | Identification number of DVSET entry. (Integer)                                                                                                |

**Remarks:**

1. DVAR entries must be selected by the SENSITY and SET2 Case Control commands.
2. The DVAR entry is used only in design sensitivity analysis (original DSA).

## 1432 DVBSHAP Design Variable to Boundary Shapes

### DVBSHAP Design Variable to Boundary Shapes

Associates a design variable identification number to a linear combination of boundary shape vectors from a particular auxiliary model.

#### Format:

| 1       | 2    | 3      | 4    | 5   | 6    | 7   | 8    | 9   | 10 |
|---------|------|--------|------|-----|------|-----|------|-----|----|
| DVBSHAP | DVID | AUXMOD | COL1 | SF1 | COL2 | SF2 | COL3 | SF3 |    |

#### Example:

|         |   |   |   |     |  |  |  |  |  |
|---------|---|---|---|-----|--|--|--|--|--|
| DVBSHAP | 4 | 1 | 1 | 1.6 |  |  |  |  |  |
|---------|---|---|---|-----|--|--|--|--|--|

#### Fields:

| Field  | Contents                                                                            |
|--------|-------------------------------------------------------------------------------------|
| DVID   | Design variable identification number of a DESVAR entry. (Integer>0)                |
| AUXMOD | Auxiliary model identification number. (Integer>0)                                  |
| COLi   | Load sequence identification number from AUXMODEL Case Control command. (Integer>0) |
| SFi    | Scaling factor for load sequence identification number. (Real; Default = 1.0)       |

#### Remarks:

1. Design variable DVID must be defined on a DESVAR entry.
2. Multiple references to the same DVID and/or COLi will result in the vector addition of the referenced boundary shape vectors.
3. Multiple DVBSHAP entries may be specified.



**DVCREL1** Design Variable to Connectivity Property Relation

Defines the relation between a connectivity property and design variables.

**Format:**

| 1       | 2     | 3     | 4     | 5      | 6     | 7     | 8      | 9 | 10 |
|---------|-------|-------|-------|--------|-------|-------|--------|---|----|
| DVCREL1 | ID    | TYPE  | EID   | CPNAME | CPMIN | CPMAX | C0     |   |    |
|         | DVID1 | COEF1 | DVID2 | COEF2  | DVID3 | COEF3 | -etc.- |   |    |

**Example:**

|         |   |        |   |       |  |     |  |  |  |
|---------|---|--------|---|-------|--|-----|--|--|--|
| DVCREL1 | 5 | CQUAD4 | 1 | ZOFFS |  | 1.0 |  |  |  |
|         | 1 | 1.0    |   |       |  |     |  |  |  |

**Fields:**

| Field  | Contents                                                                                                                                                                                      |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID     | Unique identification number. (Integer>0)                                                                                                                                                     |
| TYPE   | Name of an element connectivity entry, such as “CBAR”, CQUAD4”, etc. (Character; case sensitive)                                                                                              |
| EID    | Element Identification number. (Integer>0)                                                                                                                                                    |
| CPNAME | Name of connectivity property, such as “X1”, X2”, “X3”, “ZOFFS”, etc. (Character)                                                                                                             |
| CPMIN  | Minimum value allowed for this property. If CPNAME references a connectivity property that can only be positive, then the default value of CPMIN is 1.0E-20. Otherwise, it is -1.0E35. (Real) |
| CPMAX  | Maximum value allowed for this property. (Real; Default =1.0E+20)                                                                                                                             |
| C0     | Constant term of relation. (Real; Default = 0.0)                                                                                                                                              |
| DVIDi  | DESVAR entry identification number. (Integer>0)                                                                                                                                               |
| COEFi  | Coefficient of linear relation. (Real)                                                                                                                                                        |

**Remarks:**

1. The relationship between the connectivity property and design variables is given by:

**1434 DVCREL1**  
**Design Variable to Connectivity Property Relation**

$$CP_j = C_0 + \sum_i COEF_i \times DVID_i$$

2. The continuation entry is required.
3. The fifth field of the entry, CPNAME, only accepts string characters. These string values must be the same as those given in the connectivity entry descriptions in this Guide. For example, if the plate offset is to be designed (CQUAD4, CTRIA3, etc), ZOFFS (case insensitive) must be specified on the CPNAME field.

**DVCREL2** Design Variable to Connectivity Property Relation

Defines the relation between a connectivity property and design variables with a user-supplied equation.

**Format:**

| 1       | 2        | 3     | 4     | 5      | 6      | 7     | 8    | 9 | 10 |
|---------|----------|-------|-------|--------|--------|-------|------|---|----|
| DVCREL2 | ID       | TYPE  | EID   | CPNAME | CPMIN  | CPMAX | EQID |   |    |
|         | "DESVAR" | DVID1 | DVID2 | DVID3  | -etc.- |       |      |   |    |
|         | "DTABLE" | LABL1 | LABL2 | LABL3  | -etc.- |       |      |   |    |

**Example:**

|         |        |      |     |    |      |     |     |  |  |
|---------|--------|------|-----|----|------|-----|-----|--|--|
| DVCREL2 | 1      | CBAR | 100 | X1 | 0.05 | 1.0 | 100 |  |  |
|         | DESVAR | 1001 |     |    |      |     |     |  |  |
|         | DTABLE | X10  |     |    |      |     |     |  |  |

**Fields:**

| Field    | Contents                                                                                                                                                                                      |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID       | Unique identification number. (Integer>0)                                                                                                                                                     |
| TYPE     | Name of an element connectivity entry, such as "CBAR", "CQUAD4", etc. (Character)                                                                                                             |
| EID      | Element Identification number. (Integer>0)                                                                                                                                                    |
| CPNAME   | Name of connectivity property, such "X1", "X2", "X3", "ZOFFS", etc. (Character)                                                                                                               |
| CPMIN    | Minimum value allowed for this property. If CPNAME references a connectivity property that can only be positive, then the default value of CPMIN is 1.0E-20. Otherwise, it is -1.0E35. (Real) |
| CPMAX    | Maximum value allowed for this property. (Real; Default =1.0E+20)                                                                                                                             |
| EQID     | DEQATN entry identification number. (Integer>0)                                                                                                                                               |
| "DESVAR" | DESVAR flag. Indicates that the IDs of DESVAR entries follow. (Character)                                                                                                                     |
| DVIDi    | DESVAR entry identification number. (Integer>0)                                                                                                                                               |

## 1436 DVCREL2 Design Variable to Connectivity Property Relation

| Field             | Contents                                                                                                                                                                     |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| COEF <sub>i</sub> | Coefficient of linear relation. (Real)                                                                                                                                       |
| “DTABLE”          | DTABLE flag. Indicates that the LABLs for the constants in a DTABLE entry follow. This field may be omitted if there are no constants involved in this relation. (Character) |
| LABL <sub>i</sub> | Label for a constant on the DTABLE entry. (Character)                                                                                                                        |

### Remarks:

1. The variable identified by DVID<sub>i</sub> and LABL<sub>i</sub> correspond to variable names (x1, x2, etc.) listed in the left-hand side of the first equation on the DEQATN entry identified by EQID. The variable names x1 through xN (where  $N = m + n$ ) are assigned in the order DVID1, DVID2, ..., DVIDm, LABL1, LABL2, ..., LABLn.
2. If both “DESVAR” and “DTABLE” are specified in field 2, “DESVAR” must appear first.
3. The fifth field of the entry, CPNAME, only accepts string characters. These string values must be the same as those given in the connectivity entry descriptions in this Guide. For example, if the plate offset is to be designed (CQUAD4, CTRIA3, etc.), ZOFFS (case insensitive) must be specified on the CPNAME field.

**DVGEOM**      Design Variable to Geometry Relation

Associates a design variable with a GMCURV or GMSURF geometry definition.

**Format:**

| 1      | 2    | 3      | 4  | 5      | 6 | 7 | 8 | 9 | 10 |
|--------|------|--------|----|--------|---|---|---|---|----|
| DVGEOM | DVID | ENTITY | ID | IDPRTB |   |   |   |   |    |

**Example:**

|        |   |        |     |     |  |  |  |  |  |
|--------|---|--------|-----|-----|--|--|--|--|--|
| DVGEOM | 4 | GMCURV | 100 | 101 |  |  |  |  |  |
|--------|---|--------|-----|-----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                          |
|--------|-----------------------------------------------------------------------------------|
| DVID   | DESVAR entry identification number. (Integer>0)                                   |
| ENTITY | Designed entity (GMCURV or GMSURF). (Character)                                   |
| ID     | Identification number of the parent entity specified by ENTITY.<br>(Integer>0)    |
| IDPRTB | Identification number of the perturbed entity specified by ENTITY.<br>(Integer>0) |

**Remarks:**

1. DVID must be defined on a DESVAR entry.

## 1438 DVGRID Design Variable to Grid Point Relation

### DVGRID Design Variable to Grid Point Relation

Defines the relationship between design variables and grid point locations.

#### Format:

| 1      | 2    | 3   | 4   | 5     | 6  | 7  | 8  | 9 | 10 |
|--------|------|-----|-----|-------|----|----|----|---|----|
| DVGRID | DVID | GID | CID | COEFF | N1 | N2 | N3 |   |    |

#### Example:

|        |   |     |   |     |     |     |     |  |  |
|--------|---|-----|---|-----|-----|-----|-----|--|--|
| DVGRID | 3 | 108 | 5 | 0.2 | 0.5 | 0.3 | 1.0 |  |  |
|--------|---|-----|---|-----|-----|-----|-----|--|--|

#### Fields:

| Field | Contents                                                                                                 |
|-------|----------------------------------------------------------------------------------------------------------|
| DVID  | DESVAR entry identification number. (Integer>0)                                                          |
| GID   | Grid point (GRID) or geometric point (POINT) identification number. (Integer>0)                          |
| CID   | Coordinate system identification number. (Integer ≥ 0; Default = 0)                                      |
| COEFF | Multiplier of the vector defined by Ni. (Real; Default = 0.0)                                            |
| Ni    | Components of the vector measured in the coordinate system defined by CID. (Real; at least one Ni ≠ 0.0) |

#### Remarks:

1. A CID of zero or blank (the default) references the basic coordinate system.
2. Multiple references to the same grid ID and design variable result in vectorial addition of the participation vectors defined by CID, COEFF, and Ni. There is no restriction on the number of DVGRID entries that may reference a given grid (GID) or design variable (DVID).
3. The coordinate update equation is given as

$$\{g\}_i - \{g\}_i^0 = \sum_j \text{COEFF}_j (X_{\text{DVID}j} - X_{\text{DVID}j}^0) \{N\}_j$$

where  $\{g\}_i$  is the location of the  $i$ -th grid,  $[g_x g_y g_z]^T$ .

The vector  $\{N\} = [N_x N_y N_z]^T$  is determined from CID and Ni. Note that it is a change in a design variable from its initial value  $X^0$ , and not the absolute value of the design variable itself, that represents a change in a grid point location,  $\{g\}_i - \{g\}_i^0$ .

4. The DVGRID entry defines the participation coefficients (basis vectors) of each design variable for each of the coordinates affected by the design process in the relationship

$$\{\Delta g\}_i = \sum_j \{T\}_{ij} \cdot \Delta X_j$$

5. DVGRID entries that reference grid points on MPCs or RSSCON entries produce incorrect sensitivities. Often the sensitivities are 0.0 which may result in a warning message indicating zero gradients which may be followed by UFM 6499. Other rigid elements produce correct results.

**1440 DVMREL1**  
**Design Variable to Material Relation**

**DVMREL1** Design Variable to Material Relation

Defines the relation between a material property and design variables.

**Format:**

| 1       | 2     | 3     | 4     | 5      | 6     | 7     | 8      | 9 | 10 |
|---------|-------|-------|-------|--------|-------|-------|--------|---|----|
| DVMREL1 | ID    | TYPE  | MID   | MPNAME | MPMIN | MPMAX | C0     |   |    |
|         | DVID1 | COEF1 | DVID2 | COEF2  | DVID3 | COEF3 | -etc.- |   |    |

**Example:**

|         |   |      |   |     |      |     |  |  |  |
|---------|---|------|---|-----|------|-----|--|--|--|
| DVMREL1 | 5 | MAT1 | 1 | RHO | 0.05 | 1.0 |  |  |  |
|         | 1 | 1.0  |   |     |      |     |  |  |  |

**Fields:**

| Field  | Contents                                                                                                                                                                                   |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID     | Unique identification number. (Integer>0)                                                                                                                                                  |
| TYPE   | Name of a material property entry, such as "MAT1", "MAT2", etc. (Character)                                                                                                                |
| MID    | Material Identification number. (Integer>0)                                                                                                                                                |
| MPNAME | Name of material property, such "E", "RHO", etc. (Character)                                                                                                                               |
| MPMIN  | Minimum value allowed for this property. If MPNAME references a material property that can only be positive, then the default value for MPMIN is 1.0E-20. Otherwise, it is -1.0E35. (Real) |
| MPMAX  | Maximum value allowed for this property. (Real; Default = 1.0E+20)                                                                                                                         |
| C0     | Constant term of relation. (Real, Default = 0.0)                                                                                                                                           |
| DVIDi  | DESVAR entry identification number. (Integer>0)                                                                                                                                            |
| COEFi  | Coefficient of linear relation. (Real)                                                                                                                                                     |

**Remarks:**

1. The relationship between the material property and design variables is given by:



$$MP_i = C_0 + \sum_i COEF_i \cdot DVID_i$$

2. The continuation entry is required.
3. The fifth field of the entry, MPNAME, only accepts string characters. It must refer to the same name as appears in the [“Bulk Data Entries”](#) for various material properties. For example, if the isotropic material density is to be design, RHO (case insensitive) must be specified on the MPNAME field.

**1442 DVMREL2**  
**Design Variable to Material Relation**

**DVMREL2**      Design Variable to Material Relation

Defines the relation between a material property and design variables with a user-supplied equation.

**Format:**

| 1       | 2      | 3     | 4     | 5      | 6      | 7     | 8    | 9 | 10 |
|---------|--------|-------|-------|--------|--------|-------|------|---|----|
| DVMREL2 | ID     | TYPE  | MID   | MPNAME | MPMIN  | MPMAX | EQID |   |    |
|         | DESVAR | DVID1 | DVID2 | DVID3  | -etc.- |       |      |   |    |
|         | DTABLE | LABL1 | LABL2 | LABL3  | -etc.- |       |      |   |    |

**Example:**

|         |        |      |   |   |      |     |     |  |  |
|---------|--------|------|---|---|------|-----|-----|--|--|
| DVMREL2 | 5      | MAT1 | 1 | E | 0.05 | 1.0 | 100 |  |  |
|         | DESVAR | 1    | 2 |   |      |     |     |  |  |
|         | DTABLE | E0   |   |   |      |     |     |  |  |

**Fields:**

| Field  | Contents                                                                                                                                                                                   |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID     | Unique identification number. (Integer>0)                                                                                                                                                  |
| TYPE   | Name of a material property entry, such as "MAT1", "MAT2", etc. (Character)                                                                                                                |
| MID    | Material Identification number. (Integer>0)                                                                                                                                                |
| MPNAME | Name of material property, such "E", "RHO", etc. (Character)                                                                                                                               |
| MPMIN  | Minimum value allowed for this property. If MPNAME references a material property that can only be positive, then the default value for MPMIN is 1.0E-20. Otherwise, it is -1.0E35. (Real) |
| MPMAX  | Maximum value allowed for this property. (Real; Default = 1.0E+20)                                                                                                                         |
| EQID   | DEQATN entry identification number. (Integer>0)                                                                                                                                            |
| DESVAR | DESVAR flag. Indicates that the IDs of DESVAR entries follow. (Character)                                                                                                                  |
| DVIDi  | DESVAR entry identification number. (Integer>0)                                                                                                                                            |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                               |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DTABLE       | DTABLE flag. Indicates that the LABELs for the constants in a DTABLE entry follow. This field may be omitted if there are no constants involved in this relation. (Character) |
| LABLi        | Label for a constant on the DTABLE entry. (Character)                                                                                                                         |

**Remarks:**

1. The variables identified by DVIDi and LABLi correspond to variable names (x1, x2, etc.) listed in the left-hand side of the first equation on the DEQATN entry identified by EQID. The variable names x1 through xN (where  $N = m + n$ ) are assigned in the order DVID1, DVID2, ..., DVIDm, LABEL1, LABEL2, ..., LABELn.
2. If both “DESVAR” and “DTABLE” are specified in field 2, “DESVAR” must appear first.
3. The fifth field of the entry, MPNAME, only accepts string characters. It must refer to the same name as appears in the [“Bulk Data Entries”](#) for various material properties. For example, if Young’s modulus is to be defined as a function of design variables, E (case insensitive) must be specified in the MPNAME field.

**1444 DVPREL1**  
**Design Variable to Property Relation**

**DVPREL1** Design Variable to Property Relation

Defines the relation between an analysis model property and design variables.

**Format:**

| 1       | 2     | 3     | 4     | 5         | 6     | 7      | 8  | 9 | 10 |
|---------|-------|-------|-------|-----------|-------|--------|----|---|----|
| DVPREL1 | ID    | TYPE  | PID   | PNAME/FID | PMIN  | PMAX   | C0 |   |    |
|         | DVID1 | COEF1 | DVID2 | COEF2     | DVID3 | -etc.- |    |   |    |

**Example:**

|         |    |      |     |      |     |     |  |  |  |
|---------|----|------|-----|------|-----|-----|--|--|--|
| DVPREL1 | 12 | PBAR | 612 | 6    | 0.2 | 3.0 |  |  |  |
|         | 4  | 0.25 | 20  | 20.0 | 5   | 0.3 |  |  |  |

**Fields:**

| Field     | Contents                                                                                                                                                                                                                                                                                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID        | Unique identification number. (Integer>0)                                                                                                                                                                                                                                                             |
| TYPE      | Name of a property entry, such as "PBAR", "PBEAM", etc. (Character)                                                                                                                                                                                                                                   |
| PID       | Property entry identification number. (Integer>0)                                                                                                                                                                                                                                                     |
| PNAME/FID | Property name, such as "T", "A", or field position of the property entry, or word position in the element property table of the analysis model. (Character or Integer ≠ 0)                                                                                                                            |
| PMIN      | Minimum value allowed for this property. If FID references a stress recovery location, then the default value for PMIN is -1.0 + 35. PMIN must be explicitly set to a negative number for properties that may be less than zero (for example, field ZO on the PCOMP entry). (Real; Default = 1.0E-20) |
| PMAX      | Maximum value allowed for this property. (Real; Default = 1.0E+20)                                                                                                                                                                                                                                    |
| C0        | Constant term of relation. (Real; Default = 0.0)                                                                                                                                                                                                                                                      |
| DVIDi     | DESVAR entry identification number. (Integer>0)                                                                                                                                                                                                                                                       |
| COEFi     | Coefficient of linear relation. (Real)                                                                                                                                                                                                                                                                |

**Remarks:**

1. The relationship between the analysis model property and design variables is given by:

$$P_i = C0 + \sum_i COEF_i \cdot DVID_i$$

2. The continuation entry is required.
3. PTYPE = "PBEND" is not supported. PTYPE="PBARL" or "PBEAML" is not supported with the FID option.
4. FID may be either a positive or a negative number. However, for PTYPE="PBEAM" or "PBUSH", FID must be negative. If FID>0, it identifies the field position on a property entry. If FID<0, it identifies the word position of an entry in the element property table. For example, to specify the area of a PBAR, either FID = +4 or FID = -3 can be used. In general, use of PNAME is recommended.
5. Designing PBEAML or PBEAM requires specification of both property name and station. [Table 14-11](#) shows several examples.

| <b>Table 14-11.</b> |                      |                 |              |                     |
|---------------------|----------------------|-----------------|--------------|---------------------|
| <b>PTYPE</b>        | <b>Property Name</b> | <b>END A</b>    | <b>END B</b> | <b>i-th Station</b> |
| PBEAML              | DMI1                 | DIM1 or DIM1(A) | DIM1(B)      | DIM1(i)             |
| PBEAM               | A                    | A or A(A)       | A(B)         | A(i)                |

Only stations that are input on a PBEAM or PBEAML entry can be referenced by a DVPREL1. For example, using an END B property name on a DVPREL1 entry when the referenced PBEAM is a constant section is not allowed.

6. The PWELD and PFAST properties are not supported.

## 1446 DVPREL2 Design Variable to Property Relation

### DVPREL2 Design Variable to Property Relation

Defines the relation between an analysis model property and design variables with a user-supplied equation.

#### Format:

| 1       | 2        | 3     | 4     | 5         | 6      | 7    | 8    | 9 | 10 |
|---------|----------|-------|-------|-----------|--------|------|------|---|----|
| DVPREL2 | ID       | TYPE  | PID   | PNAME/FID | PMIN   | PMAX | EQID |   |    |
|         | "DESVAR" | DVID1 | DVID2 | DVID3     | -etc.- |      |      |   |    |
|         | "DTABLE" | LABL1 | LABL2 | LABL3     | -etc.- |      |      |   |    |

#### Example:

|         |        |      |     |    |     |   |  |  |  |
|---------|--------|------|-----|----|-----|---|--|--|--|
| DVPREL2 | 13     | PBAR | 712 | 5  | 0.2 | 4 |  |  |  |
|         | DESVAR | 4    | 11  | 13 | 5   |   |  |  |  |
|         | DTABLE | PI   | YM  |    |     |   |  |  |  |

#### Fields:

| Field     | Contents                                                                                                                                                                                                                                                                                                 |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID        | Unique identification number. (Integer>0)                                                                                                                                                                                                                                                                |
| TYPE      | Name of a property entry, such as PBAR, PBEAM, etc. (Character)                                                                                                                                                                                                                                          |
| PID       | Property entry identification number. (Integer>0)                                                                                                                                                                                                                                                        |
| PNAME/FID | Property name, such as "T", "A", or field position of the property entry, or word position in the element property table of the analysis model. (Character or Integer ≠ 0)                                                                                                                               |
| PMIN      | Minimum value allowed for this property. If FID references a stress recovery location field, then the default value for PMIN is -1.0+35. PMIN must be explicitly set to a negative number for properties that may be less than zero (for example, field ZO on the PCOMP entry). (Real; Default = 1.E-20) |
| PMAX      | Maximum value allowed for this property. (Real; Default = 1.0E20)                                                                                                                                                                                                                                        |
| EQID      | DEQATN entry identification number. (Integer>0)                                                                                                                                                                                                                                                          |
| "DESVAR"  | DESVAR flag. Indicates that the IDs of DESVAR entries follow. (Character)                                                                                                                                                                                                                                |

| Field    | Contents                                                                                                                                                                     |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DVIDi    | DESVAR entry identification number. (Integer>0)                                                                                                                              |
| “DTABLE” | DTABLE flag. Indicates that the LABLs for the constants in a DTABLE entry follow. This field may be omitted if there are no constants involved in this relation. (Character) |
| LABLi    | Label for a constant on the DTABLE entry. (Integer>0)                                                                                                                        |

**Remarks:**

1. The variables identified by DVIDi and LABLi correspond to variable names (x1, x2, etc.) listed in the left-hand side of the first equation on the DEQATN entry identified by EQID. The variable names x1 through xN (where N = m+n) are assigned in the order DVID1, DVID2, ..., DVIDn, LABL1, LABL2, ..., LABLm.
2. If both “DESVAR” and “DTABLE” are specified in field 2, “DESVAR” must appear first.
3. FID may be either a positive or a negative number. However, for PTYPE=“PBEAM” or “PBUSH”, FID must be negative. If FID>0, it identifies the field position on a property entry. If FID<0, it identifies the word position of an entry in EPT. For example, to specify the area of a PBAR, either FID = +4 or FID = -3 may be used. In general, use of PNAME is recommended.
4. PTYPE = “PBEND” is not supported. PTYPE=“PBARL” or “PBEAML” is not supported with the FID option.
5. Designing PBEAM requires specification of both property name and station. [Table 14-12](#) shows one example.

| PTYPE | Property Name | END A     | END B | i-th Station |
|-------|---------------|-----------|-------|--------------|
| PBEAM | A             | A or A(A) | A(B)  | A(i)         |

Only stations that are input on a PBEAM entry can be referenced by a DVPREL2. For example, using an END B property name on a DVPREL2 entry when the referenced PBEAM is a constant section is not allowed.

6. The PWELD and PFAST properties are not supported.

## 1448 DVSET Design Variable Set Property

### DVSET Design Variable Set Property

Defines a set of element properties that vary in a fixed relation to a design variable for design sensitivity analysis (original DSA).

#### Format:

| 1     | 2    | 3    | 4      | 5    | 6     | 7    | 8    | 9    | 10 |
|-------|------|------|--------|------|-------|------|------|------|----|
| DVSET | VID  | TYPE | FIELD  | PREF | ALPHA | PID1 | PID2 | PID3 |    |
|       | PID4 | PID5 | -etc.- |      |       |      |      |      |    |

#### Example:

|       |     |        |   |     |    |    |     |     |  |
|-------|-----|--------|---|-----|----|----|-----|-----|--|
| DVSET | 21  | PSHELL | 4 | .20 | 1. | 99 | 101 | 110 |  |
|       | 111 | 122    |   |     |    |    |     |     |  |

#### Alternate Format and Example:

|       |     |        |       |      |       |     |        |      |  |
|-------|-----|--------|-------|------|-------|-----|--------|------|--|
| DVSET | VID | TYPE   | FIELD | PREF | ALPHA | PID | “THRU” | PID2 |  |
| DVSET | 21  | PSHELL | 4     | .20  | 1.    | 101 | THRU   | 105  |  |

|       |     |        |       |      |  |      |      |      |  |
|-------|-----|--------|-------|------|--|------|------|------|--|
| DVSET | VID | TYPE   | FIELD | MIDV |  | PID1 | PID2 | PID3 |  |
| DVSET | 21  | PSHELL | 3     | 134  |  | 87   | 101  |      |  |

#### Fields:

| Field            | Contents                                                                                                                                                                                                                      |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VID              | Identification number. (Integer>0)                                                                                                                                                                                            |
| TYPE             | Type of element property entry, e.g., “PSHELL”. See Remark 8 . (Character)                                                                                                                                                    |
| PID <sub>i</sub> | Property entry identification number. (Integer>0)                                                                                                                                                                             |
| FIELD            | Word number on the element property entry to be varied. The field number for the n-th continuation property entries is $10 \cdot n + FL$ , where FL is the field number of the continuation entry. See Remark 7 . (Integer>2) |
| PREF             | Reference value for element property. See Remark 3 . (Real $\neq$ 0.0 or blank)                                                                                                                                               |



| Field | Contents                                                                                                                                                                                     |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MIDV  | Material identification of the material property after a design change of DELTAB (See the “DVAR” entry). Note that FIELD must specify a material ID field on the property entry. (Integer>0) |
| ALPHA | Exponent, alpha, of the actual element property versus the design variable. (Real ≠ 0.0; Default = 1.0)                                                                                      |

**Remarks:**

1. DVSET is used only in design sensitivity analysis (original DSA). DVSET entries are selected by DVAR Bulk Data entries.
2. There is no restriction on the number of DVSET entries that may reference a given VID.
3. If PREF is blank, the corresponding value on the property entry will be used. PREF must be specified when the basic property value is 0.0.
4. The form of PREF is

$$P = P_0 + \text{PREF} \cdot (B^{\text{ALPHA}} - 1.0)$$

5. The form of MIDV is

$$M = M_0 + \frac{(MIDV - M_0)}{\text{DELTAB}} \cdot (B^{\text{ALPHA}} - 1.0)$$

where  $M_0$  is the material specified on the element property. For example, to determine the sensitivity of Young’s modulus, the only change between the materials  $M_0$  and MIDV would be Young’s modulus.

6. MIDV material states correspond to a design variable at  $B = (1.0 + \Delta B)$ .
7. For the CBEAM and CBEND elements, FIELD corresponds to the word number on the PBEAM or PBEND record in the EPT datablock documented in the DMAP Programmers Guide. The word number will appear as a positive in the EPT record, but should be entered as a negative on FIELD. For example, if TYPE is PBEAM, the word number for the AREA in the EPT datablock is "8". You would then enter "-8" in the FIELD column.
8. Since the DVSET entry references only property entries (“Pxxx”), only elements with property entries may be used as design variables. Elements such as

**1450 DVSET**  
**Design Variable Set Property**

CONRODs and CONM2s are therefore excluded. However, these elements may be designated as design constraints if they have force or stress output.

**DVSHAP** Design Variable to Basis Vector(s)

Defines a shape basis vector by relating a design variable identification number (DVID) to columns of a displacement matrix.

**Format:**

| 1      | 2    | 3    | 4   | 5    | 6   | 7    | 8   | 9 | 10 |
|--------|------|------|-----|------|-----|------|-----|---|----|
| DVSHAP | DVID | COL1 | SF1 | COL2 | SF2 | COL3 | SF3 |   |    |

**Example:**

|        |   |   |     |   |     |  |  |  |  |
|--------|---|---|-----|---|-----|--|--|--|--|
| DVSHAP | 2 | 1 | 2.0 | 4 | 1.0 |  |  |  |  |
|--------|---|---|-----|---|-----|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                          |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| DVID  | Design variable identification number on the DESVAR entry. (Integer>0)                                                                            |
| COLi  | Column number of the displacement matrix. See Remark 2. ( $1 \leq \text{Integer} \leq \text{maximum column number in the displacement matrix.}$ ) |
| SFi   | Scaling factor applied to the COLi-th column of the displacement matrix. (Real; Default = 1.0)                                                    |

**Remarks:**

1. DVID must be defined on a DESVAR entry.
2. COLi must be a valid column number in the displacement matrix.
3. Multiple references to the same DVID and/or COLi will result in a linear combination of displacement vectors. In the example above, the shape basis vector is a linear combination of the fourth column and twice the second column.
4. The displacement matrix must have been created by NX Nastran and be available on a database, which is attached via the DBLOCATE FMS statement shown below:

```
ASSIGN      DISPMAT=' physical filename of MASTER DBset '
DBLOCATE   DATABLK=(UG/UGD,GEOM1/GEOM1D,GEOM2/GEOM2D) ,
           LOGICAL=DISPMAT
```

**1452 EBDADD**  
**Element Birth/Death Set Combination (SOLs 601 and 701)**

**EBDADD**      Element Birth/Death Set Combination (SOLs 601 and 701)

Defines an element birth/death set as a union of element birth/death sets defined on EBDSET entries.

**Format:**

| 1      | 2    | 3   | 4   | 5     | 6 | 7 | 8 | 9 | 10 |
|--------|------|-----|-----|-------|---|---|---|---|----|
| EBDADD | BDID | BD1 | BD2 | -etc- |   |   |   |   |    |

**Example:**

|        |    |   |   |   |  |  |  |  |  |
|--------|----|---|---|---|--|--|--|--|--|
| EBDADD | 10 | 1 | 2 | 3 |  |  |  |  |  |
|--------|----|---|---|---|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                     |
|-------|----------------------------------------------------------------------------------------------|
| BDID  | Element birth/death set identification number. (Integer > 0)                                 |
| BDi   | Identification numbers of element birth/death sets defined via EBDSET entries. (Integer > 0) |

**Remarks:**

1. To include several element birth/death sets defined via EBDSET entries in a model, EBDADD must be used to combine the element birth/death sets. BDID in EBDADD is then selected with the Case Control command EBDSET.
2. BDi must be unique and may not be the identification of this or any other EBDADD entry.

**EBDSET**      Element Birth/Death Set Definition (SOLs 601 and 701)

Defines element birth and death times for a set of elements.

**Format:**

|        |      |        |        |      |      |      |      |      |    |
|--------|------|--------|--------|------|------|------|------|------|----|
| 1      | 2    | 3      | 4      | 5    | 6    | 7    | 8    | 9    | 10 |
| EBDSET | BDID | TBIRTH | TDEATH | EID1 | EID2 | EID3 | EID4 | EID5 |    |

**Continuation Format 1:**

|  |      |      |      |       |  |  |  |  |  |
|--|------|------|------|-------|--|--|--|--|--|
|  | EID6 | EID7 | EID8 | -etc- |  |  |  |  |  |
|--|------|------|------|-------|--|--|--|--|--|

**Continuation Format 2 (“THRU” option is only available on a continuation line):**

|  |      |        |      |      |     |  |  |  |  |
|--|------|--------|------|------|-----|--|--|--|--|
|  | EID6 | “THRU” | EID7 | “BY” | INC |  |  |  |  |
|--|------|--------|------|------|-----|--|--|--|--|

**Example:**

|        |    |      |     |     |     |     |     |     |  |
|--------|----|------|-----|-----|-----|-----|-----|-----|--|
| EBDSET | 3  | 0.2  | 0.5 | 101 | 201 | 300 | 400 | 450 |  |
|        | 25 | THRU | 33  |     |     |     |     |     |  |

**Fields:**

| Field            | Contents                                                                   |
|------------------|----------------------------------------------------------------------------|
| BDID             | Element birth/death set identification number. See Remark 2. (Integer > 0) |
| TBIRTH           | Element birth time. (Real ≥ 0.0; Default = 0.0)                            |
| TDEATH           | Element death time. (Real > TBIRTH; Default = 1.0E+20)                     |
| EID <sub>i</sub> | Element identification numbers. See Remark 3. (Integer > 0)                |

**Remarks:**

1. The continuation line is optional.
2. The “THRU” option is only available on a continuation line.
3. BDID may be selected by Case Control command EBDSET. If other element birth/death sets are defined, the EBDADD entry must be used to combine all the EBDSET entries.

## 1454 EBDSET

### Element Birth/Death Set Definition (SOLs 601 and 701)

4. Element birth/death may be used with the elements CROD, CONROD, CBAR, CBEAM, CQUAD, CQUAD4, CQUAD8, CQUADR, CQUADX, CQUADX4, CQUADX8, CTRAX3, CTRAX6, CTRIA3, CTRIA6, CTRIAR, CTRIAX, CHEXA, CPENTA, CPYRAM, CTETRA, CELAS1, CELAS2, CDAMP1, CDAMP2, CMASS1, CMASS2, CGAP, or CBUSH1D.

**ECHOFF** Deactivate Printed Echo

Marks the point or points in the input file to deactivate printed echo of the Bulk Data.

**Format:**

| 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------|---|---|---|---|---|---|---|---|----|
| ECHOFF |   |   |   |   |   |   |   |   |    |

**Example:**

|        |  |  |  |  |  |  |  |  |  |
|--------|--|--|--|--|--|--|--|--|--|
| ECHOFF |  |  |  |  |  |  |  |  |  |
|--------|--|--|--|--|--|--|--|--|--|

**Remarks:**

1. This entry may also be used in the Executive Control and Case Control Sections. It is described in the [“Case Control Commands”](#).
2. The companion to this entry is the ECHOON entry.

**1456 ECHOON**  
Activate Printed Echo

**ECHOON**      Activate Printed Echo

Marks the point or points in the input file to activate printed echo of the Bulk Data.

**Format:**

| 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------|---|---|---|---|---|---|---|---|----|
| ECHOON |   |   |   |   |   |   |   |   |    |

**Example:**

|        |  |  |  |  |  |  |  |  |  |
|--------|--|--|--|--|--|--|--|--|--|
| ECHOON |  |  |  |  |  |  |  |  |  |
|--------|--|--|--|--|--|--|--|--|--|

**Remarks:**

1. This entry may also be used in the Executive Control and Case Control Sections. It is described in [“Case Control Commands”](#).
2. The companion to this entry is the ECHOOFF entry.



**EIGB** Buckling Analysis Set

Defines data needed to perform buckling analysis.

**Format:**

| 1    | 2    | 3      | 4  | 5  | 6   | 7   | 8   | 9 | 10 |
|------|------|--------|----|----|-----|-----|-----|---|----|
| EIGB | SID  | METHOD | L1 | L2 | NEP | NDP | NDN |   |    |
|      | NORM | G      | C  |    |     |     |     |   |    |

**Example:**

|      |     |      |     |     |   |   |   |  |  |
|------|-----|------|-----|-----|---|---|---|--|--|
| EIGB | 13  | SINV | 0.1 | 2.5 | 2 | 1 | 1 |  |  |
|      | MAX |      |     |     |   |   |   |  |  |

**Fields:**

| Field    | Contents                                                                                                                                                                                                                                                                                                                                                                    |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID      | Set identification number. (Unique Integer>0)                                                                                                                                                                                                                                                                                                                               |
| METHOD   | Method of eigenvalue extraction. (Character: "SINV" for enhanced inverse power method.)                                                                                                                                                                                                                                                                                     |
| L1, L2   | Eigenvalue range of interest. (Real, L1<L2)                                                                                                                                                                                                                                                                                                                                 |
| NEP      | Estimate of number of roots in positive range not used for METHOD = "SINV". (Integer>0)                                                                                                                                                                                                                                                                                     |
| NDP, NDN | Desired number of positive and negative roots. (Integer>0; Default = 3*NEP)                                                                                                                                                                                                                                                                                                 |
| NORM     | Method for normalizing eigenvectors. (Character: "MAX" or "POINT"; Default = "MAX")<br><br>MAX - Normalize eigenvectors to the unit value of the largest component in the analysis set. (Default).<br><br>POINT - Normalize eigenvectors to the unit value of the component defined in G and C fields. The value for NORM defaults to MAX if the defined component is zero. |
| G        | Grid or scalar point identification number. Required only if NORM = "POINT". (Integer>0)                                                                                                                                                                                                                                                                                    |

## 1458 EIGB Buckling Analysis Set

| Field | Contents                                                                                                            |
|-------|---------------------------------------------------------------------------------------------------------------------|
| C     | Component number. Required only if NORM="POINT" and G is a geometric grid point. ( $1 \leq \text{Integer} \leq 6$ ) |

### Remarks:

1. The EIGB entry must be selected with the Case Control command METHOD = SID.
2. Each eigenvalue is the factor by which the prebuckling state of stress is multiplied to produce buckling in the shape defined by the corresponding eigenvector.
3. The continuation entry is optional. If the continuation is not specified, than NORM = "MAX" normalization is performed.
4. See *The Nastran Theoretical Manual* for a discussion of convergence criteria.
5. If NORM = "MAX", components that are not in the analysis set may have values larger than unity.
6. The SINV method uses Sturm sequence techniques to ensure that all roots in the range have been found.
7. Convergence is achieved at  $10^{-6}$ .

**EIGC**      Complex Eigenvalue Extraction Data

Defines data needed to perform complex eigenvalue analysis.

**Format:**

|      |     |        |      |   |   |   |     |   |    |
|------|-----|--------|------|---|---|---|-----|---|----|
| 1    | 2   | 3      | 4    | 5 | 6 | 7 | 8   | 9 | 10 |
| EIGC | SID | METHOD | NORM | G | C | E | ND0 |   |    |

The following continuation is repeated for each desired search region. (J = 1 to n, where n is the number of search regions.)

|  |         |         |         |         |    |     |     |  |  |
|--|---------|---------|---------|---------|----|-----|-----|--|--|
|  | ALPHAAJ | OMEGAAJ | ALPHABJ | OMEGABJ | LJ | NEJ | NDJ |  |  |
|--|---------|---------|---------|---------|----|-----|-----|--|--|

**Alternate Format for Continuation Entry for Block Complex Lanczos:**

|  |         |         |        |        |        |  |     |  |  |
|--|---------|---------|--------|--------|--------|--|-----|--|--|
|  | ALPHAAJ | OMEGAAJ | MBLKSZ | IBLKSZ | KSTEPS |  | NJi |  |  |
|--|---------|---------|--------|--------|--------|--|-----|--|--|

**Alternate Format for Continuation Entry for ISRR:**

|  |         |         |  |  |  |         |     |  |  |
|--|---------|---------|--|--|--|---------|-----|--|--|
|  | ALPHACJ | OMEGACJ |  |  |  | ISRRFLG | NJi |  |  |
|--|---------|---------|--|--|--|---------|-----|--|--|

**Example:**

|      |    |      |  |  |  |  |   |  |  |
|------|----|------|--|--|--|--|---|--|--|
| EIGC | 14 | CLAN |  |  |  |  |   |  |  |
|      |    | +5.6 |  |  |  |  | 4 |  |  |
|      |    | -5.5 |  |  |  |  | 3 |  |  |

|      |      |      |  |  |  |   |   |  |  |
|------|------|------|--|--|--|---|---|--|--|
| EIGC | 15   | ISRR |  |  |  |   |   |  |  |
|      | -1.0 | 0.0  |  |  |  | 3 | 4 |  |  |

|      |    |      |  |  |  |  |   |  |  |
|------|----|------|--|--|--|--|---|--|--|
| EIGC | 16 | HESS |  |  |  |  | 6 |  |  |
|------|----|------|--|--|--|--|---|--|--|

**Fields:**


| Field  | Contents                                                                              |
|--------|---------------------------------------------------------------------------------------|
| SID    | Set identification number. (Unique Integer>0)                                         |
| METHOD | Method of complex eigenvalue extraction. (Character: "INV," "HESS," "CLAN" or "ISRR") |
| INV    | Inverse power.                                                                        |

## 1460 EIGC Complex Eigenvalue Extraction Data

| Field   | Contents                                                                                                                                                                                                                                                                 |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | HESS Upper Hessenberg. See Remark 2 .                                                                                                                                                                                                                                    |
|         | CLAN Complex Lanczos. See Remark 10 .                                                                                                                                                                                                                                    |
|         | ISRR Iterative Schur-Rayleigh-Ritz. See Remark 3 .                                                                                                                                                                                                                       |
| NORM    | Method for normalizing eigenvectors. See Remark 9 . (Character: “MAX” or “POINT”; Default = “MAX”) and “Normalization Options” in the <i>NX Nastran Numerical Methods User’s Guide</i>                                                                                   |
|         | MAX Normalize the component having the largest magnitude to a unit value for the real part and a zero value for the imaginary part.                                                                                                                                      |
|         | POINT Normalize the component defined in fields 5 and 6 to a unit value for the real part and a zero value for the imaginary part. The value for NORM defaults to “MAX” if the magnitude of the defined component is zero. “POINT” is available only for METHOD = “DET”. |
| G       | Grid or scalar point identification number. Required if and only if NORM = “POINT”. (Integer>0)                                                                                                                                                                          |
| C       | Component number. Required if and only if NORM = “POINT” and G is a geometric grid point. (0 ≤ Integer ≤ 6)                                                                                                                                                              |
| E       | Convergence criterion. (Real ≥ 0.0)<br>Default values are:<br>= 10 <sup>-4</sup> for METHOD = “INV”<br>= 10 <sup>-15</sup> for METHOD = “HESS”<br>= 10 <sup>-8</sup> for METHOD = “ISRR”<br>E is machine dependent for METHOD = “CLAN”.)                                 |
| MBLKSZ  | Maximum block size. See Remark 13 . (Default = 7, Real ≥ 0.0)                                                                                                                                                                                                            |
| IBLKSZ  | Initial block size. (Default = See Remark 14 , Real ≥ 0.0)                                                                                                                                                                                                               |
| KSTEPS  | Frequency of solve. (Default = 5, Integer>0)                                                                                                                                                                                                                             |
| ISRRFLG | Used only for ISRR (See remark 15 . ) (Default=0, Integer≥0)                                                                                                                                                                                                             |
| ALPHACJ | Used only for ISRR (See remark 15 . )                                                                                                                                                                                                                                    |
| OMEGACJ | Used only for ISRR (See remark 15 . )                                                                                                                                                                                                                                    |

| <b>Table 14-13. Relationship Between METHOD Field and Other Fields</b>    |                                              |                                                                                  |                                                                                            |                                                  |
|---------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------|
| Field                                                                     | METHOD Field                                 |                                                                                  |                                                                                            |                                                  |
|                                                                           | HESS                                         | INV                                                                              | CLAN                                                                                       | ISRR                                             |
| NDj (Integer>0)                                                           | Desired number of eigenvectors. (No default) | Desired number of roots and eigenvectors in j-th search region.(Default = 3*NEj) | Desired number of roots and eigenvectors to be extracted at j-th shift point. (No default) | Desired number of eigenvectors. (No default)     |
| ALPHAAj<br>OMEGAAj Real and imaginary parts of Aj in radians/time (Real). | Not used                                     | End point Aj of j-th search region in complex plane. (Default = 0.0)             | j-th shift point.(Default = 0.0)                                                           | Fields have alternate meaning (See remark 15 . ) |
| ALPHABj<br>OMEGABj Real and imaginary parts of Bj in radians/time (Real). | Not used                                     | End point Bj of j-th search region in complex plane. (Default = 0.0)             | See alternate definition below.                                                            | Not used                                         |
| Lj (Real>0.0)                                                             | Not used                                     | Width of j-th search region. (Default = 1.0)                                     | See alternate definition below.                                                            | Not used                                         |
| NEj (Integer>0)                                                           | Not used                                     | Estimated number of roots in j-th search region. (Default = 0)                   | Not used                                                                                   | Not used                                         |
| MBLKSZ<br>For block CLAN only                                             | Not used                                     | Not used                                                                         | Maximum Block SizeDefault = 7                                                              | Not used                                         |
| IBLKSZ<br>For block CLAN only                                             | Not used                                     | Not used                                                                         | Initial Block SizeDefault = 2                                                              | Not used                                         |

**1462 EIGC**  
**Complex Eigenvalue Extraction Data**

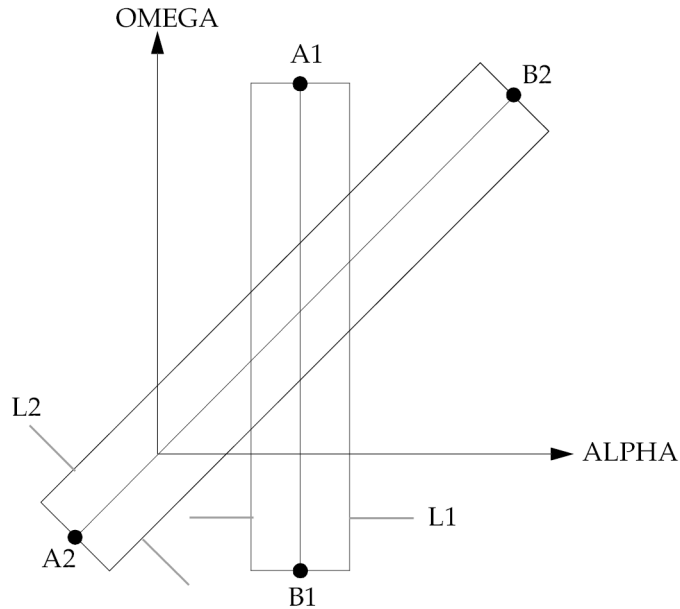

**Figure 14-2. Sample Search Regions**

**Remarks:**

1. The EIGC entry must be selected in the Case Control Section with the command CMETHOD = SID. Methods of solution are also controlled by SYSTEM(108) on the NASTRAN statements (described in [“nastran Command and NASTRAN Statement”](#) ).

| <b>SYSTEM(108)</b> | <b>Specification</b>                                                                                      |
|--------------------|-----------------------------------------------------------------------------------------------------------|
| 0                  | QZ HESS method or CLAN block Lanczos, as selected by EIGC entry or equivalent PARAM input. Default value. |
| 1(default)         | Force Householder QR (Hessenberg with spill, mass matrix must be nonsingular)                             |
| 2                  | Force old single vector complex Lanczos                                                                   |
| 4                  | Force new block complex Lanczos                                                                           |
| 8                  | Debugging output for Lanczos methods                                                                      |
| 16                 | Turn off block reduction in block complex Lanczos                                                         |
| 32                 | Turn off block augmentation in block complex Lanczos                                                      |
| 64                 | Turn off full orthogonality in block complex Lanczos                                                      |

| SYSTEM(108) | Specification                                                          |
|-------------|------------------------------------------------------------------------|
| 128         | Turn off preprocessing of initial vectors in block complex Lanczos     |
| 256         | Force LR method (Hessenberg, no spill, mass matrix must be invertible) |
| 512         | Force QZ method                                                        |
| 65536       | Use semi-algebraic sort on imaginary part of roots (pre-V70.6 sort)    |

The word “force” above implies that the method selected by the system cell will be used even when another method has been selected on an EIGC entry. Sums of these values will produce two or more actions at once, when feasible. As the numbers get larger, the function is more developer-oriented than user-oriented.

2. The “HESS” method is generally more reliable and economical for small and moderate-size problems. It computes all eigenvalues and ND eigenvectors.
3. The “ISRR” method works well on sparse matrices, confines the search region to a circle centered on the origin of the complex plane, and provides some reliability that all modes within the circle have been found.
4. The EIGC entry may or may not require continuations as noted below.
  - For the “HESS” method, continuations are not required; and their contents are ignored when present, except for ND1. However, it is recommended that continuations are not used.
  - For the “CLAN” method when the continuation entry is not used a shift is calculated automatically. When a shift is input on the first continuation entry it is used as the initial shift. Only one shift is used. Data on other continuation entries is ignored.
  - For METHOD = “INV”, each continuation defines a rectangular search region. Any number of regions may be used and they may overlap. Roots in overlapping regions will not be extracted more than once.
  - For METHOD = “ISRR” continuation, see Remark 15 .
  - For all methods, if no continuation is present, then ND0 must be specified on the first entry. If a continuation is present, then NDj must be specified on the continuation and not on the first entry.
5. The units of ALPHA AJ, OMEGA AJ, ALPHA BJ, and OMEGA BJ are radians per unit time.

## 1464 EIGC Complex Eigenvalue Extraction Data

6. See *The NASTRAN Theoretical Manual* for a discussion of convergence criteria and the search procedure with the INV method.
7. DIAG 12 prints diagnostics for the inverse power method, the complex Lanczos method, the QZ HESS method and the ISRR method.
8. If METHOD = "HESS" and the LR or QR methods (non-default methods) are selected by system cell 108 the mass matrix must be nonsingular. The method does not require nonsingular mass matrix.
9. The normalized eigenvectors may be output with the SDISPLACEMENT and/or DISPLACEMENT Case Control commands.
10. When using METHOD = CLAN, the following should be noted. The modern CLAN method (default for METHOD entry of CLAN) has been enhanced to include a block complex Lanczos approach. This method is more reliable and will not accept inaccurate roots which the old method had a tendency to do. Thus, given the same input, the new method may often accept fewer roots. For continuity the old method has been maintained and may be selected by setting SYSTEM(108).
11. The SVD method is provided for DMAP applications. If used in solution 107 or 110, and mass or damping terms are present, a user fatal exit is taken. The SVD operation decomposes the input stiffness matrix  $K$  into the factors  $U$ ,  $S$ , and  $V$ .  $U$  and  $V$  are collections of vectors of orthogonal functions.  $S$  is a rectangular matrix with terms on the diagonal of its left partition. The factors satisfy the equation  $K = U^*S^*V^T$ , where "\*" implies complex conjugate transpose. The ND1 value has a meaning for the SVD functions which differs from eigensolution.

| ND1 | OUTPUT                                                                                                                                                                                                                                                                                                                             |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| >0  | All vectors of U and V are output.                                                                                                                                                                                                                                                                                                 |
| =0  | U and V are returned in a purged state.                                                                                                                                                                                                                                                                                            |
| <0  | S is returned as a square matrix whose number of columns is equal to the minimum number of rows or columns of the input matrix. U and V are truncated to be commensurate with S. This is a method to reduce the costs of solving very rectangular input matrices by providing a partial solution for the most interesting vectors. |

12. For DMAP applications there are input parameters, not present in the solution sequences, that may be used to replace the function of the EIGC and CMETHOD entries.



13. The MBLKSZ and IBKLSZ parameters are integers in concept, but must be input at real numbers (that is, with a decimal point). They represent maximum sizes, and may be reduced internally for small size problems.
14. The initial block size (IBKLSZ) default is as follows:  
 If  $N < 1000$ , IBKLSZ = 1.  
 If  $N < 50,000$ , IBKLSZ = 2.  
 If  $N < 100,000$ , IBKLSZ = 4.
15. Using the METHOD=ISRR alternate continuation card, field 7 (ISRRFLG) can be used to define the following instructions;

| ISRRFLG     | Instruction                                                                                                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 (default) | All of the options below are disabled.                                                                                                                                                                                           |
| 1           | Reserves fields 2 (ALPHACJ) and 3 (OMEGACJ) for a user supplied shift. Shift does not redefine search region, only used during decomposition to avoid a singularity. The use of the shift is recommended for better performance. |
| 2           | Forces the out-of-core path in the code.                                                                                                                                                                                         |
| 4           | Overrides system cell 405.                                                                                                                                                                                                       |
| 8           | Forces balanced iteration for real unsymmetrical problems only.                                                                                                                                                                  |
| 16          | Forces generation of starting vectors for quadratic problems from the values found for the linear case when damping is ignored. In all other cases, the starting vectors are randomly generated.                                 |
| M * 32      | Forces the maximum size of the subspace to M vectors.                                                                                                                                                                            |

The above ISRRFLG values may be added to obtain a combination of settings. For example ISRRFLG = 323 would indicate options “1”, “2” and a maximum subspace of 10 vectors (1 + 2 + (10\*32) = 323).

#### Alternate EIGC Bulk Data Entry

The following alternate format is valid for all methods except inverse power:

| 1                                                  | 2   | 3      | 4    | 5 | 6 | 7 | 8   | 9 | 10 |
|----------------------------------------------------|-----|--------|------|---|---|---|-----|---|----|
| EIGC                                               | SID | METHOD | NORM | G | C | E | ND0 |   |    |
| KEYWORD1=<value> KEYWORD2=<value> KEYWORD3=<value> |     |        |      |   |   |   |     |   |    |

## 1466 EIGC Complex Eigenvalue Extraction Data

where KEYWORD may be any of the parameters from the original entry except SID, as well as:

|         |                                                                                   |
|---------|-----------------------------------------------------------------------------------|
| NDj     | Number of desired roots at shift j. (Integer>0).                                  |
| SHIFTRj | The real part of shift j. (Real)                                                  |
| SHIFTIj | The imaginary part of shift j. (Real)                                             |
| KSTEPSj | Block tridiagonal solution frequency at shift j; (only block Lanczos).(Integer>0) |
| MBLKSZj | Maximum block size at shift j; (only block Lanczos). (Integer>0)                  |
| IBLKSZj | Initial block size at shift j; (only block Lanczos). (Integer>0)                  |

### Note

In the parameters above, the value of j ranges from 1 to 10.

Example:

|                                                        |   |      |  |  |  |  |  |  |  |
|--------------------------------------------------------|---|------|--|--|--|--|--|--|--|
| EIGC                                                   | 1 | CLAN |  |  |  |  |  |  |  |
| eps=1.E-12, nd1=12, shiftr1=0, shifti1=2.4E2           |   |      |  |  |  |  |  |  |  |
| EIGC                                                   | 2 | HESS |  |  |  |  |  |  |  |
| ND1=10                                                 |   |      |  |  |  |  |  |  |  |
| EIGC                                                   | 3 | CLAN |  |  |  |  |  |  |  |
| shiftr1=0.0, shifti1=20., nd1=5, iblksz1=2, mblksz1=5  |   |      |  |  |  |  |  |  |  |
| shiftr2=0.0, shifti2=50., nd2=5, iblksz2=2, mblksz2=5  |   |      |  |  |  |  |  |  |  |
| shiftr3=0.0, shifti3=100., nd3=5, iblksz3=1, mblksz3=5 |   |      |  |  |  |  |  |  |  |

### Remarks about alternate entry options:

1. The first of the keyword-driven continuation entry must be blank.
2. If any of the parameters METHOD, NORM, G, C, EPS, or ND1 are specified on the continuation entry, the corresponding field on the original entry must be blank.
3. A maximum of 10 shifts may be specified.

**EIGP** Poles in Complex Plane

Defines poles that are used in complex eigenvalue extraction by the Determinant method.

**Format:**

| 1    | 2   | 3      | 4      | 5  | 6      | 7      | 8  | 9 | 10 |
|------|-----|--------|--------|----|--------|--------|----|---|----|
| EIGP | SID | ALPHA1 | OMEGA1 | M1 | ALPHA2 | OMEGA2 | M2 |   |    |

**Example:**

|      |    |      |     |   |     |     |   |  |  |
|------|----|------|-----|---|-----|-----|---|--|--|
| EIGP | 15 | -5.2 | 0.0 | 2 | 6.3 | 5.5 | 3 |  |  |
|------|----|------|-----|---|-----|-----|---|--|--|

**Fields:**

| Field                                   | Contents                                                                                                         |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------|
| SID                                     | Set identification number. (Integer>0)                                                                           |
| ALPHA <sub>i</sub> , OMEGA <sub>i</sub> | Coordinates of point in complex plane. (Real)                                                                    |
| M <sub>i</sub>                          | Multiplicity of complex root at pole defined by point at ALPHA <sub>i</sub> and OMEGA <sub>i</sub> . (Integer>0) |

**Remarks:**

1. The EIGP entry defines poles in the complex plane that are used with an associated EIGC entry having the same set number.
2. The units of ALPHA<sub>i</sub> and OMEGA<sub>i</sub> are radians per unit time.
3. Poles are used only in the determinant method. (METHOD = "DET" on the EIGC entry).
4. One or two poles may be defined on a single entry.
5. See *The NASTRAN Theoretical Manual*.

**1468 EIGR**  
**Real Eigenvalue Extraction Data**

**EIGR** Real Eigenvalue Extraction Data

Defines data needed to perform real eigenvalue analysis.

**Format:**

| 1    | 2    | 3      | 4  | 5  | 6  | 7  | 8 | 9 | 10 |
|------|------|--------|----|----|----|----|---|---|----|
| EIGR | SID  | METHOD | F1 | F2 | NE | ND |   |   |    |
|      | NORM | G      | C  |    |    |    |   |   |    |

**Example:**

|      |    |     |  |  |  |    |  |  |  |
|------|----|-----|--|--|--|----|--|--|--|
| EIGR | 13 | LAN |  |  |  | 12 |  |  |  |
|------|----|-----|--|--|--|----|--|--|--|

**Fields:**

**Field Contents**

SID Set identification number. (Unique Integer>0)

METHOD Method of eigenvalue extraction.(Character)

Modern Methods:

LAN Lanczos Method

AHOU Automatic selection of HOU or MHOu method. See Remark [13](#) .

Obsolete Methods:

INV Inverse Power method.

SINV Inverse Power method with enhancements.

GIV Givens method of tridiagonalization.

MGIV Modified Givens method.

HOU Householder method of tridiagonalization.

MHOu Modified Householder method.

AGIV Automatic selection of METHOD = "GIV" or "MGIV". See Remark [13](#) .

| <b>Field</b> | <b>Contents</b>                                                                                                                              |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| NORM         | Method for normalizing eigenvectors. (Character: "MASS," "MAX," or "POINT"; Default = "MASS")                                                |
| MASS         | Normalize to unit value of the generalized mass. (Default)                                                                                   |
| MAX          | Normalize to unit value of the largest component in the analysis set.                                                                        |
| POINT        | Normalize to a positive or negative unit value of the component defined in fields 3 and 4 (defaults to "MASS" if defined component is zero). |
| G            | Grid or scalar point identification number. Required only if NORM = "POINT". (Integer>0)                                                     |
| C            | Component number. Required only if NORM = "POINT" and G is a geometric grid point. (1 ≤ Integer ≤ 6)                                         |

**Table 14-14. Relationship Between METHOD Field and Other Fields for Obsolete Methods**

| Field  | METHOD Field                                                                                                                                                                                           |                                                                                                                                                                                                                                                                      |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | INV or SINV                                                                                                                                                                                            | GIV, MGIV, HOU, or MHO                                                                                                                                                                                                                                               |
| F1, F2 | Frequency range of interest. F1 must be input. If METHOD = "SINV" and ND, is blank, then F2 must be input. (Real ≥ 0.0)                                                                                | Frequency range of interest. Eigenvectors are found with natural frequencies that lie in the range between F1 and F2. If ND is not blank, at most ND eigenvectors are found. (Real ≥ 0.0; F1<F2)                                                                     |
| NE     | Estimate of number of roots in range (Required for METHOD = "INV"). Not used by "SINV" method. (Integer>0)                                                                                             | Not used.                                                                                                                                                                                                                                                            |
| ND     | Desired number of roots. If this field is blank and METHOD = "SINV", then all roots between F1 and F2 are searched and the limit is 600 roots. (Integer>0, Default is 3 ≠ NE for METHOD = "INV" only.) | Desired number of eigenvectors. If ND is zero, the number of eigenvectors is determined from F1 and F2. If all three are blank, then ND is automatically set to one more than the number of degrees-of-freedom listed on SUPORTi entries. (Integer ≥ 0; Default = 0) |

## 1470 EIGR Real Eigenvalue Extraction Data

### Remarks:

1. The EIGR entry must be selected with the Case Control command METHOD = SID.
2. See “**Real Eigenvalue Analysis**” in the *NX Nastran Basic Dynamic Analysis User’s Guide* for a discussion of method selection.
3. The units of F1 and F2 are cycles per unit time.
4. The continuation entry is optional. If the continuation entry is not specified, then mass normalization is performed.
5. The contemporary methods are LAN and AHOU. The other methods are in a maintenance-only status, with no enhancements planned for them. They may be eliminated in a future release.
6. The LAN method is the most general-purpose method, and may be used on both small- and large-size problems. It takes advantage of sparsity of input matrices, leading to greater efficiency on large-size problems. Because Lanczos performance is tuned for medium to large problems, this has caused difficulties with very small problems. Thus, by default, on problems with fewer than 20 degrees-of-freedom when the LAN method is selected, the method is switched to AHOU. The criteria for automatic switching is controlled by SYSTEM(359) on the NASTRAN entry. The NE, G, and C fields are ignored for the LAN method. The NORM field may be set to MASS (the default value) or NORM. The conventions used when both the Fi and ND fields are specified are described in Table 1 of the EIGRL entry description. The EIGRL entry is an alternate method to select the LAN method. It has several other input options for special cases. When both EIGRL and EIGR have the same SID and that SID is selected by a METHOD command the EIGRL entry takes precedence.
7. The AHOU method is competitive with the LAN method when there are small, dense matrices and many eigenvectors are required. This most commonly occurs when static or dynamic reduction is performed. The AHOU method does not take advantage of matrix sparsity, so that computation cost rises with the cube of the number of DOFs. The AHOU method responds to all permitted values for all the other fields except NE, which is ignored.
8. All methods require a positive semi-definite (psd) mass matrix for stable solutions. The mass matrix may be tested for this condition for all methods of solution by setting SYSTEM(303). A value of “-4” should be sufficient to identify problem matrices. A fatal error exit is taken when it is not met. All NX Nastran metric elements are designed to produce psd mass matrices. CMASSi elements, DMIG matrices selected by the M2GG command, and matrices input via INPUTT4 are special methods that allow addition of non-psd terms by use of

non-metric element input. If none of this type of special input is present and the fatal error exit is taken you may have encountered an error in a metric element. Contact a Technical Support representative for corrective action in this case.

9. The LAN and AHOU methods allow singular but psd mass matrices.
10. The tridiagonal methods include the xGIV and xHOU methods, where “x” is described in the following comments. All tridiagonal methods compute all eigenvalues, and the number of eigenvectors specified by the Fi and Nd fields, as described in Table 14-14 above.
11. If “x” is blank (for example, the HOU method is selected) the mass matrix must be non-singular.
12. If “x” is M (for example, the MHOU method is selected) the mass matrix may be singular. A modified, shifted problem is solved in an inverse basis with this method. Some precision in the solution and longer computation time is exchanged for a more stable solution.
13. If “x” is A (for example, the AHOU method is selected) an attempt is made to solve the problem without shifting, in the interest of cost reduction and maximum precision. If the mass matrix is determined to be poorly conditioned for inversion the basis is automatically shifted with the modified method.
14. If NORM = “MAX”, components that are not in the analysis set may have values larger than unity.
15. If NORM = “POINT”, the selected component should be in the analysis set (a-set). (The program uses NORM = “MAX” when it is not in the analysis set.) The displacement value at the selected component will be positive or negative unity.
16. The “SINV” method is an enhanced version of the “INV” method. It uses Sturm sequence number techniques to make it more likely that all roots in the range have been found. It is generally more reliable and more efficient than the “INV” method.
17. For the “INV” and “SINV” methods, convergence is achieved at  $10^{-6}$ . Convergence is tested by other criteria for the other methods.
18. For the “SINV” method only, if F2 is blank, the first shift will be made at F1, and only one eigensolution above F1 will be calculated. If there are no modes below F1, it is likely that the first mode will be calculated. If there are modes below F1 (including rigid body modes defined by SUPORT entries), a mode higher than the first mode above F1 may be calculated.

**1472 EIGR**  
**Real Eigenvalue Extraction Data**

19. When F1, F2, and ND are all zero or blank, ND is reset to 1. A User Warning Message is produced for this condition, which is interpreted as likely to be due to an inadvertent omission by the user.



**EIGRL** Real Eigenvalue Extraction Data, Lanczos Method

Defines data needed to perform real eigenvalue (vibration or buckling) analysis with the Lanczos method.

**Format:**

| 1     | 2                                           | 3  | 4  | 5  | 6      | 7      | 8      | 9    | 10 |
|-------|---------------------------------------------|----|----|----|--------|--------|--------|------|----|
| EIGRL | SID                                         | V1 | V2 | ND | MSGVLV | MAXSET | SHFSCL | NORM |    |
|       | option_1 = value_1 option_2 = value_2, etc. |    |    |    |        |        |        |      |    |

**Example:**

|       |                 |     |     |    |  |  |  |  |  |
|-------|-----------------|-----|-----|----|--|--|--|--|--|
| EIGRL | 1               | 0.1 | 3.2 | 10 |  |  |  |  |  |
|       | NORM=MAX NUMS=2 |     |     |    |  |  |  |  |  |

**Fields:**

| Field  | Contents                                                                                                                                                                                          |      |                                                                                                                            |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------------------------------------------------------------------------------------------------------------------|
| SID    | Set identification number. (Unique Integer>0)                                                                                                                                                     |      |                                                                                                                            |
| V1, V2 | For vibration analysis: frequency range of interest. For buckling analysis: eigenvalue range of interest. See Remark 4. (Real or blank, $-5 \times 10^{16} \leq V1 < V2 \leq 5. \times 10^{16}$ ) |      |                                                                                                                            |
| ND     | Number of roots desired. See Remark 4. (Integer>0 or blank)                                                                                                                                       |      |                                                                                                                            |
| MSGVLV | Diagnostic level. ( $0 \leq \text{Integer} \leq 4$ ; Default = 0)                                                                                                                                 |      |                                                                                                                            |
| MAXSET | Number of vectors in block or set. Default is machine dependent. See Remark 14.                                                                                                                   |      |                                                                                                                            |
| SHFSCL | Estimate of the first flexible mode natural frequency. See Remark 10. (Real or blank)                                                                                                             |      |                                                                                                                            |
| NORM   | Method for normalizing eigenvectors (Character: "MASS" or "MAX")                                                                                                                                  |      |                                                                                                                            |
|        | <table> <tr> <td>MASS</td> <td>Normalize to unit value of the generalized mass. Not available for buckling analysis. (Default for normal modes analysis.)</td> </tr> </table>                     | MASS | Normalize to unit value of the generalized mass. Not available for buckling analysis. (Default for normal modes analysis.) |
| MASS   | Normalize to unit value of the generalized mass. Not available for buckling analysis. (Default for normal modes analysis.)                                                                        |      |                                                                                                                            |

**1474 EIGRL**  
**Real Eigenvalue Extraction Data, Lanczos Method**

| Field                | Contents                                                                                                                                                                                                                                                        |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                      | <p>MAX                    Normalize to unit value of the largest displacement in the analysis set. Displacements not in the analysis set may be larger than unity. (Default for buckling analysis.)</p>                                                         |
| ALPH                 | <p>Specifies a constant for the calculation of frequencies (Fi) at the upper boundary segments for the parallel method based on the following formula. See Remark 13. (0.0 &lt; Real ≤ 1.0; Default = 1.0):</p>                                                 |
|                      | $\text{ALPH} < 1.0, \quad Fi = V1 + (V2 - V1) \frac{1 - \text{ALPH}^i}{1 - \text{ALPH}^{\text{NUMS}}}$                                                                                                                                                          |
|                      | $\text{ALPH} = 1.0, \quad Fi = V1 + (V2 - V1) \left( \frac{i}{\text{NUMS}} \right)$                                                                                                                                                                             |
| NUMS                 | <p>Number of frequency segments for the multisegment method (serial only). (Integer&gt;0; Default = 1) See Remark 19.</p>                                                                                                                                       |
| Fi                   | <p>Frequency at the upper boundary of the i-th segment. See Remark 13. (Real or blank; V1&lt;F1&lt;F2&lt;... F15&lt;V2)</p>                                                                                                                                     |
| option_i=<br>value_i | <p>Assigns a value to the fields above except for SID. ALPH, NUMS, and Fi must be specified in this format. V1, V2, ND, MSGLVL, MAXSET, SHFSCL, and NORM may be specified in this format as long as their corresponding field is blank in the parent entry.</p> |

**Remarks:**

1. Real eigenvalue extraction data sets must be selected with the Case Control command METHOD = SID.
2. The units of V1 and V2 are cycles per unit time in vibration analysis, and are eigenvalues in buckling analysis. Each eigenvalue is the factor by which the prebuckling state of stress is multiplied to produce buckling in the shape defined by the corresponding eigenvector.
3. NORM = "MASS" is ignored in buckling analysis and NORM = "MAX" will be applied.
4. The roots are found in order of increasing magnitude; that is, those closest to zero are found first. V2 should be set to a physically meaningful upper bound on

the desired eigenvalues, or omitted. Extremely large values of V2 may result in a fatal message, depending on the model. The number and type of roots to be found can be determined from [Table 14-15](#).

| <b>Table 14-15. Number and Type of Roots Found with EIGRL Entry</b> |           |           |                                                  |
|---------------------------------------------------------------------|-----------|-----------|--------------------------------------------------|
| <b>V1</b>                                                           | <b>V2</b> | <b>ND</b> | <b>Number and Type of Roots Found</b>            |
| V1                                                                  | V2        | ND        | Lowest ND or all in range, whichever is smaller. |
| V1                                                                  | V2        | blank     | All in range                                     |
| V1                                                                  | blank     | ND        | Lowest ND in range [V1,+∞]                       |
| V1                                                                  | blank     | blank     | Lowest root in range [V1,+∞]                     |
| blank                                                               | blank     | ND        | Lowest ND roots in [-∞,+∞]                       |
| blank                                                               | blank     | blank     | Lowest root. See Remark 11.                      |
| blank                                                               | V2        | ND        | Lowest ND roots below V2                         |
| blank                                                               | V2        | blank     | All below V2                                     |

5. In vibration analysis, if  $V1 < 0.0$ , the negative eigenvalue range will be searched. (Eigenvalues are proportional to  $V_i$  squared; therefore, the negative sign would be lost.) This is a means for diagnosing improbable models. In buckling analysis, negative V1 and/or V2 require no special logic.
6. Eigenvalues are sorted on order of magnitude for output. An eigenvector is found for each eigenvalue.
7. MSGLVL controls the amount of diagnostic output during the eigenvalue extraction process. The default value of zero suppresses all diagnostic output. A value of one prints eigenvalues accepted at each shift. Higher values result in increasing levels of diagnostic output.
8. MAXSET is used to limit the maximum block size. It is otherwise set by the region size or by ND with a maximum size of 15. It may also be reset if there is insufficient memory available. The default value is recommended.
9. In vibration analysis, if V1 is blank, all roots less than zero are calculated. Small negative roots are usually computational zeroes which indicate rigid body modes. Finite negative roots are an indication of modeling problems. If V1 is set to zero, negative eigenvalues are not calculated.

**1476 EIGRL**  
**Real Eigenvalue Extraction Data, Lanczos Method**

10. A specification for SHFSCL may improve performance, especially when large mass techniques are used in enforced motion analysis. Large mass techniques can cause a large gap between the rigid body and flexible frequencies. If this field is blank, a value for SHFSCL is estimated automatically.
11. On occasion, it may be necessary to compute more roots than requested to ensure that all roots in the range have been found. However, this method will not output the additional roots.
12. NASTRAN SYSTEM(146) provides options for I/O in sparse method only:

| <b>Table 14-16. SYSTEM(146) Options</b> |                                                                   |
|-----------------------------------------|-------------------------------------------------------------------|
| <b>SYSTEM(146)</b>                      | <b>Description</b>                                                |
| 2                                       | Increase memory reserved for sparse method by approximately 100%. |
| 3                                       | Increase memory reserved for sparse method by approximately 300%. |
| 4                                       | Increase memory reserved for sparse method by approximately 400%. |

13. For the fdmodes distributed parallel method, the frequency range between V1 and V2 is subdivided into segments and analyzed in parallel. V1 and V2 must be defined, and the number of frequency segments must be specified with the NUMSEG keyword or the NASTRAN NUMSEG statement. Currently, NUMSEG must equal the number of processors and by default is set to the number of processors requested by the DMP keyword. If both DMP and NUMSEG are specified, NUMSEG takes precedence. The upper frequencies of each segment may be generated automatically by ALPH or specified directly in Fi. If both are specified, then Fi takes precedence over ALPH as long as they are consistent. ALPH, if multiplied by 100, may also be specified on FRQSEQ keyword of the NASTRAN statement. For best performance, ND should not be used with fdmodes. The segment boundaries are distributed automatically in units of frequency, not cycles.

For the gdmodes distributed parallel method, the geometry is partitioned into segments and analyzed in parallel. ND, V1 and V2 can all be used with gdmodes. On the rare occasion that the geometry partitioning fails, gdmodes will revert to the fdmodes method if the keyword gpart=1 (default).

For the hdmodes distributed parallel method, the frequency range between V1 and V2 is subdivided into segments, as in fdmodes. Also as in fdmodes, V1 and V2 must be defined. However, the number of segments equals the value of the NCLUST or FSEGS keyword, and NUMS is not used. If desired, the

## Real Eigenvalue Extraction Data, Lanczos Method

upper frequencies of each segment may be adjusted using ALPH; they cannot be specified directly in Fi. For best performance, ND should not be used with hdmodes.

The rdmodes distributed parallel method uses substructuring technology for very large scale normal modes problems. The rdmodes method generally computes fewer modes with lower accuracy compared to standard Lanczos solution in order to gain performance. The rdmodes method requires V1 and V2, but ND should not be used. This method is not supported in buckling solutions.

|         | Modal Solution (SOL 103)                                         | Buckling Solution (SOL 105)                                                              |
|---------|------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| fdmodes | V1 and V2 are required.<br>ND is not supported.                  | V1 and V2 are required.<br>ND is not supported.                                          |
| gdmodes | ND, V1 and V2 can all be used. See <a href="#">Table 14-15</a> . | ND, V1 and V2 can all be used. If ND is not specified, both V1 and V2 must be specified. |
| hdmodes | V1 and V2 are required.<br>ND is not supported.                  | V1 and V2 are required.<br>ND is not supported.                                          |
| rdmodes | V1 and V2 are required.<br>ND is not supported.                  | Not supported.                                                                           |

14. Increasing MAXSET may improve performance for large problems where a large number of eigenvalues are being found. The default is 7 on all machines. SYSTEM(263) may be set in an rcfile to effectively modify the default; however the setting on the EIGRL entry always takes precedence.
15. SYSTEM(196), keyword SCRSAVE, controls reuse of scratch files when segment logic is invoked. SYSTEM(196) is useful only when multiple frequency segments are requested on a Lanczos run. (Multiple frequency segments can be requested via the NUMS field in the EIGRL entry and by SYSTEM(197).) Each frequency segment requires a minimum of three scratch files. When multiple frequency segments are used on a single processor computer then each frequency segment is solved serially. In this case, it makes sense to let segment #2 use the scratch files which were used by segment #1 since work for segment #1 has been completed (otherwise it wouldn't be working on #2). Similarly, when work for segment #2 is finished, segment #3 should be able to use #2's scratch files. SYSTEM(196)=1 allows such file reuse and is considered a safe default on Version 70 and later systems.
16. The new buckling shift logic in Version 70.5 tends to shift to 1.0 first. The logic may have difficulty finding the lowest ND roots if a problem requests a small number of roots (ND) when there are thousands of roots below 1. In this case

## 1478 EIGRL

### Real Eigenvalue Extraction Data, Lanczos Method

either the loading should be scaled, SHFSCL specified, or a smaller frequency range requested.

17. Because Lanczos performance is tuned for medium to large problems, this has caused difficulties with very small problems. Thus, by default, on problems with fewer than 20 degrees-of-freedom when the LAN method is selected, the method is switched to AHOU. The criteria for automatic switching is controlled by SYSTEM(359) on the NASTRAN entry.
18. The parameter input VMOPT=2 should not be used with MAX normalization. VMOPT=2 will only yield correct results with MASS normalization.
19. The multisegment method subdivides the frequency range between V1 and V2 into segments, as in fdmodes. Unlike fdmodes, the multisegment method analyzes each segment in turn on one processor only. V1 and V2 must be defined, and ND must not be defined. The number of segments may be specified in NUMS, with the NUMSEG keyword, or with the NASTRAN NUMSEG statement. If both NUMS and NUMSEG are specified, NUMS takes precedence.

**ELIST**      Element List

Defines a list of structural elements for virtual fluid mass.

**Format:**

| 1     | 2   | 3  | 4   | 5      | 6  | 7  | 8  | 9  | 10 |
|-------|-----|----|-----|--------|----|----|----|----|----|
| ELIST | LID | E1 | E2  | E3     | E4 | E5 | E6 | E7 |    |
|       | E8  | E9 | E10 | -etc.- |    |    |    |    |    |

**Example:**

|       |   |    |     |    |      |     |     |  |  |
|-------|---|----|-----|----|------|-----|-----|--|--|
| ELIST | 3 | 51 | -62 | 68 | THRU | 102 | 122 |  |  |
|-------|---|----|-----|----|------|-----|-----|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                          |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LID   | Identification number of list. (Integer>0)                                                                                                                                                                                                                                        |
| Ei    | Identification number of a structural element. See Remark 1 . for the meaning of the negative sign. The string “THRU” may be used to indicate that all existing elements between those referenced in the preceding and succeeding fields are in the list. (Integer ≠ 0 or “THRU”) |

**Remarks:**

1. If the ELIST entry is referenced by field 6 of an MFLUID entry, the wetted side of the element is determined by the presence or absence of a minus sign preceding the element’s ID on the ELIST entry. A minus sign indicates that the fluid is on the side opposite to the element’s positive normal as determined by applying the right-hand rule to the sequence of its corner points. If the “THRU” option is used, then immediately preceding and succeeding elements must have the same sign.
2. Large open “THRUs” should be avoided.
3. The word “THRUs” must not appear in field 2 or 9 on the parent entry or on any continuations.

**1480 ENDDATA**  
Bulk Data Delimiter

**ENDDATA** Bulk Data Delimiter

Designates the end of the Bulk Data Section.

**Format:**

ENDDATA

**Remarks:**

1. ENDDATA is optional.



## EPOINT      Extra Point List

Defines extra points for use in dynamics problems.

**Format:**

|        |     |     |     |     |     |     |     |     |    |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
| EPOINT | ID1 | ID2 | ID3 | ID4 | ID5 | ID6 | ID7 | ID8 |    |

**Example:**

|        |   |    |   |   |    |   |  |  |  |
|--------|---|----|---|---|----|---|--|--|--|
| EPOINT | 3 | 18 | 1 | 4 | 16 | 2 |  |  |  |
|--------|---|----|---|---|----|---|--|--|--|

**Alternate Format and Example:**

|        |     |        |     |  |  |  |  |  |  |
|--------|-----|--------|-----|--|--|--|--|--|--|
| EPOINT | ID1 | “THRU” | ID2 |  |  |  |  |  |  |
| EPOINT | 17  | THRU   | 43  |  |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                            |
|-------|-------------------------------------------------------------------------------------|
| IDI   | Extra point identification number. (1000000>Integer>0; for “THRU” option, ID1<ID2). |

**Remarks:**

1. All extra point identification numbers must be unique with respect to all other structural, scalar, and fluid points for direct methods of solution. For modal methods, they must be larger than the number of eigenvectors retained for analysis.
2. EPOINT is used to define coordinates used in transfer function definitions (see the TF and DMIG entries).
3. If the alternate format is used, extra points ID1 through ID2 are also defined to be extra points.
4. See the *NX Nastran Advanced Dynamic Analysis User’s Guide* for a discussion of extra points.

## 1482 **EXTRN** Partitioned External Superelement Connection

### **EXTRN**      Partitioned External Superelement Connection

Defines a boundary connection for an external superelement.

#### **Format:**

| 1     | 2      | 3  | 4    | 5      | 6    | 7  | 8      | 9  | 10 |
|-------|--------|----|------|--------|------|----|--------|----|----|
| EXTRN | GID1   | C1 | GID2 | C2     | GID3 | C3 | GID4   | C4 |    |
|       | -etc.- |    | GID6 | “THRU” | GID7 | C6 | -etc.- |    |    |

#### **Example:**

|       |      |     |      |        |      |     |  |  |  |
|-------|------|-----|------|--------|------|-----|--|--|--|
| EXTRN | 1001 | 123 | 1120 | 123456 | 1201 | 123 |  |  |  |
|-------|------|-----|------|--------|------|-----|--|--|--|

#### **Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                        |
|--------------|------------------------------------------------------------------------------------------------------------------------|
| GIDi         | Grid identification number to which the exterior superelement matrices will be connected.                              |
| Ci           | Component numbers. (Integer 0, blank, or 1 for scalar points; Integers 1 through 6 with no embedded blanks for grids.) |

#### **Remarks:**

1. EXTRN can only be specified in partitioned Bulk Data Sections and is ignored in the main Bulk Data Section.
2. Connection grids must be specified in the partitioned Bulk Data Section following BEGIN SUPER = SEID.
3. “THRU” may be specified only in fields 3, 5, or 7.
4. Pairs of blank fields may be entered to allow easier modification of the EXTRN entry.

Chapter

# 15 Bulk Data Entries F—L

15  
Bulk F-L

Bulk data entries FEEDGE—LSEQ

**1484 FEEDGE**  
Finite Element Edge Definition

**FEEDGE**      Finite Element Edge Definition

Defines a finite element edge and associates it with a curve.

**Format:**

| 1      | 2      | 3     | 4     | 5     | 6      | 7   | 8   | 9 | 10 |
|--------|--------|-------|-------|-------|--------|-----|-----|---|----|
| FEEDGE | EDGEID | GRID1 | GRID2 | CIDBC | GEOMIN | ID1 | ID2 |   |    |

**Example:**

|        |     |     |     |  |        |    |  |  |  |
|--------|-----|-----|-----|--|--------|----|--|--|--|
| FEEDGE | 101 | 123 | 547 |  | GMCURV | 12 |  |  |  |
|--------|-----|-----|-----|--|--------|----|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                            | Type           | Default  |
|--------|-------------------------------------------------------------------------------------------------------------------------------------|----------------|----------|
| EDGEID | Unique identification number.                                                                                                       | Integer<br>> 0 | Required |
| GRIDi  | Identification number of end GRIDs defining this edge.                                                                              | Integer<br>> 0 | Required |
| CIDBC  | Identification number of the coordinate system in which constraints specified on GMBC and GMSPC entries are defined. See Remark 1 . | Integer<br>≥ 0 |          |
| GEOMIN | Type of entry referenced by IDi; "GMCURV" or "POINT". See Remark 2 .                                                                | Character      | POINT    |
| IDI    | Identification number of a POINT or GMCURV entry. See Remarks 2, 3, and 4.                                                          | Integer<br>≥ 0 |          |


**Remarks:**

1. If CIDBC is not blank then it overrides the CIDBC specified on the GMSURF or FEFACE entries for this particular edge. A fatal message will be issued when more than one CIDBC is associated with any entity.
2. The Bulk Data entries referenced by ID1 and ID2 depends on the GEOMIN field:

| GEOMIN | ID1    | ID2            |
|--------|--------|----------------|
| POINT  | POINT  | POINT          |
| GMCURV | GMCURV | not applicable |

3. When GEOMIN = “GMCURV”

- FEEDGE associates the finite element model and the geometric information.
- GRID1 and GRID2 are the end points of the edge, and the edge is on the CURVID curve. A locally parametric cubic curve is fit to the geometric curve such that the two have the same tangent at GRIDi (C1 continuous).

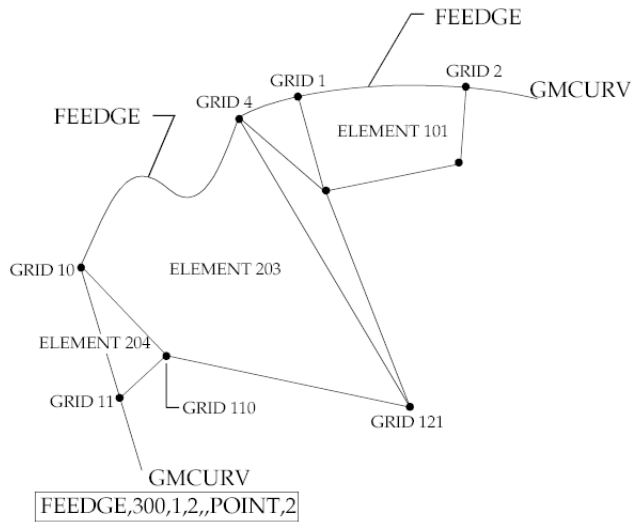


**Figure 15-1. Specifying Geometry Using GEOMIN=GMCURV Method**

4. When GEOMIN = “POINT”

- The edge passes through the points defined on the POINT entries referenced by ID1 and ID2.
- The shape of the edge is selected as follows:

| ID1        | ID2        | Shape of the FEEDGE |
|------------|------------|---------------------|
| Blank or 0 | Blank or 0 | Linear              |
| >0         | Blank or 0 | Quadratic           |
| >0         | >0         | Cubic               |
| Blank or 0 | >0         | Not allowed         |

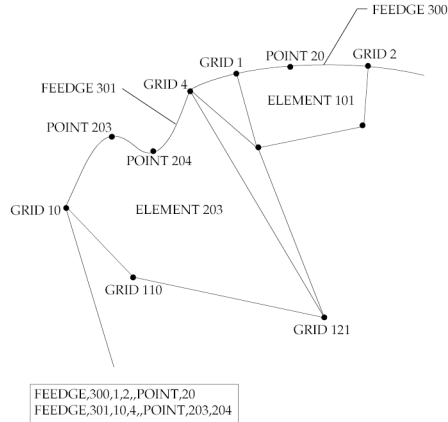

**Figure 15-2. Specifying Geometry Using GEOMIN=POINT Method**

5. A local coordinate system can be associated with an edge using the GMCORD entry.
6. The hierarchy set to resolve the conflicts arising in the Global System input data is described in the “GMBC” entry description.

**FEFACE**      Finite Element Face Definition

Defines geometric information that will be used in elements, surface definition, load definition, and boundary condition definition.

**Format:**

| 1      | 2      | 3     | 4     | 5     | 6     | 7     | 8      | 9 | 10 |
|--------|--------|-------|-------|-------|-------|-------|--------|---|----|
| FEFACE | FACEID | GRID1 | GRID2 | GRID3 | GRID4 | CIDBC | SURFID |   |    |

**Example:**

|        |     |     |     |     |     |    |  |  |  |
|--------|-----|-----|-----|-----|-----|----|--|--|--|
| FEFACE | 101 | 123 | 547 | 243 | 295 | 12 |  |  |  |
|--------|-----|-----|-----|-----|-----|----|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                                            | Type        | Default                    |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------|
| FACEID | Unique identification number. See Remark <a href="#">1</a> .                                                                                        | Integer > 0 | Required                   |
| GRIDi  | Identification number of end GRIDs defining a triangular or quadrilateral face. See Remark <a href="#">2</a> .                                      | Integer > 0 | Required                   |
| CIDBC  | Identification number of the coordinate system in which constraints specified on GMBC and GMSPC entries are defined. See Remark <a href="#">3</a> . | Integer ≥ 0 | Remark <a href="#">3</a> . |
| SURFID | Alternate method used to specify the geometry of the edges of the face. See Remarks <a href="#">4</a> and <a href="#">5</a> .                       | Integer ≥ 0 | 0                          |


**Remarks:**

- An FEFACE entry is required if any of the following situations exist:
  - The geometry of the surface defined by SURFID is to be used by a finite element;
  - CIDBC is specified for a face or surface; or
  - If loads or constraints or enforced boundary conditions are applied to a surface.

## 1488 FEFACE Finite Element Face Definition

15  
Bulk F-L

2. The shape (geometry) of the face is defined by the shape of the edges. The points defined by GRIDi must be specified in either a clockwise or counterclockwise order.
3. If CIDBC is not blank, then it overrides the CIDBC specified on the GMSURF entry for this particular face. A fatal message will be issued when more than one CIDBC is associated with any entity.
4. When SURFID is blank or 0, the edges will be considered linear unless there is an FEEDGE entry for the given edge.
5. When SURFID > 0,
  - FEFACE associates the finite element model and the geometric information specified on the GMSURF entry.
  - GRIDi defines a finite element face (clockwise or counter clockwise in order) that is on the SURFID surface.
  - For the edges of this face, which are not defined by an FEEDGE entry, locally parametric cubic curves are fit to the geometric surface such that the two have the same tangent at GRIDi (C1 continuous).
6. Whenever a given edge of a face is common to two or more surfaces (i.e., lies on the intersecting curve), then the user must supply GMCURV and FEEDGE entries in order to resolve the conflict in the input geometry. A fatal message is issued if an edge is not uniquely defined.

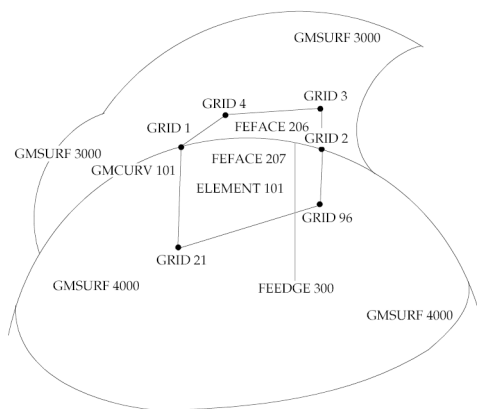

**Figure 15-3. Face Edge Common to Two Surfaces**

7. The hierarchy set to resolve the conflicts arising in the Global System input data is described in the “GMBC” entry description.



**FLFACT** Aerodynamic Physical Data

Used to specify density ratios, Mach numbers, reduced frequencies, and velocities for flutter analysis.

**Format:**

| 1      | 2   | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|----|--------|----|----|----|----|----|----|
| FLFACT | SID | F1 | F2     | F3 | F4 | F5 | F6 | F7 |    |
|        | F8  | F9 | -etc.- |    |    |    |    |    |    |

**Example:**

|        |    |    |    |     |  |  |  |  |  |
|--------|----|----|----|-----|--|--|--|--|--|
| FLFACT | 97 | .3 | .7 | 3.5 |  |  |  |  |  |
|--------|----|----|----|-----|--|--|--|--|--|

**Alternate Format and Example:**

|        |     |      |        |      |    |         |  |  |  |
|--------|-----|------|--------|------|----|---------|--|--|--|
| FLFACT | SID | F1   | "THRU" | FNF  | NF | FMID    |  |  |  |
| FLFACT | 201 | .200 | THRU   | .100 | 11 | .133333 |  |  |  |

**Fields:**

| Field          | Contents                                               |
|----------------|--------------------------------------------------------|
| SID            | Set identification number. (Unique Integer > 0)        |
| F <sub>i</sub> | Aerodynamic factor. (Real)                             |
| FNF            | Final aerodynamic factor. (Real)                       |
| NF             | Number of aerodynamic factors. (Integer > 0)           |
| FMID           | Intermediate aerodynamic factors. See Remark 4. (Real) |

**Remarks:**

1. Only the factors selected by a FLUTTER entry will be used.
2. Embedded blank fields are not allowed in the first format above.
3. The factors must be specified in the order in which they are to be used within the looping of flutter analysis.
4. FMID must lie between F1 and FNF; otherwise, FMID will be set to  $(F1 + FNF)/2$ . then

1490 **FLFACT**  
Aerodynamic Physical Data

**15**  
Bulk F-L

$$F_i = \frac{F_1(FNF - FMID) + FNF(FNF - F_1)(i-1)}{(FNF - FMID) + (FMID - F_1)(i-1)}$$

where  $i = 1, 2, \dots, NF$

The use of FMID (middle factor selection) allows unequal spacing of the factors.

$$FMID = \frac{2 \cdot F_1 \cdot FNF}{F_1 + FNF}$$

gives equal values to increments of the reciprocal of  $F_i$ .

5. If method = PK and this entry specifies velocities, then the velocities must be non-zero. Input of negative values produces eigenvector results at a velocity equal to the positive value of the input. Input of positive values provide eigenvalues results without eigenvectors.

**FLSYM**      Axisymmetric Symmetry Control

Defines the relationship between the axisymmetric fluid and a structural boundary having symmetric constraints. The purpose is to allow fluid boundary matrices to conform to structural symmetry definitions.

**Format:**

| 1     | 2 | 3  | 4  | 5 | 6 | 7 | 8 | 9 | 10 |
|-------|---|----|----|---|---|---|---|---|----|
| FLSYM | M | S1 | S2 |   |   |   |   |   |    |

**Example:**

|       |    |   |   |  |  |  |  |  |  |
|-------|----|---|---|--|--|--|--|--|--|
| FLSYM | 12 | S | A |  |  |  |  |  |  |
|-------|----|---|---|--|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                                                             |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| M      | Number of symmetric sections of structural boundary around the circumference of the fluid being modeled by the set of structural elements. (Even Integers $\geq 2$ ) |
| S1, S2 | Description of boundary constraints used on the structure at the first and second planes of symmetry. (Character: “S” means symmetric, “A” means antisymmetric.)     |

**Remarks:**

1. This entry is allowed only if an AXIF entry is also present.
2. Only one FLSYM entry is allowed.
3. This entry is not required if there are no planes of symmetry.
4. First plane of symmetry is assumed to be at  $f = 0$ . Second plane of symmetry is assumed to be at  $f = 360^\circ / M$ .
5. Symmetric and antisymmetric constraints for the structure must, in addition, be provided by the user.
6. The solution is performed for those harmonic indices listed on the AXIF entry that are compatible with the symmetry conditions.
7. For example, if FLSYM is used to model a quarter section of structure at the boundary,  $M = 4$ . If the boundary constraints are “SS”, the compatible cosine

**1492 FLSYM**  
**Axisymmetric Symmetry Control**

**15**  
Bulk F-L

harmonics are 0, 2, 4, ..., etc. If "SA" is used, the compatible cosine harmonics are 1, 3, 5, ..., etc.

**FLUTTER** Aerodynamic Flutter Data

Defines data needed to perform flutter analysis.

**Format:**

| 1       | 2   | 3      | 4    | 5    | 6     | 7     | 8      | 9   | 10 |
|---------|-----|--------|------|------|-------|-------|--------|-----|----|
| FLUTTER | SID | METHOD | DENS | MACH | RFREQ | IMETH | NVALUE | EPS |    |

**Example:**

|         |    |   |     |     |     |   |   |      |  |
|---------|----|---|-----|-----|-----|---|---|------|--|
| FLUTTER | 19 | K | 119 | 219 | 319 | S | 5 | 1.-4 |  |
|---------|----|---|-----|-----|-----|---|---|------|--|

**Fields:**

| Field             | Contents                                                                                                                                                                                                               |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID               | Set identification number. (Integer > 0)                                                                                                                                                                               |
| METHOD            | Flutter analysis method. (Character: “K” for K-method, “PK” for PK method, “PKNL” for PK method with no looping, “KE” for the K-method restricted for efficiency.)                                                     |
| DENS              | Identification number of an FLFACT entry specifying density ratios to be used in flutter analysis. (Integer > 0)                                                                                                       |
| MACH              | Identification number of an FLFACT entry specifying Mach numbers ( <i>m</i> ) to be used in flutter analysis. (Integer > 0)                                                                                            |
| RFREQ<br>(or VEL) | Identification number of an FLFACT entry specifying reduced frequencies ( <i>k</i> ) to be used in flutter analysis; for the PK and PKNL method, the velocities FLFACT entry is specified in this field. (Integer > 0) |
| IMETH             | Choice of interpolation method for aerodynamic matrix interpolation. Used in the “K” and “KE” methods only. See Remark 6 . (Character: “L” = linear, “S” = surface; Default = “L”.)                                    |
| NVALUE            | Number of eigenvalues beginning with the first eigenvalue for output and plots. [Integer > 0; Default is the number of modal degrees-of-freedom ( $u_h$ )]                                                             |
| EPS               | Convergence parameter for k. Used in the PK and PKNL methods only. See Remark 4 . (Real > 0.0; Default = $10^{-3}$ )                                                                                                   |

## 1494 FLUTTER

### Aerodynamic Flutter Data

15  
Bulk F-L

#### Remarks:

1. The FLUTTER entry must be selected with the Case Control command METHOD = SID.
2. The density is given by DENS · RHOREF, where RHOREF is the reference value specified on the AERO entry and DENS is the density ratio specified on the FLFACT entry.
3. The reduced frequency is given by  $k = (REFC \cdot w/2 \cdot V)$ , where REFC is given on the AERO entry, w is the circular frequency, and V is the velocity. If  $k = 0.0$ , as specified on the FLFACT entry, then only the K-method may be specified and the Inverse Power method of eigenvalue extraction (INV on the EIGC entry) must be used. Aeroelastic divergence analysis is more appropriately performed using the PK-method or PKNL method.

4. An eigenvalue is accepted in the PK and PKNL methods when:

$$|k - k_{estimate}| < EPS \quad \text{for } k_{estimate} < 1.0$$

$$|k - k_{estimate}| < EPS \cdot k_{estimate} \quad \text{for } k_{estimate} \geq 1.0$$

5. When the PK or PKNL method is selected, physical displacements will only be generated for the velocities on the FLFACT that are specified as negative values of the requested velocity. Also, structural damping as specified on the GE field of MATi entries is ignored.
6. If IMETH = "L", a linear interpolation is performed on reduced frequencies at the Mach numbers specified on the FLFACT entry using the MKAEROi entry Mach number that is closest to the FLFACT entry Mach number. For IMETH = "S", a surface interpolation is performed across Mach numbers and reduced frequencies. For METHOD = "PK" or "PKNL", linear interpolation is always performed.
7. For the "K", "KE" and "PK" methods, all combinations of the FLFACT entry are analyzed. For the "PKNL" method, only ordered pairs are analyzed; i.e.,  $(M_1, V_1)$ ,  $(M_2, V_2) \dots (M_n, V_n)$ . For the PKNL method, equal number of densities, Mach numbers and velocities must be specified.
8. Only the "PK" and "PKNL" methods are supported for design sensitivity and optimization.

**FORCE**      Static Force

Defines a static concentrated force at a grid point by specifying a vector.

**Format:**

| 1     | 2   | 3 | 4   | 5 | 6  | 7  | 8  | 9 | 10 |
|-------|-----|---|-----|---|----|----|----|---|----|
| FORCE | SID | G | CID | F | N1 | N2 | N3 |   |    |

**Example:**

|       |   |   |   |     |     |     |     |  |  |
|-------|---|---|---|-----|-----|-----|-----|--|--|
| FORCE | 2 | 5 | 6 | 2.9 | 0.0 | 1.0 | 0.0 |  |  |
|-------|---|---|---|-----|-----|-----|-----|--|--|

**Fields:**

| Field | Contents                                                                                            |
|-------|-----------------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)                                                       |
| G     | Grid point identification number. (Integer > 0)                                                     |
| CID   | Coordinate system identification number. (Integer ≥ 0; Default = 0)                                 |
| F     | Scale factor. (Real)                                                                                |
| Ni    | Components of a vector measured in coordinate system defined by CID. (Real; at least one Ni ≠ 0.0.) |

**Remarks:**

1. The static force applied to grid point G is given by

$$\vec{f} = F\vec{N}$$

where  $\vec{N}$  is the vector defined in fields 6, 7 and 8. The magnitude of  $\vec{f}$  is equal to F times the magnitude of  $\vec{N}$ .

2. In the static solution sequences, the load set ID must be selected by the Case Control command LOAD = SID. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
3. A CID of zero or blank (the default) references the basic coordinate system.
4. For scalar points see SLOAD.

**1496 FORCE**  
**Static Force**

**15**  
Bulk F-L

**Remarks related to SOLs 601 and 701:**

1. To apply a force with constant magnitude, SID is selected by Case Control command `LOAD = SID` for both static and transient analyses.
2. To apply a time-dependent force, SID is referenced by the field `EXCITEID = SID` in the `TLOAD1` entry. Time-dependent loads are selected by Case Control command `DLOAD`.



**FORCE1**      Static Force, Alternate Form 1

Defines a static concentrated force at a grid point by specification of a magnitude and two grid points that determine the direction.

**Format:**

|        |     |   |   |    |    |   |   |   |    |
|--------|-----|---|---|----|----|---|---|---|----|
| 1      | 2   | 3 | 4 | 5  | 6  | 7 | 8 | 9 | 10 |
| FORCE1 | SID | G | F | G1 | G2 |   |   |   |    |

**Example:**

|        |   |    |       |    |    |  |  |  |  |
|--------|---|----|-------|----|----|--|--|--|--|
| FORCE1 | 6 | 13 | -2.93 | 16 | 13 |  |  |  |  |
|--------|---|----|-------|----|----|--|--|--|--|

**Fields:**

| Field  | Contents                                                                           |
|--------|------------------------------------------------------------------------------------|
| SID    | Load set identification number. (Integer > 0)                                      |
| G      | Grid point identification number. (Integer > 0)                                    |
| F      | Magnitude of the force. (Real)                                                     |
| G1, G2 | Grid point identification numbers. (Integer > 0; G1 and G2 may not be coincident.) |

**Remarks:**

- The static force applied to grid point G is given by

$$\vec{f} = F\vec{h}$$

where  $\vec{h}$  is a unit vector parallel to a vector from G1 to G2.

- In the static solution sequences, the load set ID must be selected by the Case Control command LOAD=SID. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
- The follower force effects due to loads from this entry are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter FOLLOWK.). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution

## 1498 FORCE1

### Static Force, Alternate Form 1

15  
Bulk F-L

sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with `PARAM,LGDISP,1`. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).

#### Remarks related to SOLs 601 and 701:

1. If  $G1=G$  or  $G2=G$ , the force is a follower force in large displacement analysis (i.e., `PARAM,LGDISP,1`). Otherwise, the direction of the force is defined by the original positions of  $G1$  and  $G2$  and does not change even for large displacement analysis.
2. To apply a force with constant magnitude, `SID` is selected by Case Control command `LOAD = SID` for both static and transient analysis.
3. To apply a time-dependent force, `SID` is referenced by the field `EXCITEID = SID` in the `TLOAD1` entry. Time-dependent loads are selected by Case Control command `DLOAD`.

**FORCE2**      Static Force, Alternate Form 2

Defines a static concentrated force at a grid point by specification of a magnitude and four grid points that determine the direction.

**Format:**

|        |     |   |   |    |    |    |    |   |    |
|--------|-----|---|---|----|----|----|----|---|----|
| 1      | 2   | 3 | 4 | 5  | 6  | 7  | 8  | 9 | 10 |
| FORCE2 | SID | G | F | G1 | G2 | G3 | G4 |   |    |

**Example:**

|        |   |    |       |    |    |    |    |  |  |
|--------|---|----|-------|----|----|----|----|--|--|
| FORCE2 | 6 | 13 | -2.93 | 16 | 13 | 17 | 13 |  |  |
|--------|---|----|-------|----|----|----|----|--|--|

**Fields:**

| Field | Contents                                                                                                           |
|-------|--------------------------------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)                                                                      |
| G     | Grid point identification number. (Integer > 0)                                                                    |
| F     | Magnitude of the force. (Real)                                                                                     |
| Gi    | Grid point identification numbers. (Integer > 0; G1 and G2 may not be coincident; G3 and G4 cannot be coincident.) |

**Remarks:**

1. The direction of the force is parallel to the cross product of vectors from G1 to G2 and G3 to G4.
2. In the static solution sequences, the load set ID must be selected by the Case Control command LOAD=SID. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
3. The follower force effects due to loads from this entry are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter FOLLOWK). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with PARAM,LGDISP,1. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).

**1500 FORCE2**  
**Static Force, Alternate Form 2**

**15**  
Bulk F-L

**Remarks related to SOLs 601 and 701:**

1. The direction of the force is defined by the original positions of G1 to G4 and does not change during the analysis.
2. To apply a force with constant magnitude, SID is selected by Case Control command `LOAD = SID` for both static and transient analyses.
3. To apply a time-dependent force, SID is referenced by the field `EXCITEID = SID` in the `TLOAD1` entry. Time-dependent loads are selected by Case Control command `DLOAD`.

**FORCEAX** Conical Shell Static Force

Defines a static concentrated force on a conical shell ring.

**Format:**

|         |     |     |     |   |    |    |    |   |    |
|---------|-----|-----|-----|---|----|----|----|---|----|
| 1       | 2   | 3   | 4   | 5 | 6  | 7  | 8  | 9 | 10 |
| FORCEAX | SID | RID | HID | S | FR | FP | FZ |   |    |

**Example:**

|         |   |   |   |     |     |     |     |  |  |
|---------|---|---|---|-----|-----|-----|-----|--|--|
| FORCEAX | 1 | 2 | 3 | 2.0 | 0.1 | 0.2 | 0.3 |  |  |
|---------|---|---|---|-----|-----|-----|-----|--|--|

**Fields:**

| Field      | Contents                                                                                             |
|------------|------------------------------------------------------------------------------------------------------|
| SID        | Load set identification number. (Integer > 0)                                                        |
| RID        | RINGAX entry identification number. (Integer > 0)                                                    |
| HID        | Harmonic identification number or a sequence of harmonics. See Remark 5 . (Integer ≥ 0 or Character) |
| S          | Scale factor for the force. (Real)                                                                   |
| FR, FP, FZ | Force components in <i>r</i> , <i>f</i> , <i>z</i> directions. (Real)                                |

**Remarks:**

1. FORCEAX is allowed only if an AXIC entry is also present.
2. Axisymmetric shell loads must be selected with the Case Control command LOAD = SID.
3. A separate entry is needed for the definition of the force associated with each harmonic.
4. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
5. If a sequence of harmonics is to be placed in HID, the form is as follows: “Sn1Tn2” where n1 is the start of the sequence and n2 is the end of the sequence (e.g., for harmonics 0 through 10, the field would contain “S0T10”).

**1502 FREEPT**  
**Fluid Free Surface Point**

**FREEPT**      Fluid Free Surface Point

Defines the location of points on the surface of a fluid for recovery of surface displacements in a gravity field.

**Format:**

| 1      | 2   | 3 | 4    | 5    | 6    | 7    | 8    | 9    | 10 |
|--------|-----|---|------|------|------|------|------|------|----|
| FREEPT | IDF |   | IDP1 | PHI1 | IDP2 | PHI2 | IDP3 | PHI3 |    |

**Example:**

|        |   |  |     |      |     |      |     |       |  |
|--------|---|--|-----|------|-----|------|-----|-------|--|
| FREEPT | 3 |  | 301 | 22.5 | 302 | 90.0 | 303 | 370.0 |  |
|--------|---|--|-----|------|-----|------|-----|-------|--|

**Fields:**

| Field | Contents                                                                                |
|-------|-----------------------------------------------------------------------------------------|
| IDF   | RINGFL entry identification number. (Integer > 0)                                       |
| IDPi  | Free surface point identification number. (Integer > 0)                                 |
| PHIi  | Azimuthal position on fluid point (RINGFL entry) in the fluid coordinate system. (Real) |

**Remarks:**

1. FREEPT is allowed only if an AXIF entry is also present.
2. All free surface point identification numbers must be unique with respect to other scalar, structural, and fluid points.
3. The free surface points are used for the identification of output data only.
4. Three points may be defined on a single entry.
5. The referenced fluid point (IDF) must be included in a free surface list (FSLIST entry).
6. Output requests for velocity and acceleration can be made at these points.

**FREQ**      Frequency List

Defines a set of frequencies to be used in the solution of frequency response problems.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| FREQ     | SID      | F1       | F2       | F3       | F4       | F5       | F6       | F7       |           |
|          | F8       | F9       | F10      | -etc.-   |          |          |          |          |           |

**Example:**

|      |      |      |      |      |      |      |      |      |  |
|------|------|------|------|------|------|------|------|------|--|
| FREQ | 3    | 2.98 | 3.05 | 17.9 | 21.3 | 25.6 | 28.8 | 31.2 |  |
|      | 29.2 | 22.4 | 19.3 |      |      |      |      |      |  |

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                |
|--------------|----------------------------------------------------------------|
| SID          | Set identification number. (Integer > 0)                       |
| Fi           | Frequency value in units of cycles per unit time. (Real ≥ 0.0) |

**Remarks:**

1. Frequency sets must be selected with the Case Control command **FREQUENCY = SID**.
2. All **FREQi** entries with the same frequency set identification numbers will be used. Duplicate frequencies will be ignored.  $f_N$  and  $f_{N-1}$  are considered duplicated if

$$|f_N - f_{N-1}| < DFREQ \cdot |f_{MAX} - f_{MIN}|,$$

where **DFREQ** is a user parameter, with a default of  $10^{-5}$ .  $f_{MAX}$  and  $f_{MIN}$  are the maximum and minimum excitation frequencies of the combined **FREQi** entries.

3. In modal analysis, solutions for modal DOFs from rigid body modes at zero excitation frequencies may be discarded. Solutions for nonzero modes are retained.

**1504** **FREQ1**  
**Frequency List, Alternate Form 1**

**FREQ1**      Frequency List, Alternate Form 1

Defines a set of frequencies to be used in the solution of frequency response problems by specification of a starting frequency, frequency increment, and the number of increments desired.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| FREQ1    | SID      | F1       | DF       | NDF      |          |          |          |          |           |

**Example:**

|       |   |     |     |    |  |  |  |  |  |
|-------|---|-----|-----|----|--|--|--|--|--|
| FREQ1 | 6 | 2.9 | 0.5 | 13 |  |  |  |  |  |
|-------|---|-----|-----|----|--|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                            |
|--------------|------------------------------------------------------------|
| SID          | Set identification number. (Integer > 0)                   |
| F1           | First frequency in set. (Real ≥ 0.0)                       |
| DF           | Frequency increment. (Real > 0.0)                          |
| NDF          | Number of frequency increments. (Integer > 0; Default = 1) |

**Remarks:**

1. FREQ1 entries must be selected with the Case Control command FREQUENCY = SID.
2. The units for F1 and DF are cycles per unit time.
3. The frequencies defined by this entry are given by

$$f_i = F1 + DF \cdot (i-1)$$

where i = 1 to (NDF + 1).

4. All FREQi entries with the same frequency set identification numbers will be used. Duplicate frequencies will be ignored.  $f_N$  and  $f_{N-1}$  are considered duplicated if



$$|f_N - f_{N-1}| < \text{DFREQ} \cdot |f_{MAX} - f_{MIN}|,$$

where DFREQ is a user parameter, with a default of  $10^{-5}$ .  $f_{MAX}$  and  $f_{MIN}$  are the maximum and minimum excitation frequencies of the combined FREQi entries.

5. In modal analysis, solutions for modal DOFs from rigid body modes at zero excitation frequencies may be discarded. Solutions for nonzero modes are retained.

1506 **FREQ2**  
Frequency List, Alternate Form 2

**FREQ2** Frequency List, Alternate Form 2

Defines a set of frequencies to be used in the solution of frequency response problems by specification of a starting frequency, final frequency, and the number of logarithmic increments desired.

**Format:**

| 1     | 2   | 3  | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|-------|-----|----|----|----|---|---|---|---|----|
| FREQ2 | SID | F1 | F2 | NF |   |   |   |   |    |

**Example:**

|       |   |     |     |   |  |  |  |  |  |
|-------|---|-----|-----|---|--|--|--|--|--|
| FREQ2 | 6 | 1.0 | 8.0 | 6 |  |  |  |  |  |
|-------|---|-----|-----|---|--|--|--|--|--|

**Fields:**

| Field | Contents                                                    |
|-------|-------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                    |
| F1    | First frequency. (Real > 0.0)                               |
| F2    | Last frequency. (Real > 0.0, F2 > F1)                       |
| NF    | Number of logarithmic intervals. (Integer > 0; Default = 1) |

**Remarks:**

1. FREQ2 entries must be selected with the Case Control command FREQUENCY = SID.
2. The units for F1 and F2 are cycles per unit time.
3. The frequencies defined by this entry are given by

$$f_i = F1 \cdot e^{(i-1)d}$$

where

$$d = \frac{1}{NF} \ln \frac{F2}{F1}$$

and  $i = 1, 2, \dots, (NF+1)$

In the example above, the list of frequencies will be 1.0, 1.4142, 2.0, 2.8284, 4.0, 5.6569 and 8.0 cycles per unit time.

4. All FREQi entries with the same frequency set identification numbers will be used. Duplicate frequencies will be ignored.  $f_N$  and  $f_{N-1}$  are considered duplicated if

$$|f_N - f_{N-1}| < \text{DFREQ} \cdot |f_{MAX} - f_{MIN}| \quad ,$$

where DFREQ is a user parameter, with a default of  $10^{-5}$ .  $f_{MAX}$  and  $f_{MIN}$  are the maximum and minimum excitation frequencies of the combined FREQi entries.

5. In modal analysis, solutions for modal DOFs from rigid body modes at zero excitation frequencies may be discarded. Solutions for nonzero modes are retained.

1508 **FREQ3**  
Frequency List, Alternate 3

**15**  
Bulk F-L

**FREQ3** Frequency List, Alternate 3

Defines a set of excitation frequencies for modal frequency-response solutions by specifying number of excitation frequencies between two modal frequencies.

**Format:**

| 1     | 2   | 3  | 4  | 5    | 6   | 7       | 8 | 9 | 10 |
|-------|-----|----|----|------|-----|---------|---|---|----|
| FREQ3 | SID | F1 | F2 | TYPE | NEF | CLUSTER |   |   |    |

**Example:**

|       |   |      |       |        |    |     |  |  |  |
|-------|---|------|-------|--------|----|-----|--|--|--|
| FREQ3 | 6 | 20.0 | 200.0 | LINEAR | 10 | 2.0 |  |  |  |
|-------|---|------|-------|--------|----|-----|--|--|--|

**Fields:**

| Field   | Contents                                                                                                                                                                                                                                                                                                                                                            |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID     | Set identification number. (Integer > 0)                                                                                                                                                                                                                                                                                                                            |
| F1      | Lower bound of modal frequency range in cycles per unit time. (Real $\geq 0.0$ for TYPE = LINEAR and Real = 0.0 for TYPE = LOG)                                                                                                                                                                                                                                     |
| F2      | Upper bound of modal frequency range in cycles per unit time. (Real > 0.0, F2 $\geq$ F1, Default = F1)                                                                                                                                                                                                                                                              |
| TYPE    | LINEAR or LOG. Specifies linear or logarithmic interpolation between frequencies. (Character; Default = "LINEAR")                                                                                                                                                                                                                                                   |
| NEF     | Number of excitation frequencies within each subrange including the end points. The first subrange is between F1 and the first modal frequency within the bounds. The second subrange is between first and second modal frequencies between the bounds. The last subrange is between the last modal frequency within the bounds and F2. (Integer > 1, Default = 10) |
| CLUSTER | Specifies clustering of the excitation frequency near the end points of the range. See Remark 6 . (Real > 0.0; Default = 1.0)                                                                                                                                                                                                                                       |

**Remarks:**

1. FREQ3 applies only to modal frequency-response solutions (SOLs 111, 146, and 200) and is ignored in direct frequency response solutions.
2. FREQ3 entries must be selected with the Case Control command FREQUENCY = SID.

3. In the example above, there will be 10 frequencies in the interval between each set of modes within the bounds 20 and 2000, plus 10 frequencies between 20 and the lowest mode in the range, plus 10 frequencies between the highest mode in the range and 2000.
4. Since the forcing frequencies are near structural resonances, it is important that some amount of damping be specified.
5. All FREQ<sub>i</sub> entries with the same set identification numbers will be used. Duplicate frequencies will be ignored.  $f_N$  and  $f_{N-1}$  are considered duplicated if

$$|f_N - f_{N-1}| < \text{DFREQ} \cdot |f_{MAX} - f_{MIN}|$$

where DFREQ is a user parameter, with a default of  $10^{-5}$ .  $f_{MAX}$  and  $f_{MIN}$  are the maximum and minimum excitation frequencies of the combined FREQ<sub>i</sub> entries.

6. CLUSTER is used to obtain better resolution near the modal frequencies where the response varies the most. CLUSTER > 1.0 provides closer spacing of excitation frequency towards the ends of the frequency range, while values of less than 1.0 provide closer spacing towards the center of the frequency range. For example, if the frequency range is between 10 and 20, NEF = 11, TYPE = "LINEAR"; then, the excitation frequencies for various values of CLUSTER would be as shown in [Table 15-1](#).

$$\hat{f}_k = \frac{1}{2}(\hat{f}_1 + \hat{f}_2) + \frac{1}{2}(\hat{f}_2 - \hat{f}_1)|\xi|^{1/\text{CLUSTER}} \cdot \text{SIGN}(\xi)$$

where

$x$  =  $-1 + 2(k-1)/(NEF-1)$  is a parametric coordinate between -1 and 1

$k$  = varies from 1 to NEF ( $k = 1, 2, \dots, NEF$ )

$\hat{f}_1$  = is the lower limit of the frequency subrange

$\hat{f}_2$  = is the upper limit of the subrange

$\hat{f}_k$  = is the k-th excitation frequency

$\hat{f}$  = is the frequency, or the logarithm of the frequency, depending on the value specified for TYPE

1510 **FREQ3**  
Frequency List, Alternate 3

**15**  
Bulk F-L

| <b>Table 15-1. CLUSTER Usage Example</b>   |          |                                        |               |              |              |              |
|--------------------------------------------|----------|----------------------------------------|---------------|--------------|--------------|--------------|
| <b>Excitation<br/>Frequency<br/>Number</b> | <b>x</b> | <b>CLUSTER</b>                         |               |              |              |              |
|                                            |          | <b>c=0.25</b>                          | <b>c-0.50</b> | <b>c-1.0</b> | <b>c-2.0</b> | <b>c-4.0</b> |
|                                            |          | <b>Excitation Frequencies in Hertz</b> |               |              |              |              |
| 1                                          | -1.0     | 10.00                                  | 10.0          | 10.0         | 10.00        | 10.00        |
| 2                                          | -0.8     | 12.95                                  | 11.8          | 11.0         | 10.53        | 10.27        |
| 3                                          | -0.6     | 14.35                                  | 13.2          | 12.0         | 11.13        | 10.60        |
| 4                                          | -0.4     | 14.87                                  | 14.2          | 13.0         | 11.84        | 11.02        |
| 5                                          | -0.2     | 14.99                                  | 14.8          | 14.0         | 12.76        | 11.66        |
| 6                                          | 0.0      | 15.00                                  | 15.0          | 15.0         | 15.00        | 15.00        |
| 7                                          | 0.2      | 15.01                                  | 15.2          | 16.0         | 17.24        | 18.34        |
| 8                                          | 0.4      | 15.13                                  | 15.8          | 17.0         | 18.16        | 18.98        |
| 9                                          | 0.6      | 15.65                                  | 16.8          | 18.0         | 18.87        | 19.40        |
| 10                                         | 0.8      | 17.05                                  | 18.2          | 19.0         | 19.47        | 19.73        |
| 11                                         | 1.0      | 20.00                                  | 20.0          | 20.0         | 20.00        | 20.00        |

7. In design optimization (SOL 200), the excitation frequencies are derived from the natural frequencies computed at each design cycle.
8. In modal analysis, solutions for modal DOFs from rigid body modes at zero excitation frequencies may be discarded. Solutions for nonzero modes are retained.

**FREQ4**      Frequency List, Alternate Form 4

Defines a set of frequencies used in the solution of modal frequency-response problems by specifying the amount of “spread” around each natural frequency and the number of equally spaced excitation frequencies within the spread.

**Format:**

| 1     | 2   | 3  | 4  | 5    | 6   | 7 | 8 | 9 | 10 |
|-------|-----|----|----|------|-----|---|---|---|----|
| FREQ4 | SID | F1 | F2 | FSPD | NFM |   |   |   |    |

**Example:**

|       |   |      |       |      |    |  |  |  |  |
|-------|---|------|-------|------|----|--|--|--|--|
| FREQ4 | 6 | 20.0 | 200.0 | 0.30 | 21 |  |  |  |  |
|-------|---|------|-------|------|----|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                             |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                                                                             |
| F1    | Lower bound of frequency range in cycles per unit time. (Real ≥ 0.0, Default = 0.0)                                                                  |
| F2    | Upper bound of frequency range in cycles per unit time. (Real > 0.0, F2 > F1, Default = 1.0E20)                                                      |
| FSPD  | Frequency spread, +/- the fractional amount specified for each mode which occurs in the frequency range F1 to F2. (1.0 > Real > 0.0, Default = 0.10) |
| NFM   | Number of evenly spaced frequencies per “spread” mode. (Integer > 0; Default = 3; If NFM is even, NFM + 1 will be used.)                             |


**Remarks:**

1. FREQ4 applies only to modal frequency-response solutions (SOLs 111, 146, and 200) and is ignored in direct frequency-response solutions.
2. FREQ4 entries must be selected with the Case Control command FREQUENCY=SID.
3. There will be NFM excitation frequencies between  $(1-FSPD) f_N$  and  $(1+FSPD) f_N$ , for each natural frequency in the range F1 to F2.

1512 **FREQ4**  
Frequency List, Alternate Form 4

**15**  
Bulk F-L

4. In the example above there will be 21 equally spaced frequencies across a frequency band of  $0.7 \cdot f_N$  to  $1.3 \cdot f_N$  for each natural frequency that occurs between 20 and 2000. See [Figure 15-4](#) for the definition of frequency spread.

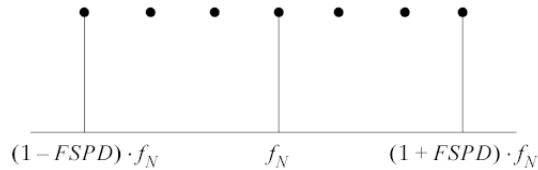


**Figure 15-4. Frequency Spread Definition**

Excitation frequencies may be based on natural frequencies that are not within the range (F1 and F2) as long as the calculated excitation frequencies are within the range. Similarly, an excitation frequency calculated based on natural frequencies within the range (F1 through F2) may be excluded if it falls outside the range.

5. The frequency spread can be used also to define the half-power bandwidth. The half-power bandwidth is given by  $2 \cdot x \cdot f_N$ , where  $x$  is the damping ratio. Therefore, if FSPD is specified equal to the damping ratio for the mode, NFM specifies the number of excitation frequency within the half-power bandwidth. See [Figure 15-5](#) for the definition of half-power bandwidth.



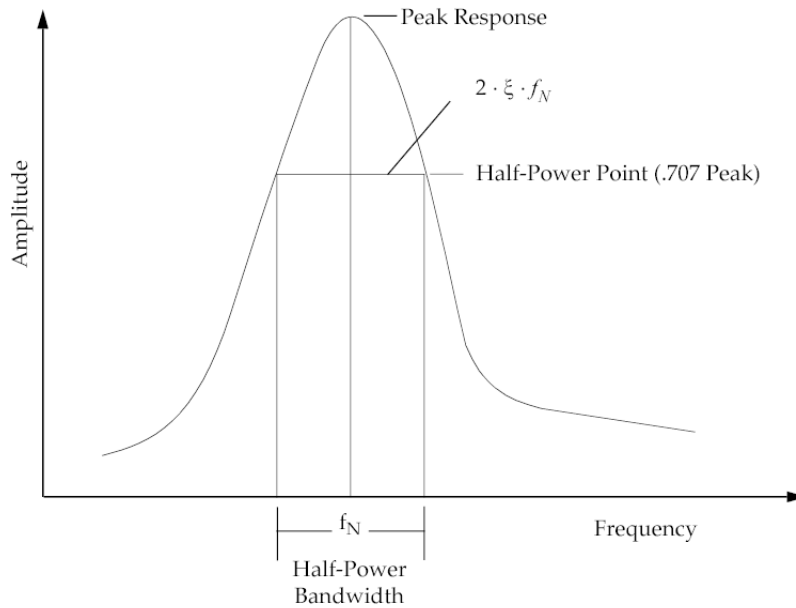

**Figure 15-5. Half-Power Bandwidth Definition**

6. Since the forcing frequencies are near structural resonances, it is important that some amount of damping be specified.
7. All FREQi entries with the same set identification numbers will be used. Duplicate frequencies will be ignored.  $f_N$  and  $f_{N-1}$  are considered duplicated if

$$|f_N - f_{N-1}| < \text{DFREQ} \cdot |f_{MAX} - f_{MIN}|$$

where DFREQ is a user parameter with a default of  $10^{-5}$ . The values  $f_{MAX}$  and  $f_{MIN}$  are the maximum and minimum excitation frequencies of the combined FREQi entries.

8. In design optimization (SOL 200), the excitation frequencies are derived from the natural frequencies computed at each design cycle.
9. In modal analysis, solutions for modal DOFs from rigid body modes at zero excitation frequencies may be discarded. Solutions for nonzero modes are retained.

**1514** **FREQ5**  
**Frequency List, Alternate Form 5**

**FREQ5**      Frequency List, Alternate Form 5

Defines a set of frequencies used in the solution of modal frequency-response problems by specification of a frequency range and fractions of the natural frequencies within that range.

**Format:**

| 1     | 2   | 3   | 4      | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|--------|-----|-----|-----|-----|-----|----|
| FREQ5 | SID | F1  | F2     | FR1 | FR2 | FR3 | FR4 | FR5 |    |
|       | FR6 | FR7 | -etc.- |     |     |     |     |     |    |

**Example:**

|       |      |      |       |     |     |     |     |      |  |
|-------|------|------|-------|-----|-----|-----|-----|------|--|
| FREQ5 | 6    | 20.0 | 200.0 | 1.0 | 0.6 | 0.8 | 0.9 | 0.95 |  |
|       | 1.05 | 1.1  | 1.2   |     |     |     |     |      |  |

**Fields:**

| Field | Contents                                                                                        |
|-------|-------------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                        |
| F1    | Lower bound of frequency range in cycles per unit time. (Real ≥ 0.0; Default = 0.0)             |
| F2    | Upper bound of frequency range in cycles per unit time. (Real > 0.0, F2 > F1, Default = 1.0E20) |
| FRi   | Fractions of the natural frequencies in the range F1 to F2. (Real > 0.0)                        |

**Remarks:**

1. FREQ5 applies only to modal frequency-response solutions (SOLs 111, 146, and 200) and is ignored in direct frequency response solutions.
2. FREQ5 entries must be selected with the Case Control command FREQUENCY=SID.
3. The frequencies defined by this entry are given by

$$f_i = FRi \cdot f_{N_i}$$

where  $f_{Ni}$  are the natural frequencies in the range F1 through F2.

4. In the example above, the list of frequencies will be 0.6, 0.8, 0.9, 0.95, 1.0, 1.05, 1.1, and 1.2 times each natural frequency between 20 and 2000. If this computation results in excitation frequencies less than F1 and greater than F2, those computed excitation frequencies are ignored.

Excitation frequencies may be based on natural frequencies that are not within the range (F1 and F2) as long as the calculated excitation frequencies are within the range. Similarly, an excitation frequency calculated based on natural frequencies within the range (F1 through F2) may be excluded if it falls outside the range.

5. Since the forcing frequencies are near structural resonances, it is important that some amount of damping be specified.
6. All FREQi entries with the same set identification numbers will be used. Duplicate frequencies will be ignored.  $f_N$  and  $f_{N-1}$  are considered duplicated if

$$|f_N - f_{N-1}| < \text{DFREQ} \cdot |f_{MAX} - f_{MIN}|$$

where DFREQ is a user parameter with a default of  $10^{-5}$ . The values  $f_{MAX}$  and  $f_{MIN}$  are the maximum and minimum excitation frequencies of the combined FREQi entries.

7. In design optimization (SOL 200), the excitation frequencies are derived from the natural frequencies computed at each design cycle.
8. In modal analysis, solutions for modal DOFs from rigid body modes at zero excitation frequencies may be discarded. Solutions for nonzero modes are retained.

**1516 FSLIST**  
Free Surface List

**FSLIST** Free Surface List

Defines the fluid points (RINGFL entry) that lie on a free surface boundary.

**Format:**

| 1      | 2    | 3    | 4      | 5    | 6    | 7    | 8    | 9    | 10 |
|--------|------|------|--------|------|------|------|------|------|----|
| FSLIST | RHO  | IDF1 | IDF2   | IDF3 | IDF4 | IDF5 | IDF6 | IDF7 |    |
|        | IDF8 | IDF9 | -etc.- |      |      |      |      |      |    |

**Example:**

| 1      | 2     | 3 | 4  | 5  | 6    | 7 | 8 | 9 | 10 |
|--------|-------|---|----|----|------|---|---|---|----|
| FSLIST | 1.0-4 | 1 | 3  | 5  | 4    | 2 | 7 | 6 |    |
|        | 8     | 9 | 10 | 11 | AXIS |   |   |   |    |

**Fields:**

| Field | Contents                                                                                                    |
|-------|-------------------------------------------------------------------------------------------------------------|
| RHO   | Mass density at the surface. (Real > 0.0; the default is taken from DRHO on the AXIF entry).                |
| IDFi  | Identification number of RINGFL entry. (Integer > 0 or Character = "AXIS" in first and/or last field only). |

**Remarks:**

1. This entry is allowed only if an AXIF entry is also present.
2. The order of the points must be sequential with the fluid on the right with respect to the direction of travel.
3. The word "AXIS" defines an intersection with the polar axis of the fluid coordinate system.
4. If the fluid density varies along the boundary, there must be one FSLIST entry for each interval between fluid points.

**GENEL** General Element

Defines a general element.

**Format:**

| 1     | 2   | 3   | 4   | 5   | 6      | 7   | 8   | 9   | 10 |
|-------|-----|-----|-----|-----|--------|-----|-----|-----|----|
| GENEL | EID |     | UI1 | CI1 | UI2    | CI2 | UI3 | CI3 |    |
|       | UI4 | CI4 | UI5 | CI5 | -etc.- |     |     |     |    |

UI<sub>m</sub> – The last item in the UI list will appear in one of fields 2, 4, 6, or 8.

|  |      |  |     |     |     |     |        |  |  |
|--|------|--|-----|-----|-----|-----|--------|--|--|
|  | “UD” |  | UD1 | CD1 | UD2 | CD2 | -etc.- |  |  |
|--|------|--|-----|-----|-----|-----|--------|--|--|

UD<sub>n</sub> –The last item in the UD list will appear in one of fields 2, 4, 6, or 8.

|  |            |      |      |      |        |      |      |  |  |
|--|------------|------|------|------|--------|------|------|--|--|
|  | “K” or “Z” | KZ11 | KZ21 | KZ31 | -etc.- | KZ22 | KZ32 |  |  |
|  | -etc.-     |      | KZ33 | KZ43 | -etc.- |      |      |  |  |

KZ<sub>mm</sub> – The last item in the K or Z matrix will appear in one of fields 2 through 9.

|  |     |     |     |        |  |     |        |  |  |
|--|-----|-----|-----|--------|--|-----|--------|--|--|
|  | “S” | S11 | S12 | -etc.- |  | S21 | -etc.- |  |  |
|--|-----|-----|-----|--------|--|-----|--------|--|--|

S<sub>mn</sub> – The last item in the S matrix will appear in one of fields 2 through 9.

**Example:**

|       |     |     |      |     |     |     |     |     |  |
|-------|-----|-----|------|-----|-----|-----|-----|-----|--|
| GENEL | 629 |     | 1    | 1   | 13  | 4   | 42  | 0   |  |
|       | 24  | 2   |      |     |     |     |     |     |  |
|       | UD  |     | 6    | 2   | 33  | 0   |     |     |  |
|       | Z   | 1.0 | 2.0  | 3.0 | 4.0 | 5.0 | 6.0 | 7.0 |  |
|       | 8.0 | 9.0 | 10.0 |     |     |     |     |     |  |
|       | S   | 1.5 | 2.5  | 3.5 | 4.5 | 5.5 | 6.5 | 7.5 |  |
|       | 8.5 |     |      |     |     |     |     |     |  |

**Fields:**

| Field | Contents                                            |
|-------|-----------------------------------------------------|
| EID   | Unique element identification number. (Integer > 0) |

| Field                           | Contents                                                                                                                                                                                                                                                                                                   |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Uli,<br>C <i>l</i> iUDj,<br>CDj | Identification numbers of coordinates in the UI or UD list, in sequence corresponding to the [K], [Z], and [S] matrices. U <i>l</i> i and U <i>D</i> i are grid point numbers, and C <i>l</i> i and CDj are the component numbers. If a scalar point is given, the component number is zero. (Integer ≥ 0) |
| KZij                            | Values of the [K] or [Z] matrix ordered by columns from the diagonal, according to the UI list. (Real)                                                                                                                                                                                                     |
| Sij                             | Values of the [S] matrix ordered by rows according to the UD list. (Real)                                                                                                                                                                                                                                  |
| “UD”, “K”,<br>“Z”, and<br>“S”   | Character strings that indicate the start of data belonging to the UD list or the [K], [Z], or [S] matrices.                                                                                                                                                                                               |

**Remarks:**

1. The stiffness approach:

$$\begin{Bmatrix} f_1 \\ f_d \end{Bmatrix} = \begin{bmatrix} K & -KS \\ -S^T K & S^T K S \end{bmatrix} \begin{Bmatrix} u_i \\ u_d \end{Bmatrix}$$

The flexibility approach:

$$\begin{Bmatrix} u_i \\ f_d \end{Bmatrix} = \begin{bmatrix} Z & S \\ -S^T & O \end{bmatrix} \begin{Bmatrix} f_i \\ u_d \end{Bmatrix} = \begin{bmatrix} Z & S \\ -S^T & O \end{bmatrix} \begin{Bmatrix} f_i \\ f_d \end{Bmatrix} = \begin{bmatrix} Z & S \\ -S^T & O \end{bmatrix} \begin{Bmatrix} f_i \\ u_d \end{Bmatrix}$$

where

$$\begin{aligned} \{u_i\} &= [u_{i1}, u_{i2}, \dots, u_{im}]^T \\ \{u_d\} &= [u_{d1}, u_{d2}, \dots, u_{dn}]^T \end{aligned}$$

$$[KZ] = [K] \text{ or } [Z] = \begin{bmatrix} KZ11 & \dots & \dots & \dots \\ KZ21 & KZ22 & \dots & \dots \\ KZ31 & KZ32 & \dots & \dots \\ \vdots & \vdots & \vdots & \vdots \\ KZ_{m1} & \dots & \dots & KZ_{mm} \end{bmatrix} \text{ and } [KZ]^T = [KZ]$$

$$[S] = \begin{bmatrix} S11 & \dots & S_{1n} \\ S21 & \dots & \dots \\ S31 & \dots & \dots \\ \vdots & \vdots & \vdots \\ S_{m1} & \dots & S_{mn} \end{bmatrix}$$

The required input is the  $\{u_i\}$  list and the lower triangular portion of  $[K]$  or  $[Z]$ . Additional input may include the  $\{u_d\}$  list and  $[S]$ . If  $[S]$  is input,  $\{u_d\}$  must also be input. If  $\{u_d\}$  is input but  $[S]$  is omitted,  $[S]$  is internally calculated. In this case,  $\{u_d\}$  must contain six and only six degrees-of-freedom.

The forms shown above for both the stiffness and flexibility approaches assume that the element is a free body with rigid body motions that are defined by  $\{u_i\} = [S]\{u_d\}$ . See "General Element Capability (GENEL)" in the *NX Nastran Element Library*.

2. When the stiffness matrix  $K$  is input, the number of significant digits should be the same for all terms.
3. Double-field format may be used for input of  $K$  or  $Z$ .
4. The DMIG entry or the INPUTT4 module offer alternative methods for inputting large matrices.
5. The general element entry in the example above defines the following:

$$\{u_i\} = [1-1, 13-4, 42, 24-2]^T$$

$$\{u_d\} = [6-2, 33]^T$$

where i-j means the j-th component of grid point i. Points 42 and 33 are scalar points.

1520 GENEL  
General Element

15  
Bulk F-L

$$[Z] = \begin{bmatrix} 1.0 & 2.0 & 3.0 & 4.0 \\ 2.0 & 5.0 & 6.0 & 7.0 \\ 3.0 & 6.0 & 8.0 & 9.0 \\ 4.0 & 7.0 & 9.0 & 10.0 \end{bmatrix} \quad [S] = \begin{bmatrix} 1.5 & 2.5 \\ 3.5 & 4.5 \\ 5.5 & 6.5 \\ 7.5 & 8.5 \end{bmatrix}$$



**GMBC**      General Enforced Displacement Definition

Defines enforced displacements for GRID, FEEDGE, GMCURV, FEFACE, and GMSURF entries.

**Format:**

| 1    | 2      | 3      | 4      | 5      | 6  | 7      | 8      | 9      | 10 |
|------|--------|--------|--------|--------|----|--------|--------|--------|----|
| GMBC | LID    | SPCID  | C      | ENTITY | ID | METHOD | FIELD1 | FIELD2 |    |
|      | FIELD3 | FIELD4 | -etc.- |        |    |        |        |        |    |

**Example:**

|      |     |   |   |        |   |      |    |    |  |
|------|-----|---|---|--------|---|------|----|----|--|
| GMBC | 127 | 1 | 2 | GMCURV | 1 | QUAD | 1. | 2. |  |
|      | 1.0 |   |   |        |   |      |    |    |  |

**Fields:**

| Field  | Contents                                                                                                            | Type                           | Default  |
|--------|---------------------------------------------------------------------------------------------------------------------|--------------------------------|----------|
| LID    | LOAD set identification number. See Remark 2 .                                                                      | Integer $\geq 0$               | Required |
| SPCID  | SPC set identification number. See Remark 2 .                                                                       | Integer $> 0$                  | Required |
| C      | Component number in the output coordinate system (global). See Remarks 3 and 4.                                     | $0 \leq \text{Integer} \leq 6$ | Required |
| ENTITY | Entity that the enforced displacements is applied to (Specify GRID, FEEDGE, GMCURV, FEFACE, or GMSURF).See Remarks. | Character                      | Required |
| ID     | ID of the entity selected above. See Remarks.                                                                       | Integer $> 0$                  | Required |
| METHOD | Method used to supply the data (EQUATION or TABLE, CONSTANT, LINEAR, QUAD, CUBIC). See Remarks.                     | Character                      | Remark   |
| FIELDi | Enforced displacement data. See Remarks.                                                                            | Integer or Real                | Required |

1522 **GMBC**  
**General Enforced Displacement Definition**

**Remarks:**

1. GMBC is the recommended entry for specifying boundary conditions and must be selected with Case Control command SPC = SPCID.
2. LID and SPCID refer to Case Control commands for specifying loads and boundary conditions. Whenever there are several nonzero enforced motion vectors supplied, the most efficient processing of the data (single decomposition of the stiffness matrix) is accomplished by specifying both LID and SPCID.

| LID | Result                                                                                     |
|-----|--------------------------------------------------------------------------------------------|
| > 0 | Generate SPC entries with zero displacements and SPCD entries with non-zero displacements. |
| 0   | Generate SPC entries with non-zero displacements only                                      |

3. The components of motion specified by C (field 4) of all degrees-of-freedom in the output coordinate system (Global System) associated with an entity will be constrained.
4. If C = 0 is specified then the degrees-of-freedom will be taken out of the constraint set. In this case the method field is not required.
5. The component is a single integer (1 or 2 or 3 etc.). Use multiple GMBC entries to enforce constraints on multiple components.
6. If METHOD = "EQUATION", "TABLE", or "CONSTANT" then FIELD1 is:

| METHOD   | FIELD1                                                                          | Type        |
|----------|---------------------------------------------------------------------------------|-------------|
| EQUATION | ID of a DEQATN entry defining the displacement value as a function of location  | Integer > 0 |
| TABLE    | ID of a TABLE3D entry defining the displacement value as a function of location | Integer > 0 |
| CONSTANT | Value of enforced displacement                                                  | Real        |

7. When METHOD = CONSTANT, a constant displacement is specified for the FEEDGE, GMCURV, FEFACE, and GMSURF entities.
8. If ENTITY = "FEEDGE" the METHOD field can be used to specify, linear, quadratic, and cubic displacements. FIELD1 and FIELD2 correspond to GRID1 and GRID2 on the FEEDGE entry. The values in FIELD3 and FIELD4 are:

| Applying Linear, Quadratic, and Cubic Displacements to an FEEDGE |        |        |
|------------------------------------------------------------------|--------|--------|
| METHOD                                                           | FIELD3 | FIELD4 |
| LINEAR                                                           | blank  | blank  |

| <b>Applying Linear, Quadratic, and Cubic Displacements to an FEEDGE</b> |                           |                           |
|-------------------------------------------------------------------------|---------------------------|---------------------------|
| QUAD                                                                    | Value at 1/2 chord length | blank                     |
| CUBIC                                                                   | Value at 1/3 chord length | Value at 2/3 chord length |

9. If ENTITY = “FEFACE” the METHOD field specifies linear or quadratic displacements. The values of FIELDi are location specific:

- Quadrilateral FEFACE

| METHOD | FIELD1 through FIELD4   | FIELD5 through FIELD8               | FIELD9                    | Displacement function |
|--------|-------------------------|-------------------------------------|---------------------------|-----------------------|
| LINEAR | Value at GRID1, 2, 3, 4 | blank                               | blank                     | Linear                |
| QUAD   | Value at GRID1, 2, 3, 4 | Value at mid side of EDGE1, 2, 3, 4 | Value at middle of FEFACE | Quadratic             |

- Triangular FEFACE


| METHOD | FIELD1 through FIELD3 | FIELD4 through FIELD6            | Displacement function |
|--------|-----------------------|----------------------------------|-----------------------|
| LINEAR | Value at GRID1, 2, 3  | blank                            | Linear                |
| QUAD   | Value at GRID1, 2, 3  | Value at mid side of EDGE1, 2, 3 | Quadratic             |

10. In general, the hierarchy set to resolve the conflicts arising in the enforced displacement input data is: GRIDs followed by FEEDGES followed by GMCURVs followed by FEFACEs followed by GMSURFs. This means that:

- In general the program does not allow the user to supply multiple values of enforced displacements for the same component (C).
- Displacement values specified for each component of a given GMSURF entry are applied to the same component of all GRID, FEEDGE, and FEFACE degrees-of-freedom that lie within the GMSURF.
- Displacement values specified for each component of different GMSURF entries are averaged and applied to the same component of all GRID, FEEDGE degrees-of-freedom that are shared by (that are common to) the multiple GMSURFs.
- Displacement values specified for a given FEFACE entry are applied to all GRID, FEEDGE, and FEFACE degrees-of-freedom that lie within the FEFACE. This data overrides the data that is specified for all the components of the given GRID, FEEDGE and FEFACE degrees-of-freedom that lie within the FEFACE by using GMSURF entries.

- Displacement values specified for each component of different FEFACE entries are averaged and applied to the same component of all GRID, FEEDGE degrees-of-freedom that are shared by (that are common to) the multiple FEFACEs. This data overrides the data that is specified for all the components of the given FEEDGE and GRIDs by using GMSURF entries.
- Displacement values specified for each component of a given GMCURV entry are applied to the same component of all GRID, FEEDGE, degrees-of-freedom that lie within the GMCURV. This data overrides the data for all the components that are specified for the given FEEDGE and GRIDs by using GMSURF or FEFACE entries.
- Displacement values specified for each component of different GMCURV entries are averaged and applied to the same component of all GRID degrees-of-freedom that are shared by (that are common to) the multiple GMCURVs. This data overrides the data for all the components that are specified for the given GRIDs by using GMSURF or FEFACE entries.
- Displacement values specified for each component of a given FEEDGE entry are applied to the same component of all GRID, FEEDGE, degrees-of-freedom that lie within the FEEDGE. This data overrides the data for all the components that is specified for the given FEEDGE and GRIDs by using GMCURV or FEFACE or GMSURF entries.
- Displacement values specified for each component of different FEEDGE entries are averaged and applied to the same component of all GRID degrees-of-freedom that are shared by (that are common to) the multiple FEEDGEs. This data overrides the data for all the components that are specified for the given GRIDs by using GMCURV or FEFACE or GMSURF entries.
- Grids have the highest priority, i.e., any value/property specified using a GRID entry overrides all other information associated with that GRID. If multiple entries are used for a given GRID, e.g., multiple SPCs, then the existing rules govern (SPCs are combined, FORCE is added, SPCDs for the same component are not allowed).
- It is important to recall that these displacements are assumed to be in the Global Coordinate System and that the interconsistency of the output coordinate systems of the various GRIDs, FEEDGEs, FEFACEs is not checked.
- If an entity is specified on both a GMBC and GMSPC entry then the GMSPC specification will be ignored.

11. For the example in [Figure 15-6](#),

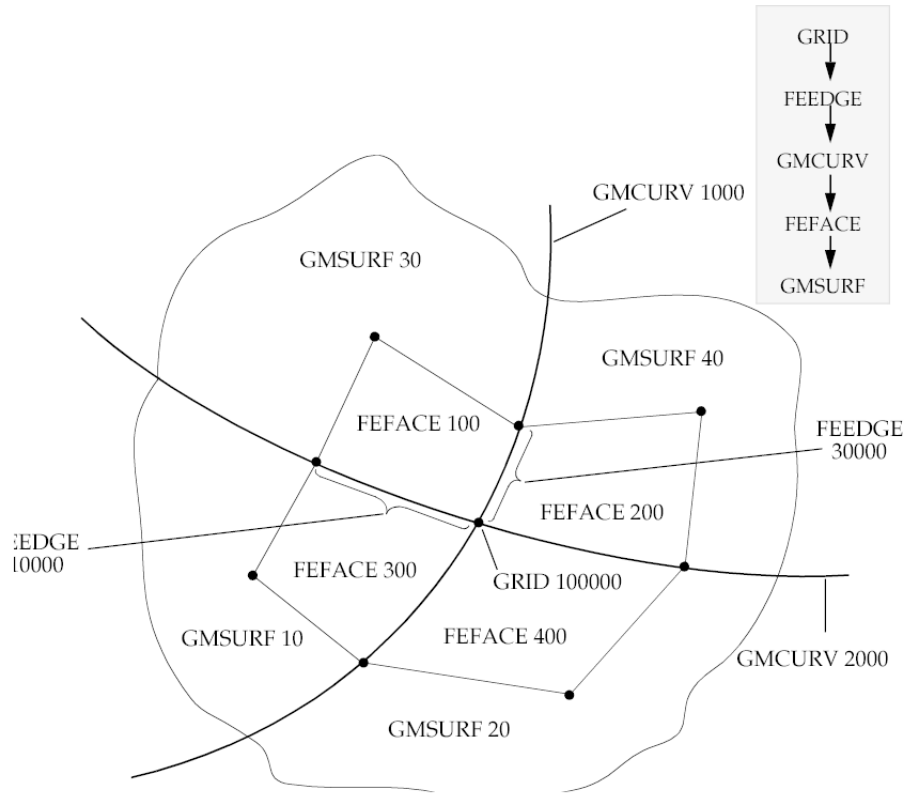

**Figure 15-6. Use of Multiple Surface and Curves**

- The enforced displacement for GRID 100000 can be specified using SPCD, GMBC referring to an FEEDGE, GMBC referring to a GMCURV, GMBC referring to a FEFACE, and GMBC referring to a GMSURF. [Table 15-2](#) describes the outcome of using these different methods:

| <b>Table 15-2. Enforced Displacement Used for GRID 10000</b> |                                                                                                          |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| <b>When Specified Using</b>                                  | <b>Action</b>                                                                                            |
| SPCD                                                         | Overrides all other information supplied for all components.                                             |
| Single GMBC (FEEDGE)                                         | Overrides information supplied for all components using GMBC(GMCURV) GMBC(FEFACE), GMBC(GMSURF) entries. |

| <b>Table 15-2. Enforced Displacement Used for GRID 10000</b> |                                                                                                                                                                         |
|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>When Specified Using</b>                                  | <b>Action</b>                                                                                                                                                           |
| Multiple GMBC (FEEDGE)                                       | Values are averaged on a component basis. The resulting value overrides information supplied for all components using GMBC(GMCURV), GMBC(FEFACE), GMBC(GMSURF) entries. |
| Single GMBC (GMCURV)                                         | Overrides information supplied for all components using GMBC(FEFACE), GMBC(GMSURF) entries.                                                                             |
| Multiple GMBC (GMCURV)                                       | Values are averaged on a component basis. The resulting value overrides information supplied for all components using GMBC(FEFACE), GMBC(GMSURF) entries.               |
| Single GMBC (FEFACE)                                         | Overrides information supplied for all components using GMBC(GMSURF) entries.                                                                                           |
| Multiple GMBC (FEFACE)                                       | Values are averaged on a component basis. The resulting value overrides information supplied for all components using GMBC(GMSURF) entries.                             |
| Single GMBC (GMSURF)                                         | Values are applied.                                                                                                                                                     |
| Multiple GMBC (GMSURF)                                       | Values are averaged on a component basis.                                                                                                                               |

- The enforced displacement for GRID DOFs and edge DOFs belonging to FEEDGE 10000 can be specified using GMBC referring to an FEEDGE, GMBC referring to a GMCURV, GMBC referring to a FEFACE, and GMBC referring to a GMSURF. [Table 15-3](#) describes the outcome of using these different methods:

| <b>Table 15-3. Enforced Displacement Used for FEEDGE 10000</b> |                                                                                                           |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>When Specified Using</b>                                    | <b>Action</b>                                                                                             |
| Single GMBC (FEEDGE)                                           | Overrides information supplied for all components using GMBC(GMCURV), GMBC(FEFACE), GMBC(GMSURF) entries. |

| <b>Table 15-3. Enforced Displacement Used for FEEDGE 10000</b> |                                                                                                                                                                         |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>When Specified Using</b>                                    | <b>Action</b>                                                                                                                                                           |
| Multiple GMBC (FEEDGE)                                         | Values are averaged on a component basis. The resulting value overrides information supplied for all components using GMBC(GMCURV), GMBC(FEFACE), GMBC(GMSURF) entries. |
| Single GMBC (GMCURV)                                           | Overrides information supplied for all components using GMBC(FEFACE), GMBC(GMSURF) entries.                                                                             |
| Multiple GMBC (GMCURV)                                         | Values are averaged on a component basis. The resulting value overrides information supplied for all components using GMBC(FEFACE), GMBC(GMSURF) entries.               |
| Single GMBC (FEFACE)                                           | Overrides information supplied for all components using GMBC(GMSURF) entries.                                                                                           |
| Multiple GMBC (FEFACE)                                         | Values are averaged on a component basis. The resulting value overrides information supplied for all components using GMBC(GMSURF) entries.                             |
| Single GMBC (GMSURF)                                           | Values are applied.                                                                                                                                                     |
| Multiple GMBC (GMSURF)                                         | Values are averaged on a component basis.                                                                                                                               |

- The enforced displacement for the GRID DOFs and edge DOFs belonging to GMCURV 1000 can be specified using GMBC referring to a GMCURV, GMBC referring to a FEFACE, and GMBC referring to a GMSURF. [Table 15-4](#) describes the outcome of using these different methods:

| <b>Table 15-4. Enforced Displacement Used for GMCURV 1000</b> |                                                                                             |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| <b>When Specified Using</b>                                   | <b>Action</b>                                                                               |
| Single GMBC (GMCURV)                                          | Overrides information supplied for all components using GMBC(FEFACE), GMBC(GMSURF) entries. |
| Single GMBC (FEFACE)                                          | Overrides information supplied for all components using GMBC(GMSURF) entries.               |

| <b>Table 15-4. Enforced Displacement Used for GMCURV 1000</b> |                                                                                                                                             |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>When Specified Using</b>                                   | <b>Action</b>                                                                                                                               |
| Multiple GMBC (FEFACE)                                        | Values are averaged on a component basis. The resulting value overrides information supplied for all components using GMBC(GMSURF) entries. |
| Single GMBC (GMSURF)                                          | Values are applied.                                                                                                                         |
| Multiple GMBC (GMSURF)                                        | Values are averaged on a component basis.                                                                                                   |

- The enforced displacement for the GRID DOFs, the edge DOFs, and the face DOFs belonging to FEFACE 300 can be specified using GMBC referring to a FEFACE and GMBC referring to a GMSURF. [Table 15-5](#) describes the outcome of using these different methods:

| <b>Table 15-5. Enforced Displacement Used for FEFACE 300</b> |                                                                               |
|--------------------------------------------------------------|-------------------------------------------------------------------------------|
| <b>When Specified Using</b>                                  | <b>Action</b>                                                                 |
| Single GMBC (FEFACE)                                         | Overrides information supplied for all components using GMBC(GMSURF) entries. |
| Single GMBC (GMSURF)                                         | Values are applied.                                                           |



**GMBNDC**      Geometric Boundary - Curve

Defines a geometric boundary consisting of p-element edges along a curve interface. The boundary may consist of edges of shell, beam, or p-solid elements.

**Format:**

| 1      | 2      | 3      | 4     | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|--------|--------|-------|-----|-----|-----|-----|-----|----|
| GMBNDC | BID    | GRIDI  | GRIDF |     |     |     |     |     |    |
|        | ENTITY | ID1    | ID2   | ID3 | ID4 | ID5 | ID6 | ID7 |    |
|        | ID8    | -etc.- |       |     |     |     |     |     |    |

**Example:**

|        |        |     |     |  |  |  |  |  |  |
|--------|--------|-----|-----|--|--|--|--|--|--|
| GMBNDC | 1      | 101 | 106 |  |  |  |  |  |  |
|        | GMCURV | 1   |     |  |  |  |  |  |  |

|        |        |     |     |    |    |    |  |  |  |
|--------|--------|-----|-----|----|----|----|--|--|--|
| GMBNDC | 1      | 101 | 106 |    |    |    |  |  |  |
|        | FEEDGE | 11  | 12  | 13 | 14 | 15 |  |  |  |

|        |      |     |     |     |     |  |  |  |  |
|--------|------|-----|-----|-----|-----|--|--|--|--|
| GMBNDC | 1    | 101 | 106 |     |     |  |  |  |  |
|        | GRID | 102 | 103 | 104 | 105 |  |  |  |  |

**Fields:**

| Field  | Contents                                                                         |
|--------|----------------------------------------------------------------------------------|
| BID    | Boundary identification number to be referenced by a GMINTC entry. (Integer > 0) |
| GRIDI  | Initial grid identification number for boundary. (Integer > 0)                   |
| GRIDF  | Final grid identification number for boundary. (Integer > 0)                     |
| ENTITY | Entity type for defining boundary. (Character)                                   |
| Idi    | Entity identification numbers for boundary of subdomain. (Integer > 0)           |


**Remarks:**

1. All boundary identification numbers must be unique.
2. GRIDI and GRIDF define the end points of the boundary.

1530 **GMBNDC**  
**Geometric Boundary - Curve**

**15**  
Bulk F-L

3. For each boundary, one of the entity types GMCURV, FEEDGE, or GRID is required.
4. For the GMCURV entity type, if there are multiple paths on the GMCURV from the GRIDI to the GRIDF, such as two segments of a circle, the FEEDGE or GRID method must be used instead to uniquely define the path.
5. For the GRID entity type, the entities should be listed in order from the GRIDI to the GRIDF. The GRIDI and GRIDF need not be repeated in the IDi list.
6. If more than one boundary references the same GMCURV entry with the same GRIDI and GRIDF, then the FEEDGE or GRID entity type must be used instead for each to uniquely identify the boundaries.
7. Multiple continuation entries may be specified for additional entity identification numbers, IDi.

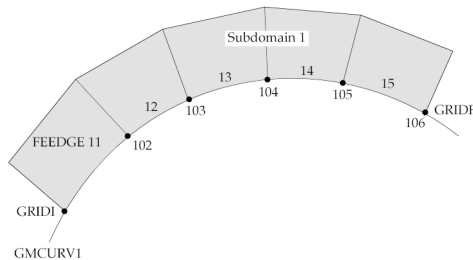

**Figure 15-7. Geometric Boundary Definition**

8. Interface elements may generate high or negative matrix/factor diagonal ratios. If there are no other modelling errors, these messages may be ignored and PARAM,BAILOUT,-1 may be used to continue the run.

**GMBNDS**      Geometric Boundary - Surface

Defines a geometric boundary consisting of p-element faces along a surface interface. The boundary may consist of faces of p-solid or p-shell elements.

**Format:**

| 1      | 2      | 3      | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|--------|--------|-----|-----|-----|-----|-----|-----|----|
| GMBNDS | BID    |        |     |     |     |     |     |     |    |
|        | ENTITY | ID1    | ID2 | ID3 | ID4 | ID5 | ID6 | ID7 |    |
|        | ID8    | -etc.- |     |     |     |     |     |     |    |

**Example:**

|        |        |   |  |  |  |  |  |  |  |
|--------|--------|---|--|--|--|--|--|--|--|
| GMBNDS | 1      |   |  |  |  |  |  |  |  |
|        | GMSURF | 1 |  |  |  |  |  |  |  |

|        |        |    |    |    |    |    |    |  |  |
|--------|--------|----|----|----|----|----|----|--|--|
| GMBNDS | 1      |    |    |    |    |    |    |  |  |
|        | FEFACE | 11 | 12 | 13 | 14 | 15 | 16 |  |  |

|        |      |     |     |     |     |     |     |     |  |
|--------|------|-----|-----|-----|-----|-----|-----|-----|--|
| GMBNDS | 1    | 101 |     |     |     |     |     |     |  |
|        | GRID | 102 | 103 | 105 | 106 | 107 | 108 | 110 |  |
|        |      | 111 |     |     |     |     |     |     |  |

**Fields:**

| Field  | Contents                           | Type        | Default  |
|--------|------------------------------------|-------------|----------|
| BID    | Boundary identification number.    | Integer > 0 | Required |
| ENTITY | Entity type for defining boundary. | Character   | Required |
| Idi    | Entity ID i for boundary           | Integer > 0 | Optional |


**Remarks:**

1. All BIDs must be unique.
2. For each boundary, one of the entity types GMSURF, FEFACE, or GRID is required.
3. For the GMSURF entity type, all the faces referencing the GMSURF will be included in the boundary.

1532 **GMBNDS**  
**Geometric Boundary - Surface**

**15**  
Bulk F-L

4. If more than one boundary references the same GMSURF, then the FEFACE or GRID entity type must be used instead for each to uniquely identify the boundaries.
5. Multiple continuation entries may be used without repeating the ENTITY field.

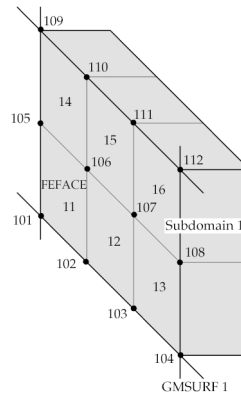

**Figure 15-8. Surface Boundary Definition**

6. Interface elements may generate high or negative matrix/factor diagonal ratios. If there are no other modelling errors, these messages may be ignored and PARAM,BAILOUT,-1 may be used to continue the run.

**GMCORD** Convective/Follower Coordinate System Definition

Defines a convective/follower coordinate system on an FEEDGE, GMCURV, FEFACE, or GMSURF entry.

**Format:**

| 1      | 2   | 3      | 4   | 5   | 6 | 7 | 8 | 9 | 10 |
|--------|-----|--------|-----|-----|---|---|---|---|----|
| GMCORD | CID | ENTITY | ID1 | ID2 |   |   |   |   |    |

**Example:**

|        |     |        |    |    |  |  |  |  |  |
|--------|-----|--------|----|----|--|--|--|--|--|
| GMCORD | 101 | GMCURV | 26 | 44 |  |  |  |  |  |
|--------|-----|--------|----|----|--|--|--|--|--|

**Fields:**

| Field    | Contents                                                                             | Type           | Default  |
|----------|--------------------------------------------------------------------------------------|----------------|----------|
| CID      | Coordinate system identification number, unique with respect to all CORDij entries.  | Integer<br>> 0 | Required |
| ENTITY   | Type of Bulk Data entry that is used to define the coordinate system. See Remark 3 . | Character      | Required |
| ID1, ID2 | Entity identification numbers. See Remark 3.                                         | Integer<br>> 0 | Required |



**Remarks:**

1. GMCORD defines a (convective) coordinate system associated with an entity. This type of coordinate system can be used to apply loads and boundary conditions only.
2. GMCORD can only be specified for p-version elements.
3. The Bulk Data entries referenced by ID1 and ID2 depends on ENTITY.

| ENTITY | ID1             | ID2             |
|--------|-----------------|-----------------|
| FEEDGE | FEEDGE entry ID | FEFACE entry ID |
| GMCURV | GMCURV entry ID | GMSURF entry ID |
| FEFACE | FEFACE entry ID | Blank           |
| GMSURF | GMSURF entry ID | Blank           |

## 1534 GMCORD Convective/Follower Coordinate System Definition

- For ENTITY = "FEEDGE" normal is defined by the FEFACE.
- For ENTITY = "GMCURV" normal is defined by the GMSURF.

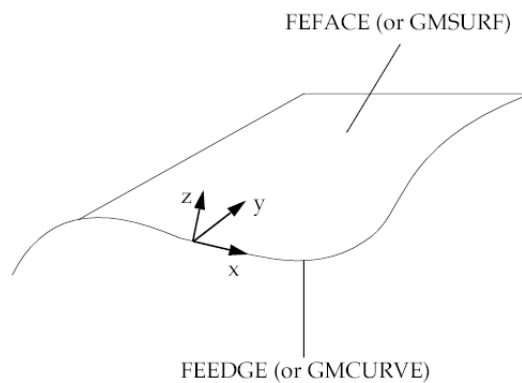

**GMCURV**      Curve Definition

Defines geometric curve that will be used in element geometry, load definition, and boundary condition definition.

**Format:**

| 1      | 2         | 3        | 4     | 5     | 6      | 7 | 8 | 9 | 10 |
|--------|-----------|----------|-------|-------|--------|---|---|---|----|
| GMCURV | CURVID    | GROUP    | CIDIN | CIDBC |        |   |   |   |    |
|        | Evaluator | Specific | Data  | and   | Format |   |   |   |    |

**Example:**

|        |          |        |     |     |     |     |         |  |  |
|--------|----------|--------|-----|-----|-----|-----|---------|--|--|
| GMCURV | 101      | FENDER |     |     |     |     |         |  |  |
|        | RPC      | POINT  |     |     |     |     |         |  |  |
|        | 0.0, 2.0 | 1.0    | 1.0 |     | 2.0 | 3.0 | 4.0,1.0 |  |  |
|        | 0.0, 2.0 | 1.0    | 1.0 | 1.0 | 2.0 | 3.0 | 4.0     |  |  |

**Fields:**

| Field  | Contents                                                                                                                       | Type        | Default  |
|--------|--------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| CURVID | Unique identification number. See Remarks 1 and 2.                                                                             | Integer > 0 | Required |
| GROUP  | Group of curves/surfaces that this curve belongs to. See Remarks 4 through 8.                                                  | Character   | Required |
| CIDIN  | Coordinate system identification number used in defining the geometry of the curve. The coordinate system must be rectangular. | Integer ≥ 0 | 0        |
| CIDBC  | Identification number of the coordinate system in which constraints specified on GMBC and GMSPC entries are defined.           | Integer ≥ 0 | 0        |

**Remarks:**

1. GMCURV is used to calculate geometric information only. The edges of the finite elements that are connected to the curve will be parametric cubic curves that are calculated from the more complex curve geometry.

**1536 GMCURV**  
Curve Definition

2. On the continuation entries, no commas can appear in columns 1 through 8 and the data in fields 2 through 9 must be specified in columns 9 through 72.
3. The continuation entries are passed directly to the geometry evaluator indicated by the GROUP parameter.
4. The GROUP parameter is initialized by an CONNECT GEOMEVAL statement in the FMS section. This command specifies the evaluator that will be used for this curve.
5. Two reserved names, MSCGRP0 and MSCGRP1, are provided for the GROUP parameter. These need not be explicitly initialized on the CONNECT FMS statement.
6. If the GROUP parameter is specified as MSCGRP0, the rational parametric cubic (MSCRPC) geometry evaluator is used for this curve. In this case the evaluator specific data in lines 2 through 4 of this Bulk Data entry should be provided as given below. Spaces or a comma character may be used to delimit each value. However, a comma must not be specified in the first field.

| 1 | 2     | 3      | 4     | 5     | 6     | 7     | 8     | 9     | 10 |
|---|-------|--------|-------|-------|-------|-------|-------|-------|----|
|   | RPC   | REPRES |       |       |       |       |       |       |    |
|   | XW(1) | XW(2)  | XW(3) | XW(4) | YW(1) | YW(2) | YW(3) | YW(4) |    |
|   | ZW(1) | ZW(2)  | ZW(3) | ZW(4) | W(1)  | W(2)  | W(3)  | W(4)  |    |

| Field                    | Contents                                                         | Type      | Default  |
|--------------------------|------------------------------------------------------------------|-----------|----------|
| RPC                      | Rational Parametric Cubic Curve.                                 | Character | Required |
| REPRES                   | Representation of the curve<br>("ALGEBRAIC", "POINT", "BEZIER"). | Character | Required |
| XW(1)<br>through<br>W(4) | Data used to define the curve.                                   | Real      | Required |

- A rational parametric curve (RPC) is defined as

$$x(t) = \frac{xw(t)}{w(t)}$$



$$y(t) = \frac{yw(t)}{w(t)}$$

$$z(t) = \frac{zw(t)}{w(t)}$$

$$0.0 \leq t \leq 1.0$$

- For REPRES = "ALGEBRAIC", the parametric curve is defined by the algebraic coefficients ( $a, b, c, d$ ) for a rational cubic equation.

$$P(t) = at^3 + bt^2 + ct + d$$

Expressed in matrix form:

$$P(t) = \begin{bmatrix} t^3 & t^2 & t & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} a \\ b \\ c \\ d \end{bmatrix}$$

for the Bulk Data input as algebraic coefficients

$$xw(t) = XW(1)t^3 + XW(2)t^2 + XW(3)t + XW(4)$$

$$yw(t) = YW(1)t^3 + YW(2)t^2 + YW(3)t + ZW(4)$$

$$zw(t) = ZW(1)t^3 + ZW(2)t^2 + ZW(3)t + ZW(4)$$

$$w(t) = W(1)t^3 + W(2)t^2 + W(3)t + W(4)$$

where  $XW(i)$ ,  $YW(i)$ ,  $ZW(i)$ , and  $W(i)$  are the algebraic coefficients for each of the independent equations  $xw(t)$ ,  $yw(t)$ ,  $zw(t)$ , and  $w(t)$ .

and

$$x(t) = \frac{xw(t)}{w(t)}; y(t) = \frac{yw(t)}{w(t)}; z(t) = \frac{zw(t)}{w(t)}$$


- For REPRES = “BEZIER”, the curve parametric is defined by four rational Bezier control points ( $V_1, V_2, V_3,$  and  $V_4$ ) expressed in matrix form

$$P(t) = V_1(1-t)^3 + V_2 3t(1-t)^2 + V_3 3t^2(1-t) + V_4 t^3$$

$$P(t) = \begin{bmatrix} t^3 & t^2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Bezier} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} V_1 \\ V_2 \\ V_3 \\ V_4 \end{bmatrix}$$

where Bezier constants are

$$\begin{bmatrix} -1 & 3 & -3 & 1 \\ 3 & -6 & 3 & 0 \\ -3 & 3 & 0 & 0 \\ 1 & 0 & 0 & 0 \end{bmatrix}$$

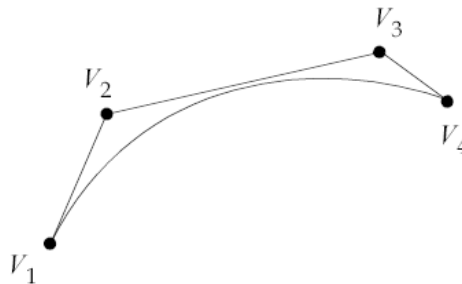

for Bulk Data defined as Bezier control points

$$xw(t) = \begin{bmatrix} 3 & 2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Bezier} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} XW(1) \\ XW(2) \\ XW(3) \\ XW(4) \end{bmatrix}$$

$$yw(t) = \begin{bmatrix} 3 & 2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Bezier} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} YW(1) \\ YW(2) \\ YW(3) \\ YW(4) \end{bmatrix}$$

$$zw(t) = \begin{bmatrix} 3 & 2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Bezier} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} ZW(1) \\ ZW(2) \\ ZW(3) \\ ZW(4) \end{bmatrix}$$


$$w(t) = \begin{bmatrix} 3 & 2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Bezier} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} W(1) \\ W(2) \\ W(3) \\ W(4) \end{bmatrix}$$

where  $XW(i)$ ,  $YW(i)$ ,  $ZW(i)$ , and  $W(i)$  correspond to  $V_i$ ,  
and

$$x(t) = \frac{xw(t)}{w(t)}; y(t) = \frac{yw(t)}{w(t)}; z(t) = \frac{zw(t)}{w(t)}$$

- For REPRES = “POINT”, the parametric curve is defined by four uniformly spaced rational points that are all on the curve similarly expressed in matrix form:

$$P(t) = \begin{bmatrix} 3 & 2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Point} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} V_1 \\ V_2 \\ V_3 \\ V_4 \end{bmatrix}$$

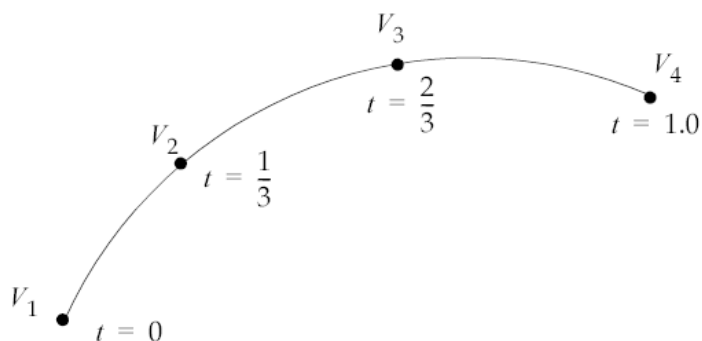

for the Bulk Data input are uniformly spaced rational points

$$xw(t) = \begin{bmatrix} 3 & 2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Point} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} XW(1) \\ XW(2) \\ XW(3) \\ XW(4) \end{bmatrix}$$

$$yw(t) = \begin{bmatrix} 3 & 2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Point} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} YW(1) \\ YW(2) \\ YW(3) \\ YW(4) \end{bmatrix}$$

$$z_w(t) = \begin{bmatrix} 3 & t^2 & t & 1 \end{bmatrix} \begin{bmatrix} \text{Point} \\ \text{Constants} \end{bmatrix} \begin{bmatrix} ZW(1) \\ ZW(2) \\ ZW(3) \\ ZW(4) \end{bmatrix}$$

and

$$x(t) = \frac{xw(t)}{w(t)}; y(t) = \frac{yw(t)}{w(t)}; z(t) = \frac{zw(t)}{w(t)}$$

7. If the GROUP parameter is specified as MSCGRP1, the generic equation (MSCEQN) geometry evaluator is used for this curve. In this case the evaluator specific data in lines 2 through 3 of this Bulk Data entry should be provided as given below. Spaces or a comma character may be used to delimit each value. However, the comma character should not be used in the first “field”.

| 1 | 2        | 3      | 4      | 5      | 6   | 7   | 8     | 9     | 10 |
|---|----------|--------|--------|--------|-----|-----|-------|-------|----|
|   | EQUATION | MINU   | MAXU   | IDX    | IDY | IDZ | IDDXU | IDDYU |    |
|   | IDDZU    | IDDXU2 | IDDYU2 | IDDZU2 |     |     |       |       |    |

| Field               | Contents                                                                                                                                                                                                | Type        | Default  |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| EQUATION            | EQUATION method is to be used                                                                                                                                                                           | Character   |          |
| MINU, MAXU          | Range of the curve parameter <i>u</i> . If MAXU is found less than MINU, the range is assumed to be [-∞, +∞].                                                                                           | Real        | 0.0,1.0  |
| IDX, IDY, IDZ       | ID of DEQATN entries providing equations for the X,Y,Z coordinates of the curve in terms of the curve parameter <i>u</i> .                                                                              | Integer > 0 | Required |
| IDDXU, IDDYU, IDDZU | ID of DEQATN entries providing equations for the first derivatives of X,Y,Z functions with respect to the curve parameter <i>u</i> . If a value of 0 is used, the derivatives are computed numerically. | Integer ≥ 0 | 0        |

1542 **GMCURV**  
Curve Definition

| Field                        | Contents                                                                                                                                                                                                        | Type        | Default |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|
| IDDXU2,<br>IDDYU2,<br>IDDZU2 | ID of DEQATN entries providing equations for the second derivatives of X,Y,Z functions with respect to the curve parameter <i>u</i> . If a value of 0 is used, the second derivatives are computed numerically. | Integer > 0 | 0       |

8. When a user-supplied geometry evaluator is selected for this curve (through the CONNECT GEOMEVAL FMS command) the continuation entries will not be interpreted. In this case an image of this entry is passed on to the evaluator modules provided by the user. Depending on the configuration, these modules could either be linked in with NX Nastran or connected with NX Nastran during execution. If these modules are not accessible, a User Fatal Message will be issued. For example, if in the FMS Section, the following command is given:

- CONNECT GEOMEVAL FENDER,CATIA,'/u/kiz/data', Version = 68 as of 1/3/94
- and the GMCURV Bulk Data entry is provided as follows:

| 1      | 2     | 3      | 4   | 5   | 6   | 7  | 8 | 9 | 10 |
|--------|-------|--------|-----|-----|-----|----|---|---|----|
| GMCURV | 102   | FENDER |     |     |     |    |   |   |    |
|        | Sweep | /u/kiz | 2.5 | arc | 2.7 | 66 |   |   |    |

- In this case, "Sweep /u/kiz 2.5 arc 2.7 66" is passed to the geometry evaluator supplied by the user, and it is expected that the user supplied routines to interpret and use this record.

**GMINTC**      Geometric Interface – Curve

Defines an interface element along a curve interface between boundaries of multiple subdomains. Typically, the boundaries will consist of edges of p-shell subdomains but also may consist of p-beam subdomains or edges of p-solid subdomains.

**Format:**

| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| GMINTC | EID | PID | ID1 | ID2 | ID3 | ID4 | ID5 | ID6 |    |

**Example:**


|        |      |   |   |   |  |  |  |  |  |
|--------|------|---|---|---|--|--|--|--|--|
| GMINTC | 1001 | 1 | 1 | 2 |  |  |  |  |  |
|--------|------|---|---|---|--|--|--|--|--|

**Fields:**

| Field | Contents                                                              |
|-------|-----------------------------------------------------------------------|
| EID   | Element identification number. (Integer>0)                            |
| PID   | Property identification number of a PINTC property entry. (Integer>0) |
| IDi   | Boundary identification number of a GMBNDC entry. (Integer>0)         |

**Remarks:**

1. All element identification numbers must be unique.
2. For the curve interface it is recommended that only two boundaries be specified.
3. All of the end points for each boundary IDi should be coincident, and may not refer to the same grid point. The two end points of a particular boundary may not refer to the same grid, because there would be multiple directions. The boundaries of each of the subdomains should also be coincident, because no geometrical adjustment is performed.
4. Connecting curve boundaries of solid p-elements is not recommended because of the possibility of stress singularities.

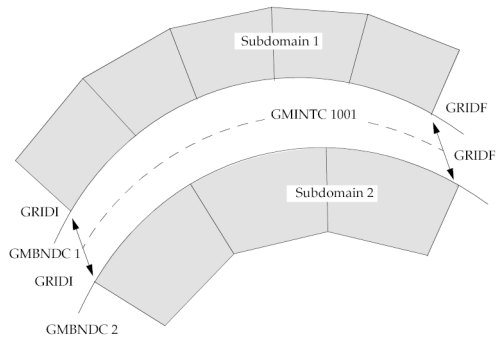

**Figure 15-9. Geometric Interface Element Definition (Exploded View)**

5. Because of the structure of the interface matrices, the sparse solver (default) should be used for linear statics, and the Lanczos eigensolver should be used for normal modes. In addition, for normal modes, `SYSTEM(166) = 4` should be set for models where the shell normal rotations are parallel on the boundaries.



**GMINTS**      Geometric Interface – Surface

Defines an interface element along a surface interface between boundaries of multiple subdomains. Typically, the boundaries will consist of faces of p-solid subdomains, but also may consist of p-shell subdomains.

**Format:**

|        |     |     |     |     |     |     |   |   |    |
|--------|-----|-----|-----|-----|-----|-----|---|---|----|
| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8 | 9 | 10 |
| GMINTS | EID | PID | ID1 | ID2 | ID3 | ID4 |   |   |    |

**Example:**

|        |      |   |   |   |  |  |  |  |  |
|--------|------|---|---|---|--|--|--|--|--|
| GMINTS | 1001 | 1 | 1 | 2 |  |  |  |  |  |
|--------|------|---|---|---|--|--|--|--|--|

**Fields:**


| Field | Contents                        | Type        | Default  |
|-------|---------------------------------|-------------|----------|
| EID   | Element identification number.  | Integer > 0 | Required |
| PID   | Property identification number. | Integer > 0 | Required |
| IDi   | Boundary IDi of subdomain       | Integer > 0 | Required |

**Remarks:**

1. All EIDs must be unique.
2. The PID refers to a PINTS Bulk Data entry.
3. The boundary IDi of each subdomain must be defined on a GMBNDS Bulk Data entry.
4. For the surface interface, more than two boundaries are possible, but should be used carefully.
5. The perimeters of each boundary i should be coincident. In addition, the boundaries of each of the subdomains should also be coincident, because no geometrical adjustment is performed.

1546 **GMINTS**  
Geometric Interface – Surface

**15**  
Bulk F-L

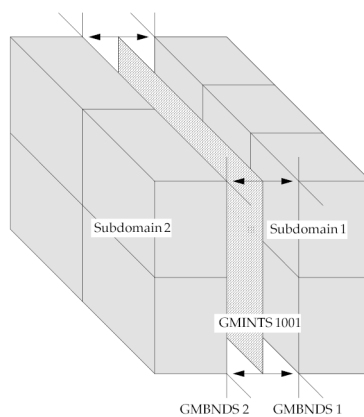

**Figure 15-10. Geometric Interface Element Definition (Exploded View)**

## GMLOAD      General Load Definition

Define the forces and moments to be applied to a FEEDGE, GMCURV, FEFACE, or GMSURF entry.

### Format:

| 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8  | 9      | 10 |
|--------|--------|--------|--------|--------|--------|--------|----|--------|----|
| GMLOAD | LID    | CID    | N1     | N2     | N3     | ENTITY | ID | METHOD |    |
|        | FIELD1 | FIELD2 | FIELD3 | FIELD4 | -etc.- |        |    |        |    |

### Example:

|        |     |     |     |  |    |    |   |  |  |
|--------|-----|-----|-----|--|----|----|---|--|--|
| GMLOAD | 105 | 11  | 1.2 |  | 1. | 1. | 1 |  |  |
|        |     | 7.5 | 1.9 |  |    |    |   |  |  |

### Fields:

| Field  | Contents                                                                                                                                                            | Type              | Default    |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| LID    | Load set identification number.                                                                                                                                     | Integer > 0       | Required   |
| CID    | Coordinate system in which the load is supplied. See Remark 2 .                                                                                                     | Integer ≥ -1      | 0          |
| Ni     | Direction of the force vector or axis of rotation of the moment. See Remark 3 .                                                                                     | Real              | 0., 0., 1. |
| ENTITY | Entity that is being loaded (FEEDGE, GMCURV, FEFACE, GMSURF).                                                                                                       | Character         | Required   |
| ID     | ID of the entity selected by ENTITY.                                                                                                                                | Integer ≥ 0       | Required   |
| METHOD | Method used to specify forces (EQUATION, TABLE, CONSTANT, LINEAR, QUAD, CUBIC) or moments (MEQUA, MTABLE, MCONST, MLINEAR, MQUAD, MCUBIC). See Remarks 4 through 6. | Character         | Required   |
| FIELDi | Load magnitude data. See Remarks 4 through 8.                                                                                                                       | Real<br>orInteger |            |

**1548 GMLOAD**  
**General Load Definition**

**Remarks:**

1. GMLOAD is the only method of applying forces and moments to any FEEDGE, FEFACE, GMCURV, or GMSURF in the model.
2. If CID=-1, the coordinate system on the edge or face is a local system based on the FEEDGE or FEFACE definition. (Note that an edge only has the tangent direction uniquely defined.)
3. If N1=N2=N3=0., the normal direction to the face is assumed, with the positive sense dependent on the FEFACE definition. No load will be applied for edges.
4. For both an FEEDGE and FEFACE, the METHOD field can be used to specify equation, table or constant load density. The value of FIELD1 is method-specific:

| Applying Equation, Table or Constant Load Density |                                                                            |
|---------------------------------------------------|----------------------------------------------------------------------------|
| METHOD                                            | FIELD1                                                                     |
| EQUATION, MEQUA                                   | ID of a DEQATN entry defining the load density as a function of location.  |
| TABLE, MTABLE                                     | ID of a TABLE3D entry defining the load density as a function of location. |
| CONSTANT, MCONST                                  | Value of load density.                                                     |

5. For an FEEDGE, the METHOD field can be used to specify linear, quadratic or cubic load density. The values of FIELDi are method-specific:

| Applying Linear, Quadratic or Cubic Load Density to an FEEDGE |                 |                 |                          |                          |              |
|---------------------------------------------------------------|-----------------|-----------------|--------------------------|--------------------------|--------------|
| METHOD                                                        | FIELD1          | FIELD2          | FIELD3                   | FIELD4                   | Load Density |
| LINEAR, MLINEAR                                               | Value at GRID 1 | Value at GRID 2 | blank                    | blank                    | Linear       |
| QUAD, MQUAD                                                   | Value at GRID 1 | Value at GRID 2 | Value at 1/2 edge length | blank                    | Quadratic    |
| CUBIC, MCUBIC                                                 | Value at GRID 1 | Value at GRID 2 | Value at 1/3 edge length | Value at 2/3 edge length | Cubic        |

6. For an FEFACE, the METHOD field can be used to specify linear or quadratic load density. The edges of the face are defined in the order of the grids entered (e.g., edge 1 is between the first and second grid etc.). The values of FIELDi are method-specific:

| Applying Linear and Quadratic Load Density to a Quadrilateral FEFACE |                          |                                  |                           |              |
|----------------------------------------------------------------------|--------------------------|----------------------------------|---------------------------|--------------|
| METHOD                                                               | FIELD1 through FIELD4    | FIELD5 through FIELD8            | FIELD9                    | Load Density |
| LINEAR, MLINEAR                                                      | Value at GRID 1, 2, 3, 4 | blank                            | blank                     | Linear       |
| QUAD, MQUAD                                                          | Value at GRID 1, 2, 3, 4 | Value at midside of EDGE 1,2,3,4 | Value at middle of FEFACE | Quadratic    |

| Applying Linear and Quadratic Load Density to a Triangular FEFACE |                       |                                  |              |
|-------------------------------------------------------------------|-----------------------|----------------------------------|--------------|
| METHOD                                                            | FIELD1 through FIELD3 | FIELD4 through FIELD6            | Load Density |
| LINEAR, MLINEAR                                                   | Value at GRID 1, 2, 3 | blank                            | Linear       |
| QUAD, MQUAD                                                       | Value at GRID 1, 2, 3 | Value at midside of EDGE 1, 2, 3 | Quadratic    |

7. The proper units must be specified for the value of FIELD<sub>i</sub>.

| Units of FIELD <sub>i</sub> for Different ENTITY Fields |             |
|---------------------------------------------------------|-------------|
| ENTITY                                                  | Units       |
| FEEDGE                                                  | Load/Length |
| GMCURV                                                  | Load/Length |
| FEFACE                                                  | Load/Area   |
| GMSURF                                                  | Load/Area   |

8. The load density applied to the edge or face is given by the product of the specified density with the direction vector.
9. The shell p-elements do not have stiffness in the direction of the normal rotation. Any component of moment applied in that direction will be ignored.
10. In general, a hierarchy is set to resolve the conflicts arising in the input data:
- Information provided on multiple GMSURF and FEFACE entries are added for all GRID, FEEDGE, and FEFACE degrees-of-freedom.
  - Information provided on multiple GMCURV and FEEDGE entries are added for all GRID and FEEDGE degrees-of-freedom.
  - Loads are summed over all entities.

1550 **GMSPC**  
General Constraint Definition

**GMSPC**      General Constraint Definition

Defines constraints for entities.

**Format:**

| 1     | 2   | 3 | 4      | 5  | 6 | 7 | 8 | 9 | 10 |
|-------|-----|---|--------|----|---|---|---|---|----|
| GMSPC | SID | C | ENTITY | ID |   |   |   |   |    |

**Example:**

|       |    |   |        |     |  |  |  |  |  |
|-------|----|---|--------|-----|--|--|--|--|--|
| GMSPC | 12 | 1 | FEEDGE | 109 |  |  |  |  |  |
|-------|----|---|--------|-----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                                              | Type                           | Default  |
|--------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------|----------|
| SID    | SPC set identification number.                                                                                        | Integer > 0                    | Required |
| C      | Component number in the global coordinate system.                                                                     | $0 \leq \text{Integer} \leq 6$ | 0        |
| ENTITY | Entity that the enforced displacement is applied to (Specify GRID, FEEDGE, GMCURV, FEFACE, or GMSURF). See Remark 4 . | Character                      | Required |
| ID     | ID of the entity selected above.                                                                                      | Integer > 0                    | Required |

**Remarks:**

1. The components of motion specified by C (field 3) of all degrees-of-freedom associated with an entity will be constrained.
2. If C = 0 is specified then the degrees-of-freedom will be taken out of the constraint set.
3. The component C has to be a single integer (1 or 2 or 3, etc.). Use multiple GMSPC entries for constraining multiple components.
4. In general, the hierarchy set to resolve the conflicts arising in the enforced displacement input data is the same as for the constraints. See “GMBC” for a description of the hierarchy.

**GMSURF** Surface Definition

Defines geometric information that will be used in elements, surface definition, load definition, and boundary condition definition.

**Format:**

| 1      | 2         | 3        | 4     | 5     | 6      | 7 | 8 | 9 | 10 |
|--------|-----------|----------|-------|-------|--------|---|---|---|----|
| GMSURF | SURFID    | GROUP    | CIDIN | CIDBC |        |   |   |   |    |
|        | Evaluator | Specific | Data  | and   | Format |   |   |   |    |

**Example:**

|        |          |         |     |     |     |     |         |  |  |
|--------|----------|---------|-----|-----|-----|-----|---------|--|--|
| GMSURF | 101      | MSCGRP0 |     |     |     |     |         |  |  |
|        | RPC,     | POINT   |     |     |     |     |         |  |  |
|        | 0.0, 2.0 | 1.0     | 1.0 |     | 2.0 | 3.0 | 4.0,1.0 |  |  |
|        | 0.0, 2.0 | 1.0     | 1.0 | 1.0 | 2.0 | 3.0 | 4.0     |  |  |

**Fields:**

| Field  | Contents                                                                                                                       | Type        | Default  |
|--------|--------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| SURFID | Surface Identification number. See Remark 2 .                                                                                  | Integer > 0 | Required |
| GROUP  | Group of curves/surfaces that this surface belongs to. See Remarks 5 through 9.                                                | Character   | Required |
| CIDIN  | Coordinate system identification number used in defining the geometry of the curve. The coordinate system must be rectangular. | Integer ≥ 0 | 0        |
| CIDBC  | Identification number of the coordinate system in which constraints specified on GMBC and GMSPC entries are defined.           | Integer ≥ 0 | 0        |

**Remarks:**

1. All SURFIDs must be unique.
2. A GMSURF entry is required if:
  - the geometry of the surface defined by this entry is to be used by an element.

**1552 GMSURF**  
**Surface Definition**

- output (global) coordinate system is assigned to a GMSURF.
  - permanent constraints are specified for a GMSURF.
  - loads are applied to a GMSURF.
  - enforced boundary conditions are applied to a GMSURF.
3. GMSURF is used to calculate geometric information only. The edges of the finite elements that are connected to the surface will be parametric cubic curves that are calculated from the more complex surface geometry.
  4. On the continuation entries, no commas can appear in columns 1 through 8 and the data in fields 2 through 9 must be specified in columns 9 through 72.
  5. The continuation entries are passed directly to the geometry evaluator indicated by the GROUP parameter.
  6. The GROUP value is initialized by an CONNECT GEOMEVAL command in the FMS section. This command specifies the evaluator that will be used for this surface.
  7. Two reserved names, MSCGRP0 and MSCGRP1, are provided for the GROUP parameter. These need not be explicitly initialized in the FMS Section.
  8. If the GROUP parameter is specified as MSCGRP0, the rational parametric cubic (MSCRPC) geometry evaluator is used for this surface. In this case the evaluator specific data in lines 2 through 9 of this Bulk Data entry should be provided as given on the following page. Spaces or a comma character may be used to delimit each value. However, the comma character should not be used in the first field.

| 1      | 2      | 3       | 4      | 5      | 6      | 7      | 8      | 9      | 10 |
|--------|--------|---------|--------|--------|--------|--------|--------|--------|----|
| GMSURF | SURFID | MSCGRP0 | CIDIN  | CIDOUT |        |        |        |        |    |
|        | RPC    | REPRES  |        |        |        |        |        |        |    |
|        | XW(1)  | XW(2)   | XW(3)  | XW(4)  | XW(5)  | XW(6)  | XW(7)  | XW(8)  |    |
|        | XW(9)  | XW(10)  | XW(11) | XW(12) | XW(13) | XW(14) | XW(15) | XW(16) |    |
|        | YW(1)  | YW(2)   | YW(3)  | YW(4)  | YW(5)  | YW(6)  | YW(7)  | YW(8)  |    |
|        | YW(9)  | YW(10)  | YW(11) | YW(12) | YW(13) | YW(14) | YW(15) | YW(16) |    |
|        | ZW(1)  | ZW(2)   | ZW(3)  | ZW(4)  | ZW(5)  | ZW(6)  | ZW(7)  | ZW(8)  |    |
|        | ZW(9)  | ZW(10)  | ZW(11) | ZW(12) | ZW(13) | ZW(14) | ZW(15) | ZW(16) |    |
|        | W(1)   | W(2)    | W(3)   | W(4)   | W(5)   | W(6)   | W(7)   | W(8)   |    |
|        | W(9)   | W(10)   | W(11)  | W(12)  | W(13)  | W(14)  | W(15)  | W(16)  |    |



| Field                      | Contents                                                    | Type      | Default  |
|----------------------------|-------------------------------------------------------------|-----------|----------|
| RPC                        | Rational Parametric Cubic Surface.                          | Character | Required |
| REPRES                     | Representation of the curve,<br>(ALGEBRAIC, POINT, BEZIER). | Character | Required |
| XW(1)<br>through<br>XW(16) | Data used to define the surface.                            | Real      | Required |

- A rational parametric surface is defined as

$$x(u, v) = \frac{xw(u, v)}{w(u, v)}$$

$$y(u, v) = \frac{yw(u, v)}{w(u, v)}$$

$$z(u, v) = \frac{zw(u, v)}{w(u, v)}$$

$$0.0 \leq u \leq 1.0$$

$$0.0 \leq v \leq 1.0$$

- For REPRES = "ALGEBRAIC", the rational parametric surface is defined by the algebraic coefficient for rational cubic equations.
- Expressed as a tensor product

$$P(u, v) = \begin{bmatrix} u^3 & u^2 & u & 1 \end{bmatrix} [\text{algebraic coefficients}] \begin{bmatrix} v^3 \\ v^2 \\ v \\ 1 \end{bmatrix}$$

for the Bulk Data input in algebraic form

$$xw(u, v) = \begin{bmatrix} u^3 & u^2 & u & 1 \end{bmatrix} \begin{bmatrix} XW(1) & XW(2) & XW(3) & XW(4) \\ XW(5) & XW(6) & XW(7) & XW(8) \\ XW(9) & XW(10) & XW(11) & XW(12) \\ XW(13) & XW(14) & XW(15) & XW(16) \end{bmatrix} \begin{bmatrix} v^3 \\ v^2 \\ v \\ 1 \end{bmatrix}$$


and similarly for  $yw(u, v)$ ,  $zw(u, v)$ , and  $w(u, v)$ .

and

$$x(u, v) = \frac{xw(u, v)}{w(u, v)}; y(u, v) = \frac{yw(u, v)}{w(u, v)}; z(u, v) = \frac{zw(u, v)}{w(u, v)}$$

where  $XW(i)$ ,  $YW(i)$ ,  $ZW(i)$ , and  $W(i)$  are the algebraic coefficients for the independent equations  $xw(u, v)$ ,  $yw(u, v)$ ,  $zw(u, v)$ , and  $w(u, v)$ .

- For REPRES = "BEZIER", the surface is defined by 16 rational Bezier control points  $V_{11}$  through  $V_{44}$ .

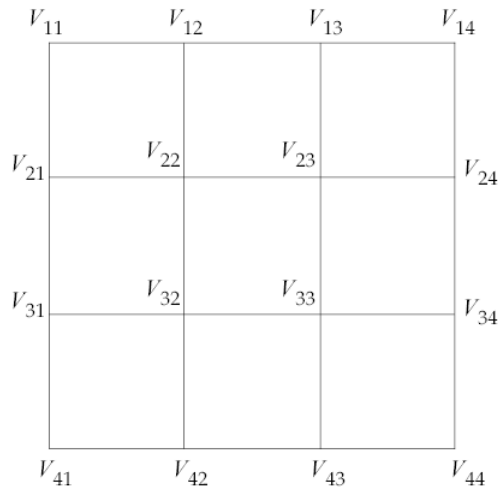

and

$$P(u, v) = \sum_{i=1}^4 \sum_{j=1}^4 V_{ij} B_{i,4} u \cdot B_{j,4} v$$

where  $B_{i,4}u$  and  $B_{j,4}v$  are the Bernstein polynomials for curves of degree 3.

For Bulk Data input defined as Bezier control points

$$xw \left( (u, v) = \sum_{i=1}^4 \sum_{j=1}^4 XW(i, j) B_{i,4} \cdot B_{j,4} v \right)$$


where  $XW(1)$  through  $XW(16)$  are ordered to conform to the two-dimensional array for  $V_{ij}$ ; that is,  $XW(4 \cdot (i-1) + j)$  corresponds to  $xw(u, v)$  for  $V_{ij}$ . For example,  $XW(7)$  corresponds to  $V_{23}$ .

$yw(u, v)$ ;  $zw(u, v)$ ; and  $w(u, v)$  are solved in a similar fashion.

and

$$x(u, v) = \frac{xw(u, v)}{w(u, v)}; y(u, v) = \frac{yw(u, v)}{w(u, v)}; z(u, v) = \frac{zw(u, v)}{w(u, v)}$$

- When the point representation is used, the surface is defined by 16 uniformly spaced rational points lying on the surface.

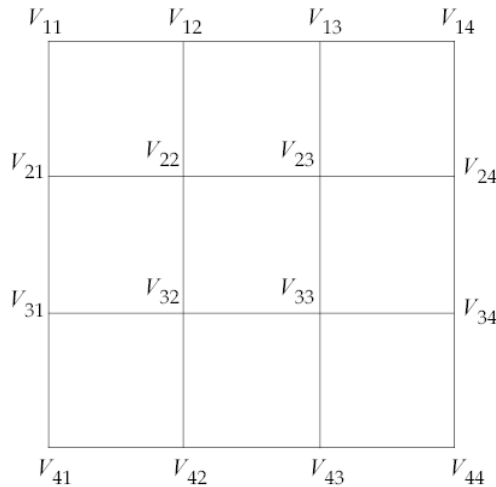

where  $XW(1)$  through  $XW(16)$  are ordered to contain to the two-dimensional mapping above for  $V_{ij}$ ; that is,  $XW(4 \cdot (i - 1) + j)$  corresponds to  $xw(u, v)$  for  $V_{ij}$ . For example,  $XW(7)$  corresponds to  $V_{23}$ .

- If the GROUP parameter is specified as MSCGRP1, the generic equation (MSCEQN) geometry evaluator is used for this surface. In this case the evaluator specific data should be on the continuation entries. Spaces or a comma character may be used to delimit each value. However, a comma must not be specified in the first field.

| 1 | 2        | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10 |
|---|----------|--------|--------|--------|--------|--------|--------|--------|----|
|   | EQUATION | MINU   | MAXU   | MINV   | MAXV   | IDX    | IDY    | IDZ    |    |
|   | IDDXU    | IDDYU  | IDDZU  | IDDXV  | IDDYV  | IDDZV  | IDDXU2 | IDDYU2 |    |
|   | IDDZU2   | IDDXV2 | IDDYV2 | IDDZV2 | IDDXUV | IDDYUV | IDDZUV |        |    |

| Field      | Contents                                                                                                                                      | Type      | Default |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|
| EQUATION   | EQUATION method is to be used.                                                                                                                | Character |         |
| MINU, MAXU | Range of the first parameter describing the surface. If MAXU is found less than MINU, the range for U is assumed to be $[-\infty, +\infty]$ . | Real      | 0.0,1.0 |

| Field                  | Contents                                                                                                                                                                                                   | Type        | Default  |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| MINV, MAXV             | Range of the second parameter describing the surface. If MAXV is found less than MINV, the range is assumed to be $[-\infty, +\infty]$ .                                                                   | Real        | 0.0,1.0  |
| IDX, IDY, IDZ          | ID of DEQATN entries providing equations for the X,Y,Z coordinate of the surface in terms of two parameters $u$ and $v$ .                                                                                  | Integer > 0 | Required |
| IDDXU, IDDYU, IDDZU    | ID of DEQATN entries providing equations for the first derivatives of X,Y,Z functions with respect to the first surface parameter $u$ . If a value of 0 is used, the derivatives are computed numerically. | Integer ≥ 0 | 0        |
| IDDXV, IDDYV, IDDZV    | ID of an DEQATN entry describing the first derivatives of X, Y, Z functions with respect to the first surface parameter $v$ . If a value of 0 is used, the derivatives are computed numerically.           | Integer ≥ 0 | 0        |
| IDDXU2, IDDYU2, IDDZU2 | ID of an DEQATN entry describing the second derivatives of X,Y,Z functions with respect to the first surface parameter $u$ . If a value of 0 is used, the derivatives are computed numerically.            | Integer ≥ 0 | 0        |
| IDDXV2, IDDYV2, IDDZV2 | ID of an DEQATN entry describing the second derivatives of X,Y,Z functions with respect to the second surface parameter $v$ . If a value of 0 is used, the derivatives are computed numerically.           | Integer ≥ 0 | 0        |

1558 **GMSURF**  
Surface Definition

| Field                        | Contents                                                                                                                                                                                                             | Type        | Default |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|
| IDDXUV,<br>IDDYUV,<br>IDDZUV | ID of an DEQATN entry describing the mixed second derivatives of X,Y,Z functions with respect to the surface parameters <i>u</i> , and <i>v</i> . If a value of 0 is used, the derivatives are computed numerically. | Integer ≥ 0 | 0       |

10. When an external geometry evaluator class is selected for this group (which is the case when the CONNECT GEOMEVAL statement selects an external geometry evaluator for the specified group), the data in Fields 1 to n will not be interpreted. In this case an image of this entry is passed on to the evaluator modules provided by the user for the specific geometric package that being used. These modules are connected with NX Nastran during execution. If these modules are not provided, a User Fatal Message will be issued. For example, if in the FMS Section, the following command is given:

- CONNECT GEOMEVAL FENDER,CATIA,'/u/kiz/data', Version=68 as of 1/3/94
- then the GMSURF entry could use that geometry data base as follows:

| 1      | 2       | 3      | 4   | 5   | 6   | 7  | 8 | 9 | 10 |
|--------|---------|--------|-----|-----|-----|----|---|---|----|
| GMSURF | 765     | FENDER |     |     |     |    |   |   |    |
|        | Extrude | /u/kiz | 2.5 | arc | 2.7 | 66 |   |   |    |

- In this case, "Extrude u/kiz 2.5 arc 2.7 66" is passed to the geometry evaluator supplied by the user, and it is expected that the user-supplied routines interpret and use this record.

**GRAV**      Acceleration or Gravity Load

Defines acceleration vectors for gravity or other acceleration loading.

**Format:**

|      |     |     |   |    |    |    |    |   |    |
|------|-----|-----|---|----|----|----|----|---|----|
| 1    | 2   | 3   | 4 | 5  | 6  | 7  | 8  | 9 | 10 |
| GRAV | SID | CID | A | N1 | N2 | N3 | MB |   |    |

**Example:**

|      |   |   |      |     |     |      |  |  |  |
|------|---|---|------|-----|-----|------|--|--|--|
| GRAV | 1 | 3 | 32.2 | 0.0 | 0.0 | -1.0 |  |  |  |
|------|---|---|------|-----|-----|------|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                                                                      |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                                                                                                                                                                                                                                                                      |
| CID   | Coordinate system identification number. (Integer ≥ 0; Default = 0)                                                                                                                                                                                                                                                                           |
| A     | Acceleration vector scale factor. (Real)                                                                                                                                                                                                                                                                                                      |
| Ni    | Acceleration vector components measured in coordinate system CID. (Real; at least one Ni ≠ 0.0)                                                                                                                                                                                                                                               |
| MB    | Indicates whether the CID coordinate system is defined in the main Bulk Data Section (MB = -1) or the partitioned superelement Bulk Data Section (MB = 0). Coordinate systems referenced in the main Bulk Data Section are considered stationary with respect to the assembly basic coordinate system. See Remark 10 . (Integer; Default = 0) |

**Remarks:**

- The acceleration vector is defined by

$$\vec{a} = A\vec{N}, \text{ where}$$

$\vec{N}$  is the vector defined by (N1, N2, N3). The magnitude of  $\vec{a}$  is equal to A times the magnitude of  $\vec{N}$ . The static loads generated by this entry are in the direction of  $\vec{a}$ .

- A CID of zero references the basic coordinate system.

## 1560 GRAV Acceleration or Gravity Load

15  
Bulk F-L

3. Acceleration or gravity loads may be combined with “simple loads” (e.g., FORCE, MOMENT) only by specification on a LOAD entry. That is, the SID on a GRAV entry may not be the same as that on a simple load entry.
4. In the static solution sequences, the load set ID must be selected by the Case Control command LOAD = SID. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
5. At most 100 GRAV entries can be selected in a given run either by Case Control or the LOAD Bulk Data entry. Multiples or reflections of a given acceleration or gravity load can be economically accomplished by use of the LOAD Bulk Data entry.
6. In cyclic symmetry solution sequences, the T3 axis of the coordinate system referenced in field 3 must be parallel to the axis of symmetry. In dihedral cyclic symmetry (where STYPE = “DIH” on the CYSYM entry), the T1 axis must, in addition, be parallel to Side 1 of segment 1R of the model.
7. For image superelements, the coordinate system must be rotated if the image is rotated relative to its primary superelement.
8. Acceleration or gravity loads do not include effects due to mass on scalar points.
9. The RFORCE entry may be used to specify rotational accelerations.
10. The coordinate systems in the main Bulk Data Section are defined relative to the assembly basic coordinate system which is fixed. This feature is useful when a superelement defined by a partitioned Bulk Data Section is rotated or mirrored and the gravity load is more conveniently defined in terms of coordinates which are fixed.

### Remarks related to SOLs 601 and 701:

1. MB is ignored.
2. To apply an acceleration or gravity load with constant magnitude, SID is selected by Case Control command LOAD = SID for both static and transient analyses.
3. To apply a time-dependent acceleration or gravity load, SID is referenced by the field EXCITEID = SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.



**GRDSET**      GRID Entry Defaults

Defines default options for fields 3, 7, 8, and 9 of all GRID entries.

**Format:**

|        |   |    |   |   |   |    |    |      |    |
|--------|---|----|---|---|---|----|----|------|----|
| 1      | 2 | 3  | 4 | 5 | 6 | 7  | 8  | 9    | 10 |
| GRDSET |   | CP |   |   |   | CD | PS | SEID |    |

**Example:**

|        |  |    |  |  |  |    |      |  |  |
|--------|--|----|--|--|--|----|------|--|--|
| GRDSET |  | 16 |  |  |  | 32 | 3456 |  |  |
|--------|--|----|--|--|--|----|------|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                           |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CP    | Identification number of coordinate system in which the location of the grid points are defined. (Integer ≥ 0 or blank)                                                            |
| CD    | Identification number of coordinate system in which the displacements, degrees-of-freedom, constraints, and solution vectors of the grid point are defined. (Integer ≥ 0 or blank) |
| PS    | Permanent single-point constraints on the grid point. (Any combination of Integers 1 through 6 with no embedded blanks, or blank.)                                                 |
| SEID  | Superelement identification number. (Integer ≥ 0 or blank)                                                                                                                         |

**Remarks:**

- The contents of fields 3, 7, 8, or 9 of this entry are assumed for the corresponding fields of any GRID entry whose field 3, 7, 8, and 9 are blank. If any of these fields on the GRID entry are blank, the default option defined by this entry occurs for that field. If no permanent single-point constraints are desired, one of the coordinate systems is basic, or the grid is assigned to the residual structure then the default may be overridden on the GRID entry by making one of fields 3, 7, 8, or 9 zero (rather than blank). Only one GRDSET entry may appear in the Bulk Data Section.
- The primary purpose of this entry is to minimize the burden of preparing data for problems with a large amount of repetition (e.g., two-dimensional pinned-joint problems).
- At least one of the fields CP, CD, PS, or SEID must be specified.

1562 **GRID**  
Grid Point

**GRID**      Grid Point

Defines the location of a geometric grid point, the directions of its displacement, and its permanent single-point constraints.

**Format:**

| 1    | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9    | 10 |
|------|----|----|----|----|----|----|----|------|----|
| GRID | ID | CP | X1 | X2 | X3 | CD | PS | SEID |    |

**Example:**

|      |   |   |     |      |     |  |     |  |  |
|------|---|---|-----|------|-----|--|-----|--|--|
| GRID | 2 | 3 | 1.0 | -2.0 | 3.0 |  | 316 |  |  |
|------|---|---|-----|------|-----|--|-----|--|--|

**Fields:**

| Field      | Contents                                                                                                                                                                              |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID         | Grid point identification number. (0 < Integer < 100000000)                                                                                                                           |
| CP         | Identification number of coordinate system in which the location of the grid point is defined. (Integer ≥ 0 or blank*)                                                                |
| X1, X2, X3 | Location of the grid point in coordinate system CP. (Real; Default = 0.0)                                                                                                             |
| CD         | Identification number of coordinate system in which the displacements, degrees-of-freedom, constraints, and solution vectors are defined at the grid point. (Integer ≥ -1 or blank *) |
| PS         | Permanent single-point constraints associated with the grid point. (Any of the Integers 1 through 6 with no embedded blanks, or blank*.)                                              |
| SEID       | Superelement identification number. (Integer ≥ 0; Default = 0)                                                                                                                        |

\* See the GRDSET entry for default options for the CP, CD, PS, and SEID fields.

**Remarks:**

1. All grid point identification numbers must be unique with respect to all other structural, scalar, and fluid points.
2. The meaning of X1, X2, and X3 depends on the type of coordinate system CP as follows (see the CORDij entry descriptions):

| Type        | X1 | X2         | X3          |
|-------------|----|------------|-------------|
| Rectangular | X  | Y          | Z           |
| Cylindrical | R  | q(degrees) | Z           |
| Spherical   | R  | q(degrees) | f (degrees) |

See “Overview of Coordinate Systems in NX Nastran” in the *NX Nastran User’s Guide* for a definition of coordinate system terminology.

3. The collection of all CD coordinate systems defined on all GRID entries is called the global coordinate system. All degrees-of-freedom, constraints, and solution vectors are expressed in the global coordinate system. See the chapter “Understanding Coordinate Systems” in the *NX Nastran User’s Guide* for more details.
4. The SEID field can be overridden by use of the SESET entry.
5. If CD = -1, then this defines a fluid grid point in coupled fluid-structural analysis (see “Performing a Coupled Fluid-Structural Analysis” in the *NX Nastran User’s Guide*). This type of point may only connect the CAABSF, CHACBR, CHACAB, CHEXA, CPENTA, and CTETRA elements to define fluid elements.
6. A zero (or blank if the GRDSET entry is not specified) in the CP and CD fields refers to the basic coordinate system.
7. In p-version analysis, the hierarchy set to resolve the conflicts arising in the global system input data is described under Remark 10 of the GMBC entry description.
8. CID can reference GMCORD type coordinate systems only when the GRID is connected to p-version elements.

**Remarks related to SOLs 601 and 701:**

1. SEID is ignored.
2. The use of GRDSET entry for default options for the CP, CD, and PS fields is not supported.

**1564 GRIDB**  
**Axisymmetric Grid Point**

**GRIDB**      Axisymmetric Grid Point

Defines the location of a geometric grid point on a fluid point (RINGFL entry) for an axisymmetric fluid model and/or axisymmetric structure. Also defines the boundary of the fluid.

**Format:**

|       |    |   |   |     |   |    |    |     |    |
|-------|----|---|---|-----|---|----|----|-----|----|
| 1     | 2  | 3 | 4 | 5   | 6 | 7  | 8  | 9   | 10 |
| GRIDB | ID |   |   | PHI |   | CD | PS | IDF |    |

**Example:**

|       |    |  |  |      |  |   |     |    |  |
|-------|----|--|--|------|--|---|-----|----|--|
| GRIDB | 30 |  |  | 30.0 |  | 3 | 345 | 20 |  |
|-------|----|--|--|------|--|---|-----|----|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                                                 |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ID           | Grid point identification number. (0 < Integer < 1000000)                                                                                       |
| PHI          | Azimuthal position of the fluid in degrees. (Real)                                                                                              |
| CD           | Identification number of the coordinate system in which the displacements are defined at the grid point. (Integer ≥ 0 or blank)                 |
| PS           | Permanent single-point constraints associated with grid point. (Any combination of the Integers 1 through 6 with no embedded blanks, or blank.) |
| IDF          | Identification number of a RINGFL entry. (Integer > 0)                                                                                          |

**Remarks:**

1. GRIDB is allowed only if an AXIF entry is also present. The AXIF entry must define a fluid coordinate system.
2. All GRIDB identification numbers must be unique with respect to other scalar, structural, and fluid points.
3. The referenced RINGFL entry must be present and be included in a boundary list (BDYLIST entry).
4. If no harmonic numbers on the AXIF entry are specified, no fluid elements are necessary.

5. The collection of all CD coordinate systems defined on all GRID and GRIDB entries is called the global coordinate system.
6. Fields 3, 4, and 6 are ignored, which facilitates the conversion of GRID entries to GRIDB entries. Note that the fields are the same except for fields 1 and 9 when a cylindrical coordinate system is used.

1566 **GRIDF**  
Fluid Point

**GRIDF** Fluid Point

Defines a scalar degree-of-freedom for harmonic analysis of a fluid.

**Format:**

|       |    |   |   |   |   |   |   |   |    |
|-------|----|---|---|---|---|---|---|---|----|
| 1     | 2  | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| GRIDF | ID | R | Z |   |   |   |   |   |    |

**Example:**

|       |    |     |      |  |  |  |  |  |  |
|-------|----|-----|------|--|--|--|--|--|--|
| GRIDF | 23 | 2.5 | -7.3 |  |  |  |  |  |  |
|-------|----|-----|------|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                   |
|-------|----------------------------------------------------------------------------|
| ID    | Identification number of axisymmetric fluid point. (0 < Integer < 1000000) |
| R     | Radial location of point in basic coordinate system. (Real > 0.0)          |
| Z     | Axial location of point in basic coordinate system. (Real)                 |

**Remarks:**

1. This entry is allowed only if an AXSLOT entry is also present.
2. ID must be unique with respect to all other scalar, structural, and fluid points.
3. Grid points on slot boundaries are defined on GRIDS entries. Do not also define them on GRIDF entries.
4. For plotting purposes, the R location corresponds to the basic X coordinate. The Z location corresponds to the basic Y coordinate. Pressures will be plotted as displacements in the basic Z direction.
5. Load and constraint conditions are applied as if GRIDF were a scalar point. Positive loads correspond to inward flow. A single-point constraint causes zero pressure at the point.

**GRIDS** Slot Surface Point

Defines a scalar degree-of-freedom with a two-dimensional location. Used in defining pressure in slotted acoustic cavities.

**Format:**

| 1     | 2  | 3 | 4 | 5 | 6   | 7 | 8 | 9 | 10 |
|-------|----|---|---|---|-----|---|---|---|----|
| GRIDS | ID | R | Z | W | IDF |   |   |   |    |

**Example:**

|       |    |     |      |     |  |  |  |  |  |
|-------|----|-----|------|-----|--|--|--|--|--|
| GRIDS | 25 | 2.5 | -7.3 | 0.5 |  |  |  |  |  |
|-------|----|-----|------|-----|--|--|--|--|--|

**Fields:**

| Field | Contents                                                              |
|-------|-----------------------------------------------------------------------|
| ID    | Identification number of the slot point. (Integer > 0)                |
| R     | Radial location of point in basic coordinate system. (Real ≠ 0.0)     |
| Z     | Axial location of point in basic coordinate system. (Real)            |
| W     | Slot width or thickness at the GRIDS point. (Real ≥ 0.0 or blank)     |
| IDF   | Identification number to define a GRIDF point. (Integer > 0 or blank) |

**Remarks:**

1. This entry is allowed only if an AXSLOT entry is also present.
2. ID (and IDF if present) must be unique with respect to all other scalar, structural, and fluid points.
3. If W is blank, the default value on the AXSLOT entry will be used.
4. The IDF number is referenced on the CAXIFi entry for central cavity fluid elements next to the interface. The IDF number is entered only if the grid point is on an interface. In this case, the IDF should also be defined on a GRIDF entry.
5. If IDF is nonzero, then R must be greater than zero.
6. For plotting purposes, the R location corresponds to the basic X coordinate. The Z location corresponds to the basic Y coordinate. The slot width, W, corresponds to the basic Z coordinate. The pressure will be plotted in the basic Z direction.

**1568 GRIDS**  
**Slot Surface Point**

**15**  
**Bulk F-L**

7. Load and constraint conditions are applied as if the GRIDS is a scalar point. Positive loads correspond to inward flow. A single-point constraint causes zero pressure at the point.



**GUST** Aerodynamic Gust Load Description

Defines a stationary vertical gust for use in aeroelastic response analysis.

**Format:**

|      |     |       |    |    |   |   |   |   |    |
|------|-----|-------|----|----|---|---|---|---|----|
| 1    | 2   | 3     | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
| GUST | SID | DLOAD | WG | X0 | V |   |   |   |    |

**Example:**

|      |     |    |     |    |      |  |  |  |  |
|------|-----|----|-----|----|------|--|--|--|--|
| GUST | 133 | 61 | 1.0 | 0. | 1.+4 |  |  |  |  |
|------|-----|----|-----|----|------|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                           |
|-------|--------------------------------------------------------------------------------------------------------------------|
| SID   | Gust set identification number. (Integer > 0)                                                                      |
| DLOAD | Set identification number of a TLOADi or RLOADi entry that defines the time or frequency dependence. (Integer > 0) |
| WG    | Scale factor (gust velocity/forward velocity) for gust velocity. (Real ≠ 0.0)                                      |
| X0    | Streamwise location in the aerodynamic coordinate system of the gust reference point. (Real)                       |
| V     | Velocity of vehicle. See Remark 5 . (Real > 0.0)                                                                   |

**Remarks:**

1. The GUST entry must be selected with the Case Control command GUST = SID.
2. The gust angle is in the +z direction of the aerodynamic coordinate system. The value is

$$WG \cdot T\left(t - \frac{X - X0}{V}\right)$$

where  $T$  is the tabular function.

3. In random analysis, a unit gust velocity ( $WG = 1/\text{velocity}$ ) is suggested. The actual rms value is entered on the TABRNDG entry.
4. X0 and V may not change between subcases under one execution.

**1570 GUST**  
**Aerodynamic Gust Load Description**

5. V must be equal to VELOCITY on the AERO Bulk Data entry.

## **INCLUDE**      Insert External File

Inserts an external file into the input file. The INCLUDE statement may appear anywhere within the input data file.

### **Format:**

```
INCLUDE 'filename'
```

### **Describer:**

filename            Physical filename of the external file to be inserted. The user must supply the name according to installation or machine requirements. It is recommended that the filename be enclosed by single right-hand quotation marks.

### **Example:**

The following INCLUDE statement is used to obtain the Bulk Data from another file called MYBULK.DATA:

```
SOL 101  
CEND  
TITLE = STATIC ANALYSIS  
LOAD = 100  
BEGIN BULK  
INCLUDE 'MYBULK.DATA'  
ENDDATA
```

### **Remarks:**

1. INCLUDE statements may be nested; that is, INCLUDE statements may appear inside the external file. The nested depth level must not be greater than 10.
2. The INCLUDE statement does not allow continuations. The total length of the statement must be 72 characters or less.

1572 **ITER**  
Iterative Solver Options

**ITER** Iterative Solver Options

Defines options for the global iterative solver in SOLs 101, 106, 108, 111, 153 and the element iterative solver in SOL 101.

**Format:**

| 1    | 2                                  | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |  |
|------|------------------------------------|---|---|---|---|---|---|---|----|--|
| ITER | SID                                |   |   |   |   |   |   |   |    |  |
|      | OPTION1VALUE1 OPTION2VALUE2 -etc.- |   |   |   |   |   |   |   |    |  |

**Example:**

|      |                                                     |  |  |  |  |  |  |  |  |  |
|------|-----------------------------------------------------|--|--|--|--|--|--|--|--|--|
| ITER | 100                                                 |  |  |  |  |  |  |  |  |  |
|      | ITSEPS=1.0E0-7, MSGFLG=YES, PRECOND=BICWELL, IPAD=3 |  |  |  |  |  |  |  |  |  |

**Fields:**

**Field Contents**

SID Set identification number. (Integer > 0).

PRECOND Preconditioner option for global and element iterative solution. (Global default = “BIC” for real analysis, “BICMPLX” for complex analysis and “PBDJ” for p-version analysis. Element default is to leave option blank) See Remark 3 .

Global preconditioner options:

- J Jacobi
- JS Jacobi with diagonal scaling.
- C Incomplete Cholesky.
- CS Incomplete Cholesky with diagonal scaling.
- RIC Reduced incomplete Cholesky.
- RICS Reduced incomplete Cholesky with diagonal scaling.
- PBCJ p-version block Cholesky/Jacobi.
- PBDJ p-version block Direct/Jacobi.
- PBDC p-version block Direct/Cholesky.

| Field                           | Contents                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BIC                             | Block incomplete Cholesky for real problems.                                                                                                                                                                                                                                                                                                                               |
| BICCMPLX                        | Block incomplete Cholesky for complex problems.                                                                                                                                                                                                                                                                                                                            |
| USER                            | User given preconditioning. For direct frequency response (SOL 108): a decomposition will be done for 1st frequency and the factor will be used for all subsequent frequencies as a preconditioner with the iterative solver. Other solutions require a DMAP alter. Please refer to the <i>NX Nastran Numerical Methods User's Guide</i> description of the SOLVIT module. |
| Element preconditioner options: |                                                                                                                                                                                                                                                                                                                                                                            |
| blank                           | Standard preconditioning option for element iterative solver (default)                                                                                                                                                                                                                                                                                                     |
| PRIMAL                          | Optional preconditioning option for element iterative solver. This option may produce faster convergence for models which contain a large number of elements with bad aspect ratios.                                                                                                                                                                                       |
| CONV                            | Convergence criterion. (Character; Default = "AREX")                                                                                                                                                                                                                                                                                                                       |
| Global iterative solution:      |                                                                                                                                                                                                                                                                                                                                                                            |
| AR                              | $\ r\ /\ b\ $ where r is the residual vector of current iteration and b is the initial load vector; internal criterion.                                                                                                                                                                                                                                                    |
| GE                              | Alternative convergence criterion using geometric progression and the differences between two consecutive solution updates; internal criterion.                                                                                                                                                                                                                            |
| AREX                            | Same criterion as AR but with the additional consideration of the external convergence criterion. See Remark 2 . (Default).                                                                                                                                                                                                                                                |
| GEEX                            | Same criterion as GE but with the additional consideration of the external convergence criterion. See Remark 2 .                                                                                                                                                                                                                                                           |
| Element iterative solution:     |                                                                                                                                                                                                                                                                                                                                                                            |
| AR                              | For relative reduction in the residual 2-norm.                                                                                                                                                                                                                                                                                                                             |

1574 ITER  
Iterative Solver Options

15  
Bulk F-L

| Field       | Contents                                                                                                                                                                                                           |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GE          | For relative reduction in the residual preconditioned norm.                                                                                                                                                        |
| AREX        | For one of the other or energy norm of error. Also each must fall below a looser stopping threshold (Default).                                                                                                     |
| GEEEX       | For relative reduction in the residual infinity norm.                                                                                                                                                              |
| MSGFLG      | Message flag. (Character; Default = "NO")                                                                                                                                                                          |
| YES         | Messages will be printed for each iteration.                                                                                                                                                                       |
| NO          | Only minimal messages will be printed from the iterative solver (Default).                                                                                                                                         |
| ITSEPS      | User-given convergence parameter epsilon. (Real>0.0; Default=1.0E-6) (Default=1.0E-8 when the element iterative solver is used.) See remark 5 for information on setting ITSEPS with the element iterative solver. |
| ITSMAX      | Maximum number of iterations. (Integer > 0; Default = N/4 where N is the number of rows in the matrix. Default = 1000 when using the element iterative solver. See Remark 1.)                                      |
| IPAD        | Global iterative solution padding value for RIC, RICS, BIC, and BICCMPLX preconditioning. The default values are recommended. (Integer)                                                                            |
| Default = 0 | PRECOND = "RIC" or "RICS"                                                                                                                                                                                          |
| Default = 2 | PRECOND = "BIC" and purely three-dimensional models.                                                                                                                                                               |
| Default = 3 | PRECOND = "BIC" and mixed element models.                                                                                                                                                                          |
| Default = 5 | PRECOND = "BICCMPLX".                                                                                                                                                                                              |
| IEXT        | Global iterative solution extraction level in reduced or block incomplete Cholesky factorization. The default values are recommended. (Integer = 0-7)                                                              |
| Default = 0 | Purely three-dimensional model. Requires USET and SIL.                                                                                                                                                             |

| Field    | Contents                                                                                                                                                                                                 |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | Default = 1    Purely two-dimensional model. Heuristic block structure.                                                                                                                                  |
|          | Default = 2    Mixed element types including rigid elements.                                                                                                                                             |
| PREFONLY | Specifies early termination of the global iterative solver. (Integer = 0 or -1; Default = 0)                                                                                                             |
|          | 0                Runs to completion (Default).                                                                                                                                                           |
|          | -1               Terminates after preface giving resource estimates.                                                                                                                                     |
| ZPIVOT   | Used to adjust the singularity tolerance during the preconditioner phase of an element iterative solution. (Real, Default=1.0e-9, Default=1.0e-10 when contact (BCSET) or glue (BGSET) conditions exist) |

**Remarks:**

1. The global iterative solver is requested by specifying ITER = YES on the NASTRAN statement. To request the element iterative solver, both ELEMITER = YES and ITER = YES must be defined on the NASTRAN statement. The ITER Bulk Data entry is optional and only required to override the defaults specified above. Note that, when no ITER Bulk Data entry is present, the default CONV for the serial global iterative solver in SOLs 108 and 111 is GEEX instead of AREX. The ITER Bulk Data entry must be selected by the SMETHOD = SID Case Control command.
2. The external epsilon is computed as follows:

$$\varepsilon = \frac{(r, x)}{(b, x)}$$

where  $r$  is the final residual vector,  $x$  is the final solution vector and  $b$  is the initial load vector  $(r, x)$  indicates the inner product of  $r$  and  $x$  and  $(b, x)$  indicates the inner product of  $b$  and  $x$ .

3. Prior to Version 70.5 of MSC.Nastran, the user had the burden of choosing BICWELL for well conditioned problems and BICILL for ill-conditioned problems. NX Nastran now determines this automatically. Thus BICWELL and BICILL are now equivalent to BIC. See “Preconditioning Methods” in the *NX Nastran Numerical Methods User’s Guide* for more information on these options.

**1576 ITER**  
**Iterative Solver Options**

4. The restrictions for the element iterative solver are as follows; only available in solution type 101, does not support superelements, CQUAD8 and CTRIA6 elements are only supported if the parameter ELITASPC = YES, CQUAD4 and CTRIA3 elements are supported only if the parameter K6ROT is defined (results obtained will be the same as if the parameter snorm = 0.0 was entered), DMIG is not supported, inertia relief is not supported, differential stiffness conditions cannot be generated with the element iterative solver.
5. When using the element iterative solver, the convergence tolerance (ITSEPS option) is used to control when the solution terminates. The equation to be solved is:

$$Kx=b,$$

let the residual  $r=b-K(x_0)$

where  $x_0$  is the current solution

The solution stops iterating when the minimum of the following four error measures is below the specified value:

- the relative reduction in the 2–Norm of the residual (the 2–Norm of  $r$  divided by the 2–Norm of  $b$ )
- The relative reduction in the preconditioned norm of the residual
- the relative reduction in the infinity norm of the residual
- the estimated energy norm of the error

For each error measure, the software also applies a looser tolerance than the tolerance you define here.

This table shows typical results obtained for convergence tolerances:

| Convergence Tolerance | Typical Results                                                    |
|-----------------------|--------------------------------------------------------------------|
| 1e-5                  | Most displacement within 1% accuracy.<br>Unreliable stresses.      |
| 1e-6                  | All displacements within 1% accuracy.<br>Some stresses off 10–20%. |
| 1e-7                  | Some stresses off as much as 5%.                                   |
| 1e-8                  | All stresses (even the small values) within 1%.                    |

6. On the continuation entries, no commas can appear in columns 1 through 8 and the data in fields 2 through 9 must be specified in columns 9 through 72. The large-field format is not allowed.



**LOAD**      Static Load Combination (Superposition)

Defines a static load as a linear combination of load sets defined via FORCE, MOMENT, FORCE1, MOMENT1, FORCE2, MOMENT2, PLOAD, PLOAD1, PLOAD2, PLOAD4, PLOADX1, SLOAD, RFORCE, and GRAV entries.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| LOAD     | SID      | S        | S1       | L1       | S2       | L2       | S3       | L3       |           |
|          | S4       | L4       | -etc.-   |          |          |          |          |          |           |

**Example:**

|      |     |      |     |   |     |   |  |  |  |
|------|-----|------|-----|---|-----|---|--|--|--|
| LOAD | 101 | -0.5 | 1.0 | 3 | 6.2 | 4 |  |  |  |
|------|-----|------|-----|---|-----|---|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                    |
|--------------|------------------------------------------------------------------------------------|
| SID          | Load set identification number. (Integer > 0)                                      |
| S            | Overall scale factor. (Real)                                                       |
| Si           | Scale factor on Li. (Real)                                                         |
| Li           | Load set identification numbers defined on entry types listed above. (Integer > 0) |

**Remarks:**

1. The load vector  $\{P\}$  is defined by

$$\{P\} = S \sum_i S_i \{P_{Li}\}$$

2. Load set IDs (Li) must be unique.
3. This entry must be used if acceleration loads (GRAV entry) are to be used with any of the other types.
4. In the static solution sequences, the load set ID must be selected by the Case Control command LOAD=SID. In the dynamic solution sequences, SID must be

## 1578 **LOAD** Static Load Combination (Superposition)

referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.

5. A LOAD entry may not reference a set identification number defined by another LOAD entry.

### **Remarks related to SOLs 601 and 701:**

1. LOAD may be used in a static or transient analysis to combine loads with constant magnitude.
2. Both LOAD and DLOAD can be used in the same analysis to define some loads with constant magnitude and some time-dependent loads.

**LOADCYH**      Harmonic Load Input for Cyclic Symmetry

Defines the harmonic coefficients of a static or dynamic load for use in cyclic symmetry analysis.

**Format:**

| 1       | 2   | 3 | 4   | 5     | 6  | 7  | 8  | 9  | 10 |
|---------|-----|---|-----|-------|----|----|----|----|----|
| LOADCYH | SID | S | HID | HTYPE | S1 | L1 | S2 | L2 |    |

**Example:**

|         |    |     |   |   |     |    |  |  |  |
|---------|----|-----|---|---|-----|----|--|--|--|
| LOADCYH | 10 | 1.0 | 7 | C | 0.5 | 15 |  |  |  |
|---------|----|-----|---|---|-----|----|--|--|--|

**Fields:**

| Field | Contents                                                                           |
|-------|------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)                                      |
| S     | Scale Factor. (Real)                                                               |
| HID   | Harmonic. See Remark 6 . (Integer or blank)                                        |
| HTYPE | Harmonic type. (Character: "C", "S", "CSTAR" "SSTAR", "GRAV", "RFORCE", or blank). |
| Si    | Scale factor on Li. (Real)                                                         |
| Li    | Load set identification number. See Remark 10 . (Integer > 0)                      |

**Remarks:**

1. The LOADCYH entry is selected with the Case Control command LOAD = SID.
2. If HTYPE is blank, the load will be applied to all applicable types in the problem.
3. If HTYPE is "GRAV" or "RFORCE", GRAV or RFORCE entry loading will be used. Harmonic loads for appropriate available harmonics will be generated automatically in these cases.
4. L1 and L2 may reference LOAD entries. However, the LOAD entry in such a case must not reference load sets defined via RFORCE and/or GRAV entries.
5. If L1 refers to a set ID defined by an SPCD entry, the same ID must not reference any nonzero loading specified by the other Bulk Data loading entries given via

## 1580 LOADCYH Harmonic Load Input for Cyclic Symmetry

**15**  
Bulk F-L

FORCE, MOMENT, FORCE1, MOMENT1, FORCE2, MOMENT2, PLOAD, PLOAD1, PLOAD2, PLOAD4, PLOADX, and SLOAD entries. In other words, an enforced deformation loading via the SPCD entry is specified by a load set ID L1 or L2 and a zero magnitude loading via a load (such as FORCE) with the same ID.

6. If HTYPE is "GRAV" or "RFORCE", the entry in HID will be ignored and therefore may be blank. S2 and L2 must be blank for this case.
7. Load set IDs L1 or L2 may not be referenced by load set ID L1 or L2 of LOADCYN entries.
8. If HTYPE = "C", "S", "CSTAR", or "SSTAR", the load on component (HTYPE) of harmonic (HID) is  $L = S(S1 \cdot L1 + S2 \cdot L2)$ .
9. S must be nonzero. In addition, either S1 or S2 must be nonzero.
10. L1 and L2 may reference any of the static or dynamic loading entries including GRAV and RFORCE.

**LOADCYN**      Physical Load Input for Cyclic Symmetry

Defines a physical static or dynamic load for use in cyclic symmetry analysis.

**Format:**

| 1       | 2   | 3 | 4     | 5       | 6  | 7  | 8  | 9  | 10 |
|---------|-----|---|-------|---------|----|----|----|----|----|
| LOADCYN | SID | S | SEGID | SEGTYPE | S1 | L1 | S2 | L2 |    |

**Example:**

|         |    |     |   |   |     |    |  |  |  |
|---------|----|-----|---|---|-----|----|--|--|--|
| LOADCYN | 10 | 1.0 | 1 | R | 0.5 | 17 |  |  |  |
|---------|----|-----|---|---|-----|----|--|--|--|

**Fields:**

| Field   | Contents                                          |
|---------|---------------------------------------------------|
| SID     | Load set identification number. (Integer > 0)     |
| S       | Scale Factor. (Real)                              |
| SEGID   | Segment identification number. (Integer)          |
| SEGTYPE | Segment type. (Character: "R", "L", or blank)     |
| Si      | Scale Factors. (Real)                             |
| Li      | Load set ID numbers. See Remark 8 . (Integer > 0) |

**Remarks:**

1. The LOADCYN entry is selected by the LOAD Case Control command.
2. If SEGTYPE is blank, both R and L segments will be used in DIH-type symmetry.
3. L1 and L2 may reference LOAD entries. However, the LOAD entry in such a case must not reference load sets defined via RFORCE and/or GRAV entries.
4. If L1 refers to a set ID defined by SPCD loading entry, the same ID must not reference any nonzero loading specified by the other Bulk Data loading entries given via FORCE, MOMENT, FORCE1, MOMENT1, FORCE2, MOMENT2, PLOAD, PLOAD1, PLOAD2, PLOAD4, PLOADX1, and SLOAD entries. In other words, an enforced deformation loading via the SPCD entry is specified by a load set ID L1 or L2 and a zero magnitude loading via a load (such as FORCE) with the same ID.

**1582 LOADCYN**  
**Physical Load Input for Cyclic Symmetry**

5. Load set IDs L1 or L2 may not be referenced by load set ID L1 or L2 of LOADCYH entries.
6. The load on the segment (or half-segment) is  $L = S(S1 \cdot L1 + S2 \cdot L2)$ .
7. S must be nonzero. In addition, either S1 or S2 must be nonzero.
8. L1 and L2 may reference any of the static or dynamic loading entries except GRAV and RFORCE.

**LOADCYT**      Table Load Input for Cyclic Symmetry

Specifies loads as a function of azimuth angle by references to tables that define scale factors of loads versus azimuth angles. This entry is used only when STYPE = "AXI" on the CYSYM entry.

**Format:**

| 1       | 2   | 3        | 4        | 5       | 6        | 7        | 8       | 9 | 10 |
|---------|-----|----------|----------|---------|----------|----------|---------|---|----|
| LOADCYT | SID | TABLEID1 | LOADSET1 | METHOD1 | TABLEID2 | LOADSET2 | METHOD2 |   |    |

**Example:**

|         |    |    |    |  |    |    |   |  |  |
|---------|----|----|----|--|----|----|---|--|--|
| LOADCYT | 10 | 19 | 27 |  | 21 | 26 | 1 |  |  |
|---------|----|----|----|--|----|----|---|--|--|

**Fields:**

| Field                | Contents                                                                                                                            |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| SID                  | Load set identification number. (Integer > 0)                                                                                       |
| TABLEID <sub>i</sub> | Table ID for table load input for load set Li. See Remark 3. (Integer > 0)                                                          |
| LOADSET <sub>i</sub> | Load set Li. (Integer > 0)                                                                                                          |
| METHOD <sub>i</sub>  | Method of interpolation. See Remark 5. (Integer: 0 or 1, Default = 0)                                                               |
|                      | 0      interpolate the load with the Fourier coefficients specified in the table up to the specified number of harmonics. (Default) |
|                      | 1      interpolate the magnitude of the load at corresponding grid points in all segments.                                          |

**Remarks:**

1. The LOADCYT entry is selected by the LOAD Case Control command.
2. The load set ID given in fields 4 or 7 of this entry may refer to FORCE, MOMENT, PLOAD, PLOAD2, PLOAD4, SPCD, TEMP, or TEMPP1 Bulk Data entries.
3. Either TABLED1 or TABLED2 type tabular data of azimuth angle (Xi) versus scale factors (Yi) may be used. The azimuth angle values must be in degrees.

## 1584 **LOADCYT** Table Load Input for Cyclic Symmetry

**15**

Bulk F-L

4. The scale factors given in the tables referenced by TABLEDi entries will be applied only to the magnitudes of the loads defined by LOADSET IDs given in fields 4 or 7.
5. For grid point loading entries, (like FORCE, MOMENT, SPCD, and TEMP Bulk Data entries) METHODi = 1 option should be used. For element loading entries (like PLOAD, PLOAD2, PLOAD4, and TEMPP1 Bulk Data entries) either METHODi = 0 or METHODi = 1 option can be used. In particular, if harmonic output of element stresses under temperature loading via TEMPP1 Bulk Data entry, METHODi = 0 option should be used to specify TEMPP1 load set.



**LSEQ**      Static Load Set Definition

Defines a sequence of static load sets.

**Format:**

| 1    | 2   | 3        | 4   | 5   | 6 | 7 | 8 | 9 | 10 |
|------|-----|----------|-----|-----|---|---|---|---|----|
| LSEQ | SID | EXCITEID | LID | TID |   |   |   |   |    |

**Example:**

|      |     |     |      |      |  |  |  |  |  |
|------|-----|-----|------|------|--|--|--|--|--|
| LSEQ | 100 | 200 | 1000 | 1001 |  |  |  |  |  |
|------|-----|-----|------|------|--|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID      | Set identification of the set of LSEQ entries. See Remark 5 . (Integer > 0)                                                                             |
| EXCITEID | The EXCITEID set identification assigned to this static load vector. See Remark 5 . (Integer > 0)                                                       |
| LID      | Load set identification number of a set of static load entries such as those referenced by the LOAD Case Control command. (Integer > 0 or blank)        |
| TID      | Temperature set identification of a set of thermal load entries such as those referenced by the TEMP(LOAD) Case Control command. (Integer > 0 or blank) |

**Remarks:**

- LSEQ will not be used unless selected in the Case Control Section with the LOADSET command.
- The number of static load vectors created for each superelement depends upon the type of analysis. In static analysis, the number of vectors created is equal to the number of unique EXCITEID IDs on all LSEQ entries in the Bulk Data; in dynamic analysis, the number of vectors created is equal to the number of unique EXCITEID IDs on all RLOAD1, RLOAD2, TLOAD1, TLOAD2 and ACSRCE entries in the Bulk Data.
- EXCITEID may be referenced by CLOAD, RLOAD1, RLOAD2, TLOAD1, and TLOAD2 entries in order to apply the static load in nonlinear, static and dynamic analysis.

**1586 LSEQ**  
**Static Load Set Definition**

**15**  
**Bulk F-L**

4. Element data recovery for thermal loads is not currently implemented in dynamics.
5. The SID-EXCITEID number pair must be unique with respect to similar pairs on all other LSEQ entries in the Bulk Data.
6. In a nonsuperelement analysis, LID and TID cannot both be blank. In superelement analysis, they may both be blank as long as static loads are prescribed in the upstream superelements.
7. It is no longer necessary to employ LOADSET/LSEQ data to specify static loading data for use in dynamic analysis. In the absence of LSEQ Bulk Data entries, all static loads whose load set IDs match the EXCITEID IDs on all RLOAD1, RLOAD2, TLOAD1, TLOAD2 and ACSRCE entries in the Bulk Data are automatically processed.

Chapter

# 16 Bulk Data Entries M—N

16  
Bulk  
M-N

Bulk data entries MAT1—NXSTRAT

**1588 MAT1**  
**Isotropic Material Property Definition**

**MAT1** Isotropic Material Property Definition

Defines the material properties for linear isotropic materials.

**Format:**

| 1    | 2   | 3  | 4  | 5     | 6   | 7 | 8    | 9  | 10 |
|------|-----|----|----|-------|-----|---|------|----|----|
| MAT1 | MID | E  | G  | NU    | RHO | A | TREF | GE |    |
|      | ST  | SC | SS | MCSID |     |   |      |    |    |

**Example:**

|      |       |       |       |      |      |       |        |      |  |
|------|-------|-------|-------|------|------|-------|--------|------|--|
| MAT1 | 17    | 3.+7  |       | 0.33 | 4.28 | 6.5-6 | 5.37+2 | 0.23 |  |
|      | 20.+4 | 15.+4 | 12.+4 | 1003 |      |       |        |      |  |

**Fields:**

| Field      | Contents                                                                                                                                                                                                              |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID        | Material identification number. See Remark 10. (Integer > 0)                                                                                                                                                          |
| E          | Young's modulus. (Real $\geq$ 0.0 or blank)                                                                                                                                                                           |
| G          | Shear modulus. (Real $\geq$ 0.0 or blank)                                                                                                                                                                             |
| NU         | Poisson's ratio. (-1.0 < Real $\leq$ 0.5 or blank)                                                                                                                                                                    |
| RHO        | Mass density. See Remark 5. (Real)                                                                                                                                                                                    |
| A          | Thermal expansion coefficient. (Real)                                                                                                                                                                                 |
| TREF       | Reference temperature for the calculation of thermal loads, or a temperature-dependent thermal expansion coefficient. See Remarks 9 and 10. (Real; Default = 0.0 if A is specified.)                                  |
| GE         | Structural element damping coefficient. See Remarks 8, 9, and 4. (Real)                                                                                                                                               |
| ST, SC, SS | Stress limits for tension, compression, and shear are optionally supplied, used only to compute margins of safety in certain elements; and have no effect on the computational procedures. (Real $\geq$ 0.0 or blank) |
| MCSID      | Material coordinate system identification number. Used only for PARAM,CURV processing. See <a href="#">Parameters</a> for more information. (Integer $\geq$ 0 or blank)                                               |

**Remarks:**

1. The material identification number must be unique for all MAT1, MAT2, MAT3, and MAT9 entries.
2. The following rules apply when E, G, or NU are blank.
  - E and G may not both be blank.
  - If NU and E, or NU and G, are both blank, then both are set to 0.0.
  - If only one E, G, or NU is blank, then it will be computed from the equation:  $E = 2 \cdot (1 + NU) \cdot G$ . If this is not desired, then the MAT2 entry is recommended. If E, G, or NU are made temperature dependent by the MATT1 entry, then the equation is applied to the initial values only.

**Note**

Note: These rules are always validated at the beginning of the solution, even when a MATS1 entry is used.

3. If values are specified for all of the properties E, G, and NU, then it is recommended that the following relationship be satisfied:

$$\left| 1 - \frac{E}{2 \cdot (1 + NU) \cdot G} \right| < 0.01$$

If this relationship is not desired, then the MAT2 entry is recommended.

It should also be noted that some of the properties are not applied in the stiffness formulation of certain elements as indicated in [Table 16-1](#). Therefore, it is recommended that only the applicable properties be specified for a given element.

| <b>Table 16-1. Material Property Usage Versus Element Types</b> |                                                 |          |                          |
|-----------------------------------------------------------------|-------------------------------------------------|----------|--------------------------|
| Element Entry                                                   | E                                               | NU       | G                        |
| CROD<br>CBEAM<br>CBAR                                           | Extension and Bending                           | Not Used | Torsion Transverse Shear |
| CQUADi<br>CTRIAi<br>CCONEAX                                     | Membrane, including In-plane Shear, and Bending |          | Transverse Shear         |

1590 **MAT1**  
Isotropic Material Property Definition

**16**  
Bulk  
M-N


| <b>Table 16-1. Material Property Usage Versus Element Types</b> |                                   |                    |          |
|-----------------------------------------------------------------|-----------------------------------|--------------------|----------|
| <b>Element Entry</b>                                            | <b>E</b>                          | <b>NU</b>          | <b>G</b> |
| CSHEAR                                                          | Not Used                          |                    | Shear    |
| CRAC2D                                                          | All Terms                         |                    | Not Used |
| CHEXA<br>CPENTA<br>CTETRA<br>CRAC3D                             | All Terms                         |                    | Not Used |
| CTRIAX6<br>CTRAX3<br>CQUADX4<br>CTRAX6<br>CQUADX8               | Radial, Axial,<br>Circumferential | All Coupled Ratios | Shear    |

4. MAT1 materials may be made temperature-dependent by use of the MATT1 entry. In SOL 106, linear and nonlinear elastic material properties in the residual structure will be updated as prescribed under the TEMPERATURE Case Control command.
5. The mass density RHO will be used to compute mass for all structural elements automatically.
6. Weight density may be used in field 6 if the value 1/g is entered on the PARAM,WTMASS entry, where g is the acceleration of gravity (see [Parameters](#) for more information).
7. MCSID must be nonzero if PARAM,CURV is specified to calculate stresses or strains at grid points on plate and shell elements only.
8. To obtain the damping coefficient GE, multiply the critical damping ratio  $C/C_o$ , by 2.0.
9. TREF and GE are ignored if the MAT1 entry is referenced by a PCOMP entry.
10. When PCOMP bulk data entries are used, the MATi IDs must be less than 400,000,000. Furthermore, when only PSHELL bulk data entries exist and MID is greater than 400,000,000, A1, A2, and A3 are a special format. They

are  $[G4] \cdot [alpha4]$  not  $[alpha4]$ . If MIDs larger than 99,999,999 are used, PARAM,NOCOMPS,-1 must be specified to obtain stress output.

11. TREF is used in two different ways:

- In nonlinear static analysis (SOL 106), TREF is used only for the calculation of a temperature-dependent thermal expansion coefficient. The reference temperature for the calculation of thermal loads is obtained from the TEMPERATURE(INITIAL) set selection.

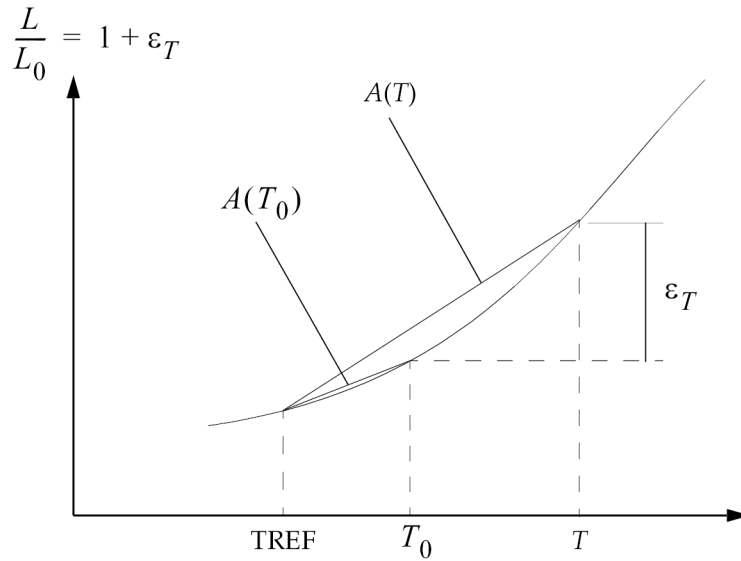

**Figure 16-1. Use of TREF in Calculation of Thermal Loads**

$$\epsilon_T = A(T) \cdot (T - TREF) - A(T_0) \cdot (T_0 - TREF)$$

where  $T$  is requested by the TEMPERATURE(LOAD) command and  $T_0$  is requested by the TEMPERATURE(INITIAL) command.

1592 **MAT1**  
Isotropic Material Property Definition

**Note**

- a. A is a secant quantity.
- b. TREF is obtained from the same source as the other material properties; e.g., ASTM, etc.
- c. If  $A(T)$  constant, then  $\epsilon_T = A \cdot (T - T_0)$ 
  - In all SOLs except 106, TREF is used only as the reference temperature for the calculation of thermal loads. TEMPERATURE(INITIAL) may be used for this purpose, but TREF must be blank.
- d. If PARAM,W4 is not specified, GE is ignored in transient analysis. See **Parameters**.

**Remarks related to SOLs 601 and 701:**

1. GE, ST, SC, SS, and MCSID are ignored.
2. RHO is always used as mass density regardless of PARAM,WTMASS entry.
3. TREF is used only used when MAT1 is made temperature dependent by use of the MATT1 entry.
4. For CQUADi and CTRIAi elements, the transverse shear modulus is equal to the in-plane shear modulus.
5. E and NU may not be both blank.



**MAT2** Shell Element Anisotropic Material Property Definition

Defines the material properties for linear anisotropic materials for two-dimensional elements.

**Format:**

| 1    | 2     | 3   | 4   | 5    | 6   | 7   | 8   | 9   | 10 |
|------|-------|-----|-----|------|-----|-----|-----|-----|----|
| MAT2 | MID   | C11 | C12 | C13  | C22 | C23 | C33 | RHO |    |
|      | A1    | A2  | A3  | TREF | GE  | ST  | SC  | SS  |    |
|      | MCSID |     |     |      |     |     |     |     |    |

**Example:**

|      |       |       |  |        |       |       |       |       |  |
|------|-------|-------|--|--------|-------|-------|-------|-------|--|
| MAT2 | 13    | 6.2+3 |  |        | 6.2+3 |       | 5.1+3 | 0.056 |  |
|      | 6.5-6 | 6.5-6 |  | -500.0 | 0.002 | 20.+5 |       |       |  |
|      | 1003  |       |  |        |       |       |       |       |  |

**Fields:**

| Field      | Contents                                                                                                                                                                                                             |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID        | Material identification number. See Remark 13. (Integer > 0)                                                                                                                                                         |
| Cij        | The material property matrix. (Real)                                                                                                                                                                                 |
| RHO        | Mass density. (Real)                                                                                                                                                                                                 |
| Ai         | Thermal expansion coefficient vector. (Real)                                                                                                                                                                         |
| TREF       | Reference temperature for the calculation of thermal loads, or a temperature-dependent thermal expansion coefficient. See Remarks 10 and 11. (Real or blank)                                                         |
| GE         | Structural element damping coefficient. See Remarks 7, 10 and 12. (Real)                                                                                                                                             |
| ST, SC, SS | Stress limits for tension, compression, and shear are optionally supplied (these are used only to compute margins of safety in certain elements) and have no effect on the computational procedures. (Real or blank) |
| MCSID      | Material coordinate system identification number. Used only for PARAM, CURV processing. See <a href="#">Parameters</a> for more information. (Integer ≥ 0 or blank)                                                  |

## 1594 MAT2 Shell Element Anisotropic Material Property Definition

### Remarks:

1. The material identification numbers must be unique for all MAT1, MAT2, MAT3, and MAT9 entries.
2. MAT2 materials may be made temperature dependent by use of the MATT2 entry. In SOL 106, linear and nonlinear elastic material properties in the residual structure will be updated as prescribed under the TEMPERATURE Case Control command.
3. The mass density, RHO, will be used to automatically compute mass for all structural elements.
4. The convention for the  $C_{ij}$  in fields 3 through 8 are represented by the matrix relationship

$$\begin{Bmatrix} \sigma_1 \\ \sigma_2 \\ \tau_{12} \end{Bmatrix} = \begin{bmatrix} C_{11} & C_{12} & C_{13} \\ C_{12} & C_{22} & C_{23} \\ C_{13} & C_{23} & C_{33} \end{bmatrix} \left( \begin{Bmatrix} \varepsilon_1 \\ \varepsilon_2 \\ \gamma_{12} \end{Bmatrix} - (T - T_0) \begin{Bmatrix} A_1 \\ A_2 \\ A_3 \end{Bmatrix} \right)$$

5. If this entry is referenced by the MID3 field (transverse shear) on the PSHELL, then C13, C23, and C33 must be blank. See *The NASTRAN Theoretical Manual*.
6. MCSID must be nonzero if PARAM,CURV is specified to extrapolate element centroid stresses or strains to grid points on plate and shell elements only. CQUAD4 element corner stresses are not supported by PARAM,CURV.
7. To obtain the damping coefficient GE, multiply the critical damping ratio  $C/C_0$  by 2.0.
8. If the MAT2 entry is referenced by the PCOMP entry, the transverse shear flexibility for the referenced lamina is zero.
9. Unlike the MAT1 entry, data from the MAT2 entry is used directly without adjustment of equivalent E, G, or NU values.
10. TREF and GE are ignored if this entry is referenced by a PCOMP entry.
11. TREF is used in two different ways:
  - In nonlinear static analysis (SOL 106), TREF is used only for the calculation of a temperature-dependent thermal expansion coefficient. The reference temperature for the calculation of thermal loads is obtained from the

**MAT2 1595**

**Shell Element Anisotropic Material Property Definition**

TEMPERATURE(INITIAL) set selection. See Remark 10 in the MAT1 description.

- In all SOLs except 106, TREF is used only as the reference temperature for the calculation of thermal loads. TEMPERATURE(INITIAL) may be used for this purpose, but TREF must be blank.
12. If PARAM,W4 is not specified, GE is ignored in transient analysis. See “Parameters”.
  13. PCOMP entries generate MAT2 entries equal to 100,000,000 plus the PCOMP PID. Explicitly specified MAT2 IDs must not conflict with internally generated MAT2 IDs. When PCOMP bulk data entries are used, the MATi IDs must be less than 400,000,000. Furthermore, when only PSHELL bulk data entries exist and the ID of a MAT2 referenced on the PSHELL MID4 field is greater than 400,000,000, A1, A2, and A3 are a special format. They are  $[C_{ij}] \cdot [alpha]$ , and not  $[alpha]$ . If MIDs larger than 99,999,999 are used, PARAM,NOCOMPS,-1 must be specified to obtain stress output.

**Remarks related to SOLs 601 and 701:**

1. MAT2 defines an orthotropic material for SOLs 601 and 701 with properties calculated from C11, C12, C22, and C33. See Section 3.2.2 of the Advanced Nonlinear Theory and Modeling Guide.
2. C13, C23, A3, GE, ST, SC, SS, and MCSID are ignored.
3. TREF is used only when MAT2 is made temperature dependent by use of the MATT2 entry.

**1596 MAT3**  
**Axisymmetric Element Orthotropic Material Property Definition**

**MAT3** Axisymmetric Element Orthotropic Material Property Definition

Defines the material properties for linear orthotropic materials used by the CTRAX3, CTRAX6, CQUADX4, CQUADX8, and CTRIAX6 axisymmetric elements.

**Format:**

| 1    | 2   | 3  | 4   | 5  | 6     | 7     | 8    | 9   | 10 |
|------|-----|----|-----|----|-------|-------|------|-----|----|
| MAT3 | MID | EX | ETH | EZ | NUXTH | NUTHZ | NUZX | RHO |    |
|      |     |    | GZX | AX | ATH   | AZ    | TREF | GE  |    |

**Example:**

|      |    |       |       |       |       |       |      |       |  |
|------|----|-------|-------|-------|-------|-------|------|-------|--|
| MAT3 | 23 | 1.0+7 | 1.1+7 | 1.2+7 | .3    | .25   | .27  | 1.0-5 |  |
|      |    |       | 2.5+6 | 1.0-4 | 1.0-4 | 1.1-4 | 68.5 | .23   |  |

**Fields:**

| Field              | Contents                                                                                                                                            |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| MID                | Material identification number. (Integer > 0)                                                                                                       |
| EX, ETH, EZ        | Young's moduli in the $x$ , $q$ , and $z$ directions, respectively. (Real > 0.0)                                                                    |
| NUXTH, NUTHZ, NUZX | Poisson's ratios (coupled strain ratios in the $xq$ , $zq$ , and $zx$ directions, respectively). (Real)                                             |
| RHO                | Mass density. (Real)                                                                                                                                |
| GZX                | Shear modulus. (Real > 0.0)                                                                                                                         |
| AX, ATH, AZ        | Thermal expansion coefficients. (Real)                                                                                                              |
| TREF               | Reference temperature for the calculation of thermal loads or a temperature-dependent thermal expansion coefficient. See Remark 10. (Real or blank) |
| GE                 | Structural element damping coefficient. See Remarks 9 and 11. (Real)                                                                                |

**Remarks:**

1. The material identification number must be unique with respect to the collection of all MAT1, MAT2, MAT3, and MAT9 entries.

Axisymmetric Element Orthotropic Material Property Definition

2. MAT3 materials may be made temperature dependent by use of the MATT3 entry. In SOL 106, linear and nonlinear elastic material properties in the residual structure will be updated as prescribed under the TEMPERATURE Case Control command.
3. All seven of the numbers EX, ETH, EZ, NUXTH, NUTHZ, NUZX, and GZX must be present.
4. A warning message will be issued if any value of NUXTH or NUTHZ has an absolute value greater than 1.0.
5. The mass density RHO will be used to automatically compute mass for the axisymmetric element.
6. The x-axis lies along the material axis (see the CTRIAX6 entry). The q-axis lies in the azimuthal direction. The z-axis is normal to both.
7. The strain-stress relationship is

$$\begin{Bmatrix} \varepsilon_x \\ \varepsilon_\theta \\ \varepsilon_z \\ \gamma_{zx} \end{Bmatrix} = \begin{bmatrix} \frac{1}{EX} & \frac{NUTHX}{ETH} & \frac{NUZX}{EZ} & 0 \\ \frac{NUXTH}{EX} & \frac{1}{ETH} & \frac{NUZTH}{EZ} & 0 \\ \frac{NUXZ}{EX} & \frac{NUTHZ}{ETH} & \frac{1}{EZ} & 0 \\ 0 & 0 & 0 & \frac{1}{GZX} \end{bmatrix} \begin{Bmatrix} \sigma_x \\ \sigma_\theta \\ \sigma_z \\ \sigma_{zx} \end{Bmatrix} + (T - TREF) \begin{Bmatrix} AX \\ ATH \\ AZ \\ 0 \end{Bmatrix}$$

Note that

$$\frac{NUXTH}{EX} = \frac{NUTHX}{E\theta}$$

$$\frac{NUZX}{EZ} = \frac{NUXZ}{EX}$$

$$\frac{NUTHZ}{ETH} = \frac{NUZTH}{EZ}$$

8. To obtain the damping coefficient GE, multiply the critical damping ratio C/C<sub>0</sub> by 2.0.

**1598 MAT3**  
**Axisymmetric Element Orthotropic Material Property Definition**

**16**  
**Bulk**  
**M-N**

9. TREF is used for two different purposes:
  - In nonlinear static analysis (SOL 106), TREF is used only for the calculation of a temperature-dependent thermal expansion coefficient. The reference temperature for the calculation of thermal loads is obtained from the TEMPERATURE(INITIAL) set selection. See Remark 10 under the MAT1 description.
  - In all SOLs except 106, TREF is used only as the reference temperature for the calculation of thermal loads. TEMPERATURE(INITIAL) may be used for this purpose, but TREF must be blank.
10. If PARAM,W4 is not specified, GE is ignored in transient analysis. See “Parameters”.

**Remarks related to SOL 601:**

1. GE is ignored.
2. TREF is used only when MAT3 is made temperature dependent by use of the MATT3 entry.

**MAT4** Heat Transfer Material Properties, Isotropic

Defines the constant or temperature-dependent thermal material properties for conductivity, heat capacity, density, dynamic viscosity, heat generation, reference enthalpy, and latent heat associated with a single-phase change.

**Format:**

| 1    | 2   | 3      | 4    | 5   | 6 | 7 | 8    | 9       | 10 |
|------|-----|--------|------|-----|---|---|------|---------|----|
| MAT4 | MID | K      | CP   | RHO | H | m | HGEN | REFENTH |    |
|      | TCH | TDELTA | QLAT |     |   |   |      |         |    |

**Example:**

|      |   |      |      |       |  |  |  |  |  |
|------|---|------|------|-------|--|--|--|--|--|
| MAT4 | 1 | 204. | .900 | 2700. |  |  |  |  |  |
|------|---|------|------|-------|--|--|--|--|--|

**Fields:**

| Field   | Contents                                                                                      |
|---------|-----------------------------------------------------------------------------------------------|
| MID     | Material identification number. (Integer > 0)                                                 |
| K       | Thermal conductivity. (Blank or Real > 0.0)                                                   |
| CP      | Heat capacity per unit mass at constant pressure (specific heat). (Blank or Real ≥ 0.0)       |
| RHO     | Density. (Real ≥ 0.0; Default = 1.0)                                                          |
| H       | Free convection heat transfer coefficient. (Real or blank)                                    |
| m       | Dynamic viscosity. See Remark 2. (Real > 0.0 or blank)                                        |
| HGEN    | Heat generation capability used with QVOL entries. (Real ≥ 0.0; Default = 1.0)                |
| REFENTH | Reference enthalpy. (Real or blank)                                                           |
| TCH     | Lower temperature limit at which phase change region is to occur. (Real or blank)             |
| TDELTA  | Total temperature change range within which a phase change is to occur. (Real ≥ 0.0 or blank) |
| QLAT    | Latent heat of fusion per unit mass associated with the phase change. (Real > 0.0 or blank)   |

**1600 MAT4**  
**Heat Transfer Material Properties, Isotropic**

**Remarks:**

1. The MID must be unique with respect to all other MAT4 and MAT5 entries. MAT4 may specify material properties for any conduction elements as well as properties for a forced convection fluid (see CONV). MAT4 also provides the heat transfer coefficient for free convection (see CONV).
2. For a forced convection fluid,  $\mu$  must be specified.
3. REFENTH is the enthalpy corresponding to zero temperature if the heat capacity CP is a constant. If CP is obtained through a TABLEM lookup, REFENTH is the enthalpy at the first temperature in the table.
4. Properties specified on the MAT4 entry may be defined as temperature dependent by use of the MATT4 entry.

**Remarks related to SOL 601:**

1.  $m$ , REFENTH, TCH, TDELTA and QLAT are ignored.



**MAT5** Thermal Material Property Definition

Defines the thermal material properties for anisotropic materials.

**Format:**

| 1    | 2   | 3    | 4   | 5   | 6   | 7   | 8   | 9  | 10 |
|------|-----|------|-----|-----|-----|-----|-----|----|----|
| MAT5 | MID | KXX  | KXY | KXZ | KYY | KYZ | KZZ | CP |    |
|      | RHO | HGEN |     |     |     |     |     |    |    |

**Example:**

|      |      |      |  |  |      |  |      |     |  |
|------|------|------|--|--|------|--|------|-----|--|
| MAT5 | 24   | .092 |  |  | .083 |  | 0.20 | 0.2 |  |
|      | 2.00 |      |  |  |      |  |      |     |  |

**Fields:**

| Field | Contents                                                                       |
|-------|--------------------------------------------------------------------------------|
| MID   | Material identification number. (Integer > 0)                                  |
| Kij   | Thermal conductivity. (Real)                                                   |
| CP    | Heat capacity per unit mass. (Real ≥ 0.0 or blank)                             |
| RHO   | Density. (Real > 0.0; Default = 1.0)                                           |
| HGEN  | Heat generation capability used with QVOL entries. (Real ≥ 0.0; Default = 1.0) |

**Remarks:**

1. The thermal conductivity matrix has the following form:

$$K = \begin{bmatrix} KXX & KXY & KXZ \\ KXY & KYY & KYZ \\ KXZ & KYZ & KZZ \end{bmatrix}$$

2. The material identification number may be the same as a MAT1, MAT2, or MAT3 entry but must be unique with respect to other MAT4 or MAT5 entries.
3. MAT5 materials may be made temperature-dependent by use of the MATT5 entry.

**1602 MAT5**  
**Thermal Material Property Definition**

4. When used for axisymmetric analysis (CTRIAX6), material properties are represented where:

KXX = radial conductivity component

KYY = axial conductivity component

**Remarks related to SOL 601:**

1. MAT5 defines the thermal properties for material with orthotropic thermal conductivity. KXY, KXZ and KYZ are ignored.

**MAT8** Shell Element Orthotropic Material Property Definition

Defines the material property for an orthotropic material for isoparametric shell elements.

**Format:**

| 1    | 2   | 3   | 4    | 5    | 6   | 7   | 8   | 9   | 10 |
|------|-----|-----|------|------|-----|-----|-----|-----|----|
| MAT8 | MID | E1  | E2   | NU12 | G12 | G1Z | G2Z | RHO |    |
|      | A1  | A2  | TREF | Xt   | Xc  | Yt  | Yc  | S   |    |
|      | GE  | F12 | STRN |      |     |     |     |     |    |

**Example:**

|      |       |       |       |      |       |      |       |       |  |
|------|-------|-------|-------|------|-------|------|-------|-------|--|
| MAT8 | 171   | 30.+6 | 1.+6  | 0.3  | 2.+6  | 3.+6 | 1.5+6 | 0.056 |  |
|      | 28.-6 | 1.5-6 | 155.0 | 1.+4 | 1.5+4 | 2.+2 | 8.+2  | 1.+3  |  |
|      | 1.-4  |       | 1.0   |      |       |      |       |       |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID   | Material identification number. See Remark 8. (0 < Integer)                                                                                                                                                                                            |
| E1    | Modulus of elasticity in longitudinal direction, also defined as the fiber direction or 1-direction. (Real ≠ 0.0)                                                                                                                                      |
| E2    | Modulus of elasticity in lateral direction, also defined as the matrix direction or 2-direction. (Real ≠ 0.0)                                                                                                                                          |
| NU12  | Poisson's ratio ( $\epsilon_2/\epsilon_1$ for uniaxial loading in 1-direction). Note that $n_{21}=\epsilon_1/\epsilon_2$ for uniaxial loading in 2-direction is related to $n_{12}$ , $E_1$ , and $E_2$ by the relation $n_{12}E_2=n_{21}E_1$ . (Real) |
| G12   | In-plane shear modulus. (Real ≥ 0.0; Default = 0.0)                                                                                                                                                                                                    |
| G1Z   | Transverse shear modulus for shear in 1-Z plane. (Real > 0.0; Default implies infinite shear modulus.)                                                                                                                                                 |
| G2Z   | Transverse shear modulus for shear in 2-Z plane. (Real > 0.0; Default implies infinite shear modulus.)                                                                                                                                                 |
| RHO   | Mass density. (Real)                                                                                                                                                                                                                                   |
| Ai    | Thermal expansion coefficient in i-direction. (Real)                                                                                                                                                                                                   |

**1604 MAT8**  
**Shell Element Orthotropic Material Property Definition**



| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                             |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TREF         | Reference temperature for the calculation of thermal loads, or a temperature-dependent thermal expansion coefficient. See Remarks 4 and 5. (Real or blank)                                                                  |
| Xt, Xc       | Allowable stresses or strains in tension and compression, respectively, in the longitudinal direction. Required if failure index is desired. See the FT field on the PCOMP entry. (Real > 0.0; Default value for Xc is Xt.) |
| Yt, Yc       | Allowable stresses or strains in tension and compression, respectively, in the lateral direction. Required if failure index is desired. (Real > 0.0; Default value for Yc is Yt.)                                           |
| S            | Allowable stress or strain for in-plane shear. See the FT field on the PCOMP entry. (Real > 0.0)                                                                                                                            |
| GE           | Structural damping coefficient. See Remarks 4 and 6. (Real)                                                                                                                                                                 |
| F12          | Interaction term in the tensor polynomial theory of Tsai-Wu. Required if failure index by Tsai-Wu theory is desired and if value of F12 is different from 0.0. See the FT field on the PCOMP entry. (Real)                  |
| STRN         | For the maximum strain theory only (see STRN in PCOMP entry). Indicates whether Xt, Xc, Yt, Yc, and S are stress or strain allowables. (Real = 1.0 for strain allowables; blank (Default) for stress allowables.)           |

**Remarks:**

1. If G1Z and G2Z values are specified as zero or blank, then transverse shear flexibility calculations will not be performed, which is equivalent to zero shear flexibility (i.e., infinite shear stiffness).
2. MAT8 materials may be made temperature dependent by use of the MATT8 entry.
3. An approximate value for G1Z and G2Z is the in-plane shear modulus G12. If test data are not available to accurately determine G1Z and G2Z for the material and transverse shear calculations are deemed essential; the value of G12 may be supplied for G1Z and G2Z. In SOL 106, linear and nonlinear elastic material properties in the residual structure will be updated as prescribed in the TEMPERATURE Case Control command.

4.  $X_t$ ,  $Y_t$ , and  $S$  are required for composite element failure calculations when requested in the  $FT$  field of the PCOMP entry.  $X_c$  and  $Y_c$  are also used but not required for failure calculations. Regardless if the  $FT$  field is defined or not, you must specify values for  $X_t$ ,  $Y_t$  and  $S$  if any of  $X_t$ ,  $X_c$ ,  $Y_t$ ,  $Y_c$ , and  $S$  are specified.
5. TREF and GE are ignored if this entry is referenced by a PCOMP entry.
6. TREF is used in two different ways:
  - In nonlinear static analysis (SOL 106), TREF is used only for the calculation of a temperature-dependent thermal expansion coefficient. The reference temperature for the calculation of thermal loads is obtained from the TEMPERATURE(INITIAL) set selection. See Remark 10. in the MAT1 description.
  - In all SOLs except 106, TREF is used only as the reference temperature for the calculation of thermal loads. TEMPERATURE(INITIAL) may be used for this purpose, but TREF must then be blank.
7. If PARAM,W4 is not specified, GE is ignored in transient analysis. See “Parameters”.
8. When PCOMP bulk data entries are used, the MATi IDs must be less than 400,000,000. Furthermore, when only PSHELL bulk data entries exist and MID is greater than 400,000,000, A1, A2, and A3 are a special format. They are  $[G4] \cdot [\alpha4]$  not  $[\alpha4]$ . If MIDs larger than 99,999,999 are used, PARAM,NOCOMPS,-1 must be specified to obtain stress output.

**Remarks related to SOLs 601 and 701:**

1.  $X_t$ ,  $X_c$ ,  $Y_t$ ,  $Y_c$ ,  $S$ , GE, F12, and STRN are ignored.
2. TREF is used only when MAT8 is made temperature dependent by use of the MATT8 entry.

**1606 MAT9**  
**Solid Element Anisotropic Material Property Definition**

**MAT9** Solid Element Anisotropic Material Property Definition

Defines the material properties for linear, temperature-independent, anisotropic materials for solid isoparametric elements (see PSOLID entry description).

**Format:**

| 1    | 2   | 3   | 4   | 5   | 6   | 7    | 8   | 9   | 10 |
|------|-----|-----|-----|-----|-----|------|-----|-----|----|
| MAT9 | MID | C11 | C12 | C13 | C14 | C15  | C16 | C22 |    |
|      | C23 | C24 | C25 | C26 | C33 | C34  | C35 | C36 |    |
|      | C44 | C45 | C46 | C55 | C56 | C66  | RHO | A1  |    |
|      | A2  | A3  | A4  | A5  | A6  | TREF | GE  |     |    |

**Example:**

|      |       |       |  |       |       |       |      |       |  |
|------|-------|-------|--|-------|-------|-------|------|-------|--|
| MAT9 | 17    | 6.2+3 |  |       |       |       |      | 6.2+3 |  |
|      |       |       |  |       | 6.2+3 |       |      |       |  |
|      | 5.1+3 |       |  | 5.1+3 |       | 5.1+3 | 3.2  | 6.5-6 |  |
|      | 6.5-6 |       |  |       |       | 125.  | .003 |       |  |

**Fields:**

| Field | Contents                                                                                                                                         |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| MID   | Material identification number. (Integer > 0)                                                                                                    |
| Cij   | Elements of the $6 \times 6$ symmetric material property matrix in the material coordinate system. (Real)                                        |
| RHO   | Mass density. (Real)                                                                                                                             |
| Ai    | Thermal expansion coefficient. (Real)                                                                                                            |
| TREF  | Reference temperature for the calculation thermal loads, or a temperature-dependent thermal expansion coefficient. See Remark 7. (Real or blank) |
| GE    | Structural element damping coefficient. See Remarks 6 and 8. (Real)                                                                              |

**Remarks:**

1. The material identification numbers must be unique for all MAT1, MAT2, MAT3, and MAT9 entries.

2. MAT9 materials may be made temperature-dependent by use of the MATT9 entry. In nonlinear static analysis (e.g., SOL 106), linear and nonlinear elastic material properties in the residual structure will be updated as prescribed under the TEMPERATURE Case Control command.
3. The mass density RHO will be used to compute mass in a structural dynamics problem automatically.
4. The third continuation entry is optional.
5. The subscripts 1 through 6 refer to x, y, z, xy, yz, and zx of the material coordinate system (see the CORDM field on the PSOLID entry description). The stress-strain relationship is

$$\begin{bmatrix} \sigma_x \\ \sigma_y \\ \sigma_z \\ \tau_{xy} \\ \tau_{yz} \\ \tau_{zx} \end{bmatrix} = \begin{bmatrix} C11 & C12 & C13 & C14 & C15 & C16 \\ & C22 & C23 & C24 & C25 & C26 \\ & & C33 & C34 & C35 & C36 \\ & & & C44 & C45 & C46 \\ & \text{symmetric} & & & C55 & C56 \\ & & & & & C66 \end{bmatrix} \left\{ \begin{bmatrix} \epsilon_x \\ \epsilon_y \\ \epsilon_z \\ \gamma_{xy} \\ \gamma_{yz} \\ \gamma_{zx} \end{bmatrix} - \begin{bmatrix} A1 \\ A2 \\ A3 \\ A4 \\ A5 \\ A6 \end{bmatrix} (T - TREF) \right\}$$

6. The damping coefficient GE is given by

$$GE = \frac{2.0 \cdot C}{C_0}$$

7. TREF is used in two different ways:
  - In nonlinear static analysis (e.g., SOL 106), TREF is used only for the calculation of a temperature-dependent thermal expansion coefficient. The reference temperature for the calculation of thermal loads is obtained from the TEMPERATURE(INITIAL) set selection. See Remark 10 in the MAT1 description.
  - In all solutions except nonlinear static analysis, TREF is used only as the reference temperature for the calculation of thermal loads. TEMPERATURE(INITIAL) may be used for this purpose, but TREF must then be blank.
8. If PARAM,W4 is not specified, GE is ignored in transient analysis. See “Parameters”.

## 1608 **MAT9** Solid Element Anisotropic Material Property Definition

### Remarks related to SOLs 601 and 701:

1. MAT9 defines an orthotropic material for SOLs 601 and 701 with properties calculated from C11, C12, C13, C22, C23, C33, C44, C44, C55, and C66. See Section 3.2.2 of the Advanced Nonlinear Theory and Modeling Guide.
2. C14, C15, C16, C24, C25, C26, C34, C35, C36, C45, C46, C56, A4, A5, A6, and GE are ignored.
3. TREF is used only when MAT9 is made temperature dependent by use of the MATT9 entry.



**MAT10** Fluid Material Property Definition

Defines material properties for fluid elements in coupled fluid-structural analysis.

**Format:**

| 1     | 2   | 3    | 4   | 5 | 6  | 7 | 8 | 9 | 10 |
|-------|-----|------|-----|---|----|---|---|---|----|
| MAT10 | MID | BULK | RHO | C | GE |   |   |   |    |

**Example:**

|       |     |       |       |  |  |  |  |  |  |
|-------|-----|-------|-------|--|--|--|--|--|--|
| MAT10 | 103 | 0.656 | 0.011 |  |  |  |  |  |  |
|-------|-----|-------|-------|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                      |
|-------|-----------------------------------------------|
| MID   | Material identification number. (Integer > 0) |
| BULK  | Bulk modulus. (Real > 0.0)                    |
| RHO   | Mass density. (Real > 0.0)                    |
| C     | Speed of sound. (Real > 0.0)                  |
| GE    | Fluid element damping coefficient. (Real)     |

**Remarks:**

1. MAT10 is referenced, with MID, by the PSOLID entry only.
2. The material identification numbers must be unique for all MAT1, MAT2, MAT3, MAT9, and MAT10 entries.
3. The mass density RHO will be used to compute the mass automatically.
4. BULK, RHO, and C are related by

$$\text{BULK} = C^2 \cdot \text{RHO}$$

Two out of the three must be specified, and the other will be calculated according to this equation.

5. To obtain the damping coefficient GE, multiply the critical damping ratio  $C/C_0$ , by 2.0.

**1610 MAT10**  
**Fluid Material Property Definition**

6. If PARAM,W4FL is not specified, GE is ignored in transient analysis. See “Parameters ”.

**MAT11** Solid Element Orthotropic Material Property Definition

Defines the material properties for a 3-D orthotropic material for isoparametric solid elements.

**Format:**

| 1     | 2   | 3   | 4   | 5  | 6    | 7    | 8    | 9   | 10 |
|-------|-----|-----|-----|----|------|------|------|-----|----|
| MAT11 | MID | E1  | E2  | E3 | NU12 | NU13 | NU23 | G12 |    |
|       | G13 | G23 | RHO | A1 | A2   | A3   | TREF | GE  |    |

**Example:**

|       |       |       |       |       |      |      |      |       |  |
|-------|-------|-------|-------|-------|------|------|------|-------|--|
| MAT11 | 101   | 2.1E7 | 2.2E7 | 2.3E7 | 0.31 | 0.29 | 0.33 | 2.1E6 |  |
|       | 2.2E6 | 2.3E6 | 0.34  | 0.35  | 0.36 | 0.37 | 0.38 | 0.39  |  |

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                        |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID   | Material identification number. (Integer > 0)                                                                                                                                                                                                                                                   |
| E1    | Modulus of elasticity in longitudinal direction, also defined as the fiber direction or 1-direction. (Real > 0.0; no default, must be defined)                                                                                                                                                  |
| E2    | Modulus of elasticity in lateral direction, also defined as the matrix direction or 2-direction. (Real > 0.0; no default, must be defined)                                                                                                                                                      |
| E3    | Modulus of elasticity in ply layup direction, also defined as the thickness direction or 3-direction. (Real > 0.0; no default, must be defined)                                                                                                                                                 |
| NU12  | Poisson's ratio ( $\epsilon_2/\epsilon_1$ for uniaxial loading in 1-direction). Note that $NU_{21}=\epsilon_1/\epsilon_2$ for uniaxial loading in 2-direction is related to $NU_{12}$ , $E_1$ , and $E_2$ by the relation $NU_{12}*E_2=NU_{21}*E_1$ . (Real > 0.0; no default, must be defined) |
| NU13  | Poisson's ratio ( $\epsilon_3/\epsilon_1$ for uniaxial loading in 1-direction). Note that $NU_{31}=\epsilon_1/\epsilon_3$ for uniaxial loading in 3-direction is related to $NU_{13}$ , $E_3$ , and $E_1$ by the relation $NU_{31}*E_1=NU_{13}*E_3$ . (Real > 0.0; no default, must be defined) |

1612 **MAT11**  
**Solid Element Orthotropic Material Property Definition**



| Field | Contents                                                                                                                                                                                                                                                                                        |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NU23  | Poisson's ratio ( $\epsilon_3/\epsilon_2$ for uniaxial loading in 2-direction). Note that $NU_{32}=\epsilon_2/\epsilon_3$ for uniaxial loading in 3-direction is related to $NU_{23}$ , $E_2$ , and $E_3$ by the relation $NU_{23}*E_3=NU_{32}*E_2$ . (Real > 0.0; no default, must be defined) |
| G12   | Shear modulus in plane 1-2. (Real > 0.0; no default, must be defined)                                                                                                                                                                                                                           |
| G13   | Transverse shear modulus in shear in 1-3 plane. (Real > 0.0; no default, must be defined)                                                                                                                                                                                                       |
| G23   | Transverse shear modulus in shear in 2-3 plane. (Real > 0.0; no default, must be defined)                                                                                                                                                                                                       |
| RHO   | Mass density. (Real or blank; Default = 0.0)                                                                                                                                                                                                                                                    |
| A1    | Thermal expansion coefficient in longitudinal direction. (Real or blank; Default = 0.0)                                                                                                                                                                                                         |
| A2    | Thermal expansion coefficient in lateral direction. (Real or blank; Default = 0.0)                                                                                                                                                                                                              |
| A3    | Thermal expansion coefficient in thickness direction. (Real or blank; Default = 0.0)                                                                                                                                                                                                            |
| TREF  | Reference temperature for the calculation of thermal loads, or a temperature-dependent thermal expansion coefficient. (Real or blank; Default = 0.0)                                                                                                                                            |
| GE    | Structural damping coefficient. (Real or blank; Default = 0.0)                                                                                                                                                                                                                                  |

**Remarks:**

1. In general,  $NU_{12}$  is not the same as  $NU_{21}$ , but they are related by  $NU_{ij}/E_i = NU_{ji}/E_j$ . Furthermore, material stability requires that  $E_i > NU_{ij}^2 E_j$  and  $1-NU_{12}NU_{21}-NU_{23}NU_{32}-NU_{31}NU_{13}-2NU_{21}NU_{32}NU_{13} > 0.0$ .
2. MAT11 materials may be made temperature dependent by use of the MATT11 entry.
3. MAT11 entries cannot be used as design variables in SOL 200 (via the DVMREL1 and DVMREL2 bulk entries).

**MATG** Gasket Material Properties (SOL 601 only)

Defines the material properties for gasket materials.

**Format:**

| 1    | 2      | 3      | 4      | 5      | 6      | 7       | 8      | 9      | 10 |
|------|--------|--------|--------|--------|--------|---------|--------|--------|----|
| MATG | MID    | IDMEM  | BEHAV  | TABLD  | TABLU1 | TABLU2  | TABLU3 | TABLU4 |    |
|      | TABLU5 | TABLU6 | TABLU7 | TABLU8 | TABLU9 | TABLU10 | YPRS   | EPL    |    |
|      | GPL    |        |        |        |        |         |        |        |    |

**Example:**

|      |      |   |   |     |     |     |     |      |  |
|------|------|---|---|-----|-----|-----|-----|------|--|
| MATG | 3    | 1 | 0 | 101 | 102 | 103 | 104 |      |  |
|      |      |   |   |     |     |     | 350 | 2000 |  |
|      | 1270 |   |   |     |     |     |     |      |  |

**Fields:**


| Field  | Contents                                                                                                                                                                                                                                         |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID    | Material identification number. (Integer > 0)                                                                                                                                                                                                    |
| IDMEM  | ID of MAT1 providing material behavior for the membrane (in-plane) direction. (Integer > 0)                                                                                                                                                      |
| BEHAV  | Behavior type. Only type 0 is supported. (Integer)                                                                                                                                                                                               |
| TABLD  | Identification number of a TABLES1 entry providing the main loading curve of the gasket (pressure vs. closure). (Integer > 0)                                                                                                                    |
| TABLUi | Identification number of a TABLES1 entry providing the unloading curve(s) of the gasket (pressure vs. closure). At least one unloading curve must be specified. Leave fields blank for tables that are not required. See Remark 3. (Integer > 0) |
| YPRESS | Initial yield pressure. See Remark 5. (Real > 0.0)                                                                                                                                                                                               |
| EPL    | Tensile modulus (pressure per unit length). (Real > 0.0)                                                                                                                                                                                         |
| GPL    | Transverse shear modulus (force per unit area). (Real > 0.0)                                                                                                                                                                                     |

## 1614 MATG Gasket Material Properties (SOL 601 only)

16  
Bulk  
M-N

### Remarks:

1. MATG can only be used with CHEXA elements with 8 grid points or CPENTA elements with 6 grid points. There should be only one layer of element elements in the direction of the gasket thickness.
2. MATG defines the compressive behavior in the thickness direction. The software will attempt to automatically determine the thickness direction and set it as the material X-axis if it is not defined by CORDM of PSOLID entry. The in-plane behavior is defined by the MAT1 entry referenced by IDMEM.
3. All unloading curves must have the same number of points as the elastic portion of the loading curve (i.e., up to the initial yield pressure). The first point must be defined at pressure=0.0 and the last point must coincide with a yield point on the loading curve. Not all yield points require unloading curves. The unloading behavior at intermediate points is interpolated from adjacent curves. See [Figure 16-2](#).
4. MID, IDMEM, TABLD, TABLU1, YPRS, EPL, and GPL must be specified.
5. The initial yield stress must match a point on the loading curve of TABLED.
6. Closure (strain) is defined as the change in gasket thickness divided by the original gasket thickness.

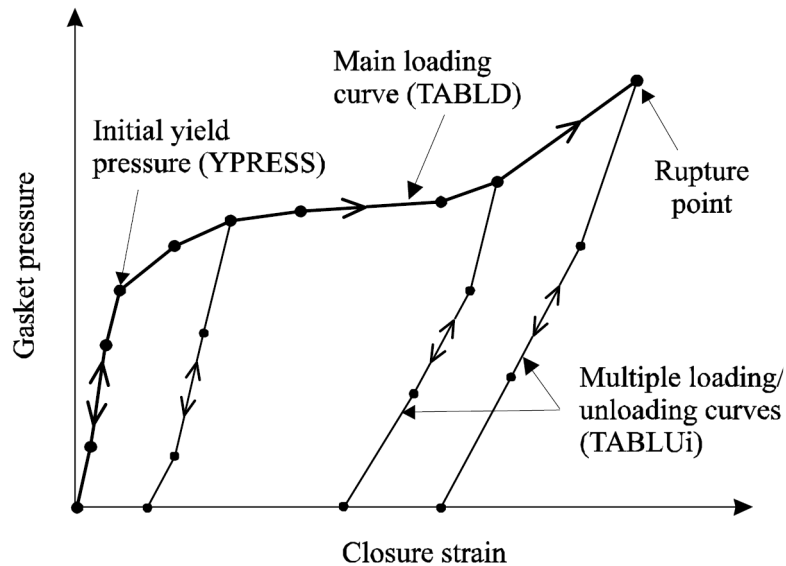

**Figure 16-2. Pressure-Closure Relationship for a Gasket Material**

**MATHE 1615**  
**Hyperelastic Material Properties (SOLs 601 and 701 only)**

**MATHE** Hyperelastic Material Properties (SOLs 601 and 701 only)

Specifies hyperelastic (rubber-like) material properties for advanced nonlinear analysis.

**Format 1 (default): Generalized Mooney-Rivlin model (Model = Mooney)**

| 1     | 2   | 3     | 4   | 5   | 6   | 7    | 8 | 9 | 10 |
|-------|-----|-------|-----|-----|-----|------|---|---|----|
| MATHE | MID | Model |     | K   | RHO | TEXP |   |   |    |
|       | C10 | C01   |     |     |     |      |   |   |    |
|       | C20 | C11   | C02 |     |     |      |   |   |    |
|       | C30 | C21   | C12 | C03 |     |      |   |   |    |

**Format 2: Ogden model or Hyperfoam model (Model = Ogden or foam)**

| 1     | 2   | 3      | 4     | 5   | 6      | 7     | 8 | 9 | 10 |
|-------|-----|--------|-------|-----|--------|-------|---|---|----|
| MATHE | MID | Model  |       | K   | RHO    | TEXP  |   |   |    |
|       | MU1 | ALPHA1 | BETA1 |     |        |       |   |   |    |
|       | MU2 | ALPHA2 | BETA2 | MU3 | ALPHA3 | BETA3 |   |   |    |
|       | MU4 | ALPHA4 | BETA4 | MU5 | ALPHA5 | BETA5 |   |   |    |
|       | MU6 | ALPHA6 | BETA6 | MU7 | ALPHA7 | BETA7 |   |   |    |
|       | MU8 | ALPHA8 | BETA8 | MU9 | ALPHA9 | BETA9 |   |   |    |

**Format 3: Arruda-Boyce model (Model = Aboyce)**

| 1     | 2   | 3     | 4 | 5 | 6   | 7    | 8 | 9 | 10 |
|-------|-----|-------|---|---|-----|------|---|---|----|
| MATHE | MID | Model |   | K | RHO | TEXP |   |   |    |
|       | NKT | N     |   |   |     |      |   |   |    |

**Format 4: Sussman-Bathe model (Model=Sussbat)**

| 1     | 2    | 3      | 4      | 5 | 6   | 7    | 8 | 9 | 10 |
|-------|------|--------|--------|---|-----|------|---|---|----|
| MATHE | MID  | Model  |        | K | RHO | TEXP |   |   |    |
|       | TAB1 | SSTYPE | RELERR |   |     |      |   |   |    |

**Fields:**

| Field | Contents                                     |
|-------|----------------------------------------------|
| MID   | Material identification number (Integer > 0) |

**1616 MATHE**  
**Hyperelastic Material Properties (SOLs 601 and 701 only)**

**16**  
**Bulk**  
**M-N**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                        |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model        | Hyperelastic material model type (Character; Default = Mooney)<br>Mooney: Generalized Mooney-Rivlin model<br>Ogden: Ogden model<br>Foam: Hyperfoam model<br>Aboyce: Arruda-Boyce model<br>Sussbat: Sussman-Bathe model |
| K            | Specifies a bulk modulus. Not used in hyperfoam material. See Remark 7. (Real > 0.0; Default = automatically set for nearly incompressible condition).                                                                 |
| RHO          | Mass density in reference configuration. (Real; Default = 0.0)                                                                                                                                                         |
| Texp         | Coefficient of thermal expansion. See Remark 8. (Real; Default = 0.0)                                                                                                                                                  |
| Cij          | Material constants related to distortional deformation for generalized Monney-Rivlin model. See Remark 3. (Real; Default = 1.0 for C10 and C01, = 0.0 for other constants).                                            |
| Muk          | Coefficients $\mu_k$ of the strain energy function for Ogden or hyperfoam material. See Remarks 4 and 5. (Real; Default = 0.0)                                                                                         |
| Alphak       | Coefficients $a_k$ of the strain energy function for Ogden or hyperfoam material. See Remarks 4 and 5. (Real; Default = 0.0)                                                                                           |
| Betak        | Coefficients $b_k$ of the strain energy function for hyperfoam material. These fields are unused for the Ogden model. See Remark 5. (Real; Default = 0.0)                                                              |
| NKT          | Material constant for Arruda-Boyce strain energy model. See Remark 6. (Real > 0; Default = 1.0)                                                                                                                        |
| N            | Material constant representing the number of statistical links of the chain for Arruda-Boyce model. See Remark 6. (Real > 0; Default = 1.0)                                                                            |



| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                                                              |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TAB1         | Table identification number of a TABLES1 entry that contains the stress-strain data associated with the material model. The stress-strain data are assumed to correspond to a uniaxial tension/compression condition. Note that both uniaxial tension and compression data must be provided to properly describe the material. (Integer > 0) |
| SSTYPE       | The type of stress-strain data entered in TAB1. (Character; Default = Eng)<br>Eng: engineering strains, engineering stresses<br>True: true strains, true stresses<br>Stretch: stretches, engineering stresses                                                                                                                                |
| RELERR       | The relative error used to determine the number of splines used to fit the stress-strain data. (Real > 0.0; Default = 0.01)                                                                                                                                                                                                                  |

**Remarks:**

1. Model = Foam or Aboyce is not supported for SOL 701.
2. Minimum input lines: 1 for Mooney or Aboyce, 2 for Ogden, foam or Sussbat.
3. The generalized Mooney-Rivlin strain energy function may be expressed as follows:

$$W(J, \bar{I}_1, \bar{I}_2) = \sum_{i+j=1}^3 C_{ij} (\bar{I}_1 - 3)^i (\bar{I}_2 - 3)^j + 0.5K(J - 1)^2$$

with

$$\bar{I}_1 = \bar{\lambda}_1^2 + \bar{\lambda}_2^2 + \bar{\lambda}_3^2, \quad \bar{I}_2 = \bar{\lambda}_1^2 \bar{\lambda}_2^2 + \bar{\lambda}_2^2 \bar{\lambda}_3^2 + \bar{\lambda}_3^2 \bar{\lambda}_1^2$$

$$\bar{\lambda}_i$$

is the deviatoric stretch ratio defined as

$$\bar{\lambda}_i = J^{-1/3} \lambda_i,$$

and K and J are the bulk modulus and volume ratio, respectively.

**1618 MATHE**  
**Hyperelastic Material Properties (SOLs 601 and 701 only)**

For small strains, the shear modulus  $G$  is related to the Mooney-Rivlin constants by  $G = 2(C_{10} + C_{01})$ .

The model reduces to a Mooney-Rivlin material with only two constants ( $C_{10}$  and  $C_{01}$ ), and to a Neo-Hookean material with one constant ( $C_{10}$ ).

4. For the Ogden material model, the strain energy function is

$$W = \sum_{k=1}^9 \frac{\mu_k}{\alpha_k} \left( \bar{\lambda}_1^{\alpha_k} + \bar{\lambda}_2^{\alpha_k} + \bar{\lambda}_3^{\alpha_k} \right) + 0.5K(J - 1)^2$$

where the  $\mu_k$  and  $\alpha_k$  are material constants.

$\bar{\lambda}_i$  is the deviatoric stretch ratio defined as

$$\bar{\lambda}_i = J^{-1/3} \lambda_i,$$

and  $K$  and  $J$  are the bulk modulus and volume ratio, respectively. A two-term Ogden model can be made equivalent to a simple Mooney-Rivlin model by choosing  $\mu_1 = 2C_{10}$ ,  $\alpha_1 = 2$ ,  $\mu_2 = 2C_{01}$ ,  $\alpha_2 = -2$ .

For small strains, the shear modulus  $G$  is related to the Ogden constants by

$$G = \frac{1}{2} \sum_{k=1}^9 \mu_k \alpha_k$$

5. For the hyperfoam material model, the strain energy function is

$$W = \sum_{k=1}^9 \frac{\mu_k}{\alpha_k} \left( \lambda_1^{\alpha_k} + \lambda_2^{\alpha_k} + \lambda_3^{\alpha_k} - 3 + \frac{1}{\beta_k} \left( J^{-\alpha_k \beta_k} - 1 \right) \right)$$

where the  $\mu_k$ ,  $\alpha_k$  and  $\beta_k$  are material constants, and  $J$  is the volume ratio.

For small strains, the shear modulus  $G$  and bulk modulus  $K$  are related to the hyperfoam constants by

$$G = \frac{1}{2} \sum_{k=1}^9 \mu_k \alpha_k, \quad K = \sum_{k=1}^9 \left( \beta_k + \frac{1}{3} \right) \mu_k \alpha_k$$

These moduli must be greater than zero, hence we note that  $\beta_k$  should be greater than  $-1/3$ .

When all of the  $\beta_k$  are equal to each other, then  $\beta$  is related to the Poisson's ratio by

$$\beta = \frac{\nu}{1 - 2\nu}$$

6. For the Arruda-Boyce model, the strain energy function is

$$W = N_{kt} \left[ \frac{1}{2} (\bar{I}_1 - 3) + \frac{1}{20N} (\bar{I}_1^2 - 9) + \frac{11}{1150N^2} (\bar{I}_1^3 - 27) + \frac{19}{7000N^3} (\bar{I}_1^4 - 81) + \frac{519}{673750N^4} (\bar{I}_1^5 - 243) \right] + \frac{K}{2} \left[ \frac{(J^2 - 1)}{2} - \ln(J) \right]$$

with

$$\bar{I}_1 = \bar{\lambda}_1^2 + \bar{\lambda}_2^2 + \bar{\lambda}_3^2$$

where  $N_{kt}$  is a material constant and  $N$  is a material parameter representing the number of statistical links of the material chain.  $K$  and  $J$  are the bulk modulus and volume ratio, respectively.

For small strains, the shear modulus  $G$  is equal to  $N_{kt}$ .

7. For the Sussman-Bathe model, the strain energy function is

$$W = w(e_1) + w(e_2) + w(e_3) + K(J \ln J - (J-1))$$

with  $e_i$  = principal logarithmic strains and  $w(e)$  = a spline determined by the given uniaxial tension-compression data.  $K$  and  $J$  are the bulk modulus and volume ratio, respectively.

$\frac{1}{2} \frac{d^2 w(e)}{de^2}$

For small strains, the shear modulus  $G$  is equal to

8. Although the conventional Mooney-Rivlin, Ogden, Arruda-Boyce and Sussman-Bathe materials are fully incompressible, the Mooney-Rivlin, Ogden,

**1620 MATHE**  
**Hyperelastic Material Properties (SOLs 601 and 701 only)**

Arruda-Boyce and Sussman-Bathe material models in SOL 601/701 are compressible. Nearly incompressible materials may be simulated with a large value of K.

The default value of K is chosen so that the small-strain Poisson's ratio is 0.499.

|                                                   |                                       |
|---------------------------------------------------|---------------------------------------|
| For each material model, K is defined as follows: |                                       |
| Mooney-Rivlin material:                           | $K=1000(C_{10}+C_{01})$               |
| Ogden material:                                   | $K = 250 \sum_{k=1}^9 \mu_k \alpha_k$ |
| Arruda-Boyce material:                            | $K=500N_{kt}$                         |
| Sussman-Bathe material:                           | $K = 250 \frac{d^2 w(e)}{de^2}$       |

9. The thermal strain is computed by  $\epsilon_{th}=a (T-T_0)$  where  $T_0$  is an initial temperature.  $\epsilon_{th}$  is an engineering strain, thus, if the material is free to expand,

$$\epsilon_{th} = \frac{L(t) - L(0)}{L(0)}$$

where  $L(t)$  is the final length and  $L(0)$  is the initial length.

**MATHP** Hyperelastic Material Properties

Specifies material properties for use in fully nonlinear (i.e., large strain and large rotation) hyperelastic analysis of rubber-like materials (elastomers).

**Format:**

| 1     | 2    | 3    | 4    | 5    | 6   | 7   | 8    | 9    | 10 |
|-------|------|------|------|------|-----|-----|------|------|----|
| MATHP | MID  | A10  | A01  | D1   | RHO | AV  | TREF | GE   |    |
|       |      | NA   | ND   |      |     |     |      |      |    |
|       | A20  | A11  | A02  | D2   |     |     |      |      |    |
|       | A30  | A21  | A12  | A03  | D3  |     |      |      |    |
|       | A40  | A31  | A22  | A13  | A04 | D4  |      |      |    |
|       | A50  | A41  | A32  | A23  | A14 | A05 | D5   |      |    |
|       | TAB1 | TAB2 | TAB3 | TAB4 |     |     |      | TABD |    |

**Fields:**

| Field | Contents                                                                                                                                           |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| MID   | Identification number of a MATHP entry. (Integer > 0; No Default)                                                                                  |
| Aij   | Material constants related to distortional deformation. (Real; Default = 0.0)                                                                      |
| Di    | Material constants related to volumetric deformation. [Real ≥ 0; Default for D1 is 10 <sup>3</sup> · (A10+A01); Default for D2 through D5 is 0.0.] |
| RHO   | Mass density in original configuration. (Real; Default = 0.0)                                                                                      |
| AV    | Coefficient of volumetric thermal expansion. (Real; Default = 0.0)                                                                                 |
| TREF  | Reference temperature. See “MAT1”. (Real; Default = 0.0)                                                                                           |
| GE    | Structural damping element coefficient. (Real; Default = 0.0)                                                                                      |
| NA    | Order of the distortional strain energy polynomial function. (0 < Integer ≤ 5; Default = 1)                                                        |
| ND    | Order of the volumetric strain energy polynomial function. (0 < Integer ≤ 5; Default = 1)                                                          |

| Field | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TAB1  | Table identification number of a TABLES1 entry that contains simple tension/compression data to be used in the estimation of the material constants $A_{ij}$ . $x_i$ values in the TABLES1 entry must be stretch ratios $l/l_0$ and $y_i$ values must be values of the engineering stress $F/A_0$ . Stresses are negative for compression and positive for tension. If this convention is not followed the job may fail to converge or issue a traceback. (Integer > 0 or blank)                                                                                                                 |
| TAB2  | Table identification number of a TABLES1 entry that contains equibiaxial tension data to be used in the estimation of the material constants $A_{ij}$ . $x_i$ values in the TABLES1 entry must be stretch ratios $l/l_0$ . $y_i$ values must be values of the engineering stress $F/A_0$ . $l$ is the current length, $F$ is the current force, $A_0$ is the cross-sectional area. In the case of pressure of a spherical membrane, the engineering stress is given by $Pr_0/2t_0$ where $P$ =current value of the pressure and $r_0, t_0$ =initial radius and thickness. (Integer > 0 or blank) |
| TAB3  | Table identification number of a TABLES1 entry that contains simple shear data to be used in the estimation of the material constants $A_{ij}$ . $x_i$ values in the TABLES1 entry must be values of the shear tangent $g$ and $y_i$ values must be values of the engineering shear stress $F/A_0$ . (Integer > 0 or blank)                                                                                                                                                                                                                                                                      |
| TAB4  | Table identification number of a TABLES1 entry that contains pure shear data to be used in the estimation of the material constants $A_{ij}$ . $x_i$ and $y_i$ values in the TABLES1 entry must be stretch ratios $\lambda_1=l/l_0$ and values of the nominal stress $F/A_0$ . $l$ is the current length, $F$ is the current force, $l_0$ and $A_0$ are the initial length and cross-sectional area, respectively in the 1-direction. (Integer > 0 or blank)                                                                                                                                     |
| TABD  | Table identification number of a TABLES1 entry that contains pure volumetric compression data to be used in the estimation of the material constants $D_i$ . $x_i$ values in the TABLES1 entry must be values of the volume ratio $J=\lambda^3$ where $\lambda=l/l_0$ is the stretch ratio in all three directions; $y_i$ values must be values of the pressure, assumed positive in compression. (Integer > 0 or blank)                                                                                                                                                                         |

**Remarks:**

1. The generalized Mooney-Rivlin strain energy function may be expressed as follows:

$$U(J, \bar{I}_1, \bar{I}_2) = \sum_{i+j=1}^{NA} A_{ij}(\bar{I}_1 - 3)^i (\bar{I}_2 - 3)^j + \sum_{i=1}^{ND} D_i (J - 1 - AV(T - T_0))^{2i}$$

$$A_{00} = 0$$

where  $\bar{I}_1$  and  $\bar{I}_2$  are the first and second distortional strain invariants, respectively;  $J = \det F$  is the determinant of the deformation gradient; and  $2D1=K$  and  $2(A10 + A01)=G$  at small strains, in which  $K$  is the bulk modulus and  $G$  is the shear modulus. The model reduces to a Mooney-Rivlin material if  $NA=1$  and to a Neo-Hookean material if  $NA = 1$  and  $A01 = 0.0$ . See Remark 2. For Neo-Hookean or Mooney-Rivlin materials no continuation entry is required.  $T$  is the current temperature and  $T_0$  is the initial temperature.

2. Conventional Mooney-Rivlin and Neo-Hookean materials are fully incompressible. Full incompressibility is not presently available but may be simulated with a large enough value of  $D1$ . A value of  $D1$  higher than  $10^3 \cdot (A10 + A01)$  is, however, not recommended.
3.  $A_{ij}$  and  $D_i$  are obtained from least squares fitting of experimental data. One or more of four experiments (TAB1 to TAB4) may be used to obtain  $A_{ij}$ .  $D_i$  may be obtained from pure volumetric compression data (TABD). If all TAB1 through TAB4 are blank,  $A_{ij}$  must be specified by the user. Parameter estimation, specified through any of the TABLES1 entries, supersedes the manual input of the parameters.
4. IF  $ND=1$  and a nonzero value of  $D1$  is provided or is obtained from experimental data in TABD, then the parameter estimation of the material constants  $A_{ij}$  takes compressibility into account in the cases of simple tension/compression, equibiaxial tension, and general biaxial deformation. Otherwise, full incompressibility is assumed in estimating the material constants.
5. See "Hyperelastic Material" in the *NX Nastran Basic Nonlinear Analysis User's Guide* for further details.

**Remarks related to SOLs 601 and 701:**

1. Only  $A10$ ,  $A01$ ,  $D1$ ,  $A20$ ,  $A11$ ,  $A02$ ,  $A30$ ,  $A21$ ,  $A12$ ,  $A03$ , and  $RHO$  parameters are considered for Mooney-Rivlin material model, i.e.,  $NA \leq 3$ ,  $ND=1$ .  $TAB_i$  and  $TABD$  may be used to obtain these parameters.

**1624 MATS1**  
**Material Stress Dependence**

**MATS1**      Material Stress Dependence

Specifies stress-dependent material properties for use in applications involving nonlinear materials. This entry is used if a MAT1, MAT2, or MAT9 entry is specified with the same MID in a nonlinear solution sequence (SOLs 106 and 129).

**Format:**

| 1     | 2   | 3   | 4    | 5 | 6  | 7  | 8      | 9      | 10 |
|-------|-----|-----|------|---|----|----|--------|--------|----|
| MATS1 | MID | TID | TYPE | H | YF | HR | LIMIT1 | LIMIT2 |    |

**Example:**

|       |    |    |         |     |   |   |      |  |  |
|-------|----|----|---------|-----|---|---|------|--|--|
| MATS1 | 17 | 28 | PLASTIC | 0.0 | 1 | 1 | 2.+4 |  |  |
|-------|----|----|---------|-----|---|---|------|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                                                           |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID   | Identification number of a MAT1, MAT2, or MAT9 entry. (Integer > 0)                                                                                                                                                                                                                                                |
| TID   | Identification number of a TABLES1 or TABLEST entry. If H is given, then this field must be blank. See Remark 3. (Integer ≥ 0 or blank)                                                                                                                                                                            |
| TYPE  | Type of material nonlinearity. See Remarks. (Character: “NLELAST” for nonlinear elastic or “PLASTIC” for elastoplastic.)                                                                                                                                                                                           |
| H     | Work hardening slope (slope of stress versus plastic strain) in units of stress. For elastic-perfectly plastic cases, H = 0.0. For more than a single slope in the plastic range, the stress-strain data must be supplied on a TABLES1 entry referenced by TID, and this field must be blank. See Remark 2. (Real) |
| YF    | Yield function criterion, selected by one of the following values (Integer):<br><br>1 = von Mises (Default)<br>2 = Tresca<br>3 = Mohr-Coulomb<br>4 = Drucker-Prager                                                                                                                                                |
| HR    | Hardening Rule, selected by one of the following values (Integer):                                                                                                                                                                                                                                                 |



| Field  | Contents                                                                                                                                                                 |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | 1 = Isotropic (Default)                                                                                                                                                  |
|        | 2 = Kinematic                                                                                                                                                            |
|        | 3 = Combined isotropic and kinematic hardening                                                                                                                           |
| LIMIT1 | Initial yield point. See <a href="#">Table 16-2</a> . (Real)                                                                                                             |
| LIMIT2 | Internal friction angle, measured in degrees, for the Mohr-Coulomb and Drucker-Prager yield criteria. See <a href="#">Table 16-2</a> . ( $0.0 \leq \text{Real} < 45.0$ ) |

| <b>Table 16-2. Yield Functions Versus LIMIT1 and LIMIT2</b> |                                        |                                             |
|-------------------------------------------------------------|----------------------------------------|---------------------------------------------|
| Yield Function (YF)                                         | LIMIT1                                 | LIMIT2                                      |
| von Mises (1)or Tresca (2)                                  | Initial Yield Stress in Tension, $Y_1$ | Not used                                    |
| Mohr-Coulomb (3)or Drucker-Prager (4)                       | 2* Cohesion, $2c$ (in units of stress) | Angle of Internal Friction $f$ (in degrees) |

**Remarks:**

- If TYPE = "NLELAST", then MID may refer to a MAT1 entry only. Also, the stress-strain data given in the TABLES1 entry will be used to determine the stress for a given value of strain. The values H, YF, HR, LIMIT1, and LIMIT2 will not be used in this case.

Thermoelastic analysis with temperature-dependent material properties is available for linear and nonlinear elastic isotropic materials (TYPE = "NLELAST") and linear elastic anisotropic materials. Four options of constitutive relations exist. The relations appear in [Table 16-3](#) along with the required Bulk Data entries.

| <b>Table 16-3. Constitutive Relations and Required Material Property Entries</b> |                                   |
|----------------------------------------------------------------------------------|-----------------------------------|
| Constitutive Relation                                                            | Required Bulk Data Entries        |
| $\{s\}=[G_e(T)] \{\epsilon\}$                                                    | MATi and MATTi where i=1, 2, or 9 |


| <b>Table 16-3. Constitutive Relations and Required Material Property Entries</b>  |                                          |
|-----------------------------------------------------------------------------------|------------------------------------------|
| <b>Constitutive Relation</b>                                                      | <b>Required Bulk Data Entries</b>        |
| $\{\sigma\} = \frac{\bar{E}(\sigma, \varepsilon)}{E} [G_e(T)] \{\varepsilon\}$    | MAT1, MATT1, MATS1, and TABLES1          |
| $\{\sigma\} = \frac{\bar{E}(T, \sigma, \varepsilon)}{E} [G_e] \{\varepsilon\}$    | MAT1, MATS1, TABLEST, and TABLES1        |
| $\{\sigma\} = \frac{\bar{E}(T, \sigma, \varepsilon)}{E} [G_e(T)] \{\varepsilon\}$ | MAT1, MATT1, MATS1, TABLEST, and TABLES1 |

In [Table 16-3](#)  $\{s\}$  and  $\{\varepsilon\}$  are the stress and strain vectors,  $[G_e]$  the elasticity matrix,  $\bar{E}$  the effective elasticity modulus, and  $E$  the reference elasticity modulus.

- If TYPE = "PLASTIC", either the table identification TID or the work hardening slope H may be specified, but not both. If the TID is omitted, the work hardening slope H must be specified unless the material is perfectly plastic. The plasticity modulus ( $H$ ) is related to the tangential modulus ( $E_T$ ) by

$$H = \frac{E_T}{1 - \frac{E_T}{E}}$$

where  $E$  is the elastic modulus and  $E_T = dY/d\varepsilon$  is the slope of the uniaxial stress-strain curve in the plastic region. See [Figure 16-3](#).

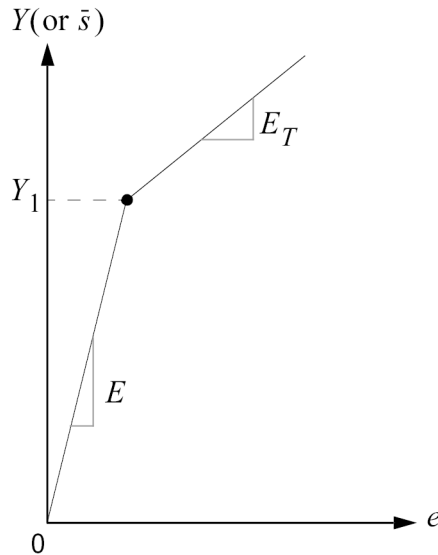

**Figure 16-3. Stress-Strain Curve Definition When H Is Specified in Field 5**

3. If TID is given, TABLES1 entries ( $X_i$ ,  $Y_i$ ) of stress-strain data ( $\epsilon_k$ ,  $Y_k$ ) must conform to the following rules (see [Figure 16-4](#)):
  - If TYPE = “PLASTIC”, the true stress-logarithmic strain curve must be defined in the first quadrant. The first point must be at the origin ( $X_1 = 0$ ,  $Y_2 = 0$ ) and the second point ( $X_2$ ,  $Y_2$ ) must be at the initial yield point ( $Y_1$  or  $2c$ ) specified on the MATS1 entry. The slope of the line joining the origin to the yield stress must be equal to the value of  $E$ . Also, TID may not reference a TABLEST entry.
  - If TYPE = “NLELAST”, the full stress-strain curve ( $-\infty < x < \infty$ ) may be defined in the first and the third quadrant to accommodate different uniaxial compression data. If the curve is defined only in the first quadrant, then the curve must start at the origin ( $X_1 = 0.0$ ,  $Y = 0.0$ ) and the compression properties will be assumed identical to tension properties.

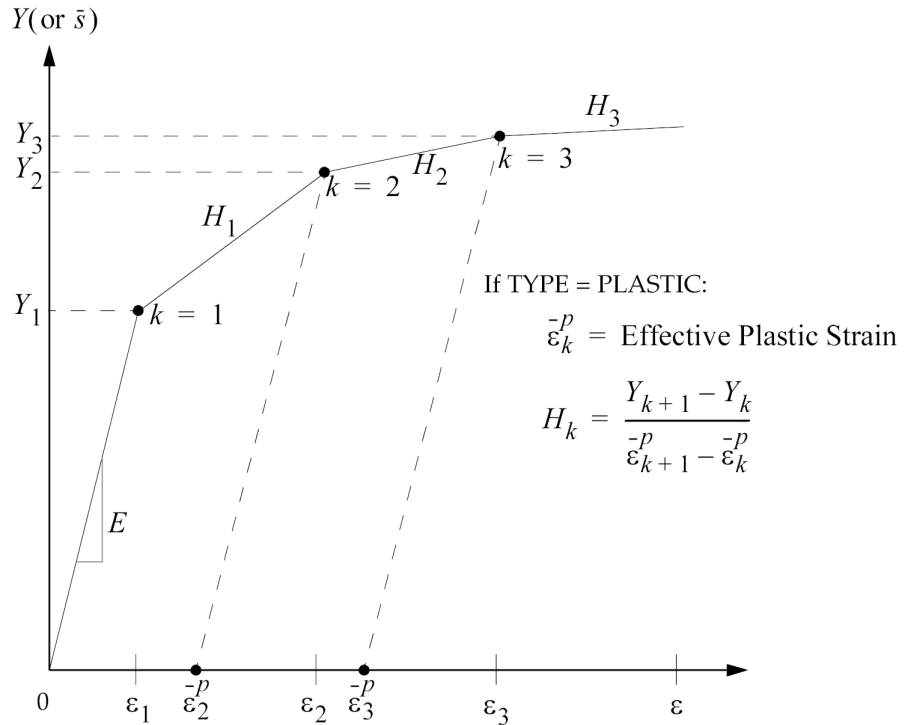


Figure 16-4. Stress-Strain Curve Definition When TID Is Specified in Field 3

Remarks related to SOLs 601 and 701:

1. MID is restricted to the identification number of a MAT1 entry.
2. LIMIT2 is ignored. LIMIT1 is only used if TID is blank and H is specified, i.e., for a bilinear plastic material.
3. Only YF = 1 (von Mises yield criterion) is supported.
4. If HR = 3, a mixed hardening factor of 0.5 is used. HR = 3 may only be used with a bilinear plastic material, i.e. TID must be blank.
5. TID can reference a TABLEST entry for TYPE = "PLASTIC" but not for TYPE = "NLELAST".
6. For SOL 701, TYPE = "NLELAST" can only be used with the rod element. The nonlinear elastic material does not support temperature-dependent properties. Hence, Table 16-3 does not apply.

7. If TYPE = "NLELAST", the full stress-strain curve (tension and compression) must be specified.
8. If the slope of the line joining the origin and second point in TABLES1 (for TYPE = "PLASTIC" and given TID) is not equal to the value of E in MAT1 entry, the strain value at the second point will be adjusted accordingly.
9. If TYPE = "PLASTIC", all tangent moduli  $E_{Ti}$  must satisfy the following:
  - HR = 1:  $E_{Ti} < E$
  - HR = 2:  $0.0001 * E < E_{Ti} < E$
  - HR = 3:  $0.0001 * E < E_{Ti} < E$
10. For beam elements, only the bilinear plastic material (i.e., TYPE="PLASTIC" with H) is applicable.

**1630 MATSMA**  
**Shape-Memory Alloy (SMA) Material Properties (SOL 601 only)**

**MATSMA** Shape-Memory Alloy (SMA) Material Properties (SOL 601 only)

Specifies properties for shape-memory alloy material.

**Format:**

| 1      | 2   | 3  | 4      | 5   | 6   | 7     | 8    | 9   | 10 |
|--------|-----|----|--------|-----|-----|-------|------|-----|----|
| MATSMA | MID | EM | EA     | NUM | NUA | ETMAX | VTM0 | RHO |    |
|        | AM  | AA | TREF   | MS  | MF  | AS    | AF   |     |    |
|        | CM  | CA | SIGMAR | CR  | TOL |       |      |     |    |

**Example:**

|        |     |       |        |      |      |      |       |  |  |
|--------|-----|-------|--------|------|------|------|-------|--|--|
| MATSMA | 111 | 500.0 | 1500.0 | 0.2  | 0.3  | 0.1  |       |  |  |
|        |     |       |        | 70.0 | 10.0 | 90.0 | 130.0 |  |  |
|        | 1.0 | 1.0   |        |      |      |      |       |  |  |

**Fields:**

| Field | Contents                                                                                     |
|-------|----------------------------------------------------------------------------------------------|
| MID   | Material identification number (Integer > 0)                                                 |
| EM    | Young's modulus for martensite phase (Real > 0.0)                                            |
| EA    | Young's modulus for austenite phase (Real > 0.0)                                             |
| NUM   | Poisson's ratio for martensite ( $0.0 \leq \text{Real} < 0.5$ ; Default = 0.0)               |
| NUA   | Poisson's ratio for austenite ( $0.0 \leq \text{Real} < 0.5$ ; Default = 0.0)                |
| ETMAX | Maximum residual transformation strain (Real > 0.0)                                          |
| VTM0  | Initial volumetric fraction of martensite ( $0.0 \leq \text{Real} \leq 1.0$ ; Default = 0.0) |
| RHO   | Mass density (Real $\geq 0.0$ ; Default = 0.0)                                               |
| AM    | Mean coefficient of thermal expansion for martensite (Real $\geq 0.0$ ; Default = 0.0)       |

**MATSMA 1631**

**Shape-Memory Alloy (SMA) Material Properties (SOL 601 only)**

| <b>Field</b> | <b>Contents</b>                                                                                                                                     |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| AA           | Mean coefficient of thermal expansion for austenite (Real $\geq 0.0$ ; Default = 0.0)                                                               |
| TREF         | Reference temperature thermal expansion calculation (Real; Default = 0.0)                                                                           |
| MS           | Temperature at which the transformation to martensite starts at the stress-free state. (Real)                                                       |
| MF           | Temperature at which the transformation to martensite is finished at the stress-free state. (Real)                                                  |
| AS           | Temperature at which the transformation to austenite starts at the stress-free state. (Real)                                                        |
| AF           | Temperature at which the transformation to austenite is finished at the stress-free state. (Real)                                                   |
| CM           | Slope of the martensite transformation conditions (Real $> 0.0$ )                                                                                   |
| CA           | Slope of the austenite transformation conditions (Real $> 0.0$ )                                                                                    |
| SIGMAR       | Martensite re-orientation yield property. SIGMAR = 0.0 means that the martensite re-orientation is not performed. (Real $\geq 0.0$ ; Default = 0.0) |
| CR           | Slope of the martensite re-orientation yield function (Real $\geq 0.0$ ; Default = 0.0)                                                             |
| TOL          | Tolerance used in calculation of effective stress (Real $> 0.0$ ; Default = 1.0E-8)                                                                 |

**Remarks related to SOL 601:**

1. MATSMA can be selected by PSHELL, PSOLID, PROD, CONROD, PCOMP, or PPLANE bulk entries. It cannot be selected by PBEAM or PBAR entries.

**1632 MATT1**  
**Isotropic Material Temperature Dependence**

**MATT1** Isotropic Material Temperature Dependence

Specifies temperature-dependent material properties on MAT1 entry fields via TABLEMi entries.

**Format:**

| 1     | 2     | 3     | 4     | 5     | 6      | 7    | 8 | 9     | 10 |
|-------|-------|-------|-------|-------|--------|------|---|-------|----|
| MATT1 | MID   | T(E)  | T(G)  | T(NU) | T(RHO) | T(A) |   | T(GE) |    |
|       | T(ST) | T(SC) | T(SS) |       |        |      |   |       |    |

**Example:**

|       |    |    |  |  |  |    |  |  |  |
|-------|----|----|--|--|--|----|--|--|--|
| MATT1 | 17 | 32 |  |  |  | 15 |  |  |  |
|       | 52 |    |  |  |  |    |  |  |  |

**Fields:**

| Field  | Contents                                                                                                    |
|--------|-------------------------------------------------------------------------------------------------------------|
| MID    | Material property identification number that matches the identification number on MAT1 entry. (Integer > 0) |
| T(E)   | Identification number of a TABLEMi entry for the Young's modulus. (Integer ≥ 0 or blank)                    |
| T(G)   | Identification number of a TABLEMi entry for the shear modulus. (Integer ≥ 0 or blank)                      |
| T(NU)  | Identification number of a TABLEMi entry for the Poisson's ratio. (Integer ≥ 0 or blank)                    |
| T(RHO) | Identification number of a TABLEMi entry for the mass density. (Integer ≥ 0 or blank)                       |
| T(A)   | Identification number of a TABLEMi entry for the thermal expansion coefficient. (Integer ≥ 0 or blank)      |
| T(GE)  | Identification number of a TABLEMi entry for the damping coefficient. (Integer ≥ 0 or blank)                |
| T(ST)  | Identification number of a TABLEMi entry for the tension stress limit. (Integer ≥ 0 or blank)               |
| T(SC)  | Identification number of a TABLEMi entry for the tension compression limit. (Integer ≥ 0 or blank)          |



| <b>Field</b> | <b>Contents</b>                                                                                   |
|--------------|---------------------------------------------------------------------------------------------------|
| T(SS)        | Identification number of a TABLEMi entry for the tension shear limit. (Integer $\geq 0$ or blank) |

**Remarks:**

1. Fields 3, 4, etc., of this entry correspond, field-by-field, to fields 3, 4, etc., of the MAT1 entry referenced in field 2. The value in a particular field of the MAT1 entry is replaced or modified by the table referenced in the corresponding field of this entry. In the example shown, E is modified by TABLEMi 32, A is modified by TABLEMi 15, and ST is modified by TABLEMi 52. Blank or zero entries mean that there is no temperature dependence of the fields on the MAT1 entry.
2. Any quantity modified by this entry must have a value on the MAT1 entry. Initial values of E, G, or NU may be supplied according to Remark 3 on the MAT1 entry.
3. Table references must be present for each item that is temperature dependent. For example, it is not sufficient to give table references only for fields 3 and 4 (Young's modulus and shear modulus) if Poisson's ratio is temperature dependent.

**Remarks related to SOLs 601 and 701:**

1. Temperature-dependent property is supported only for E, NU, and A, i.e. T(RHO) is ignored.
2. As GE, ST, SC, and SS are not supported in MAT1, T(GE), T(ST), T(SC), and T(SS) are also not supported in MATT1
3. Only TABLEM1 entry may be used to define the temperature dependent properties.
4. The TABLEM1 entries must all have the same number of temperature points with the same temperature values. The maximum number of temperature points is restricted to 16.

**1634 MATT2**  
**Anisotropic Material Temperature Dependence**

**MATT2**      Anisotropic Material Temperature Dependence

Specifies temperature-dependent material properties on MAT2 entry fields via TABLEMj entries.

**Format:**

| 1     | 2     | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10 |
|-------|-------|--------|--------|--------|--------|--------|--------|--------|----|
| MATT2 | MID   | T(C11) | T(C12) | T(C13) | T(C22) | T(C23) | T(C33) | T(RHO) |    |
|       | T(A1) | T(A2)  | T(A3)  |        | T(GE)  | T(ST)  | T(SC)  | T(SS)  |    |

**Example:**

|       |    |    |  |  |  |  |    |  |  |
|-------|----|----|--|--|--|--|----|--|--|
| MATT2 | 17 | 32 |  |  |  |  | 15 |  |  |
|       | 62 |    |  |  |  |  |    |  |  |

**Fields:**

| Field  | Contents                                                                                                       |
|--------|----------------------------------------------------------------------------------------------------------------|
| MID    | Material property identification number that matches the identification number on a MAT2 entry. (Integer > 0)  |
| T(Cij) | Identification number of a TABLEMk entry for the terms in the material property matrix. (Integer ≥ 0 or blank) |
| T(RHO) | Identification number of a TABLEMk entry for the mass density. (Integer ≥ 0 or blank)                          |
| T(Ai)  | Identification number of a TABLEMk entry for the thermal expansion coefficient. (Integer ≥ 0 or blank)         |
| T(GE)  | Identification number of a TABLEMk entry for the damping coefficient. (Integer ≥ 0 or blank)                   |
| T(ST)  | Identification number of a TABLEMk entry for the tension stress limit. (Integer ≥ 0 or blank)                  |
| T(SC)  | Identification number of a TABLEMk entry for the tension compression limit. (Integer ≥ 0 or blank)             |
| T(SS)  | Identification number of a TABLEMk entry for the tension shear limit. (Integer ≥ 0 or blank)                   |

**Remarks:**

1. Fields 3, 4, etc., of this entry correspond, field by field, to fields 3, 4, etc., of the MAT2 entry referenced in field 2. The value in a particular field of the MAT2 entry is replaced or modified by the table referenced in the corresponding field of this entry. In the example shown, C11 is modified by TABLEMk 32, C33 is modified by TABLEMk 15, and A1 is modified by TABLEMk 62. If Ri is zero or blank, then there is no temperature dependence of the field on the MAT2 entry.
2. Any quantity modified by this entry must have a value on the MAT2 entry.

**Remarks related to SOLs 601 to 701:**

1. T(C11), T(C12), T(C22), T(C33), T(A1), and T(A2) are used to define a temperature-dependent orthotropic material. Note that T(RHO) is ignored, i.e. no temperature dependence for density.
2. As C13, C23, A3, GE, ST, SC, and SS are not supported in MAT2, T(C13), T(C23), T(A3), T(GE), T(ST), T(SC), and T(SS) are also not supported in MATT2.
3. Only TABLEM1 entry may be used to define the temperature dependent properties.
4. The TABLEM1 entries must all have the same number of temperature points with the same temperature values. The maximum number of temperature points is restricted to 16.
5. The temperature range specified in TABLEM1 should be as close as possible to the range of temperature loads in the model. For example, if the temperature load in the model ranges from 100.0 to 200.0, the temperature range in the TABLEM1 entries should be about 100.0 to 200.0 and not 0.0 to 1000.0.

**1636 MATT3**  
**CTRIAX6 Material Temperature Dependence**

**MATT3** CTRIAx6 Material Temperature Dependence

Specifies temperature-dependent material properties on MAT3 entry fields via TABLEMi entries that are temperature dependent.

**Format:**

| 1     | 2   | 3     | 4      | 5     | 6        | 7        | 8       | 9      | 10 |
|-------|-----|-------|--------|-------|----------|----------|---------|--------|----|
| MATT3 | MID | T(EX) | T(ETH) | T(EZ) | T(NUXTH) | T(NUTHZ) | T(NUZX) | T(RHO) |    |
|       |     |       | T(GZX) | T(AX) | T(ATH)   | T(AZ)    |         | T(GE)  |    |

**Example:**

|       |    |    |    |    |  |  |  |  |  |
|-------|----|----|----|----|--|--|--|--|--|
| MATT3 | 23 | 32 |    | 15 |  |  |  |  |  |
|       |    |    | 62 |    |  |  |  |  |  |

**Fields:**

| Field                             | Contents                                                                                                                                           |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| MID                               | Material property identification number that matches the identification number on MAT3 entry. (Integer > 0)                                        |
| T(EX),<br>T(ETH),<br>T(EZ)        | Identification number of a TABLEMi entry for the Young's modulus in the $x$ , $q$ , and $z$ directions. (Integer $\geq 0$ or blank)                |
| T(GZX)                            | Identification number of a TABLEMi entry for the shear modulus. (Integer $\geq 0$ or blank)                                                        |
| T(NUXTH),<br>T(NUTHZ),<br>T(NUZX) | Identification number of a TABLEMi entry for the Poisson's ratio in the $xq$ , $zq$ , and $zx$ directions. (Integer $\geq 0$ or blank)             |
| T(RHO)                            | Identification number of a TABLEMi entry for the mass density. (Integer $\geq 0$ or blank)                                                         |
| T(AX),<br>T(ATH),<br>T(AZ)        | Identification number of a TABLEMi entry for the thermal expansion coefficients in the $x$ , $q$ , and $z$ directions. (Integer $\geq 0$ or blank) |
| T(GE)                             | Identification number of a TABLEMi entry for the damping coefficient. (Integer $\geq 0$ or blank)                                                  |

**Remarks:**

1. Fields 3, 4, etc., of this entry correspond, field by field, to fields 3, 4, etc., of the MAT3 entry referenced in field 2. The value recorded in a particular field of the MAT3 entry is replaced or modified by the table referenced in the corresponding field of this entry. In the example shown, EX is modified by TABLEMi 32, EZ is modified by TABLEMi 15, and GZX is modified by TABLEMi 62. If Ri is zero or blank, then there is no temperature dependence of the field on the MAT3 entry.
2. Any quantity modified by this entry must have a value on the MAT3 entry.

**Remarks related to SOL 601:**

1. T(GE) and T(RHO) are ignored.
2. Only TABLEM1 entry may be used to define the temperature dependent properties.
3. The TABLEM1 entries must all have the same number of temperature points with the same temperature values. The maximum number of temperature points is restricted to 16.

**1638 MATT4**  
**Thermal Material Temperature Dependence**

**MATT4** Thermal Material Temperature Dependence

Specifies table references for temperature-dependent MAT4 material properties.

**Format:**

| 1     | 2   | 3    | 4     | 5 | 6    | 7          | 8       | 9 | 10 |
|-------|-----|------|-------|---|------|------------|---------|---|----|
| MATT4 | MID | T(K) | T(CP) |   | T(H) | T( $\mu$ ) | T(HGEN) |   |    |

**Example(s):**

|       |   |    |    |  |  |  |  |  |  |
|-------|---|----|----|--|--|--|--|--|--|
| MATT4 | 2 | 10 | 11 |  |  |  |  |  |  |
|-------|---|----|----|--|--|--|--|--|--|

**Fields:**

| Field      | Contents                                                                                                                                                      |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID        | Identification number of a MAT4 entry that is temperature dependent. (Integer > 0)                                                                            |
| T(K)       | Identification number of a TABLEMj entry that gives the temperature dependence of the thermal conductivity. (Integer $\geq$ 0 or blank)                       |
| T(CP)      | Identification number of a TABLEMj entry that gives the temperature dependence of the thermal heat capacity. (Integer $\geq$ 0 or blank)                      |
| T(H)       | Identification number of a TABLEMj entry that gives the temperature dependence of the free convection heat transfer coefficient. (Integer $\geq$ 0 or blank)  |
| T( $\mu$ ) | Identification number of a TABLEMj entry that gives the temperature dependence of the dynamic viscosity. (Integer $\geq$ 0 or blank)                          |
| T(HGEN)    | Identification number of a TABLEMj entry that gives the temperature dependence of the internal heat generation property for QVOL. (Integer $\geq$ 0 or blank) |

**Remarks:**

1. The basic quantities on the MAT4 entry are always multiplied by the corresponding tabular function referenced by the MATT4 entry.

2. If the fields are blank or zero, then there is no temperature dependence of the referenced quantity on the MAT4 entry.

**Remarks related to SOL 601:**

1.  $T(\mu)$  is ignored.
2. Only TABLEM1 entry may be used to define the temperature dependent properties.
3. The TABLEM1 entries for T(K) and T(CP) must have the same number of temperature points with the same temperature values.

**1640 MATT5**  
**Thermal Anisotropic Material Temperature Dependence**

**MATT5** Thermal Anisotropic Material Temperature Dependence

Specifies temperature-dependent material properties on MAT5 entry fields via TABLEMi entries.

**Format:**

| 1     | 2   | 3       | 4      | 5      | 6      | 7      | 8      | 9     | 10 |
|-------|-----|---------|--------|--------|--------|--------|--------|-------|----|
| MATT5 | MID | T(KXX)  | T(KXY) | T(KXZ) | T(KYY) | T(KYZ) | T(KZZ) | T(CP) |    |
|       |     | T(HGEN) |        |        |        |        |        |       |    |

**Example:**

|       |    |    |  |  |  |  |  |  |  |
|-------|----|----|--|--|--|--|--|--|--|
| MATT5 | 24 | 73 |  |  |  |  |  |  |  |
|-------|----|----|--|--|--|--|--|--|--|

**Fields:**

| Field   | Contents                                                                                                                                                           |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MID     | Identification number of a MAT5 entry that is to be temperature dependent. (Integer > 0)                                                                           |
| T(Kij)  | Identification number of a TABLEMi entry. The TABLEMi entry specifies temperature dependence of the matrix term. (Integer ≥ 0 or blank)                            |
| T(CP)   | Identification number of a TABLEMi entry that specifies the temperature dependence of the thermal heat capacity. (Integer ≥ 0 or blank)                            |
| T(HGEN) | Identification number of a TABLEMi entry that gives the temperature dependence of the internal heat generation property for the QVOL entry. (Integer ≥ 0 or blank) |

**Remarks:**

1. The basic quantities on the MAT5 entry are always multiplied by the tabular function referenced by the MATT5 entry.
2. If the fields are blank or zero, then there is no temperature dependence of the referenced quantity on the basic MAT5 entry.



**Remarks related to SOL 601:**

1. MATT5 defines temperature-dependent thermal properties for material with orthotropic thermal conductivity. T(KXY), T(KXZ) and T(KYZ) are ignored.
2. Only TABLEM1 entry may be used to define the temperature dependent properties.
3. The TABLEM1 entries for T(KXX), T(KYY), T(KZZ) and T(CP) must have the same number of temperature points with the same temperature values.

**1642 MATT8**  
**Shell Orthotropic Material Temperature Dependence**

**MATT8** Shell Orthotropic Material Temperature Dependence

Specifies temperature-dependent material properties on MAT8 entry fields via TABLEMi entries.

**Format:**

| 1     | 2     | 3      | 4     | 5       | 6      | 7      | 8      | 9      | 10 |
|-------|-------|--------|-------|---------|--------|--------|--------|--------|----|
| MATT8 | MID   | T(E1)  | T(E2) | T(NU12) | T(G12) | T(G1Z) | T(G2Z) | T(RHO) |    |
|       | T(A1) | T(A2)  |       | T(Xt)   | T(Xc)  | T(Yt)  | T(Yc)  | T(S)   |    |
|       | T(GE) | T(F12) |       |         |        |        |        |        |    |

**Example:**

|       |    |    |  |  |  |  |  |  |  |
|-------|----|----|--|--|--|--|--|--|--|
| MATT8 | 20 | 10 |  |  |  |  |  |  |  |
|       | 11 |    |  |  |  |  |  |  |  |
|       |    |    |  |  |  |  |  |  |  |

**Fields:**

| Field   | Contents                                                                                                    |
|---------|-------------------------------------------------------------------------------------------------------------|
| MID     | Material property identification number that matches the identification number on MAT8 entry. (Integer > 0) |
| T(E1)   | Identification number of a TABLEMi entry for Young's modulus 1. (Integer ≥ 0 or blank)                      |
| T(E2)   | Identification number of a TABLEMi entry for Young's modulus 2. (Integer ≥ 0 or blank)                      |
| T(NU12) | Identification number of a TABLEMi entry for Poisson's ratio 12. (Integer ≥ 0 or blank)                     |
| T(G12)  | Identification number of a TABLEMi entry for shear modulus 12. (Integer ≥ 0 or blank)                       |
| T(G1Z)  | Identification number of a TABLEMi entry for transverse shear modulus 1Z. (Integer ≥ 0 or blank)            |
| T(G2Z)  | Identification number of a TABLEMi entry for transverse shear modulus 2Z. (Integer ≥ 0 or blank)            |
| T(RHO)  | Identification number of a TABLEMi entry for mass density. (Integer ≥ 0 or blank)                           |

| <b>Field</b> | <b>Contents</b>                                                                                                         |
|--------------|-------------------------------------------------------------------------------------------------------------------------|
| T(A1)        | Identification number of a TABLEMi entry for thermal expansion coefficient 1. See Remark 3. (Integer $\geq 0$ or blank) |
| T(A2)        | Identification number of a TABLEMi entry for thermal expansion coefficient 2. See Remark 3. (Integer $\geq 0$ or blank) |
| T(Xt)        | Identification number of a TABLEMi entry for tension stress/strain limit 1. (Integer $\geq 0$ or blank)                 |
| T(Xc)        | Identification number of a TABLEMi entry for compression stress/strain limit1. (Integer $\geq 0$ or blank)              |
| T(Yt)        | Identification number of a TABLEMi entry for tension stress/strain limit 2. (Integer $\geq 0$ or blank)                 |
| T(Yc)        | Identification number of a TABLEMi entry for compression stress/strain limit 2. (Integer $\geq 0$ or blank)             |
| T(S)         | Identification number of a TABLEMi entry for shear stress/strain limit. (Integer $\geq 0$ or blank)                     |
| T(GE)        | Identification number of a TABLEMi entry for structural damping coefficient. (Integer $\geq 0$ or blank)                |
| T(F12)       | Identification number of a TABLEMi entry for Tsai-Wu interaction term. (Integer $\geq 0$ or blank)                      |

**Remarks:**

1. Fields 3,4, etc., of this entry correspond, field-by-field, to fields 3,4, etc., of the MAT8 entry referenced in field 2. The value in a particular field of the MAT8 entry is replaced or modified by the table referenced in the corresponding field of this entry. In the example shown, E1 is modified by TABLEMi 10 and A1 is modified by TABLEMi 11. Blank or zero entries mean that there is no temperature dependence of the fields on the MAT8 entry.
2. Any quantity modified by this entry must have a value on the MAT8 entry

**Remarks related to SOLs 601 and 701:**

1. T(RHO), T(Xt), T(Xc), T(Yt), T(Yc), T(S), T(GE) and T(F12) are ignored.
2. Only TABLEM1 entry may be used to define the temperature dependent properties.

**1644 MATT8**  
**Shell Orthotropic Material Temperature Dependence**

3. The TABLEM1 entries must all have the same number of temperature points with the same temperature values. The maximum number of temperature points is restricted to 16.

**MATT9 1645**  
**Solid Element Anisotropic Material Temperature Dependence.**

**MATT9** Solid Element Anisotropic Material Temperature Dependence.

Specifies temperature-dependent material properties on MAT9 entry fields via TABLEMk entries.

**Format:**

| 1     | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|----|
| MATT9 | MID    | T(C11) | T(C12) | T(C13) | T(C14) | T(C15) | T(C16) | T(C22) |    |
|       | T(C23) | T(C24) | T(C25) | T(C26) | T(C33) | T(C34) | T(C35) | T(C36) |    |
|       | T(C44) | T(C45) | T(C46) | T(C55) | T(C56) | T(C66) | T(RHO) | T(A1)  |    |
|       | T(A2)  | T(A3)  | T(A4)  | T(A5)  | T(A6)  |        | T(GE)  |        |    |

**16**  
**Bulk**  
**M-N**

**Example:**

|       |    |    |  |    |    |  |    |    |  |
|-------|----|----|--|----|----|--|----|----|--|
| MATT9 | 17 | 32 |  |    | 18 |  |    | 17 |  |
|       |    |    |  | 12 |    |  |    |    |  |
|       |    |    |  | 5  |    |  | 10 |    |  |

**Fields:**

| Field  | Contents                                                                                                       |
|--------|----------------------------------------------------------------------------------------------------------------|
| MID    | Material property identification number that matches the identification number on MAT9 entry. (Integer > 0)    |
| T(Cij) | Identification number of a TABLEMk entry for the terms in the material property matrix. (Integer ≥ 0 or blank) |
| T(RHO) | Identification number of a TABLEMk entry for the mass density. (Integer ≥ 0 or blank)                          |
| T(Ai)  | Identification number of a TABLEMk entry for the thermal expansion coefficients. (Integer ≥ 0 or blank)        |
| T(GE)  | Identification number of a TABLEMk entry for the damping coefficient. (Integer ≥ 0 or blank)                   |

**Remarks:**

- Fields 3, 4, etc., of this entry correspond, field by field, to fields 3, 4, etc., of the MAT9 entry referenced in field 2. The value recorded in a particular field of the MAT9 entry is replaced or modified by the table referenced in the corresponding field of this entry. In the example shown, C11 is modified by TABLEMj 32, C14

## 1646 MATT9

### Solid Element Anisotropic Material Temperature Dependence.

is modified by TABLEMj 18, etc. If the fields are zero or blank, then there is no temperature dependence of the fields on the MAT9 entry.

2. Any quantity modified by this entry must have a value on the MAT9 entry.
3. The continuation entries are optional.

#### Remarks related to SOLs 601 and 701:

1. T(C11), T(C12), T(C13), T(C22), T(C23), T(C33), T(C44), T(C55), T(C66), T(A1), T(A2), and T(A3) are used to define a temperature-dependent orthotropic material. Note that T(RHO) is ignored, i.e. no temperature dependence for density.
2. As C14, C15, C16, C24, C25, C26, C34, C35, C36, C45, C46, C56, A4, A5, A6, and GE are not supported in MAT9, T(C14), T(C15), T(C16), T(C24), T(C25), T(C26), T(C34), T(C35), T(C36), T(C45), T(C46), T(C56), T(A4), T(A5), T(A6), and T(GE) are also not supported in MATT9.
3. Only TABLEM1 entry may be used to define the temperature dependent properties.
4. The TABLEM1 entries must all have the same number of temperature points with the same temperature values. The maximum number of temperature points is restricted to 16.
5. The temperature range specified in TABLEM1 should be as close as possible to the range of temperature loads in the model. For example, if the temperature load in the model ranges from 100.0 to 200.0, the temperature range in the TABLEM1 entries should be about 100.0 to 200.0 and not 0.0 to 1000.0.

**MATT11** Solid Orthotropic Material Temperature Dependence

Defines the temperature dependent material property for a 3-D orthotropic material for isoparametric solid elements.

**Format:**

| 1      | 2      | 3      | 4      | 5     | 6       | 7       | 8       | 9      | 10 |
|--------|--------|--------|--------|-------|---------|---------|---------|--------|----|
| MATT11 | MID    | T(E1)  | T(E2)  | T(E3) | T(NU12) | T(NU13) | T(NU23) | T(G12) |    |
|        | T(G13) | T(G23) | T(RHO) | T(A1) | T(A2)   | T(A3)   |         | T(GE)  |    |

**Example:**

|        |    |    |    |  |  |  |  |  |  |
|--------|----|----|----|--|--|--|--|--|--|
| MATT11 | 20 | 10 |    |  |  |  |  |  |  |
|        |    |    | 11 |  |  |  |  |  |  |

**Fields:**

| Field   | Contents                                                                                                     |
|---------|--------------------------------------------------------------------------------------------------------------|
| MID     | Material property identification number that matches the identification number on MAT11 entry. (Integer > 0) |
| T(E1)   | Identification number of a TABLEMi entry for Young's modulus 1. (Integer ≥ 0 or blank)                       |
| T(E2)   | Identification number of a TABLEMi entry for Young's modulus 2. (Integer ≥ 0 or blank)                       |
| T(E3)   | Identification number of a TABLEMi entry for Young's modulus 3. (Integer ≥ 0 or blank)                       |
| T(NU12) | Identification number of a TABLEMi entry for Poisson's ratio 12. (Integer ≥ 0 or blank)                      |
| T(NU13) | Identification number of a TABLEMi entry for Poisson's ratio 13. (Integer ≥ 0 or blank)                      |
| T(NU23) | Identification number of a TABLEMi entry for Poisson's ratio 23. (Integer ≥ 0 or blank)                      |
| T(G12)  | Identification number of a TABLEMi entry for shear modulus 12. (Integer ≥ 0 or blank)                        |

**1648 MAT11**  
**Solid Orthotropic Material Temperature Dependence**

**16**  
Bulk  
M-N

| <b>Field</b> | <b>Contents</b>                                                                                                          |
|--------------|--------------------------------------------------------------------------------------------------------------------------|
| T(G13)       | Identification number of a TABLEMi entry for shear modulus 13. (Integer $\geq 0$ or blank)                               |
| T(G23)       | Identification number of a TABLEMi entry for shear modulus 23. (Integer $\geq 0$ or blank)                               |
| T(RHO)       | Identification number of a TABLEMi entry for mass density. (Integer $\geq 0$ or blank)                                   |
| T(A1)        | Identification number of a TABLEMi entry for thermal expansion coefficient 1 in 1-direction. (Integer $\geq 0$ or blank) |
| T(A2)        | Identification number of a TABLEMi entry for thermal expansion coefficient 2 in 2-direction. (Integer $\geq 0$ or blank) |
| T(A3)        | Identification number of a TABLEMi entry for thermal expansion coefficient 2 in 3-direction. (Integer $\geq 0$ or blank) |
| T(GE)        | Identification number of a TABLEMi entry for structural damping coefficient. (Integer $\geq 0$ or blank)                 |

**Remarks:**

1. Fields 3, 4, etc., of this entry correspond, field-by-field, to fields 3, 4, etc., of the MAT11 entry referenced in field 2. The value in a particular field of the MAT11 entry is replaced or modified by the table referenced in the corresponding field of this entry. In the example shown, E1 is modified by TABLEMi 10 and A1 is modified by TABLEMi 11. Blank or zero entries mean that there is no temperature dependence of the fields on the MAT11 entry.
2. Any quantity modified by this entry must have a value on the MAT11 entry.



**MATTC** Creep Material Temperature Dependence

Specifies temperature-dependent creep coefficients on CREEP entry fields via TABLEM1 entries.

**Format:**

| 1     | 2   | 3    | 4    | 5 | 6    | 7 | 8 | 9 | 10 |
|-------|-----|------|------|---|------|---|---|---|----|
| MATTC | MID | T(a) | T(b) |   | T(d) |   |   |   |    |

**Example:**

|       |     |   |   |  |  |  |  |  |  |
|-------|-----|---|---|--|--|--|--|--|--|
| MATTC | 111 | 3 | 4 |  |  |  |  |  |  |
|-------|-----|---|---|--|--|--|--|--|--|

**Fields:**

| Field               | Contents                                                                                                                                     |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| MID                 | Material identification number of a CREEP entry. (Integer >0). See remark 1.                                                                 |
| T(a), T(b),<br>T(d) | Identification number of a TABLEM1 entry that gives the temperature dependence of the creep coefficient. (Integer > 0). See remarks 2 and 3. |

**Remarks:**

1. Only TYPE=300 in CREEP entry can be used with MATTC entry.
2. The TABLEM1 entries must all have the same number of temperature points with the same temperature values.
3. In TABLEM1 entry for T(a), the YAXIS field may be LINEAR or LOG.

**1650 MFLUID**  
**Fluid Volume Properties**

**MFLUID** Fluid Volume Properties

Defines the properties of an incompressible fluid volume for the purpose of generating a virtual mass matrix.

**Format:**

| 1      | 2    | 3       | 4   | 5   | 6      | 7      | 8      | 9      | 10 |
|--------|------|---------|-----|-----|--------|--------|--------|--------|----|
| MFLUID | SID  | CID     | ZFS | RHO | ELIST1 | ELIST2 | PLANE1 | PLANE2 |    |
|        | RMAX | FMEXACT |     |     |        |        |        |        |    |

**Example:**

|        |   |      |       |       |   |   |   |   |  |
|--------|---|------|-------|-------|---|---|---|---|--|
| MFLUID | 3 | 2    | 15.73 | 1006. | 3 | 4 | S | N |  |
|        |   | 100. |       |       |   |   |   |   |  |

**Fields:**

| Field  | Contents                                                                                                                                                                                                                                                                   |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID    | Set identification number. (Integer > 0)                                                                                                                                                                                                                                   |
| CID    | Identification number of rectangular coordinate system used to specify the orientation of the free surface (normal to $X_3$ ) and of planes of symmetry, if any. (Integer $\geq 0$ or blank)                                                                               |
| ZFS    | Intercept of the free surface on the $X_3$ axis of the coordinate system referenced by CID. If $X_3 > ZFS$ then there is no fluid. See Remark 3. (Real; Default means that the free surface is located at an infinitely large positive value of $X_3$ )                    |
| RHO    | Density of the fluid. (Real)                                                                                                                                                                                                                                               |
| ELIST1 | Identification number of an ELIST entry that lists the IDs of two-dimensional elements that can be wetted on one side by the fluid. Only those elements connected to at least one grid point below ZFS are wetted by the fluid. See Remarks 3 and 5. (Integer $\geq 0$ )   |
| ELIST2 | Identification number of an ELIST entry that lists the IDs of two-dimensional elements that can be wetted on both sides by the fluid. Only those elements connected to at least one grid point below ZFS are wetted by the fluid. (Integer $\geq 0$ ; ELIST1 + ELIST2 > 0) |

| <b>Field</b>      | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PLANE1,<br>PLANE2 | Planes of symmetry, antisymmetry, or no symmetry. “S” means that plane 1, which is the plane containing the $X_1$ and $X_3$ axes of CID, is a plane of symmetry. “A” means that plane 1 is a plane of antisymmetry. “N” means that it is neither. See Remark 5. Plane 2 uses “S”, “A”, or “N” for the $X_2$ and $X_3$ plane. (Character: “S”, “A”, or “N”) |
| RMAX              | Characteristic length. Interactions between elements with separation that is greater than RMAX will be neglected. (Real > 0.0; Default = 1.0E 10)                                                                                                                                                                                                          |
| FMEXACT           | Exact integration is used if the distance between two elements is less than FMEXACT times the square root of the area of the larger element. Otherwise, center point integration is used by default. (Real; Default = 1.0E 15)                                                                                                                             |

**Remarks:**

1. The MFLUID entry must be selected with the Case Control command MFLUID = SID.
2. Several MFLUID entries corresponding to different fluid volumes can be used simultaneously.
3. The wetted side of an element in ELIST1 is determined by the presence or absence of a minus sign preceding the element’s ID on the ELIST entry. A minus sign indicates that the fluid is on the side opposite to the element’s positive normal, as determined by applying the right-hand rule to the sequence of its corner points. The same element can appear on two ELIST entries, indicating that it forms a barrier between the unconnected fluids.
4. The fluid volume may be finite (interior) or infinite (exterior). The volume may be bounded by a free surface and one or two planes of structural symmetry. If structural symmetry is used, the structure must have the symmetric or antisymmetric boundary corresponding to the selection in fields 8 and 9. Interior fluids must have ELIST1 data and a free surface or plane of antisymmetry.
5. The planes of symmetry and/or antisymmetry defined in fields 8 and 9 must be planes of symmetry for the entire analysis. The user may apply appropriate structural boundary conditions at all grid points lying in these planes.
6. The current list of elements that may be placed in ELIST1 and ELIST2 include CTRIA3 and CQUAD4.

## 1652 MFLUID

### Fluid Volume Properties

7. The continuation entry is optional.
8. If there is ELIST1 data and no free surface nor plane of antisymmetry, the program assumes a special form of external fluid. These special external fluids must have a CID (field 3) such that the origin of the fluid coordinate system is near the center of the enclosed volume, since the singularity for volume change will be placed at the origin. Special external fluids are supported only in SOLs 103, and 107 through 112. If used in conventional solution sequences, System Fatal Message 3001 results for file 205.
9. See the parameter VMOPT. VMOPT controls when the virtual mass is included in the mass matrix.

**MKAERO1** Mach Number - Frequency Table

Provides a table of Mach numbers (m) and reduced frequencies (k) for aerodynamic matrix calculation.

**Format:**

| 1       | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|----|----|----|----|----|----|----|----|----|
| MKAERO1 | m1 | m2 | m3 | m4 | m5 | m6 | m7 | m8 |    |
|         | k1 | k2 | k3 | k4 | k5 | k6 | k7 | k8 |    |

**Example:**

|         |    |    |     |  |  |  |  |  |  |
|---------|----|----|-----|--|--|--|--|--|--|
| MKAERO1 | .1 | .7 |     |  |  |  |  |  |  |
|         | .3 | .6 | 1.0 |  |  |  |  |  |  |

**Fields:**

| Field | Contents                                              |
|-------|-------------------------------------------------------|
| mi    | List of from 1 to 8 Mach numbers. (Real ≥ 0.0)        |
| kj    | List of from 1 to 8 reduced frequencies. (Real > 0.0) |

**Remarks:**

- Blank fields end the list, and thus cannot be used for 0.0.
- All combinations of (mi, kj) will be used.
- The continuation entry is required.
- Multiple MKAERO1 entries are permitted.
- For the lifting surface theories (Doublet-Lattice and Mach Box), the maximum value of kj should be less than one quarter of the number of boxes on a representative chord (i.e.,

$$\text{MAX}(kj) < \bar{C}/4\Delta x$$

where  $\bar{C}$  is the reference chord and  $\Delta x$  is a typical box chord length).

- In SOL 146, the program selects only one value of mi to use in computing the dynamic response solution and, by default, the lowest value is selected.

**1654 MKAERO1**  
**Mach Number - Frequency Table**

The PARAM,MACH,m entry may be specified to select a different value. If PARAM,MACH,m is specified, then the value of  $m_i$  closest to  $m$  will be selected.

7. The very low nonzero value of  $k_j$  required for aeroelastic divergence analysis of restrained vehicles with the K- and KE-methods of flutter analysis must be included on this entry.

**MKAERO2** Mach Number - Frequency Table

Provides a list of Mach numbers (m) and reduced frequencies (k) for aerodynamic matrix calculation.

**Format:**

|         |    |    |    |    |    |    |    |    |    |
|---------|----|----|----|----|----|----|----|----|----|
| 1       | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
| MKAERO2 | m1 | k1 | m2 | k2 | m3 | k3 | m4 | k4 |    |

**Example:**

|         |     |     |     |     |     |     |     |     |  |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|--|
| MKAERO2 | .10 | .30 | .10 | .60 | .70 | .30 | .70 | 1.0 |  |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|--|

**Fields:**

| Field | Contents                            |
|-------|-------------------------------------|
| mi    | Mach numbers. (Real $\geq$ 0.0)     |
| ki    | Reduced frequencies. (Real $>$ 0.0) |

**Remarks:**

1. MKAERO2 will cause the aerodynamic matrices to be computed for the given sets of parameter pairs. Embedded blank pairs are skipped.
2. No continuation entries are allowed, but multiple MKAERO2 entries are permitted.
3. In SOL 146, the program selects only one value of mi to use in computing the dynamic response solution and, by default, the lowest value is selected. The PARAM,MACH,m entry may be specified to select a different value. If PARAM,MACH,m is specified, then the value of mi closest to m will be selected.
4. The very low nonzero value of ki required for aeroelastic divergence analysis of restrained vehicles with the K- and KE-methods of flutter analysis must be included on this entry.

**1656 MODTRAK**  
**Mode Tracking Parameters**

**MODTRAK**      Mode Tracking Parameters

Specifies parameters for mode tracking in design optimization (SOL 200).

**Format:**

| 1       | 2   | 3      | 4       | 5        | 6 | 7 | 8 | 9 | 10 |
|---------|-----|--------|---------|----------|---|---|---|---|----|
| MODTRAK | SID | LOWRNG | HIGHRNG | MTFILTER |   |   |   |   |    |

**Example:**

|         |     |   |    |      |  |  |  |  |  |
|---------|-----|---|----|------|--|--|--|--|--|
| MODTRAK | 100 | 1 | 26 | 0.80 |  |  |  |  |  |
|---------|-----|---|----|------|--|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                            |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID      | Set identification number that is selected in the Case Control Section with the MODTRAK command. See Remark 1. (Integer; No Default)                                |
| LOWRNG   | Lowest mode number in range to search. See Remark 2. (Integer $\geq 0$ , Default = 0. If nonzero, LOWRNG < HIGHRNG.)                                                |
| HIGHRNG  | Highest mode number in range to search. See Remark <a href="#">Remarks:</a> (Integer > 0, Default = number of eigenvalues extracted. If nonzero, LOWRNG < HIGHRNG.) |
| MTFILTER | Filtering parameter used in mode cross-orthogonality check. See Remark 3. (Real, Default = 0.9)                                                                     |

**Remarks:**

1. Only the designed modes for the subcase will be tracked. A designed mode is one that is used in the design model (in connection with either objective or constraints) and, therefore, identified on a DRESP1 entry.
2. The range of modes LOWRNG through HIGHRNG, inclusive, will be used to track the designed modes. If LOWRNG and HIGHRNG are both blank, then all computed modes will be used to search for the designed modes. Since large numbers of computed modes will result in higher computational costs, limiting the search range with LOWRNG and HIGHRNG is recommended.
3. Modes are considered to correlate if their mass normalized cross orthogonalities are greater than MTFILTER.



**MOMAX** Conical Shell Static Moment

Defines a static concentrated moment load on a ring of a conical shell.

**Format:**

| 1     | 2   | 3   | 4   | 5 | 6  | 7  | 8  | 9 | 10 |
|-------|-----|-----|-----|---|----|----|----|---|----|
| MOMAX | SID | RID | HID | S | MR | MP | MZ |   |    |

**Example:**

|       |   |   |   |     |     |     |     |  |  |
|-------|---|---|---|-----|-----|-----|-----|--|--|
| MOMAX | 1 | 2 | 3 | 1.0 | 0.1 | 0.2 | 0.3 |  |  |
|-------|---|---|---|-----|-----|-----|-----|--|--|

**Fields:**

| Field      | Contents                                                                                            |
|------------|-----------------------------------------------------------------------------------------------------|
| SID        | Load set identification number. (Integer > 0)                                                       |
| RID        | Ring identification number. See the RINGAX entry. (Integer > 0)                                     |
| HID        | Harmonic identification number or a sequence of harmonics. See Remark 5. (Integer ≥ 0 or Character) |
| S          | Scale factor. (Real)                                                                                |
| MR, MP, MZ | Moment components in the r, f, z directions. (Real)                                                 |

**Remarks:**

- MOMAX is allowed only if an AXIC entry is also present.
- Load sets must be selected with the Case Control command LOAD=SID.
- A separate entry is needed for the definition of the moment associated with each harmonic.
- For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
- If a sequence of harmonics is to be placed in HID, the form is as follows: “Sn1Tn2”, where n1 is the start of the sequence and n2 is the end of the sequence; i.e., for harmonics 0 through 10, the field would contain “S0T10”.

**1658 MOMENT**  
Static Moment

**MOMENT**     Static Moment

Defines a static concentrated moment at a grid point by specifying a scale factor and a vector that determines the direction.

**Format:**

| 1      | 2   | 3 | 4   | 5 | 6  | 7  | 8  | 9 | 10 |
|--------|-----|---|-----|---|----|----|----|---|----|
| MOMENT | SID | G | CID | M | N1 | N2 | N3 |   |    |

**Example:**

|        |   |   |   |     |     |     |     |  |  |
|--------|---|---|---|-----|-----|-----|-----|--|--|
| MOMENT | 2 | 5 | 6 | 2.9 | 0.0 | 1.0 | 0.0 |  |  |
|--------|---|---|---|-----|-----|-----|-----|--|--|

**Fields:**

| Field | Contents                                                                                                 |
|-------|----------------------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)                                                            |
| G     | Grid point identification number at which the moment is applied. (Integer > 0)                           |
| CID   | Coordinate system identification number. (Integer ≥ 0 or blank)                                          |
| M     | Scale factor. (Real)                                                                                     |
| Ni    | Components of the vector measured in the coordinate system defined by CID. (Real; at least one Ni ≠ 0.0) |

**Remarks:**

1. The static moment applied to grid point G is given by

$$\vec{m} = M\vec{N}$$

where

$\vec{N}$  is the vector defined by (N1, N2, N3).

The magnitude of  $\vec{m}$  is equal to M times the magnitude of  $\vec{N}$ .

2. In the static solution sequences, the load set ID (SID) is selected by the Case Control command, LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.

3. A CID of zero or blank references the basic coordinate system.
4. For scalar points see SLOAD.

**Remarks related to SOLs 601 and 701:**

1. To apply a moment with constant magnitude, SID is selected by Case Control command LOAD = SID for both static and transient analyses.
2. To apply a time-dependent moment, SID is referenced by the field EXCITEID = SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.

**1660 MOMENT1**  
**Static Moment, Alternate Form 1**

**MOMENT1**      Static Moment, Alternate Form 1

Defines a static concentrated moment at a grid point by specifying a magnitude and two grid points that determine the direction.

**Format:**

| 1       | 2   | 3 | 4 | 5  | 6  | 7 | 8 | 9 | 10 |
|---------|-----|---|---|----|----|---|---|---|----|
| MOMENT1 | SID | G | M | G1 | G2 |   |   |   |    |

**Example:**

|         |   |    |       |    |    |  |  |  |  |
|---------|---|----|-------|----|----|--|--|--|--|
| MOMENT1 | 6 | 13 | -2.93 | 16 | 13 |  |  |  |  |
|---------|---|----|-------|----|----|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                    |
|--------|-----------------------------------------------------------------------------------------------------------------------------|
| SID    | Load set identification number. (Integer > 0)                                                                               |
| G      | Grid point identification number at which the moment is applied. (Integer > 0)                                              |
| M      | Magnitude of moment. (Real)                                                                                                 |
| G1, G2 | Grid point identification numbers used to define the unit vector $\vec{n}$ . (Integer > 0; G1 and G2 cannot be coincident.) |

**Remarks:**

1. The static concentrated moment applied to grid point G is given by

$$\vec{m} = M\vec{N}$$

where

$\vec{N}$  is a unit vector parallel to a vector from G1 to G2.

2. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.

3. The follower force effects due to loads from this entry are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter **"FOLLOWK"** ). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with **PARAM,LGDISP,1**. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).

**Remarks related to SOLs 601 and 701:**

1. If  $G1=G$  or  $G2=G$ , the moment is a follower moment in large displacement analysis (i.e., **PARAM,LGDISP,1**). Otherwise, the direction of the moment is defined by the original positions of  $G1$  and  $G2$  and does not change even for large displacement analysis.
2. To apply a moment with constant magnitude, **SID** is selected by Case Control command **LOAD = SID** for both static and transient analysis.
3. To apply a time-dependent moment, **SID** is referenced by the field **EXCITEID = SID** in the **TLOAD1** entry. Time-dependent loads are selected by Case Control command **DLOAD**.

**1662 MOMENT2**  
**Static Moment, Alternate Form 2**

**MOMENT2**      Static Moment, Alternate Form 2

Defines a static concentrated moment at a grid point by specification of a magnitude and four grid points that determine the direction.

**Format:**

| 1       | 2   | 3 | 4 | 5  | 6  | 7  | 8  | 9 | 10 |
|---------|-----|---|---|----|----|----|----|---|----|
| MOMENT2 | SID | G | M | G1 | G2 | G3 | G4 |   |    |

**Example:**

|         |   |    |       |    |    |    |    |  |  |
|---------|---|----|-------|----|----|----|----|--|--|
| MOMENT2 | 6 | 13 | -2.93 | 16 | 13 | 17 | 13 |  |  |
|---------|---|----|-------|----|----|----|----|--|--|

**Fields:**

| Field | Contents                                                                                                                                                       |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)                                                                                                                  |
| G     | Grid point identification number at which the moment is applied. (Integer > 0)                                                                                 |
| M     | Magnitude of moment. (Real)                                                                                                                                    |
| Gi    | Grid point identification numbers used to determine the unit vector $\vec{n}$ . (Integer > 0; G1 and G2 cannot be coincident; G3 and G4 cannot be coincident.) |

**Remarks:**

1. The static concentrated moment applied to grid point G is given by

$$\vec{m} = M\vec{N}$$

where

$\vec{N}$  is the unit vector parallel to the cross product of the vectors from G1 to G2, and G3 to G4.


2. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.

3. The follower force effects due to loads from this entry are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter **"FOLLOWK"** ). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with **PARAM,LGDISP,1**. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).

**Remarks related to SOLs 601 and 701:**

1. The direction of the moment is defined by the original positions of G1 to G4 and does not change during the analysis.
2. To apply a moment with constant magnitude, **SID** is selected by Case Control command **LOAD = SID** for both static and transient analyses.
3. To apply a time-dependent moment, **SID** is referenced by the field **EXCITEID = SID** in the **TLOAD1** entry. Time-dependent loads are selected by Case Control command **DLOAD**.

**1664 MONPNT1**  
**Integrated Load Monitor Point**



**MONPNT1**      Integrated Load Monitor Point

Defines an integrated load monitor point at a point (x,y,z) in a user defined coordinate system. The integrated loads about this point over the associated nodes will be computed and printed for statics, dynamics and static aeroelastic trim analyses and form integrated loads on the nonlinear static aeroelastic database.

**Format:**

| 1       | 2    | 3     | 4   | 5 | 6 | 7 | 8 | 9 | 10 |
|---------|------|-------|-----|---|---|---|---|---|----|
| MONPNT1 | NAME | LABEL |     |   |   |   |   |   |    |
|         | AXES | COMP  | CID | X | Y | Z |   |   |    |

**Example:**

|         |         |                                     |  |     |       |      |  |  |  |
|---------|---------|-------------------------------------|--|-----|-------|------|--|--|--|
| MONPNT1 | WING155 | Wing Integrated Load to Butline 155 |  |     |       |      |  |  |  |
|         | 34      | WING                                |  | 0.0 | 155.0 | 15.0 |  |  |  |

**Fields:**

**Field      Contents**

- NAME**      A character string of up to eight characters Identifying the monitor point (Character)
- LABEL**      A string comprising no more than 56 characters (fields 3 through 9) that identifies and labels the monitor point.
- AXES**      Component axes about which to sum. (Any unique combination of the integers 1 thru 6 with no embedded blanks.)
- COMP**      The name of an AECOMP or AECOMPL entry that defines the set of grid points over which the monitor point is defined.
- CID**      The identification number of a coordinate system in which the (x,y,z) ordinates are defined.
- X,Y,Z**      The coordinates in the CID coordinate system about which the forces are to be summed (Default = 0.0).

**Remarks:**

1. The Identification NAME must be unique among all MONPNTi entries.



2. The LABEL is a 56 character string that should be unique among all MONPTi (the string is case insensitive). It is used as additional label information in the printed output.

**1666 MPC**  
**Multipoint Constraint**

**MPC** Multipoint Constraint

Defines a multipoint constraint equation of the form

$$\sum_i A_j u_j = 0$$

where  $u_j$  represents degree-of-freedom  $C_j$  at grid or scalar point  $G_j$ .

**Format:**

| 1   | 2   | 3  | 4  | 5  | 6      | 7  | 8  | 9 | 10 |
|-----|-----|----|----|----|--------|----|----|---|----|
| MPC | SID | G1 | C1 | A1 | G2     | C2 | A2 |   |    |
|     |     | G3 | C3 | A3 | -etc.- |    |    |   |    |

**Example:**

|     |   |    |   |       |   |  |      |  |  |
|-----|---|----|---|-------|---|--|------|--|--|
| MPC | 3 | 28 | 3 | 6.2   | 2 |  | 4.29 |  |  |
|     |   | 1  | 4 | -2.91 |   |  |      |  |  |

**Fields:**

| Field | Contents                                                                                                  |
|-------|-----------------------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                                  |
| Gj    | Identification number of grid or scalar point. (Integer > 0)                                              |
| Cj    | Component number. (Any one of the Integers 1 through 6 for grid points; blank or zero for scalar points.) |
| Aj    | Coefficient. (Real; Default = 0.0 except A1 must be nonzero.)                                             |

**Remarks:**

1. Multipoint constraint sets must be selected with the Case Control command MPC = SID.
2. The first degree-of-freedom (G1, C1) in the sequence is defined to be the dependent degree-of-freedom. A dependent degree-of-freedom assigned by one MPC entry cannot be assigned dependent by another MPC entry or by a rigid element.

3. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
4. The m-set degrees-of-freedom specified on this entry may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
5. By default, the grid point connectivity created by the MPC, MPCADD, and MPCAX entries is not considered during resequencing, (see the description of parameter [“OLDSEQ”](#) ). In order to consider the connectivity during resequencing, SID must be specified on the PARAM,MPCX entry. Using the example above, specify PARAM,MPCX,3.

**Remarks related to SOLs 601 and 701:**

1. No output of forces of multipoint constraint may be requested.
2. Multipoint constraints are only approximately satisfied in SOL 701, since imposing the constraints exactly results in a non-diagonal mass matrix.
3. By default, a dependent degree-of-freedom may not be assigned as independent by a rigid link (from RBAR or RBE2 entry) or another multipoint constraint (from RBAR, RBE2, RBE3 or another MPC entry). An error message will be issued in such a case. However, if GENMPC=1 is specified in the NXSTRAT entry, a dependent degree-of-freedom of a multipoint constraint can be assigned as independent by a rigid link or another multipoint constraint.

**1668 MPCADD**  
**Multipoint Constraint Set Combination**

**MPCADD**      Multipoint Constraint Set Combination

Defines a multipoint constraint set as a union of multipoint constraint sets defined via MPC entries.

**Format:**

| 1      | 2   | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|----|--------|----|----|----|----|----|----|
| MPCADD | SID | S1 | S2     | S3 | S4 | S5 | S6 | S7 |    |
|        | S8  | S9 | -etc.- |    |    |    |    |    |    |

**Example:**

|        |     |   |   |   |   |   |  |  |  |
|--------|-----|---|---|---|---|---|--|--|--|
| MPCADD | 101 | 2 | 3 | 1 | 6 | 4 |  |  |  |
|--------|-----|---|---|---|---|---|--|--|--|

**Fields:**

| Field | Contents                                                                                        |
|-------|-------------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                        |
| Sj    | Set identification numbers of multipoint constraint sets defined via MPC entries. (Integer > 0) |

**Remarks:**

1. Multipoint constraint sets must be selected with the Case Control command MPC = SID.
2. The Sj must be unique and may not be the identification number of a multipoint constraint set defined by another MPCADD entry.
3. MPCADD entries take precedence over MPC entries. If both have the same SID, only the MPCADD entry will be used.
4. By default, the grid point connectivity created by the MPC, MPCADD, and MPCAX entries is not considered during resequencing, (see "OLDSEQ" for more information). In order to consider the connectivity during resequencing, SID must be specified on the PARAM,MPCX entry. Using the example above, specify PARAM,MPCX,101.

**MPCAX** Conical Shell Multipoint Constraint

Defines a multipoint constraint equation of the form

$$\sum_i A_j u_j = 0$$

for conical shell coordinates, where  $u_j$  represents the degree-of-freedom  $C_j$  at ring  $RID_j$  and harmonic  $HID_j$ .

**Format:**

| 1     | 2    | 3    | 4  | 5  | 6      | 7    | 8  | 9  | 10 |
|-------|------|------|----|----|--------|------|----|----|----|
| MPCAX | SID  |      |    |    | RID1   | HID1 | C1 | A1 |    |
|       | RID2 | HID2 | C2 | A2 | -etc.- |      |    |    |    |

**Example:**

|       |    |   |   |      |    |   |   |     |  |
|-------|----|---|---|------|----|---|---|-----|--|
| MPCAX | 32 |   |   |      | 17 | 6 | 1 | 1.0 |  |
|       | 23 | 4 | 2 | -6.8 |    |   |   |     |  |

**Fields:**

| Field | Contents                                                      |
|-------|---------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                      |
| RIDj  | Ring identification number. (Integer > 0)                     |
| HIDj  | Harmonic identification number. (Integer > 0)                 |
| Cj    | Component number. (1 ≤ Integer ≤ 6)                           |
| Aj    | Coefficient. (Real; Default = 0.0 except A1 must be nonzero.) |

**Remarks:**

1. MPCAX is allowed only if an AXIC entry is also present.
2. The first degree-of-freedom in the sequence is assumed to be the dependent degree-of-freedom. A dependent degree-of-freedom assigned by one MPCAX entry cannot be assigned dependent by another MPCAX entry.

## 1670 MPCAX

### Conical Shell Multipoint Constraint


3. Multipoint constraint sets must be selected with the Case Control command MPC = SID.
4. Dependent degrees-of-freedom appearing on MPCAX entries may not appear on OMITAX, SPCAX, or SUPAX entries.
5. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
6. By default, the grid point connectivity created by the MPC, MPCADD, and MPCAX entries is not considered during resequencing, (see “[OLDSEQ](#)” for more information). In order to consider the connectivity during resequencing, SID must be specified on the PARAM,MPCX entry. Using the example above, specify PARAM,MPCX,32.

**NLPARM** Parameters for Nonlinear Static Analysis Control

Defines a set of parameters for nonlinear static analysis iteration strategy.

**Format:**

| 1      | 2      | 3    | 4    | 5       | 6     | 7       | 8       | 9      | 10 |
|--------|--------|------|------|---------|-------|---------|---------|--------|----|
| NLPARM | ID     | NINC | DT   | KMETHOD | KSTEP | MAXITER | CONV    | INTOUT |    |
|        | EPSU   | EPSP | EPSW | MAXDIV  | MAXQN | MAXLS   | FSTRESS | LSTOL  |    |
|        | MAXBIS |      |      |         | MAXR  |         | RTOLB   |        |    |



**Example:**

|        |    |   |  |      |  |  |  |  |  |
|--------|----|---|--|------|--|--|--|--|--|
| NLPARM | 15 | 5 |  | ITER |  |  |  |  |  |
|--------|----|---|--|------|--|--|--|--|--|

**Fields:**

| Field   | Contents                                                                                                                                                         |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID      | Identification number. (Integer > 0)                                                                                                                             |
| NINC    | Number of increments. See Remark 16. (0 < Integer < 1000; Default=10 with SOL 106; Default =1 with SOLs 153 and 159 when ANALYSIS case control command = "HEAT") |
| DT      | Incremental time interval for creep analysis. See Remark 3. (Real ≥ 0.0; Default = 0.0 for no creep.)                                                            |
| KMETHOD | Method for controlling stiffness updates. See Remark 4. (Character = "AUTO", "ITER", or "SEMI"; Default = "AUTO".)                                               |
| KSTEP   | Number of iterations before the stiffness update for ITER method. See Remark 5. (Integer ≥ 1; Default = 5)                                                       |
| MAXITER | Limit on number of iterations for each load increment. See Remark 6. (Integer > 0; Default = 25)                                                                 |
| CONV    | Flags to select convergence criteria. See Remark 7. (Character = "U", "P", "W", or any combination; Default = "PW".)                                             |
| INTOUT  | Intermediate output flag. See Remark 8. (Character = "YES", "NO", or "ALL"; Default = NO)                                                                        |
| EPSU    | Error tolerance for displacement (U) criterion. See Remark 16. (Real > 0.0; Default = 1.0E-2;)                                                                   |

## 1672 NLPARM Parameters for Nonlinear Static Analysis Control

16  
Bulk  
M-N

| Field   | Contents                                                                                                                                                             |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPSP    | Error tolerance for load (P) criterion. See Remark 16. (Real > 0.0; Usual default = 1.0E-2)                                                                          |
| EPSW    | Error tolerance for work (W) criterion. See Remark 16. (Real > 0.0; Usual default = 1.0E-3)                                                                          |
| MAXDIV  | Limit on probable divergence conditions per iteration before the solution is assumed to diverge. See Remark 9. (Integer $\neq$ 0; Default = 3)                       |
| MAXQN   | Maximum number of quasi-Newton correction vectors to be saved on the database. See Remark 10. (Integer $\geq$ 0; Default = MAXITER)                                  |
| MAXLS   | Maximum number of line searches allowed for each iteration. See Remark 11. (Integer $\geq$ 0; Default = 4)                                                           |
| FSTRESS | Fraction of effective stress $\bar{\sigma}_{FSTRESS}$ used to limit the subincrement size in the material routines. See Remark 12. (0.0 < Real < 1.0; Default = 0.2) |
| LSTOL   | Line search tolerance. See Remark 11. (0.01 < Real < 0.9; Default = 0.5)                                                                                             |
| MAXBIS  | Maximum number of bisections allowed for each load increment. See Remark 13. (-10 $\leq$ MAXBIS $\leq$ 10; Default = 5)                                              |
| MAXR    | Maximum ratio for the adjusted arc-length increment relative to the initial value. See Remark 14. (1.0 $\leq$ MAXR $\leq$ 40.0; Default = 20.0)                      |
| RTOLB   | Maximum value of incremental rotation (in degrees) allowed per iteration to activate bisection. See Remark 15. (Real > 2.0; Default = 20.0)                          |

### Remarks:

1. The NLPARM entry is selected by the Case Control command NLPARM = ID. Each solution subcase requires an NLPARM command.
2. In cases of static analysis (DT = 0.0) using Newton methods, NINC is the number of equal subdivisions of the load change defined for the subcase. Applied loads, gravity loads, temperature sets, enforced displacements, etc., define the new loading conditions. The differences from the previous case are divided by NINC to define the incremental values. In cases of static analysis (DT = 0.0) using arc-length methods, NINC is used to determine the initial arc-length for the



subcase, and the number of load subdivisions will not be equal to NINC. In cases of creep analysis ( $DT > 0.0$ ), NINC is the number of time step increments.

3. The unit of DT must be consistent with the unit used on the CREEP entry that defines the creep characteristics. Total creep time for the subcase is DT multiplied by the value in the field NINC; i.e.,  $DT * NINC$ .
4. The stiffness update strategy is selected in the KMETHOD field.
  - If the AUTO option is selected, the program automatically selects the most efficient strategy based on convergence rates. At each step the number of iterations required to converge is estimated. Stiffness is updated, if (i) estimated number of iterations to converge exceeds MAXITER, (ii) estimated time required for convergence with current stiffness exceeds the estimated time required for convergence with updated stiffness, and (iii) solution diverges. See Remarks 9 and 13. and for diverging solutions.
  - If the SEMI option is selected, the program for each load increment (i) performs a single iteration based upon the new load, (ii) updates the stiffness matrix, and (iii) resumes the normal AUTO option.
  - If the ITER option is selected, the program updates the stiffness matrix at every KSTEP iterations and on convergence if  $KSTEP \leq MAXITER$ . However, if  $KSTEP > MAXITER$ , stiffness matrix is never updated. Note that the Newton-Raphson iteration strategy is obtained by selecting the ITER option and  $KSTEP = 1$ , while the Modified Newton-Raphson iteration strategy is obtained by selecting the ITER option and  $KSTEP = MAXITER$ .
5. For AUTO and SEMI options, the stiffness matrix is updated on convergence if KSTEP is less than the number of iterations that were required for convergence with the current stiffness.
6. The number of iterations for a load increment is limited to MAXITER. If the solution does not converge in MAXITER iterations, the load increment is bisected and the analysis is repeated. If the load increment cannot be bisected (i.e., MAXBIS is attained or  $MAXBIS = 0$ ) and MAXDIV is positive, the best attainable solution is computed and the analysis is continued to the next load increment. If MAXDIV is negative, the analysis is terminated.
7. The test flags (U = displacement error, P = load equilibrium error, and W = work error) and the tolerances (EPSU, EPSP, and EPSW) define the convergence criteria. All the requested criteria (combination of U, P, and/or W) are satisfied upon convergence. See the *NX Nastran Handbook for Nonlinear Analysis* for more details on convergence criteria.

**1674 NLPARM**  
**Parameters for Nonlinear Static Analysis Control**

**16**  
**Bulk**  
**M-N**

8. INTOUT controls the output requests for displacements, element forces and stresses, etc. YES or ALL must be specified in order to be able to perform a subsequent restart from the middle of a subcase.

| INTOUT | Output Processed                                      |
|--------|-------------------------------------------------------|
| YES    | For every computed load increment.                    |
| NO     | For the last load of the subcase.                     |
| ALL    | For every computed and user-specified load increment. |

- For the Newton family of iteration methods (i.e., when no NLPCI command is specified), the option ALL is equivalent to option YES since the computed load increment is always equal to the user-specified load increment.
  - For arc-length methods (i.e., when the NLPCI command is specified) the computed load increment in general is not going to be equal to the user-specified load increment, and is not known in advance. The option ALL allows the user to obtain solutions at the desired intermediate load increments.
9. The ratio of energy errors before and after the iteration is defined as divergence rate ( $E^i$ ), i.e.,

$$E^i = \frac{\{\Delta u^i\}^T \{R^i\}}{\{\Delta u^i\}^T \{R^{i-1}\}}$$

Depending on the divergence rate, the number of diverging iteration (NDIV) is incremented as follows:

$$\text{If } E^i \geq 1 \text{ or } E^i < -10^{12}, \text{ then NDIV} = \text{NDIV} + 2$$

$$\text{If } -10^{12} < E^i < -1, \text{ then NDIV} = \text{NDIV} + 1$$

The solution is assumed to diverge when  $\text{NDIV} \geq |\text{MAXDIV}|$ . If the solution diverges and the load increment cannot be further bisected (i.e.,  $\text{MAXBIS}$  is attained or  $\text{MAXBIS}$  is zero), the stiffness is updated based on the previous iteration and the analysis is continued. If the solution diverges again in the same load increment while  $\text{MAXDIV}$  is positive, the best solution is computed and the analysis is continued to the next load increment. If  $\text{MAXDIV}$  is negative, the analysis is terminated on the second divergence.

10. The BFGS update is performed if  $\text{MAXQN} > 0$ . As many as  $\text{MAXQN}$  quasi-Newton vectors can be accumulated. The BFGS update with these QN vectors provides a secant modulus in the search direction. If  $\text{MAXQN}$  is reached, no additional QN vectors will be accumulated. Accumulated QN vectors are purged when the stiffness is updated and the accumulation is resumed.
11. The line search is performed as required, if  $\text{MAXLS} > 0$ . In the line search, the displacement increment is scaled to minimize the energy error. The line search is not performed if the absolute value of the relative energy error is less than the value specified in  $\text{LSTOL}$ .
12. The number of subincrements in the material routines (elastoplastic and creep) is determined so that the subincrement size is approximately

$$\text{FSTRESS} \cdot \bar{\sigma} \text{ (equivalent stress).}$$

$\text{FSTRESS}$  is also used to establish a tolerance for error correction in the elastoplastic material; i.e.,

$$\text{error in yield function} < \text{FSTRESS} \cdot \bar{\sigma}$$

If the limit is exceeded at the converging state, the program will exit with a fatal message. Otherwise, the stress state is adjusted to the current yield surface.

13. The number of bisections for a load increment/arc-length is limited to the absolute value of  $\text{MAXBIS}$ . Different actions are taken when the solution diverges depending on the sign of  $\text{MAXBIS}$ . If  $\text{MAXBIS}$  is positive, the stiffness is updated on the first divergence, and the load is bisected on the second divergence. If  $\text{MAXBIS}$  is negative, the load is bisected every time the solution diverges until the limit on bisection is reached. If the solution does not converge after  $|\text{MAXBIS}|$  bisections, the analysis is continued or terminated depending on the sign of  $\text{MAXDIV}$ . See Remark 9.
14.  $\text{MAXR}$  is used in the adaptive load increment/arc-length method to define the overall upper and lower bounds on the load increment/arc-length in the subcase; i.e.,

$$\frac{1}{\text{MAXR}} \leq \frac{\Delta l_n}{\Delta l_o} \leq \text{MAXR}$$

where  $\Delta l_n$  is the arc-length at step  $n$  and  $\Delta l_o$  is the original arc-length. The arc-length method for load increments is selected by an NLPCI Bulk Data entry. This entry must have the same ID as the NLPARM Bulk Data entry.

**1676 NLPARM**  
**Parameters for Nonlinear Static Analysis Control**

**16**  
**Bulk**  
**M-N**

15. The bisection is activated if the incremental rotation for any degree-of-freedom ( $\Delta q_x$ ,  $\Delta q_y$ , or  $\Delta q_z$ ) exceeds the value specified by RTOLB. This bisection strategy is based on the incremental rotation and controlled by MAXBIS.
16. Default tolerance sets are determined based on model type and desired accuracy. Accuracy is under user control and can be specified on the PARAM, NLTOL entry. NLTOL's value is used only if the CONV, EPSU, EPSP and EPSW fields are blank, and if NINC is set to a value of 10 or larger. Otherwise, the NLTOL selection will be overridden. The tables below list tolerances according to NLTOL selections:

**Table 16-4. Default Tolerances for Static Nonlinear SOL 106 Models Without Gaps, Contact or Heat Transfer**

| NLTOL | Designation   | CONV | EPSU  | EPSP   | EPSW   |
|-------|---------------|------|-------|--------|--------|
| 0     | Very high     | PW   | _____ | 1.0E-3 | 1.0E-7 |
| 1     | High          | PW   | _____ | 1.0E-2 | 1.0E-3 |
| 2     | Engineering   | PW   | _____ | 1.0E-2 | 1.0E-2 |
| 3     | Prelim Design | PW   | _____ | 1.0E-1 | 1.0E-1 |
| None  | Engineering   | PW   | _____ | 1.0E-2 | 1.0E-2 |

**Table 16-5. Default Tolerances for Static Nonlinear SOL 106 Models With Gaps or Contact (Enter NLTOL Values of 0 or 2 Only or Omit the Parameter)**

| NLTOL | Designation | CONV | EPSU  | EPSP   | EPSW   |
|-------|-------------|------|-------|--------|--------|
| 0     | Very high   | PW   | _____ | 1.0E-3 | 1.0E-7 |
| 2     | Engineering | PW   | _____ | 1.0E-3 | 1.0E-5 |
| None  | Engineering | PW   | _____ | 1.0E-3 | 1.0E-5 |

**Table 16-6. Default Tolerances for Static Nonlinear SOL 106 or 153 Models With Heat Transfer (Enter NLTOL Value of 0 Only or Omit the Parameter)**

| NLTOL | Designation | CONV | EPSU  | EPSP   | EPSW   |
|-------|-------------|------|-------|--------|--------|
| 0     | Very high   | PW   | _____ | 1.0E-3 | 1.0E-7 |
| None  | Very high   | PW   | _____ | 1.0E-3 | 1.0E-7 |

**NLPCI**      Parameters for Arc-Length Methods in Nonlinear Static Analysis

Defines a set of parameters for the arc-length incremental solution strategies in nonlinear static analysis (SOL 106). This entry will be used if a subcase contains an NLPARM command (NLPARM = ID).

**Format:**

| 1     | 2  | 3    | 4      | 5      | 6     | 7 | 8       | 9     | 10 |
|-------|----|------|--------|--------|-------|---|---------|-------|----|
| NLPCI | ID | TYPE | MINALR | MAXALR | SCALE |   | DESITER | MXINC |    |

**Example:**

|       |    |      |     |     |  |  |    |    |  |
|-------|----|------|-----|-----|--|--|----|----|--|
| NLPCI | 10 | CRIS | 1.0 | 1.0 |  |  | 12 | 10 |  |
|-------|----|------|-----|-----|--|--|----|----|--|

**Fields:**

| Field   | Contents                                                                                                                                                     |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID      | Identification number of an associated NLPARM entry. (Integer > 0)                                                                                           |
| TYPE    | Constraint type. See Remark 2. (Character: “CRIS”, “RIKS”, or “MRIKS”; Default = “CRIS”)                                                                     |
| MINALR  | Minimum allowable arc-length adjustment ratio between increments for the adaptive arc-length method. See Remarks 3 and 4. (0.0 < Real ≤ 1.0; Default = 0.25) |
| MAXALR  | Maximum allowable arc-length adjustment ratio between increments for the adaptive arc-length method. See Remarks 3 and 4. (Real ≥ 1.0; Default = 4.0)        |
| SCALE   | Scale factor (w) for controlling the loading contribution in the arc-length constraint. (Real ≥ 0.0; Default = 0.0)                                          |
| DESITER | Desired number of iterations for convergence to be used for the adaptive arc-length adjustment. See Remarks 3 and 4. (Integer > 0; Default = 12)             |
| MXINC   | Maximum number of controlled increment steps allowed within a subcase. See Remark 5. (Integer > 0; Default = 20)                                             |

**Remarks:**

1. The NLPCI entry is selected by the Case Control command NLPARM = ID. There must also be an NLPARM entry with the same ID. However, for creep analysis

**1678 NLPCI**  
**Parameters for Arc-Length Methods in Nonlinear Static Analysis**

(DT ≠ 0.0 in NLPARM entry), the arc-length methods cannot be activated, and the NLPCI entry is ignored if specified. The NLPCI entry is not recommended for heat transfer analysis in SOL 153.

2. The available constraint types are as follows:

TYPE = “CRIS”:

$$\left\{ u_n^i - u_n^0 \right\} \left\{ u_n^i - u_n^0 \right\} + w^2 (\mu^i - \mu^0)^2 = \Delta l_n^2$$

TYPE = “RIKS”:

$$\left\{ u_n^i - u_n^{i-1} \right\}^T \left\{ u_n^1 - u_n^0 \right\} + w^2 \Delta \mu^i = 0$$

TYPE = “MRIKS”:

$$\left\{ u_n^i - u_n^{i-1} \right\}^T \left\{ u_n^{i-1} - u_n^0 \right\} + w^2 \Delta \mu^i (\mu^{i-1} - \mu^0) = 0$$

where:

- $w$  = the user-specified scaling factor (SCALE)  
 $\mu$  = the load factor  
 $\Delta l$  = the arc-length

The constraint equation has a disparity in the dimension by mixing the displacements with the load factor. The scaling factor ( $w$ ) is introduced as user input so that the user can make constraint equation unit-dependent by a proper scaling of the load factor  $\mu$ . As the value of  $w$  is increased, the constraint equation is gradually dominated by the load term. In the limiting case of infinite  $w$ , the arc-length method is degenerated to the conventional Newton’s method.

3. The MINALR and MAXALR fields are used to limit the adjustment of the arc-length from one load increment to the next by:

## Parameters for Arc-Length Methods in Nonlinear Static Analysis

$$\text{MINALR} \leq \frac{\Delta l_{\text{new}}}{\Delta l_{\text{old}}} \leq \text{MAXALR}$$

The arc-length adjustment is based on the convergence rate (i.e., number of iterations required for convergence) and the change in stiffness. For constant arc-length during analysis, use  $\text{MINALR} = \text{MAXALR} = 1$ .

4. The arc-length  $\Delta l$  for the variable arc-length strategy is adjusted based on the number of iterations that were required for convergence in the previous load increment ( $I_{\text{max}}$ ) and the number of iterations desired for convergence in the current load increment (DESITER) as follows:

$$\Delta l_{\text{new}} = \sqrt{\frac{\text{DESITER} \cdot \Delta l_{\text{old}}}{I_{\text{max}}}}$$

5. The MXINC field is used to limit the number of controlled increment steps in case the solution never reaches the specified load. This field is useful in limiting the number of increments computed for a collapse analysis.

**1680 NLRGAP**  
**Nonlinear Transient Load Proportional to Gap**

**NLRGAP**      Nonlinear Transient Load Proportional to Gap

Defines a nonlinear transient radial (circular) gap.

**Format:**

| 1      | 2   | 3  | 4  | 5     | 6    | 7    | 8    | 9      | 10 |
|--------|-----|----|----|-------|------|------|------|--------|----|
| NLRGAP | SID | GA | GB | PLANE | TABK | TABG | TABU | RADIUS |    |

**Example:**

|        |    |   |   |    |   |    |   |     |  |
|--------|----|---|---|----|---|----|---|-----|--|
| NLRGAP | 21 | 3 | 4 | XY | 3 | 10 | 6 | 1.6 |  |
|--------|----|---|---|----|---|----|---|-----|--|

**Fields:**

| Field  | Contents                                                                                                  |
|--------|-----------------------------------------------------------------------------------------------------------|
| SID    | Nonlinear load set identification number. (Integer > 0)                                                   |
| GA     | Inner (e.g., shaft) grid for radial gap. (Integer > 0)                                                    |
| GB     | Outer (e.g., housing) grid for radial gap. (Integer > 0)                                                  |
| PLANE  | Radial gap orientation plane: XY, YZ, or ZX. (Character, Default = XY.)                                   |
| TABK   | Table ID of gap stiffness vs. time. (Integer > 0)Table ID of gap stiffness vs. penetration. (Integer < 0) |
| TABG   | Table ID for radial gap clearance as function of time. (Integer > 0)                                      |
| TABU   | Table ID for radial coefficient of friction as function of time. (Integer > 0)                            |
| RADIUS | Shaft radius. (Real ≥ 0.0, Default = 0.0)                                                                 |

**Remarks:**

1. NLRGAP must be selected with the Case Control command **NONLINEAR = SID**.
2. Multiple NLRGAP entries with the same SID are allowed.
3. The NLRGAP is not an element, but a nonlinear load similar to the NOLINI Bulk Data entries. It computes the relative displacements of GA and GB in the selected plane and applies appropriate nonlinear loads to simulate the radial contact.



4. The degrees-of-freedom in the XY, YZ, or ZX planes (depending on the PLANE) of GA and GB must be members of the solution set. This means the e-set for modal formulation and the d-set for direct formulation. If RADIUS is > 0.0, then the in-plane rotation degree-of-freedom must also be in the solution set.
5. As with the NOLINi entries, the NLRGAP is limited to use in direct transient response solution sequences.
6. The XY, YZ and ZX planes are relative to the displacement coordinates systems of GA and GB. GA and GB should be coincident grids with parallel displacement coordinate systems. NX Nastran does not check or enforce this. Wrong answers can occur if this rule is not followed.
7. If TABK is negative, the corresponding TID on the referenced TABLEDi entry is input positive and not negative.
8. The shaft radius is used only for the computation of friction induced torque.
9. In the underlying equations, a positive coefficient of friction is consistent with counter-clockwise shaft rotation from axis 1 towards axis 2 (anti-clockwise). A negative coefficient of friction is consistent with clockwise shaft rotation from axis 2 towards axis 1 (clockwise). See [Figure 16-5](#).
10. Nonlinear forces for the grids referenced on the NLRGAP can be output with the NLLOAD Case Control command. See [Figure 16-5](#) for the sign conventions.

1682 NLRGAP  
Nonlinear Transient Load Proportional to Gap

16  
Bulk  
M-N

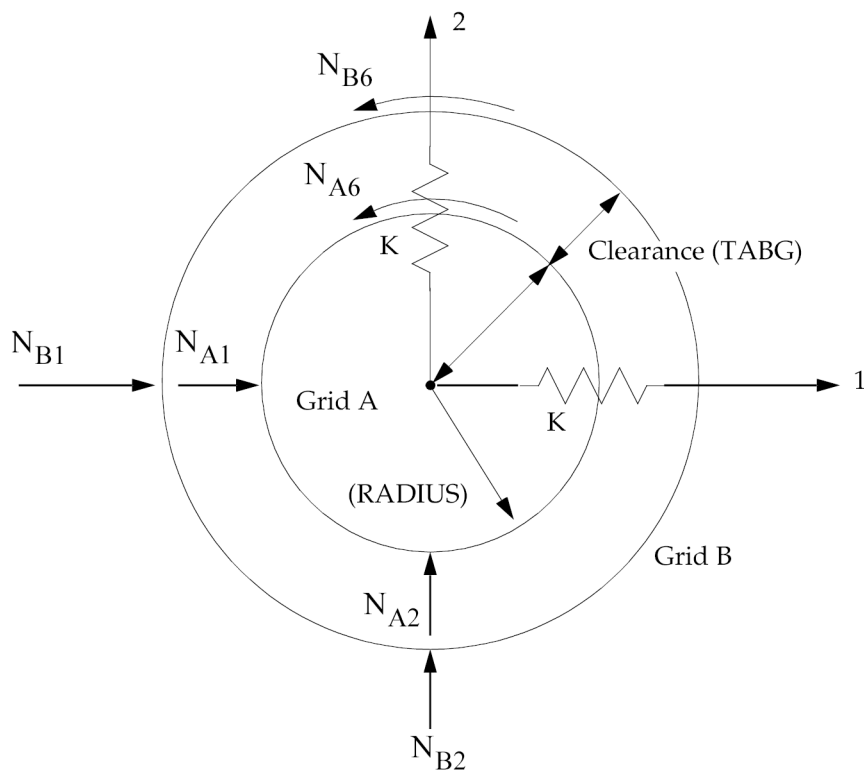


Figure 16-5. Radial Gap Orientation and Nonlinear Load Sign Conventions

**NOLIN1** Nonlinear Transient Load as a Tabular Function

Defines nonlinear transient forcing functions of the form

$$\text{Function of displacement: } P_i(t) = S \cdot T(u_j(t))$$

$$\text{Function of velocity: } P_i(t) = S \cdot T(\dot{u}_j(t))$$

where  $u_j(t)$  and

$$\dot{u}_j(t)$$

are the displacement and velocity at point GJ in the direction of CJ.

**Format:**

|        |     |    |    |   |    |    |     |   |    |
|--------|-----|----|----|---|----|----|-----|---|----|
| 1      | 2   | 3  | 4  | 5 | 6  | 7  | 8   | 9 | 10 |
| NOLIN1 | SID | GI | CI | S | GJ | CJ | TID |   |    |

**Example:**

|        |    |   |   |     |   |    |   |  |  |
|--------|----|---|---|-----|---|----|---|--|--|
| NOLIN1 | 21 | 3 | 4 | 2.1 | 3 | 10 | 6 |  |  |
|--------|----|---|---|-----|---|----|---|--|--|

**Fields:**

| Field | Contents                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------|
| SID   | Nonlinear load set identification number. (Integer > 0)                                                    |
| GI    | Grid, scalar, or extra point identification number at which nonlinear load is to be applied. (Integer > 0) |
| CI    | Component number for GI. (0 < Integer ≤ 6; blank or zero if GI is a scalar or extra point.)                |
| S     | Scale factor. (Real)                                                                                       |
| GJ    | Grid, scalar, or extra point identification number. (Integer > 0)                                          |
| CJ    | Component number for GJ according to the following table:                                                  |

| Type of Point | Displacement    | Velocity          |
|---------------|-----------------|-------------------|
| Grid          | 1 ≤ Integer ≤ 6 | 11 ≤ Integer ≤ 16 |

**1684 NOLIN1**  
**Nonlinear Transient Load as a Tabular Function**

| Type of Point | Displacement  | Velocity     |
|---------------|---------------|--------------|
| Scalar        | Blank or zero | Integer = 10 |
| Extra         | Blank or zero | Integer = 10 |

TID Identification number of a TABLEDi entry. (Integer > 0)

**Remarks:**

1. Nonlinear loads must be selected with the Case Control command NONLINEAR = SID.
2. Nonlinear loads may not be referenced on DLOAD entry.
3. All degrees-of-freedom referenced on NOLIN1 entries must be members of the solution set. This means the e-set (EPOINT entry) for modal formulation and the d-set for direct formulation.
4. Nonlinear loads as a function of velocity (Equation 2) are denoted by components ten greater than the actual component number; i.e., a component of 11 is component 1 (velocity). The velocity is determined by

$$\dot{u}_{j,t} = \frac{u_{j,t} - u_{j,t-1}}{\Delta t}$$

where  $\Delta t$  is the time step interval and  $u_{j,t-1}$  is the displacement of GJ-CJ for the previous time step.

**NOLIN2** Nonlinear Transient Load as the Product of Two Variables

Defines nonlinear transient forcing functions of the form

$$P_i(t) = S \cdot X_j(t) \cdot X_k(t)$$

where  $X_j(t)$  and  $X_k(t)$  can be either displacement or velocity at points GJ and GK in the directions of CJ and CK.

**Format:**

| 1      | 2   | 3  | 4  | 5 | 6  | 7  | 8  | 9  | 10 |
|--------|-----|----|----|---|----|----|----|----|----|
| NOLIN2 | SID | GI | CI | S | GJ | CJ | GK | CK |    |

**Example:**

|        |    |   |   |     |   |   |   |  |  |
|--------|----|---|---|-----|---|---|---|--|--|
| NOLIN2 | 14 | 2 | 1 | 2.9 | 2 | 1 | 2 |  |  |
|--------|----|---|---|-----|---|---|---|--|--|

**Fields:**

| Field  | Contents                                                                                                   |
|--------|------------------------------------------------------------------------------------------------------------|
| SID    | Nonlinear load set identification number. (Integer > 0)                                                    |
| GI     | Grid, scalar, or extra point identification number at which nonlinear load is to be applied. (Integer > 0) |
| CI     | Component number for GI. (0 ≤ Integer ≤ 6; blank or zero if GI is a scalar or extra point.)                |
| S      | Scale factor. (Real)                                                                                       |
| GJ, GK | Grid, scalar, or extra point identification number. (Integer > 0)                                          |
| CJ, CK | Component number for GJ, GK according to the following table:                                              |

| Type of Point | Displacement    | Velocity          |
|---------------|-----------------|-------------------|
| Grid          | 1 ≤ Integer ≤ 6 | 11 ≤ Integer ≤ 16 |
| Scalar        | Blank or zero   | Integer = 10      |
| Extra         | Blank or zero   | Integer = 10      |

## 1686 NOLIN2 Nonlinear Transient Load as the Product of Two Variables

### Remarks:

1. Nonlinear loads must be selected with the Case Control command `NONLINEAR=SID`.
2. Nonlinear loads may not be referenced on a `DLOAD` entry.
3. All degrees-of-freedom referenced on `NOLIN2` entries must be members of the solution set. This means the e-set for modal formulation and the d-set for direct formulation.
4. `GI-CI`, `GJ-CJ`, and `GK-CK` may be the same point.
5. Nonlinear loads may be a function of displacement ( $X = u$ ) or velocity ( $X = \dot{u}$ ). Velocities are denoted by a component number ten greater than the actual component number; i.e., a component of 10 is component 0 (velocity). The velocity is determined by

$$\dot{u}_t = \frac{u_t - u_{t-1}}{\Delta t}$$

where  $\Delta t$  is the time step interval and  $u_{t-1}$  is the displacement of `GJ-CJ` or `GK-CK` for the previous time step.

Nonlinear Transient Load as a Positive Variable Raised to a Power

**NOLIN3** Nonlinear Transient Load as a Positive Variable Raised to a Power

Defines nonlinear transient forcing functions of the form

$$P_i(t) = \begin{cases} S \cdot [X_j(t)]^A, & X_j(t) > 0 \\ 0, & X_j(t) \leq 0 \end{cases}$$

where  $X_j(t)$  may be a displacement or a velocity at point GJ in the direction of CJ.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| NOLIN3   | SID      | GI       | CI       | S        | GJ       | CJ       | A        |          |           |

**Example:**

|        |   |     |  |      |   |    |      |  |  |
|--------|---|-----|--|------|---|----|------|--|--|
| NOLIN3 | 4 | 102 |  | -6.1 | 2 | 15 | -3.5 |  |  |
|--------|---|-----|--|------|---|----|------|--|--|

**Fields:**

| Field | Contents                                                                                                       |
|-------|----------------------------------------------------------------------------------------------------------------|
| SID   | Nonlinear load set identification number. (Integer > 0)                                                        |
| GI    | Grid, scalar, or extra point identification number at which the nonlinear load is to be applied. (Integer > 0) |
| CI    | Component number for GI. (0 ≤ Integer ≤ 6; blank or zero if GI is a scalar or extra point.)                    |
| S     | Scale factor. (Real)                                                                                           |
| GJ    | Grid, scalar, extra point identification number. (Integer > 0)                                                 |
| CJ    | Component number for GJ according to the following table:                                                      |

| Type of Point | Displacement    | Velocity          |
|---------------|-----------------|-------------------|
| Grid          | 1 ≤ Integer ≤ 6 | 11 ≤ Integer ≤ 16 |
| Scalar        | Blank or zero   | Integer = 10      |
| Extra         | Blank or zero   | Integer = 10      |

## 1688 NOLIN3 Nonlinear Transient Load as a Positive Variable Raised to a Power

| Field | Contents                                 |
|-------|------------------------------------------|
| A     | Exponent of the forcing function. (Real) |

### Remarks:

1. Nonlinear loads must be selected with the Case Control command `NONLINEAR = SID`.
2. Nonlinear loads may not be referenced on a `DLOAD` entry.
3. All degrees-of-freedom referenced on `NOLIN3` entries must be members of the solution set. This means the e-set for modal formulation and the d-set for direct formulation.
4. Nonlinear loads may be a function of displacement ( $X_j=u_j$ ) or velocity ( $X_j=\dot{u}_j$ ). Velocities are denoted by a component number ten greater than the actual component number; e.g., a component of 16 is component 6 (velocity). The velocity is determined by

$$\dot{u}_{j,t} = \frac{u_{j,t} - u_{j,t-1}}{\Delta t}$$

where  $\Delta t$  is the time step interval and  $u_{j,t-1}$  is the displacement of GJ-CJ for the previous time step.

5. Use a `NOLIN4` entry for the negative range of  $X_j(t)$ .



Nonlinear Transient Load as a Negative Variable Raised to a Power

**NOLIN4** Nonlinear Transient Load as a Negative Variable Raised to a Power

Defines nonlinear transient forcing functions of the form

$$P_i(t) = \begin{cases} -S \cdot [-X_j(t)]^A, & X_j(t) < 0 \\ 0, & X_j(t) \geq 0 \end{cases}$$

where  $X_j(t)$  may be a displacement or a velocity at point GJ in the direction of CJ.

**Format:**

| 1      | 2   | 3  | 4  | 5 | 6  | 7  | 8 | 9 | 10 |
|--------|-----|----|----|---|----|----|---|---|----|
| NOLIN4 | SID | GI | CI | S | GJ | CJ | A |   |    |

**Example:**

|        |   |   |   |     |     |  |      |  |  |
|--------|---|---|---|-----|-----|--|------|--|--|
| NOLIN4 | 2 | 4 | 6 | 2.0 | 101 |  | 16.3 |  |  |
|--------|---|---|---|-----|-----|--|------|--|--|

**Fields:**

| Field | Contents                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------|
| SID   | Nonlinear load set identification number. (Integer > 0)                                                    |
| GI    | Grid, scalar, or extra point identification number at which nonlinear load is to be applied. (Integer > 0) |
| CI    | Component number for GI. (0 < Integer ≤ 6; blank or zero if GI is a scalar or extra point.)                |
| S     | Scale factor. (Real)                                                                                       |
| GJ    | Grid, scalar, or extra point identification number. (Integer > 0)                                          |
| CJ    | Component number for GJ according to the following table:                                                  |

| Type of Point | Displacement    | Velocity          |
|---------------|-----------------|-------------------|
| Grid          | 1 ≤ Integer ≤ 6 | 11 ≤ Integer ≤ 16 |
| Scalar        | Blank or zero   | Integer = 10      |
| Extra         | Blank or zero   | Integer = 10      |

**1690 NOLIN4**  
**Nonlinear Transient Load as a Negative Variable Raised to a Power**

| <b>Field</b> | <b>Contents</b>                      |
|--------------|--------------------------------------|
| A            | Exponent of forcing function. (Real) |

**Remarks:**

1. Nonlinear loads must be selected with the Case Control command `NONLINEAR = SID`.
2. Nonlinear loads may not be referenced on a `DLOAD` entry.
3. All degrees-of-freedom referenced on `NOLIN4` entries must be members of the solution set. This means the e-set for modal formulation and the d-set for direct formulation.
4. Nonlinear loads may be a function of displacement ( $X_j=u_j$ ) or velocity  $X_j=\dot{u}_j$ . Velocities are denoted by a component number ten greater than the actual component number; i.e., a component of 10 is component 0 (velocity). The velocity is determined by

$$\dot{u}_{j,t} = \frac{u_{j,t} - u_{j,t-1}}{\Delta t}$$

where  $\Delta t$  is the time step interval and  $u_{j,t-1}$  is the displacement of GJ-CJ for the previous time step.

5. Use a `NOLIN3` entry for the positive range of  $X_j(t)$ .

## NSM

Defines a set of non structural mass by ID.

### Format:

| 1   | 2   | 3    | 4  | 5     | 6  | 7     | 8  | 9     | 10 |
|-----|-----|------|----|-------|----|-------|----|-------|----|
| NSM | SID | TYPE | ID | VALUE | ID | VALUE | ID | VALUE |    |

**16**  
Bulk  
M-N

### Example:

|     |    |        |    |      |  |  |  |  |  |
|-----|----|--------|----|------|--|--|--|--|--|
| NSM | 11 | PSHELL | 16 | 0.25 |  |  |  |  |  |
|-----|----|--------|----|------|--|--|--|--|--|

### Fields:

| Field | Contents                                                                                                                                                                                                                                                                       |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Nonstructural mass set identification number. (Integer > 0)                                                                                                                                                                                                                    |
| TYPE  | Set points to either property entries or element entries. Properties are: PSHELL, PCOMP, PBAR, PBARL, PBEAM, PBEAML, PBCOMP, PCOMPG, PROD, CONROD, PBEND, PSHEAR, PTUBE, PCONEAX, and PRAC2D. ELEMENT list of individual element IDs of element that can have NSM. (Character) |
| ID    | Property or Element ID. (Integer > 0)                                                                                                                                                                                                                                          |
| VALUE | NSM value. (Real)                                                                                                                                                                                                                                                              |

### Remarks:

1. Nonstructural mass sets must be selected with Case Control command NSM = SID.
2. For CCONEAX elements, the ID specified on the NSM entry is calculated by  $ID = 1000 * EID + i$ , where EID is defined on the CCONEAX entry, and i is the harmonic number plus one.
3. The ELSUM Case Control command will give a summary of both structural and nonstructural mass by element or property type.

**NSM1**

Alternate form for NSM entry. Defines non structural mass entries by VALUE, ID list.

**Format:**

| 1    | 2   | 3    | 4     | 5    | 6  | 7  | 8  | 9  | 10 |
|------|-----|------|-------|------|----|----|----|----|----|
| NSM1 | SID | TYPE | VALUE | ID   | ID | ID | ID | ID |    |
|      | ID  | ID   | ID    | etc. |    |    |    |    |    |

**Example:**

|      |    |         |      |      |      |  |  |  |  |
|------|----|---------|------|------|------|--|--|--|--|
| NSM1 | 11 | ELEMENT | 0.46 | 1243 | 1532 |  |  |  |  |
|------|----|---------|------|------|------|--|--|--|--|

**Alternate forms:**

|      |     |      |       |    |      |    |  |  |  |
|------|-----|------|-------|----|------|----|--|--|--|
| NSM1 | SID | TYPE | VALUE | ID | THRU | ID |  |  |  |
|------|-----|------|-------|----|------|----|--|--|--|

|      |     |      |       |     |  |  |  |  |  |
|------|-----|------|-------|-----|--|--|--|--|--|
| NSM1 | SID | TYPE | VALUE | ALL |  |  |  |  |  |
|------|-----|------|-------|-----|--|--|--|--|--|

|      |     |      |       |    |      |    |    |   |  |
|------|-----|------|-------|----|------|----|----|---|--|
| NSM1 | SID | TYPE | VALUE | ID | THRU | ID | BY | N |  |
|------|-----|------|-------|----|------|----|----|---|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                                                                       |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Nonstructural mass set identification number. (Integer > 0)                                                                                                                                                                                                                    |
| TYPE  | Set points to either Property entries or Element entries. Properties are: PSHELL, PCOMP, PBAR, PBARL, PBEAM, PBEAML, PBCOMP, PCOMPG, PROD, CONROD, PBEND, PSHEAR, PTUBE, PCONEAX, and PRAC2D. ELEMENT list of individual element IDs of element that can have NSM. (Character) |
| ID    | Property or Element ID. (Integer > 0 or "ALL" or "THRU" or "BY" or N (the BY increment))                                                                                                                                                                                       |
| VALUE | NSM value. (Real)                                                                                                                                                                                                                                                              |

**Remarks:**

1. Non structural mass sets must be selected with Case Control command NSM = SID.
2. For CCONEAX elements, the ID specified on the NSM entry is calculated by  $ID = 1000 * EID + i$ , where EID is defined on the CCONEAX entry, and i is the harmonic number plus one.
3. When “ALL” is used instead of an ID:
  - Using any of the types PSHELL, PCOMP, or PCOMPG applies mass to all of these types.
  - Using any of the types PBEAM, PBEAML, or PBCOMP applies mass to all of these types.
  - Using either of the types PBAR or PBARL applies mass to both of these types

For example, the input “NSM1,12,PSHELL,12.5, ALL” will apply nonstructural mass to the elements associated to all PSHELL, all PCOMP, and all PCOMPG properties.
4. The ELSUM Case Control command will give a summary of both structural and nonstructural mass by element or property type.

**NSMADD**

Non structural mass set combination. Defines non structural mass as the sum of the sets listed.

**Format:**

| 1      | 2   | 3  | 4   | 5    | 6  | 7  | 8  | 9  | 10 |
|--------|-----|----|-----|------|----|----|----|----|----|
| NSMADD | SID | S1 | S2  | S3   | S4 | S5 | S6 | S7 |    |
|        | S8  | S9 | S10 | etc. |    |    |    |    |    |

**Example:**

|        |   |    |    |    |    |  |  |  |  |
|--------|---|----|----|----|----|--|--|--|--|
| NSMADD | 7 | 30 | 31 | 32 | 33 |  |  |  |  |
|--------|---|----|----|----|----|--|--|--|--|

**Fields:**

| Field | Contents                                                                                           |
|-------|----------------------------------------------------------------------------------------------------|
| SID   | Nonstructural mass set identification number. (Integer > 0)                                        |
| Si    | Identification numbers of non structural mass sets defined via NSM and NSM1 entries. (Integer > 0) |

**Remarks:**

1. The nonstructural mass sets must be selected with the Case Control command NSM = SID.
2. No Si may be the identification number of a non structural mass set defined by another NSMADD entry.
3. The NSMADD bulk entry take precedence over NSM, NSM1, NSM1, or NSML1 entries. If both have the same set ID, only the NSMADD entry will be used.
4. The ELSUM Case Control command will give a summary of both structural and nonstructural mass by element or property type.

## NSML

Defines a set of lumped non structural mass by ID.

### Format:

| 1    | 2   | 3    | 4  | 5     | 6  | 7     | 8  | 9     | 10 |
|------|-----|------|----|-------|----|-------|----|-------|----|
| NSML | SID | TYPE | ID | VALUE | ID | VALUE | ID | VALUE |    |

### Example:

|      |    |        |   |      |  |  |  |  |  |
|------|----|--------|---|------|--|--|--|--|--|
| NSM1 | 23 | PSHELL | 6 | 0.22 |  |  |  |  |  |
|------|----|--------|---|------|--|--|--|--|--|

### Fields:

| Field | Contents                                                                                                                                                                                                                                                                       |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Nonstructural mass set identification number. (Integer > 0)                                                                                                                                                                                                                    |
| TYPE  | Set points to either Property entries or Element entries. Properties are: PSHELL, PCOMP, PBAR, PBARL, PBEAM, PBEAML, PBCOMP, PCOMPG, PROD, CONROD, PBEND, PSHEAR, PTUBE, PCONEAX, and PRAC2D. ELEMENT list of individual element IDs of element that can have NSM. (Character) |
| ID    | Property or Element ID. (Integer > 0)                                                                                                                                                                                                                                          |
| VALUE | A lumped mass value to be distributed. (Real)                                                                                                                                                                                                                                  |

### Remarks:

1. If TYPE = ELEMENT is used, line element (CBAR, CBEAM, CBEND, CROD, CTUBE, and CONROD) IDs cannot be mixed with area element (CQUAD4, CQUAD8, CQUADR, CTRIA3, CTRIA6, CTRIAR, CSHEAR, and CRAC2D) IDs.
2. For area elements the calculation is  $NSM = VALUE / \sum \text{Element Area}$ , and for line elements the calculation is  $NSM = VALUE / \sum \text{Elements Length}$ .
3. Non structural mass sets must be selected with the case control command NSM = SID.
4. For CCONEAX elements, the ID specified on the NSM entry is calculated by  $ID = 1000 * EID + i$ , where EID is defined on the CCONEAX entry, and i is the harmonic number plus one.

## 1696 NSML

5. The ELSUM case control command will give a summary of both structural and nonstructural mass by element or property type.

**16**

**Bulk  
M-N**



## NSML1

Alternate form for NSML entry. Defines lumped non structural mass entries by VALUE, ID list.

### Format:

| 1     | 2   | 3    | 4     | 5    | 6  | 7  | 8  | 9  | 10 |
|-------|-----|------|-------|------|----|----|----|----|----|
| NSML1 | SID | TYPE | VALUE | ID   | ID | ID | ID | ID |    |
|       | ID  | ID   | ID    | etc. |    |    |    |    |    |

### Example:

|       |    |         |      |     |     |  |  |  |  |
|-------|----|---------|------|-----|-----|--|--|--|--|
| NSML1 | 13 | ELEMENT | 0.72 | 156 | 286 |  |  |  |  |
|-------|----|---------|------|-----|-----|--|--|--|--|

### Alternate forms:

| 1     | 2   | 3    | 4     | 5   | 6    | 7   | 8 | 9 | 10 |
|-------|-----|------|-------|-----|------|-----|---|---|----|
| NSML1 | SID | TYPE | VALUE | ID1 | THRU | ID2 |   |   |    |

| 1     | 2   | 3    | 4     | 5   | 6 | 7 | 8 | 9 | 10 |
|-------|-----|------|-------|-----|---|---|---|---|----|
| NSML1 | SID | TYPE | VALUE | ALL |   |   |   |   |    |

| 1     | 2   | 3    | 4     | 5   | 6    | 7   | 8  | 9 | 10 |
|-------|-----|------|-------|-----|------|-----|----|---|----|
| NSML1 | SID | TYPE | VALUE | ID1 | THRU | ID2 | BY | N |    |

### Fields:

| Field | Contents                                                                                                                                                                                                                                                                       |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Nonstructural mass set identification number. (Integer > 0)                                                                                                                                                                                                                    |
| TYPE  | Set points to either Property entries or Element entries. Properties are: PSHELL, PCOMP, PBAR, PBARL, PBEAM, PBEAML, PBCOMP, PCOMPG, PROD, CONROD, PBEND, PSHEAR, PTUBE, PCONEAX, and PRAC2D. ELEMENT list of individual element IDs of element that can have NSM. (Character) |
| ID    | Property or Element ID. (Integer > 0 or "ALL" or "THRU" (ID1 < ID2 for "THRU" option) or "BY" or N (N > 0))                                                                                                                                                                    |
| VALUE | A lumped mass value to be distributed. (Real)                                                                                                                                                                                                                                  |

**Remarks:**

1. If TYPE = ELEMENT is used, line element (CBAR, CBEAM, CBEND, CROD, CTUBE, and CONROD) IDs cannot be mixed with area element (CQUAD4, CQUAD8, CQUADR, CTRIA3, CTRIA6, CTRIAR, CSHEAR, and CRAC2D) IDs.
2. Alternate input forms using THRU, BY, and N can be included on different continuation lines except for ALL. ALL can only be used on a single line input.
3. VALUE is the total nonstructural mass to be distributed across *all* IDs. For area elements the calculation is:  

$$\text{NSM} = \text{VALUE} / \sum \text{Element Area for all IDs}$$
and for line elements the calculation is:  

$$\text{SM} = \text{VALUE} / \sum \text{Element Length for all IDs}.$$
4. Non structural mass sets must be selected with the case control command  
NSM = SID.
5. For CCONEAX elements, the ID specified on the NSM entry is calculated by  

$$\text{ID} = 1000 * \text{EID} + i,$$
where EID is defined on the CCONEAX entry, and i is the harmonic number plus one.
6. When “ALL” is used instead of an ID:
  - Using any of the types PSHELL, PCOMP, or PCOMPG applies mass to all of these types.
  - Using any of the types PBEAM, PBEAML, or PBCOMP applies mass to all of these types.
  - Using either of the types PBAR or PBARL applies mass to both of these types

For example, the input “NSML1,12,PSHELL,12.5, ALL” will apply nonstructural mass to the elements associated to all PSHELL, all PCOMP, and all PCOMPG properties.

7. The ELSUM case control command will give a summary of both structural and nonstructural mass by element or property type.

**NXSTRAT** Strategy Parameters for SOLs 601 and 701

Defines parameters for solution control and strategy in advanced nonlinear structural analysis.

**Format:**

| 1       | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9 | 10 |
|---------|--------|--------|--------|--------|--------|--------|--------|---|----|
| NXSTRAT | ID     | Param1 | Value1 | Param2 | Value2 | Param3 | Value3 |   |    |
|         | Param4 | Value4 | Param5 | Value5 | -etc-  |        |        |   |    |

**Example:**

|         |         |      |   |        |    |      |       |  |  |
|---------|---------|------|---|--------|----|------|-------|--|--|
| NXSTRAT | 1       | AUTO | 1 | MAXITE | 30 | RTOL | 0.005 |  |  |
|         | ATSNEXT | 3    |   |        |    |      |       |  |  |

**Fields:**

| Field  | Contents                                                                                                                                                |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID     | Identification number. Currently not used. (Integer > 0)                                                                                                |
| PARAMi | Name of the NXSTRAT parameter. Allowable names are given in the parameter listing below. See remark 1 for parameters applicable to SOL 701. (Character) |
| VALUEi | Value of the parameter. (Real or integer)                                                                                                               |

**NXSTRAT Parameters**

**Analysis Control**

| Name   | Description                                                                                                                                                                                                                                                                                  |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOLVER | Selects the solver to use. (Integer; Default = 0)<br><br>0 – Direct sparse solver<br><br>1 – Multigrid solver<br><br>2 – 3D iterative solver. This solver is effective for models with large numbers of higher order 3D solid elements, i.e., CTETRA and CHEXA elements with mid-side nodes. |

## 1700 NXSTRAT Strategy Parameters for SOLs 601 and 701

### Analysis Control

---

| Name | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AUTO | <p>Indicates whether automatic incrementation scheme is enabled. (Integer; Default = 0)</p> <p>0 – No automatic incrementation scheme is used</p> <p>1 – Automatic time stepping (ATS) scheme is enabled</p> <p>2 – Automatic load-displacement control (LDC) scheme is enabled</p> <p>3 – Total load application (TLA) scheme is enabled. Program ignores any time step (TSTEP) and time function (TABLEDi) specified. Instead, 50 time steps of size 0.2 is used with a linear ramp time function to reach a load factor of 1.0 at time of 10.0. In addition, the follow settings are used:</p> <ul style="list-style-type: none"><li>• maximum number of equilibrium iterations is 30</li><li>• the smallest time step size is 1/64 of initial step size</li><li>• line search is used</li><li>• maximum displacement in each iteration is 5% of maximum model dimension</li></ul> <p>4 – Total load application with stabilization (TLA-S) scheme is enabled. In addition to TLA, the following stabilization is used:</p> <ul style="list-style-type: none"><li>• matrix stabilization factor of 1.0e-10</li><li>• low speed dynamics</li><li>• contact damping</li></ul> |

Note: See sections below for parameters that may be specified for each of these schemes. Although the TLA and TLA-S schemes include the use of the automatic time stepping (ATS) scheme, the ATS set of parameters do not apply directly. Instead, the TLA set of parameters should be used to control the TLA or TLA-S schemes.

## Analysis Control

---

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NPOSIT      | <p>Indicates whether analysis continues when the system matrix is not positive definite. (Integer; Default = 0)</p> <p>0 – Analysis may stop</p> <p>1 – Analysis continues</p> <p>Notes:</p> <p>If NPOSIT=0, analysis stops unless</p> <ul style="list-style-type: none"> <li>• AUTO &gt; 0 is specified</li> <li>• contact analysis is being performed.</li> </ul> <p>It is not recommended to set NPOSIT=1 for a linear analysis.</p> |
| MASSTYP     | <p>Selects the type of mass matrix to be used in dynamic analysis. (Integer; Default = 1)</p> <p>0 – Lumped mass is used</p> <p>1 – Consistent mass is used</p>                                                                                                                                                                                                                                                                         |

## Analysis Options

---

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TINT*       | <p>Integration order for the local t-direction (through thickness) of shell elements with shape memory alloy or elasto-plastic materials. By default, 5-point Newton-Cotes is used for single-layered shell and 3-point Newton-Cotes is used for multi-layered shell. Note that 2-point Gauss integration is always used for all shell elements with elastic materials. (Integer; Default = 0).</p> <p>1 ≤ TINT ≤ 6 – Gauss integration method with integration order TINT</p> <p>-3, -5, -7 – Newton-Cotes integration with order -TINT</p> |

# 1702 NXSTRAT

## Strategy Parameters for SOLs 601 and 701

**16**  
Bulk  
M-N

### Analysis Options

---

| Name     | Description                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ICMODE*  | <p>Indicates whether incompatible modes are used for 4-node shell elements, plane strain and plane stress elements. (Integer; Default =1 for SOL 601 and 0 for SOL 701)</p> <p>0 - Incompatible modes are not used</p> <p>1 - Incompatible modes are used</p> <p>Note: In restarting from SOL 601 to 701 or vice versa, ICMODE needs to be specified such that both analyses use the same option.</p>                     |
| MSTAB    | <p>Indicates whether the stiffness matrix stabilization feature is used. (Integer; Default = 0)</p> <p>0 – Matrix stabilization is not used</p> <p>1 – Matrix stabilization is used</p> <p>2 – Matrix stabilization is automatically used if the ratio of maximum/minimum diagonal of factorized matrix is greater than 1.0E10.</p>                                                                                       |
| MSFAC    | <p>Matrix stabilization factor. (Real; Default = 1.0E-10; Unitless)</p>                                                                                                                                                                                                                                                                                                                                                   |
| DTDELAY* | <p>Element death time delay. (Real; Default = 0.0; Unit = Time)</p> <p>When an element is too deformed and becomes “dead”, its contribution to the overall stiffness of the structure is removed. By specifying DTDELAY &gt; 0.0, the contribution from the element stiffness is gradually reduced to zero over time DTDELAY instead of being suddenly removed. This may help in the convergence of the solution.</p>     |
| SDOFANG* | <p>Angle used to determine whether a shell mid-surface node is assigned 5 or 6 degrees of freedom. (Real; Default = 5.0; Unit = Angle in degrees)</p>                                                                                                                                                                                                                                                                     |
| DRILLKF  | <p>On shell grids where the drilling stiffness is zero, this factor is multiplied by the maximum rotational stiffness at the grid and assigned as the drilling stiffness. (0.0 &lt; Real &lt; 1.0; Default = 1.0E-4; Unitless)</p>                                                                                                                                                                                        |
| UPFORM*  | <p>Indicates whether u/p formulation is used for elements. Note that u/p formulation is always used for hyperelastic elements and always not used for hyperfoam elements and elastic elements with Poisson’s ratio less than 0.48. It is also not used for gasket elements (Integer; Default = 0)</p> <p>0 – u/p formulation is not used</p> <p>1 – u/p formulation is used instead of displacement-based formulation</p> |

### Analysis Options

---

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ULFORM*     | <p>Indicates which large strain formulation is used. (Integer; Default = 0)</p> <p>0 – Updated Lagrangian-Hencky (ULH) formulation is used for SOL 601 and Updated Lagrangian-Jaumann (ULJ) formulation is used for SOL 701.</p> <p>1 – Use ULH formulation</p> <p>2 – Use ULJ formulation</p> <p>Note: In restarting from SOL 601 to 701 or vice versa, ULFORM needs to be specified such that both analyses use the same formulation.</p> |
| DISPOPT     | <p>Indicates whether prescribed displacements are applied to the original configuration or the deformed configuration. This option is only applicable for a restart analysis or when a delay (or arrival) time is specified for the prescribed displacement. (Integer; Default = 0)</p> <p>0 – Applied to original configuration</p> <p>1 – Applied to deformed configuration</p>                                                           |
| LOADOPT*    | <p>Indicates whether prescribed loads (pressure and centrifugal) are deformation-dependent, i.e. the direction and magnitude of the load may change due to large deformation of the structure. This option is only applicable for large displacement analysis, i.e. PARAM,LGDISP,1 (Integer; Default = 1)</p> <p>0 – Load is independent of structural deformation</p> <p>1 – Load is affected by structural deformation</p>                |
| MAXDISP     | <p>Specifies a limit for the maximum incremental displacement that is allowed for any grid in any equilibrium iteration. This feature is generally useful for contact analysis where rigid body motion exists in a model. A value of 0.0 means there is no limit on displacements. (Real <math>\geq</math> 0.0; Default = 0.0; Unit = Length)</p>                                                                                           |

### Time Integration

---

| <b>Name</b> | <b>Description</b>                                                                                                                                                                         |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TINTEG      | <p>Selects the time integration method to be used for nonlinear transient analysis. (Integer; Default = 0)</p> <p>0 – Use the Newmark method</p> <p>1 – Use the ADINA composite method</p> |

## 1704 NXSTRAT Strategy Parameters for SOLs 601 and 701

16  
Bulk  
M-N

### Time Integration

---

| Name  | Description                                                                                 |
|-------|---------------------------------------------------------------------------------------------|
| ALPHA | Alpha coefficient for the Newmark time integration method. (Real; Default = 0.25; Unitless) |
| DELTA | Delta coefficient for the Newmark method. (Real; Default = 0.5; Unitless)                   |

### SOL 701 Time Stepping

---

| Name                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XSTEP <sup>o</sup>   | Selects time step method used in an explicit time integration analysis. (Integer; Default = 0)<br><br>0 - Time step size is calculated by the program based on the critical time step size. The data in the selected TSTEP bulk data entry is used to calculate the total solution time for the analysis.<br><br>1 - The number of time steps and the time step size as specified in the selected TSTEP bulk data entry is used.            |
| XDTCAL <sup>o</sup>  | Calculation of the critical time step size may be computationally expensive. This parameter specifies that the critical time step size will be re-calculated every XDTCAL time steps. (Integer > 0, Default = 1)                                                                                                                                                                                                                            |
| XDTFAC <sup>o</sup>  | The critical time step size is calculated based on certain assumptions. It is often necessary, especially for nonlinear analysis, to use a time step size smaller than the calculated critical time step size. The factor multiplied by the calculated critical time step size gives the time step size used in the analysis. (4.0 > Real > 0.0; Default = 0.9; Unitless)                                                                   |
| XMSCALE <sup>o</sup> | Specifies the factor to scale the mass (densities) of the entire model (at the beginning of the analysis) to increase the critical time step size required for stability when the explicit time integration scheme is used. See warning in Remark 2. (Real = 1.0, Default = 1.0; Unitless)                                                                                                                                                  |
| XDTMIN1 <sup>o</sup> | The minimum time step size used to determine if mass scaling will be applied to elements (at the beginning of the analysis) whose critical time step size is smaller than DTMIN1. The amount of mass scaling is calculated for each element so that the critical time step size is equal to DTMIN1. See Remark 2 and warning in Remark 3. (Real = 0.0, Default = 0.0; Unit = Time)                                                          |
| XDTMIN2 <sup>o</sup> | The minimum time step size used to determine whether an element will be removed in an explicit time integration analysis. In explicit time integration, the smaller an element size is, the smaller will the critical time step size be. If the critical time step size for an element is smaller than XDTMIN2, the element will be removed in the analysis. See Remark 2 and warning in Remark 3. (Real > 0.0, Default = 0.0; Unit = Time) |



### Iterative Solver

| Name   | Description                                                                                                                                                                   |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ITEMAX | Maximum number of iterations allowed for the multigrid or 3D-iterative solver to converge. (Integer > 0; Default = 1000 for multigrid solver and 200 for 3D-iterative solver) |
| EPSIA  | Convergence tolerance EPSIA. (Real; Default = 1.0E-6; Unitless)                                                                                                               |
| EPSIB  | Convergence tolerance EPSIB. (Real; Default = 1.0E-4; Unitless)                                                                                                               |
| EPSII  | Convergence tolerance EPSII. (Real; Default = 1.0E-8; Unitless)                                                                                                               |

### Equilibrium Iteration and Convergence

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LSEARCH | Flag to indicate the use of line searches within the iteration scheme. (Integer; Default = 0)<br><br>0– Line search is not used<br><br>1 – Line search is used                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| LSLOWER | Lower bound for line search. ( $0.0 \leq \text{Real} < 1.0$ ; Default = 0.001; Unitless)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| LSUPPER | Upper bound for line search. ( $1.0 \leq \text{Real}$ ; Default = 1.0 for contact analysis and 8.0 for analysis with no contact; Unitless)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| PLASALG | Selects the algorithm used in plasticity. (Integer; Default = 1)<br><br>1 – Algorithm 1 is used<br><br>2 – Algorithm 2 is used<br><br>Note: For a given time step size, if the iterations do not converge with algorithm 1 because the Jacobian determinant in the elements becomes non-positive, switching to algorithm 2 can sometimes enable convergence. When algorithm 2 is used, additional convergence check is performed. Between two successive iterations, if the state of stress changes (e.g., from elastic to plastic or from plastic to elastic) at any integration point of an element, convergence is prevented. |
| MAXITE  | Maximum number of iterations within a time step. If the maximum number of iterations is reached without achieving convergence (see CONVCRI parameter), the program will stop unless the automatic time stepping (ATS) or load displacement control scheme is selected (see parameter AUTO). ( $1 \leq \text{Integer} \leq 999$ ; Default = 15)                                                                                                                                                                                                                                                                                   |

### Equilibrium Iteration and Convergence

---

| Name    | Description                                                                                                                                                                                                                                                     |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CONVCRI | Convergence Criteria. (Integer; Default = 0)<br><br>0 – Convergence based on energy<br>1 – Convergence based on energy and force<br>2 – Convergence based on energy and displacement<br>3 – Convergence based on force<br>4 – Convergence based on displacement |
| ETOL    | Relative energy tolerance. (Real; Default = 0.001 if AUTO≠2; Default = 1.0e-6 if AUTO=2; Unitless)                                                                                                                                                              |
| RTOL    | Relative force (and moment) tolerance (Real; Default = 0.01; Unitless)                                                                                                                                                                                          |
| RNORM   | Reference force. (Real; Default = 0.0; Unit = Force). The reference force is automatically calculated by the program if RNORM=0.0.                                                                                                                              |
| RMNORM  | Reference moment. (Real; Default = 0.0; Unit = Force * Length). The reference moment is automatically calculated by the program if RMNORM=0.0.                                                                                                                  |
| RCTOL   | Relative contact force tolerance. (Real; Default = 0.05; Unitless)                                                                                                                                                                                              |
| DTOL    | Relative displacement (translation and rotation) tolerance. (Real; Default = 0.01; Unitless)                                                                                                                                                                    |
| DNORM   | Reference translation. (Real; Default = 0.0; Unit = Length). The reference translation is automatically calculated by the program if DNORM=0.0.                                                                                                                 |
| DMNORM  | Reference rotation. (Real; Default = 0.0; Unit = Angle in radians). The reference rotation is automatically calculated by the program if DMNORM=0.0.                                                                                                            |
| STOL    | Line search convergence tolerance. (Real; Default = 0.5; Unitless)                                                                                                                                                                                              |
| RCONSM  | Reference contact force. (Real; Default = 0.01; Unit = Force)                                                                                                                                                                                                   |
| ENLSTH  | Line search energy threshold. (Real; Default = 0.0; Unit = Force * Length)                                                                                                                                                                                      |

### Automatic Time Stepping (ATS) Scheme

| Name     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ATSSUBD  | Number that limits the smallest time step size when the automatic time stepping (ATS) scheme is used. For a time step size of DT, the program will stop if convergence is not achieved and the next subdivided time step size is less than DT/ATSSUBD. (Integer $\geq 1$ ; Default = 10)                                                                                                                                                                                                                                                                                                                  |
| ATSMXDT  | Factor that limits the maximum time step size when the automatic time stepping (ATS) scheme is used. In a static analysis with ATSNEXT = 2, ATSSLOWS = 0 and only one time step block (i.e., TSTEP entry has only one line), the ATS scheme may increase the time step size after convergence is achieved. In such a case, for a time step size of DT, the program will not use a time step size greater than ATSMXDT * DT. (Real; Default = 3.0; Unitless)                                                                                                                                               |
| ATSMASS  | Inertia factor used in low-speed dynamics analysis. ( $0.0 \leq \text{Real} \leq 1.0$ ; Default = 1.0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| ATSNEXT  | Flag controls what time step size to use once convergence is reached after an ATS subdivision. (Integer; Default = 0)<br><br>0 – Automatically set by program. For contact analysis, ATSNEXT = 2, otherwise ATSNEXT = 1.<br><br>1 – Use the time step size that gave convergence, i.e., the reduced time step that led to convergence is used again.<br><br>2 – Return to the original time step size, i.e., the original time step size before any subdivision took place is used.<br><br>3 – Use a time step size such that the solution time matches the original solution time specified by the user. |
| ATSDFAC  | Division factor used calculate the sub-increment time step size. If current time step size is DT and convergence is not achieved, the next time step size will be DT/ATSDFAC. (Real $> 1.0$ ; Default = 2.0; Unitless)                                                                                                                                                                                                                                                                                                                                                                                    |
| ATSSLOWS | Flag whether a low-speed dynamics analysis is performed instead of a static analysis. (Integer; Default = 0)<br>0 – Low-speed dynamics option is not activated<br>1 – Low-speed dynamics is performed                                                                                                                                                                                                                                                                                                                                                                                                     |
| ATSDAMP  | Damping factor used in low-speed dynamics analysis. (Real $\geq 0.0$ ; Default = 1.0e-4; Unit = Time)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

### Load Displacement Control (LDC) Scheme

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                       |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LDCGRID | Grid point id at which a displacement is prescribed for the first solution step. (Integer > 0)                                                                                                                                                                                                                                                                                                    |
| LDCDOF  | Degree of freedom for prescribed displacement at grid point LDCGRID. (1 ≤ Integer ≤ 6)<br><br>1 – X translation<br>2 – Y translation<br>3 – Z translation<br>4 – X rotation<br>5 – Y rotation<br>6 – Z rotation                                                                                                                                                                                   |
| LDCDISP | Prescribed displacement at grid point LDCGRID for the first solution step. (Real; Unit = Length)                                                                                                                                                                                                                                                                                                  |
| LDCIMAX | Displacement convergence factor used to limit the maximum incremental displacement during a solution step. If the incremental displacements exceed (100 * LDCIMAX * displacements in the first step), the current solution step will be repeated with a reduced load factor. (Real; Default = 3.0; Unitless)                                                                                      |
| LDCDMAX | Maximum (absolute magnitude) displacement (for the degree of freedom specified by LDCDOF) at the grid point LDCGRID allowed during the analysis. When the displacement reaches or exceeds LDCDMAX, the program will stop the analysis. See Section 6.2.4 in Advanced Nonlinear Theory and Modeling Guide for other criteria that determines when an LDC solution will stop. (Real; Unit = Length) |
| LDCCONT | Flag whether the solution is terminated when the first critical point on the equilibrium path is reached. (Integer; Default = 0)<br><br>0 – Solution stops<br>1 – Solution continues                                                                                                                                                                                                              |
| LDCSUBD | Maximum number of arc length subdivisions allowed. (Integer ≥ 1; Default = 10)                                                                                                                                                                                                                                                                                                                    |

### Total Load Application (TLA) Scheme

| Name    | Description                                                                                                                                       |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| TLANSTP | Number of time steps to use for the solution. The step size is automatically adjusted to obtain a total time of 10.0. (Integer > 0; Default = 50) |

### Total Load Application (TLA) Scheme

| Name    | Description                                                                                                                                                                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TLAMXIT | Maximum number of equilibrium iterations allowed to achieve convergence in any time step (subdivided or accelerated). ( $1 \leq \text{Integer} \leq 999$ ; Default = 30)                                                                                                          |
| TLAMXDF | Maximum displacement factor. The maximum incremental displacement allowed in any time step is equal to TLAMXDF * (maximum model dimension). TLAMXDF = 0.0 means there is no limit on the maximum incremental displacement. (Real $\geq 0.0$ ; Default = 0.05; Unitless)           |
| TLASTBF | Stiffness matrix stabilization factor. If TLASTBF = 0.0, then the stiffness matrix stabilization feature is not used. Applicable only to TLA-S (AUTO=4) scheme. (Real $\geq 0.0$ ; Default = 1.0E-10; Unitless)                                                                   |
| TLALSDF | Low-speed dynamics damping factor. If TLALSDF = 0.0, then the low-speed dynamics option is not used. Applicable only to TLA-S (AUTO=4) scheme. (Real $\geq 0.0$ ; Default = 1.0E-4; Unit = Time)                                                                                  |
| TLALSMF | Low-speed dynamics inertia factor. Applicable only to TLA-S (AUTO=4) scheme. ( $0.0 \leq \text{Real} \leq 1.0$ ; Default = 1.0; Unitless)                                                                                                                                         |
| TLACTDF | Contact damping factor. The amount of contact damping used in the solution is equal to TLACTDF * (damping determined by the program). If TLACTDF = 0.0, then contact damping is not used. Applicable only to TLA-S (AUTO=4) scheme. (Real $\geq 0.0$ ; Default = 0.001; Unitless) |

### Contact Control

| Name   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IMPACT | Impact control scheme (Integer; Default = 0)<br><br>0 – No special treatment is applied for impact problems<br>1 – Post impact adjustment of velocities and accelerations is applied<br>2 – Modified parameters are used in Newmark time integration scheme                                                                                                                                                                                                                                           |
| NSUPP  | Number of iterations for pairing contactor node to target segment. If NSUPP > 0, during the first NSUPP iterations, the pairing target segment is recorded for each contactor node. From iteration NSUPP+1, if a target segment in the recorded list is repeated, it is “frozen” to be the pairing target segment for the remaining equilibrium iterations in that time step. Specifying NSUPP > 0 may help in the convergence for certain problems. ( $0 \leq \text{Integer} \leq 99$ ; Default = 0) |

### Contact Control

---

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RTSUBD  | <p>Selects the subdivision scheme used in the old (RTALG=1) implicit rigid-target contact algorithm when the tensile contact force is too large. (Integer; Default = 0)</p> <p>0 – Subdivision is based on the magnitude of the tensile contact force, i.e., the larger the magnitude, the smaller will be the subdivided time step size.</p> <p>1 – Subdivision is based on the global automatic time stepping (ATS) subdivision settings.</p>                                                                                                                                                                                                                                                                                                                    |
| CSTYPE* | <p>Selects the type of contact segment to use. (Integer; Default = 1)</p> <p>0 – Use linear contact segment</p> <p>1 – Use element-based contact segment which gives better contact traction results</p> <p>Note: CSTYPE = 1 is only applicable for contact algorithm TYPE = 0 or XTYPE = 0 or 1 in BCTPARA entry.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| CTDISP  | <p>Selects the default displacement formulation used for contact analysis. A different formulation may be selected for each individual contact set via BCTPARA entry. (Integer; Default = 0 / 2)</p> <p>0 or 2 – Use large displacement formulation (contact conditions are updated) (default)</p> <p>1 – Use small displacement formulation (contact conditions are not updated)</p> <p>CTDISP is a global option since it applies to all contact definitions in the model. If you would like to prevent/allow a specific contact set from updating, the DISP option on the BCTPARA bulk entry can be used.</p> <p>Note: If CTDISP = 1 is selected, the search of target segments for the contactor nodes is performed only at the beginning of the analysis.</p> |
| RTALG*  | <p>Selects the rigid-target algorithm to use. (Integer; Default = 0)</p> <p>0 – Use the current algorithm</p> <p>1 – Use the old (v4) algorithm</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| FRICALG | <p>Selects the friction algorithm to use. (Integer; Default = 0)</p> <p>0 – Use the current algorithm</p> <p>1 – Use the old (v4) algorithm</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Contact Control

---

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TNSLCF      | <p>Indicates whether tensile consistent contact forces on quadratic 3D contact segments are allowed. (Integer; Default = 0)</p> <p>0 – Not allowed</p> <p>1 - Allowed</p>                                                                                                                                                                                                                                                                                                                                                            |
| CTDAMP      | <p>Indicates whether stabilization damping is applied and how it is applied for contact analysis. This feature is generally useful when rigid body motion exists in a model. (Integer; Default = 0)</p> <p>0 – No stabilization damping is applied</p> <p>1 – Stabilization damping is applied at the first time step only. The specified damping coefficients are applied and ramped down to zero by the end of the first time step.</p> <p>2 – The specified stabilization damping coefficients are applied at all time steps.</p> |
| CTDAMPN     | <p>Specifies the normal stabilization damping coefficient. (Real <math>\geq</math> 0.0, Default = 0.0; Unit = Force * Time/Length)</p>                                                                                                                                                                                                                                                                                                                                                                                               |
| CTDAMPPT    | <p>Specifies the tangential stabilization damping coefficient. (Real <math>\geq</math> 0.0, Default = 0.0; Unit = Force * Time/Length)</p>                                                                                                                                                                                                                                                                                                                                                                                           |

## Restart Options

---

| <b>Name</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MODEX*      | <p>Indicates the mode of execution. (Integer; Default = 0)</p> <p>0 – Normal analysis run, i.e. not a restart analysis</p> <p>1 – Restart analysis</p> <p>2 – Recover results from restart (.res) file without running analysis for any additional time steps. GPFORCE and SPCFORCES cannot be recovered. MODEX=2 is supported only for SOL 601 analysis.</p> <p>The restart (.res) file from a previous run must exist to do a restart analysis or result recovery. The filename and location of the restart file is determined by the “dbs” keyword. By default, dbs points to the current working directory with the prefix of the current job name. The IDs of grids, elements, properties, materials, contact sets, contact pairs and contact regions should be the same in both the original and the restart model. Note that keyword scratch=no must be used when running a restart analysis or result recovery.</p> |

# 1712 NXSTRAT

## Strategy Parameters for SOLs 601 and 701

**16**  
Bulk  
M-N

### Restart Options

---

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSTART* | Solution starting time. If MODEX=1 or 2, TSTART must equal a solution time in which data was saved in a previous run. If TSTART = 0.0, the last time step in the restart file is used. (Real, Default = 0.0; Unit = Time)                                                                                                                                                                              |
| IRINT*  | <p>Frequency of saving the analysis results in the restart file. (Integer; Default = 0)</p> <p>0 – IRINT is set to 1 when implicit time integration is used and set to the number of steps in the first time step block when explicit time integration is used.</p> <p>&gt; 0 – Restart file is overwritten every IRINT time steps</p> <p>&lt; 0 – Restart file is appended every IRINT time steps</p> |

### Other Parameters

---

| Name     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NSUBGRP* | Number of sub-groups to divide large number of elements with same property ID into. Normally, elements with same type and property ID are placed into a group. If a group contains more than 1000 elements and NSUBGRP > 1, the elements are placed into NSUBGRP sub-groups for more efficient processing. If NSUBGRP=0, the program automatically divides an element group with more than 9999 elements into sub-groups. (Integer ≥ 0; Default=0) |
| XTCURVE* | <p>Indicates whether the table in TABLES1 entry is extended by linear extrapolation of the two last points. (Integer; Default = 1)</p> <p>0 – Table is not extended. This option may be used to allow element rupture at the last specified strain value.</p> <p>1 – Table is extended</p> <p>Note: XTCURVE is only applicable for the multilinear-plastic material model.</p>                                                                     |
| CVSSVAL* | <p>Indicates whether the values in TABLES1 entry are converted from engineering stress-strain to true stress-strain. (Integer; Default = 0)</p> <p>0 – No conversion of stress strain value</p> <p>1 – Convert engineering stress and strain values to true stress and strain values.</p> <p>Note: CVSSVAL is only applicable for the multilinear-plastic material model.</p>                                                                      |



## Other Parameters

| Name     | Description                                                                                                                                                                                                                                                                                                                                                            |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ELRESCS* | <p>Indicates the coordinate system used for the stress output labeled "NONLINEAR STRESSES" on the elements CHEXA, CPENTA, CPYRAM, and CTETRA. (Integer; Default = 0).</p> <p>0 – Stresses labeled "NONLINEAR STRESSES" are output in the element coordinate system.</p> <p>1 – Stresses labeled "NONLINEAR STRESSES" are output in the material coordinate system.</p> |
| BOLTSTP  | <p>Number of steps for applying the bolt pre-load force. BOLTSTP may be used to apply the bolt pre-load force incrementally if the solution fails to converge when the total pre-load force is applied in one step. (Integer &gt; 0; Default = 1)</p>                                                                                                                  |

## Translation Options

| Name   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ELCV   | <p>Convert 8-node to 9-node quadrilateral (plane strain, axisymmetric and shell) elements and 20-node to 27-node brick elements. Note that this also converts 6-node to 7-node triangular (plane strain and axisymmetric) elements and 10-node to 11-node tetrahedral elements. (Integer; Default = 0)</p> <p>0 – No conversion of elements</p> <p>1 – Convert elements as described above; nodal coincidence is not checked against existing nodes and new generated nodes are always created.</p> <p>2 – Convert elements as described above; nodal coincidence is checked against existing nodes and a new node will not be created at a location if a node already exist at that location.</p> |
| EQRBAR | <p>Indicates how RBAR elements are handled. (Integer; Default = 0)</p> <p>0 – RBAR is simulated using rigid option in small displacement analysis and using flexible option in large displacement analysis.</p> <p>1 – RBAR is simulated using rigid option (i.e. simulated by rigid link or constraint equations as determined by program)</p> <p>2 – RBAR is simulated using flexible option (i.e. simulated by spring or beam elements as determined by program)</p> <p>3 – RBAR is simulated by spring elements</p> <p>See Section 2.7 of Advanced Nonlinear Theory and Modeling Guide for details on how RBAR elements are handled.</p>                                                       |

**Translation Options**

---

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EQRBE2  | <p data-bbox="483 366 1129 384">Indicates how RBE2 elements are handled. (Integer; Default = 0)</p> <p data-bbox="483 412 1292 460">0 – RBE2 is simulated using rigid option in small displacement analysis and using flexible option in large displacement analysis.</p> <p data-bbox="483 488 1292 536">1 – RBE2 is simulated using rigid option (i.e. simulated by rigid links or constraint equations as determined by program)</p> <p data-bbox="483 564 1292 612">2 – RBE2 is simulated using flexible option (i.e. simulated by spring or beam elements as determined by program)</p> <p data-bbox="483 640 902 657">3 – RBE2 is simulated by spring elements</p> <p data-bbox="483 686 1255 730">See Section 2.7 of Advanced Nonlinear Theory and Modeling Guide for details on how RBE2 elements are handled.</p> |
| SPRINGK | <p data-bbox="483 760 1292 807">Stiffness of spring elements that simulate RBAR or RBE2 elements. (Real, Default = 0.0; Unit = Force/Length)</p> <p data-bbox="483 836 1225 883">If SPRINGK = 0.0, program automatically sets SPRINGK according to the following calculations.</p> <p data-bbox="483 911 802 929"><math>SPRINGK = EMAX * LMODEL</math></p> <p data-bbox="483 957 1245 1030">where EMAX = maximum Young's Modulus of materials in the model and LMODEL = largest dimension of the model. If no material is specified in the model, EMAX is set to 1.0E12.</p>                                                                                                                                                                                                                                               |
| BEAME   | <p data-bbox="483 1060 1292 1107">Young's Modulus of material assigned to beam elements that simulate RBAR or RBE2 elements. (Real, Default = 0.0; Unit = Force/Length<sup>2</sup>)</p> <p data-bbox="483 1136 1292 1206">If BEAME = 0.0, BEAME is set to EMAX * 100.0 where EMAX = maximum Young's Modulus of materials in the model. If no material is specified in the model, EMAX is set to 1.0E12.</p>                                                                                                                                                                                                                                                                                                                                                                                                                |
| BEAMA   | <p data-bbox="483 1236 1292 1284">Circular cross section area of beam elements that simulate RBAR or RBE2 elements. (Real, Default = 0.0; Unit = Length<sup>2</sup>)</p> <p data-bbox="483 1312 1292 1360">If BEAMA = 0.0, program automatically sets BEAMA according to the following calculation:</p> <p data-bbox="483 1388 1259 1405"><math>BEAMA = (LMODEL * .01)^2</math> where LMODEL = largest dimension of the model</p>                                                                                                                                                                                                                                                                                                                                                                                          |

## Translation Options

| Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RBLCRIT | <p>Critical length for determining how RBAR and RBE2 elements are simulated when the rigid or flexible option is used to simulate RBAR (see EQRBAR) and RBE2 (see EQRBE2). (Real, Default = 0.0; Unit = Length)</p> <p>When RBLCRIT = 0.0, a new value will be calculated by the software:</p> <p>If EQRBAR (or EQRBE2) = 1,<br/> RBLCRIT = LMODEL * 1.0E-6</p> <p>If EQRBAR (or EQRBE2) = 2,<br/> RBLCRIT = LMODEL * 1.0E-3.</p> <p>See Table 2.7-1 in the Advanced Nonlinear Theory and Modeling Guide for information on how RBLCRIT affects the representation of RBAR or RBE2 elements.</p> |
| GENMPC  | <p>Indicates whether generalized constraints are used for multipoint constraints (MPCs). The use of generalized constraint allows dependent degrees-of-freedom in one MPC to be assigned as independent by another MPC. (Integer; Default = 0)</p> <p>0 – regular constraints are used for MPCs</p> <p>1 – generalized constraints are used for MPCs</p>                                                                                                                                                                                                                                         |

### Remarks:

1. The NXSTRAT bulk entry is not required. When it is not present, the default values are used. At least one parameter should be defined when a NXSTRAT entry exists.
2. Parameters applicable to SOL 701 are:
  - XSTEP, XDTCAL, XDTFAC, XMSCALE, XDTMIN1 and XDTMIN2 are only used for SOL 701. These parameters are indicated in the table with a superscript <sup>60</sup>.
  - TINT, ICMODE, DTDELAY, SDOFANG, UPFORM, ULFORM, LOADOPT, MODEX, TSTART, IRINT, NSUBGRP, ELRESCS, XTCURVE, CVSSVAL and CSTYPE parameters can be used for SOL 701. These parameters are indicated in the table with a superscript <sup>63\*</sup>.
3. XMSCALE, XDTMIN1 and XDTMIN2 may be used together. XDTMIN1 and DTMIN2 are applied after XMSCALE is applied. If XDTMIN1 and XDTMIN2 are both used, XDTMIN1 should be greater than XDTMIN2. If XDTMIN2 = XDTMIN1 is specified, XDTMIN1 will be ignored.

**1716 NXSTRAT**  
**Strategy Parameters for SOLs 601 and 701**

4. WARNING: Specifying  $XMSCALE > 1.0$ ,  $XDTMIN1 > 0.0$  or  $XDTMIN2 > 0.0$  may change the model significantly. Hence, extra care should be exercised in examining the results when any of these parameters are used.

Chapter

# 17 Bulk Data Entries O—P

Bulk data entries OMIT—PWELD

**17**  
Bulk O-P

**1718 OMIT**  
Omitted Degrees-of-Freedom

**OMIT** Omitted Degrees-of-Freedom

Defines degrees-of-freedom to be excluded (o-set) from the analysis set (a-set).

**Format:**

| 1    | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|------|-----|----|-----|----|-----|----|-----|----|----|
| OMIT | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

**Example:**

|      |    |   |    |      |  |  |   |   |  |
|------|----|---|----|------|--|--|---|---|--|
| OMIT | 16 | 2 | 23 | 3516 |  |  | 1 | 4 |  |
|------|----|---|----|------|--|--|---|---|--|

**Fields:**

| Field | Contents                                                                                                                                          |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                         |
| Ci    | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; zero or blank for scalar points.) |

**Remarks:**

1. The degrees-of-freedom specified on this entry form members of the mutually exclusive o-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
2. Up to 24 degrees-of-freedom may be specified on a single entry.
3. In many cases it may be more convenient to use OMIT1, ASET, or ASET1 entries.
4. In nonlinear analysis, degrees-of-freedom attached to nonlinear elements must be placed in the a-set. In other words, nonlinear degrees-of-freedom must not be specified on OMIT or OMIT1 entries.

**OMIT1** Omitted Degrees-of-Freedom, Alternate Form 1

Defines degrees-of-freedom to be excluded (o-set) from the analysis set (a-set).

**Format:**

| 1     | 2  | 3  | 4   | 5      | 6  | 7  | 8  | 9  | 10 |
|-------|----|----|-----|--------|----|----|----|----|----|
| OMIT1 | C  | G1 | G2  | G3     | G4 | G5 | G6 | G7 |    |
|       | G8 | G9 | G10 | -etc.- |    |    |    |    |    |

**Example:**

|       |   |   |   |   |    |   |   |   |  |
|-------|---|---|---|---|----|---|---|---|--|
| OMIT1 | 3 | 2 | 1 | 3 | 10 | 9 | 6 | 5 |  |
|       | 7 | 8 |   |   |    |   |   |   |  |



**Alternate Format and Example:**

|       |   |    |        |     |  |  |  |  |  |
|-------|---|----|--------|-----|--|--|--|--|--|
| OMIT1 | C | G1 | “THRU” | G2  |  |  |  |  |  |
| OMIT1 | 0 | 17 | THRU   | 109 |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                          |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| C     | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; zero or blank for scalar points.) |
| Gi    | Grid or scalar point identification number. (Integer > 0; for “THRU” option, G1 < G2.)                                                            |

**Remarks:**

1. The degrees-of-freedom specified on this entry form members of the mutually exclusive o-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
2. If the alternate format is used, not all points in the range G1 through G2 have to be defined. Undefined points will collectively produce a warning message but will otherwise be ignored.
3. In nonlinear analysis, degrees-of-freedom attached to nonlinear elements must be placed in the a-set. In other words, nonlinear degrees-of-freedom must not be specified on OMIT or OMIT1 entries.

**1720 OMITAX**  
**Omitted Conical Shell Degrees-of-Freedom**

**OMITAX** Omitted Conical Shell Degrees-of-Freedom

Defines degrees-of-freedom to be excluded (o-set) from the analysis set (a-set).

**Format:**

| 1      | 2    | 3    | 4  | 5    | 6    | 7  | 8 | 9 | 10 |
|--------|------|------|----|------|------|----|---|---|----|
| OMITAX | RID1 | HID1 | C1 | RID2 | HID2 | C2 |   |   |    |

**Example:**

|        |   |   |   |   |   |   |  |  |  |
|--------|---|---|---|---|---|---|--|--|--|
| OMITAX | 2 | 6 | 3 | 4 | 7 | 1 |  |  |  |
|--------|---|---|---|---|---|---|--|--|--|

**Fields:**

| Field | Contents                                                                                           |
|-------|----------------------------------------------------------------------------------------------------|
| RIDi  | Ring identification number. (Integer > 0)                                                          |
| HIDi  | Harmonic identification number. (Integer ≥ 0)                                                      |
| Ci    | Component number(s). (Any unique combination of the Integers 1 through 6 with no embedded blanks.) |

**Remarks:**

1. OMITAX is allowed only if an AXIC entry is also present.
2. Up to 12 degrees-of-freedom may be specified on this entry.
3. Degrees-of-freedom appearing on OMITAX entries may not appear on MPCAX, SUPAX, or SPCAX entries.
4. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.



**OUTPUT**      Output Control for Adaptive Analysis

Output control for p-adaptive analysis.

**Format:**

| 1      | 2                                                                  | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------|--------------------------------------------------------------------|---|---|---|---|---|---|---|----|
| OUTPUT | SID                                                                |   |   |   |   |   |   |   |    |
|        | ELSET=n, cmd1=(option1, option2, etc.), cmd2=(option1, etc.), etc. |   |   |   |   |   |   |   |    |
|        | ELSET=m, -etc.-                                                    |   |   |   |   |   |   |   |    |

**Example:**

|        |                                                          |  |  |  |  |  |  |  |  |
|--------|----------------------------------------------------------|--|--|--|--|--|--|--|--|
| OUTPUT | 127                                                      |  |  |  |  |  |  |  |  |
|        | ELSET=12, DISP=PRINT, STRESS=(PRINT,PUNCH), STRAIN=PUNCH |  |  |  |  |  |  |  |  |
|        | ELSET=42, STRESS=PRINT,BY=1                              |  |  |  |  |  |  |  |  |

**Fields:**

| Field   | Contents                                                                                                                                       | Type           | Default      |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------|
| SID     | DATAREC ID selected in Case Control. See Remark 1.                                                                                             | Integer<br>> 0 | Required     |
| ELSET   | ID of SET entry containing sets of elements with results that will be processed. See Remark 1.                                                 | Integer<br>> 0 | 999999       |
| cmdi    | Output commands.                                                                                                                               | See below      |              |
| optioni | Specifies one or more of the following output options. The following options may be specified in any order without regard to field boundaries. | See below      | Required     |
| DISP    | Request for calculating displacements. See Remark 1a.                                                                                          | Character      | DISP = PRINT |
| VELO    | Request for calculating velocities. See Remarks 1a, 7, and 8.                                                                                  | Character      | VELO = NONE  |
| ACCE    | Request for calculating accelerations. See Remarks 1a, 7, and 8.                                                                               | Character      | ACCE = NONE  |

## 1722 OUTPUT

### Output Control for Adaptive Analysis

| Field  | Contents                                                                           | Type           | Default        |
|--------|------------------------------------------------------------------------------------|----------------|----------------|
| STRESS | Request for calculating stresses. See Remark 1a.                                   | Character      | STRESS = PRINT |
| STRAIN | Request for calculating strains. See Remark 1a.                                    | Character      | STRAIN = NONE  |
| FORCE  | Request to output forces/length in shell elements or forces in beam elements.      | Character      | FORCE = NONE   |
| ERROR  | Request for error estimate table. See Remark 1a.                                   | Character      | ERROR = PRINT  |
| PVAL   | Request for new pval values. See Remark 1a.                                        | Character      | PVAL = PRINT   |
| LAST   | Request to print results of last analysis in an adaptive analysis. See Remark 1b.  | Character      | LAST = YES     |
| BY     | Request to print intermediate results in an adaptive analysis. See Remark 1c.      | Integer<br>≥ 0 | BY = 0         |
| FIRST  | Request to print results of first analysis in an adaptive analysis. See Remark 1b. | Character      | FIRST = YES    |

#### Remarks:

1. ELSET = n indicates the start of a new set of commands. Commands appearing after ELSET apply only to elements in SET n.
  - a. For cmdi: DISP, VELO, ACCE, STRESS, STRAIN, FORCE, ERROR, and PVAL the allowable options are PRINT, PLOT, PUNCH, REAL, IMAG, PHASE, or NONE. If more than one option is desired, enclose in parentheses; e.g., DISP = (PRINT, PUNCH).
  - b. For cmdi: STRAIN, the allowable options are STRCUR, FIBER, PRINT, PLOT, PUNCH, or NONE. If more than one option is desired, enclose in parentheses; e.g., STRAIN = (FIBER, PRINT, PUNCH). The options STRCUR and FIBER are for shell elements, they are ignored for other elements. For STRCUR membrane strain and curvature are output, for FIBER, strains in the fibers Z1 and Z2 are output. Z1 and Z2 are specified on the PSHELL Bulk Data entry. The default is STRCUR. Either STRCUR or FIBER should be specified, but not both.

- c. For `cmdi: FIRST` and `LAST`, the allowable options are YES and NO. For example, “FIRST = YES”.
  - d. For `cmdi: BY`, the allowable option is an integer greater than or equal to 0. `optioni` specifies that `cmdi` will be processed at every adaptive cycle that is a multiple of `optioni`.
2. Only the output (displacements, stresses, etc.) requested will be either printed or stored for postprocessing. `optioni = PRINT` (for print in F06 file), `PUNCH` (for print in punch file), and `PLOT` (for calculation to be used by postprocessing but not printing) can be used in any combination. For example, `DISP = (PRINT)`, `STRESS = (PRINT,PUNCH)` will result in printing of displacement data in the F06 file and printing of the stress data in both the F06 file and the punch file.
  3. If an element is specified in more than one `ELSET = n`, then the union of all commands will be performed on that element.
  4. `SET = 999999` is a reserved set that includes all elements.
  5. A command and its options must be specified entirely on the same entry.
  6. On the continuation entries, no commas can appear in columns 1 through 8 and the data in fields 2 through 9 must be specified in columns 9 through 72. The large-field format is not allowed.
  7. `VELO` and `ACCE` output commands are only available for transient and frequency response problems.
  8. For modal transient and modal frequency analyses with the default matrix data recovery method, requests of velocity or acceleration output must be accompanied by the displacement request for the same set of elements (`ELSET`). The complex output formats of displacements, velocities, and accelerations are specified by the `REAL`, `IMAG`, or `PHASE` option of the `DISP` command.
  9. The `REAL` or `IMAG` option (the default) is used to request rectangular format (real and imaginary) of complex output. Use of either `REAL` or `IMAG` yields the same output.
  10. The `PHASE` option is used to request polar format (magnitude and phase) of complex output. Phase output is in degrees.

**1724 OUTRCV**  
**Output Options for p-elements**

**OUTRCV**      Output Options for p-elements

Defines options for the output of displacements, stresses, and strains of p-elements.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| OUTRCV   | SID      | SETID    |          |          |          |          |          |          |           |
|          | OPTION1  |          |          |          | OPTION2  |          |          |          |           |

**Example:**

|        |       |     |            |  |  |  |  |  |  |
|--------|-------|-----|------------|--|--|--|--|--|--|
| OUTRCV | 150   | 160 |            |  |  |  |  |  |  |
|        | CID=2 |     | VIEW=3*3*9 |  |  |  |  |  |  |

|        |   |   |  |  |  |  |  |  |  |
|--------|---|---|--|--|--|--|--|--|--|
| OUTRCV | 3 | 5 |  |  |  |  |  |  |  |
|--------|---|---|--|--|--|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                  | <b>Type</b>            | <b>Default</b> |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------|
| SID          | Identification number. SID is selected by the OUTRCV Case Control command.                                                                                                                                                                       | Integer > 0            | Required       |
| SETID        | Set identification number of a SETCase Control command that appears after the SETS DEFINITION or OUTPUT(POST) command.                                                                                                                           | Integer > 0            | 999999         |
| OPTIONi      | Specifies one or more of the following options. The following options maybe specified in any order without regard to field boundaries.                                                                                                           | See CID and VIEW below |                |
| CID          | Specifies the output coordinate system for all stresses, strains, and displacements, except displacements at points defined by GRID entries. CID = 0 specifies the basic coordinate system; and CID = id specifies a CORDij entry. See Remark 4. | Integer ≥ 0            | CID = 0        |

| Field  | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Type                                        | Default      |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|--------------|
| VIEW   | Specifies the intervals for displacement, stress, and strain $x * h * z$ is the number of subdivisions in $x * h * z$ of the element's output recovery parametric system. See Remark 5.                                                                                                                                                                                                                                                                            | Three Integers separated by "*"             | VIEW = 3*3*3 |
| PROJ   | Specifies the orientation of aconvective coordinate system forshells. PROJ = X specifies the coordinate axis in the CID system which is projected to define the x-axis of the convective coordinate system (tangent system) for shells and beams. Ignored for solids. A minus sign specifies the reverse direction. See Remarks 5, and 10 and for more details.                                                                                                    | Character; F,X, Y, Z, -X, -Y, -Z            | PROJ = X     |
| NORMAL | Specifies the positive direction of the outward normal for shell elements inthe CID coordinate system. For NORMAL=R, the positive direction of the outward normal is the exiting arrow side of a radius vector from the origin of the CID system to the element center. For NORMAL = E, the positive direction of the outward normal is the z-axis of the element coordinate system. A minus sign specifies the reverse direction. See Remark 10 for more details. | Character; R,E, -R, -E, X, Y, Z, -X, -Y, -Z | NORMAL = R   |
| THETA  | Angle in degrees which rotates the convective system defined with CID and PROJ. THETA is measured in the tangent plane of the shell from the projected axis (selected in PROJ) to the x-axis of the final output coordinate system. For shell elements only.                                                                                                                                                                                                       | Real                                        | THETA = 0.   |

## 1726 OUTRCV

### Output Options for p-elements

#### Remarks:

1. OUTRCV is intended for p-elements only and specifies the coordinate system and density used for displacement, stress, strain, and force output. OUTRCV is used only for output and has no effect on the solution.
2. On the continuation entries, no commas can appear in columns 1 through 8 and the data in fields 2 through 9 must be specified in columns 9 through 72. The large-field format is not allowed.
3. Sets referenced by SETID are defined on the SET command after the SETS DEFINITION or OUTPUT(POST) command. Any p-element not referenced by the SET = SETID Case Control command will use the defaults listed above for CID and VIEW.
4. If an element is referenced by more than one OUTRCV entry then a warning message will be issued and the last OUTRCV will be applied to the element.
5.  $x * h * j$  represents the x, h and z, subdivisions in the solid element's output recovery parametric system. Both "\*" delimiters are required. h is ignored for the CPENTA and CTETRA element and x is ignored for the CTETRA, CQUAD4, and CTRIA3 element.
6. The elements referenced by the SET = SETID command are labeled in the stress output as VUHEXA, VUPENTA, VUTETRA, VUQUAD, VUTRIA, and VUBEAM. They may be renamed via the PARAM,VUHEXA; PARAM,VUPENTA; PARAM,VUTETRA; PARAM,VUQUAD; PARAM,VUTRIA; and PARAM,VUBEAM entries.
7. Only one OUTRCV Case Control command is allowed. Multiple OUTRCV Bulk Data entries with the same SID are allowed to specify multiple element sets with different output coordinate systems.
8. The displacement output at locations defined by the GRID Bulk Data entry are determined by the CD value located on the GRID Bulk Data entry.
9. For p-version shell elements, the default output coordinates system is the convective coordinate system tangent to the shell mid surface. The x-axis of the convective system is the projected x-axis of the basic system. For p-version beam elements, the output system is the convective coordinate system tangent to the beam axis, oriented from grid A to grid B, as specified on the CBEAM entry.
10. The PROJ and NORMAL options for shells are described below.

|                |                                                                                                                                                                                                                                                                              |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROJ           | Defines the orientation of the output coordinate system for stresses, strains and forces in shell elements. The reference system for PROJ is the CID coordinate system.                                                                                                      |
| PROJ = F       | Stresses, strains and forces of shells are output in the fixed CID. This option should be used if a postprocessor requires the results in terms of 3D vectors or tensors. For example, stress tensors with 6 components. The option does not produce output in the f06 file. |
| PROJ = X, Y, Z | The x- or y- or z-axis of the CID system is projected on to the shell tangent plane, the projected vector defines the x-axis of the convective coordinate system for output of stresses, strains and forces.                                                                 |
| NORMAL         | Specifies the positive normal direction of the output coordinate system for stresses, strains, and forces in shell elements. The reference system for NORMAL is the CID coordinate system.                                                                                   |
| NORMAL = R     | The positive direction of the normal is the exiting arrow of the position vector from the origin of the CID system to the element center.                                                                                                                                    |
| NORMAL = E     | The positive direction of the normal is the z-axis of the element coordinate system.                                                                                                                                                                                         |
| NORMAL = X     | The positive direction of the outward normal is the exiting arrow of the x-axis.                                                                                                                                                                                             |
| NORMAL = Y, Z  | See above.                                                                                                                                                                                                                                                                   |

**1728 PAABSF**  
**Frequency-Dependent Absorbers Element Property**

**PAABSF**      Frequency-Dependent Absorbers Element Property

Defines the properties of a frequency-dependent acoustic absorber element.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| PAABSF   | PID      | TZREID   | TZIMID   | S        | A        | B        | K        | RHOC     |           |

**Example:**

|        |    |    |    |  |  |  |  |  |  |
|--------|----|----|----|--|--|--|--|--|--|
| PAABSF | 44 | 38 | 47 |  |  |  |  |  |  |
|--------|----|----|----|--|--|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                     |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID          | Property identification number that matches the identification number of the corresponding CAABSF entry. (Integer > 0)                                              |
| TZREID       | Identification number of a TABLEDi entry that defines the resistance as a function of frequency. The real part of the impedance. See Remark 1 . (Integer > 0)       |
| TZIMID       | Identification number of a TABLEDi entry that defines the reactance as a function of frequency. The imaginary part of the impedance. See Remark 1 . (Integer > 0)   |
| S            | Impedance scale factor. (Real; Default = 1.0)                                                                                                                       |
| A            | Area factor when 1 or 2 grid points are specified on the CAABSF entry. (Real > 0.0; Default = 1.0)                                                                  |
| B            | Equivalent structural damping coefficient. (Real ≥ 0.0; Default = 0.0)                                                                                              |
| K            | Equivalent structural stiffness coefficient. (Real ≥ 0.0; Default = 0.0)                                                                                            |
| RHOC         | Constant used in data recovery for calculating an absorption coefficient. RHO is the media density, and C is the speed of sound in the media. (Real; Default = 1.0) |

**Remarks:**

1. At least one of the four fields TZREID, TZIMID, B, or K must be specified.



## Frequency-Dependent Absorbers Element Property

2. If only one grid point is specified on the CAABSF entry, then the impedance  $Z(f)=Z_R + iZ_I$  is the total impedance at the point. If two grids are specified, then the impedance is the impedance per unit length. If three or four points are specified, then the impedance is the impedance per unit area.  $Z_R(f)=TZREID(f)+B$  and  $Z_I(f)=TZIMID(f)-K/(2\pi f)$ .
3. The resistance represents a damper quantity B. The reactance represents a quantity of the type  $(wM-K/w)$ . The impedance is defined as  $Z = p/\dot{u}$  where  $p$  is the pressure and  $\dot{u}$  is the velocity.
4. The impedance scale factor S is used in computing element stiffness and damping terms as:

$$k = \frac{A}{S} \cdot \frac{2\pi f Z_I(f)}{Z_R^2 + Z_I^2} \int (\text{of shape functions})$$

$$b = \frac{A}{S} \cdot \frac{Z_R(f)}{Z_R^2 + Z_I^2} \int (\text{of shape functions})$$

5. The output for the element is specified by the STRESS Case Control command and consists of the resistance, reactance, and absorption coefficient. The absorption coefficient is defined as:

$$a = \frac{4(Z_R / \rho c)}{(Z_R / \rho c + 1)^2 + (Z_I / \rho c)^2}$$

**1730 PACABS**  
Acoustic Absorber Property

**PACABS** Acoustic Absorber Property

Defines the properties of the acoustic absorber element.

**Format:**

| 1      | 2   | 3     | 4    | 5    | 6    | 7      | 8     | 9 | 10 |
|--------|-----|-------|------|------|------|--------|-------|---|----|
| PACABS | PID | SYNTH | TID1 | TID2 | TID3 | TESTAR | CUTFR | B |    |
|        | K   | M     |      |      |      |        |       |   |    |

**Example:**

|        |    |  |   |   |   |     |       |  |  |
|--------|----|--|---|---|---|-----|-------|--|--|
| PACABS | 12 |  | 1 | 2 | 3 | 3.5 | 500.0 |  |  |
|--------|----|--|---|---|---|-----|-------|--|--|

**Fields:**

| Field   | Contents                                                                                                        |
|---------|-----------------------------------------------------------------------------------------------------------------|
| PID     | Property identification number. (Integer > 0)                                                                   |
| SYNTH   | Request the calculation of B, K, and M from the tables TIDi below. (Character = "YES" or "NO"; Default = "YES") |
| TID1    | Identification of the TABLEDi entry that defines the resistance. See Remark 2. (Integer > 0 or blank)           |
| TID2    | Identification of the TABLEDi entry that defines the reactance. See Remark 2. (Integer > 0 or blank)            |
| TID3    | Identification of the TABLEDi entry that defines the weighting function. See Remark 2. (Integer > 0 or blank)   |
| TESTAR  | Area of the test specimen. (Real > 0.0; Default = 1.0)                                                          |
| CUTFR   | Cutoff frequency for tables referenced above. (Real > 0.0)                                                      |
| B, K, M | Equivalent damping, stiffness and mass values per unit area. (Real ≥ 0.0)                                       |

**Remarks:**

1. PACABS is referenced by a CHACAB entry only.
2. If SYNTH = "YES", then TID1 and TID2 must be supplied (TID3 is optional) and the equivalent structural model will be derived from tables TIDi. If TID3 is blank, then the weighting function defaults to 1.0.

3. If SYNTH = "NO", then the equivalent structural model will be derived from one of B, K, or M.
4. The continuation entry is optional.
5. All data defined in tables TIDi must be a function of frequency in cycles/unit time.

**1732 PACBAR**  
Acoustic Barrier Property

**PACBAR** Acoustic Barrier Property

Defines the properties of the acoustic barrier element.

**Format:**

| 1      | 2   | 3     | 4      | 5      | 6      | 7 | 8 | 9 | 10 |
|--------|-----|-------|--------|--------|--------|---|---|---|----|
| PACBAR | PID | MBACK | MSEPTM | FRESON | KRESON |   |   |   |    |

**Example:**

|        |    |     |      |       |  |  |  |  |  |
|--------|----|-----|------|-------|--|--|--|--|--|
| PACBAR | 12 | 1.0 | 0.01 | 400.0 |  |  |  |  |  |
|--------|----|-----|------|-------|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                        |
|--------|---------------------------------------------------------------------------------|
| PID    | Property identification number. (Integer > 0)                                   |
| MBACK  | Mass per unit area of the backing material. (Real > 0.0)                        |
| MSEPTM | Mass per unit area of the septum material. (Real > 0.0)                         |
| FRESON | Resonant frequency of the sandwich construction in hertz. (Real > 0.0 or blank) |
| KRESON | Resonant stiffness of the sandwich construction. (Real > 0.0 or blank)          |

**Remarks:**

1. PACBAR is referenced by a CHACBR entry only.
2. Either FRESON or KRESON must be specified, but not both.

**PAERO1** Aerodynamic Panel Property

Defines associated bodies for the panels in the Doublet-Lattice method.

**Format:**

| 1      | 2   | 3  | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|--------|-----|----|----|----|----|----|----|---|----|
| PAERO1 | PID | B1 | B2 | B3 | B4 | B5 | B6 |   |    |

**Example:**

|        |   |   |  |  |  |  |  |  |  |
|--------|---|---|--|--|--|--|--|--|--|
| PAERO1 | 1 | 3 |  |  |  |  |  |  |  |
|--------|---|---|--|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                 |
|-------|------------------------------------------------------------------------------------------|
| PID   | Property identification number referenced by a CAERO1 entry.<br>(Integer > 0)            |
| Bi    | Identification number of CAERO2 entries for associated bodies.<br>(Integer ≥ 0 or blank) |

**Remarks:**

1. The associated bodies must be in the same aerodynamic group, as specified in the IGID field on CAERO2 entry.
2. If there are no bodies, the entry is still required (with Bi fields blank).
3. The Bi numbers above must appear on a CAERO2 entry to define these bodies completely.

**1734 PAERO2**  
**Aerodynamic Body Properties**

**PAERO2** Aerodynamic Body Properties

Defines the cross-sectional properties of aerodynamic bodies.

**Format:**

| 1      | 2    | 3      | 4     | 5    | 6    | 7    | 8    | 9    | 10 |
|--------|------|--------|-------|------|------|------|------|------|----|
| PAERO2 | PID  | ORIENT | WIDTH | AR   | LRSB | LRIB | LTH1 | LTH2 |    |
|        | THI1 | THN1   | THI2  | THN2 | THI3 | THN3 |      |      |    |

**Example:**


|        |   |   |     |     |    |    |     |  |  |
|--------|---|---|-----|-----|----|----|-----|--|--|
| PAERO2 | 2 | Z | 6.0 | 1.0 | 22 | 91 | 100 |  |  |
|        | 1 | 3 |     |     |    |    |     |  |  |

**Fields:**

| Field                               | Contents                                                                                                                                                                                                  |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID                                 | Property identification number. (Integer > 0)                                                                                                                                                             |
| ORIENT                              | Orientation flag. Type of motion allowed for bodies. Refers to the aerodynamic coordinate system of ACSID. See AERO entry. (Character = "Z", "Y", or "ZY")                                                |
| WIDTH                               | Reference half-width of body and the width of the constant width interference tube. (Real > 0.0)                                                                                                          |
| AR                                  | Aspect ratio of the interference tube (height/width). (Real > 0.0)                                                                                                                                        |
| LRSB                                | Identification number of an AEFAC T entry containing a list of slender body half-widths at the end points of the slender body elements. If blank, the value of WIDTH will be used. (Integer > 0 or blank) |
| LRIB                                | Identification number of an AEFAC T entry containing a list of slender body half-widths at the end points of the interference elements. If blank, the value of WIDTH will be used. (Integer > 0 or blank) |
| LTH1, LTH2                          | Identification number of AEFAC T entries for defining q arrays for interference calculations. (Integer ≥ 0)                                                                                               |
| THI <sub>i</sub> , THN <sub>i</sub> | The first and last interference element of a body to use the q <sub>1</sub> array; the others use the q <sub>2</sub> array. (Integer ≥ 0)                                                                 |

**Remarks:**

1. The half-widths (given on AEFACCT entries referenced in fields 6 and 7) are specified at division points. The number of entries on an AEFACCT entry used to specify half-widths must be one greater than the number of elements.
2. The half-width at the first point (i.e., the nose) on a slender body is usually 0.0; thus, it is recommended (but not required) that the LRSB data is supplied with a zero first value.
3. TH<sub>i</sub> and TH<sub>Ni</sub> are interference element numbers on a body. The first element is one for each body.
4. A body is represented by a slender body surrounded by an interference tube. The slender body creates the downwash due to the motion of the body, while the interference tube represents the effects upon panels and other bodies.

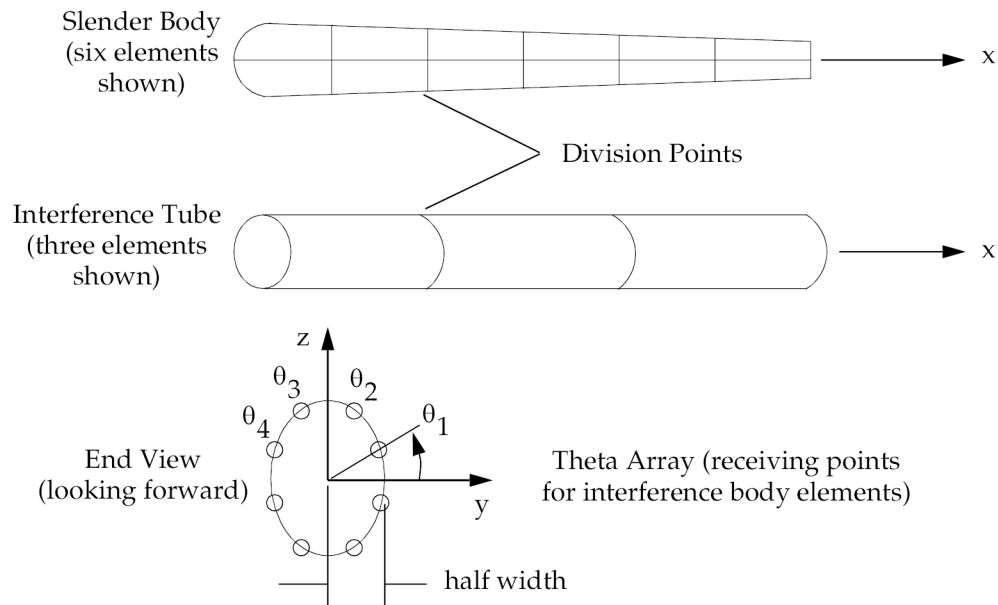

**Figure 17-1. Idealization of Aerodynamic Body**

5. The angles  $q_1$  and  $q_2$  are input in degrees using the aerodynamic element coordinate system as the reference coordinate system for defining the theta points.
6. Distribution of the theta points need not be uniform. A theta point must be placed a finite distance from any aerodynamic box edge; preferably the box edge

## 1736 PAERO2 Aerodynamic Body Properties

would be equidistant from any two theta points. This aerodynamic coordinate system is defined on the AERO Bulk Data entry.

7. For half models, the theta arrays LTH1 and LTH2 should encompass a full 360 degree range.



**PAERO3** Aerodynamic Panel Property

Defines the number of Mach boxes in the flow direction and the location of cranks and control surfaces of a Mach box lifting surface.

**Format:**

| 1      | 2   | 3    | 4     | 5   | 6  | 7  | 8   | 9   | 10 |
|--------|-----|------|-------|-----|----|----|-----|-----|----|
| PAERO3 | PID | NBOX | NCTRL |     | X5 | Y5 | X6  | Y6  |    |
|        | X7  | Y7   | X8    | Y8  | X9 | Y9 | X10 | Y10 |    |
|        | X11 | Y11  | X12   | Y12 |    |    |     |     |    |

**Example:**

|        |      |      |      |      |     |      |      |      |  |
|--------|------|------|------|------|-----|------|------|------|--|
| PAERO3 | 2001 | 15   | 1    |      | 0.  | 65.  |      |      |  |
|        | 78.  | 65.  | 108. | 65.  | 82. | 97.5 | 112. | 97.5 |  |
|        | 86.  | 130. | 116. | 130. |     |      |      |      |  |

**Fields:**

| Field          | Contents                                                                                                                                    |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| PID            | Property identification number. (Integer > 0)                                                                                               |
| NBOX           | Number of Mach boxes in the flow direction. (0 < Integer < 50)                                                                              |
| NCTRL          | Number of control surfaces. (Integer 0, 1, or 2)                                                                                            |
| X5 through Y12 | Locations of points 5 through 12, which are in the aerodynamic coordinate system, to define the cranks and control surface geometry. (Real) |

**Remarks:**

1. For an illustration of the geometry, see the CAERO3 entry description.
2. If  $Y5 \leq 0.0$ , there is no leading edge crank. Also, if  $Y6 \leq 0.0$ , there is no trailing edge crank.
3. If  $NCTRL = 0$ , no continuations are required. If  $NCTRL = 1$  or  $2$ , then  $NCTRL$  continuations are required.
4.  $Y7 \geq Y8$ ,  $Y9 \geq Y10$ , and  $Y11 \geq Y12$ .

**1738 PAERO3**  
**Aerodynamic Panel Property**

5. The number of Mach boxes in the spanwise direction (NSB) may be found from the following formula:

$$NSB = \text{INT} \left[ \frac{\beta \cdot y_{max}}{\left( \frac{x_{max}}{NBOX + 0.5} \right)} + 0.5 \right]$$

where

$$b = \sqrt{M^2 - 1}$$

$x_{max}$  = maximum chordwise direction

$y_{max}$  = maximum spanwise direction

NBOX = initial number of boxes specified in field 3

The number of Mach boxes in the streamwise direction may then be computed from:

$$NBOX = \text{INT} \left[ \frac{x_{max}}{\left( \frac{\beta \cdot y_{max}}{NSB - 0.5} \right)} + 0.999 \right]$$

The number of chordwise boxes specified by the user ( $NBOX \geq 50$ ) will be replaced by a floating point number (usually slightly higher than NBOX). The method contracts the mesh equally in both dimensions until a box edge lies on the surface tip. This mesh size is then used to compute the number of chordwise boxes.

**Note**

A minimum of seven Mach boxes in the flow direction (NBOX) is recommended.

## PAERO4 Aerodynamic Strip Properties

Defines properties of each strip element for Strip theory.

### Format:

| 1      | 2    | 3     | 4      | 5    | 6     | 7      | 8      | 9      | 10 |
|--------|------|-------|--------|------|-------|--------|--------|--------|----|
| PAERO4 | PID  | CLA   | LCLA   | CIRC | LCIRC | DOC1   | CAOC1  | GAPOC1 |    |
|        | DOC2 | CAOC2 | GAPOC2 | DOC3 | CAOC3 | GAPOC3 | -etc.- |        |    |

### Example:

|        |      |      |      |      |      |     |     |     |  |
|--------|------|------|------|------|------|-----|-----|-----|--|
| PAERO4 | 6001 | 1    | 501  | 0    | 0    | 0.0 | 0.0 | 0.0 |  |
|        | 0.50 | 0.25 | 0.02 | 0.53 | 0.24 | 0.0 |     |     |  |

### Fields:

| Field | Contents                                                                                                                                                                                         |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                                                                                                                                    |
| CLA   | Select Prandtl-Glauert correction. (Integer = -1, 0, 1; Default = 0)                                                                                                                             |
|       | -1 Compressibility correction made to lift curve slope data for a reference Mach number.                                                                                                         |
|       | 0 No correction and no list needed. (Default)                                                                                                                                                    |
|       | +1 No correction and lift curve slope provided by a list as a function of strip location and Mach number.                                                                                        |
| LCLA  | Identification number of the AEFACCT entry that lists the lift curve slope on all strips for each Mach number on the MKAEROi entry. See Remark 2 below. (Integer = 0 if CLA = 0, > 0 if CLA ≠ 0) |
| CIRC  | Select Theodorsen's function $C(k)$ or the number of exponential coefficients used to approximate $C(k)$ . (Integer = 0, 1, 2, 3; Default = 0. Must be zero if CLA ≠ 0.)                         |
|       | 0 Theodorsen function.                                                                                                                                                                           |
|       | 1, 2, 3 Approximate function with $b_0, b_1, b_1, \dots, b_n, b_n$ $n = 1, 2, 3$ .                                                                                                               |

## 1740 PAERO4 Aerodynamic Strip Properties

| Field      | Contents                                                                                                                                                                                                                                          |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LCIRC      | Identification number of the AEFACt entry that lists the $b$ , $b$ values for each Mach number. See Remark 3, 4, and 5 below; variable $b$ 's and $b$ 's for each $m_i$ on the MKAERO $_i$ entry. (Integer = 0 if CIRC = 0, > 0 if CIRC $\neq$ 0) |
| DOC $_i$   | $d/c$ = distance of the control surface hinge aft of the quarter-chord divided by the strip chord (Real $\geq$ 0.0)                                                                                                                               |
| CAOC $_i$  | $c_d/c$ = control surface chord divided by the strip chord. (Real $\geq$ 0.0)                                                                                                                                                                     |
| GAPOC $_i$ | $g/c$ = control surface gap divided by the strip chord. (Real $\geq$ 0.0)                                                                                                                                                                         |

### Remarks:

1. PAERO4 is required for Strip theory with three fields (DOC $_i$ , CAOC $_i$ , GAPOC $_i$ ) specified per strip.
2. If CLA = -1, lift curve slope data at one Mach number are needed on the AEFACt entry.
3. If CAOC $_i$  = 0.0, there is no control surface.
4. If GAPOC $_i$  = 0.0, there is no slot flow.
5. If GAPOC $_i$  < 0.01, then 0.01 is used.
6. Embedded blank fields are not permitted.
7. The following table lists the lift curve slope or lag function selection and the AEFACt entry formats used for Strip theory:

| Theodorsen Function | Data Type Input                            | Parameter Combinations |      |      |       | Number of Words          | Entry Format Index |
|---------------------|--------------------------------------------|------------------------|------|------|-------|--------------------------|--------------------|
|                     |                                            | CLA                    | LCLA | CIRC | LCIRC |                          |                    |
| Exact               | Lift Curve Slope<br>$c_{l\alpha i} = 2\pi$ | 0                      | 0    | 0    | 0     | No AEFACt entry required |                    |

| <b>Table 17-1. Strip Theory Function Selections and AERACT Entry Formats</b> |                                                           |                        |      |      |       |                      |                    |
|------------------------------------------------------------------------------|-----------------------------------------------------------|------------------------|------|------|-------|----------------------|--------------------|
| Theodorsen Function                                                          | Data Type Input                                           | Parameter Combinations |      |      |       | Number of Words      | Entry Format Index |
|                                                                              |                                                           | CLA                    | LCLA | CIRC | LCIRC |                      |                    |
|                                                                              | $c_{l\alpha_i}$<br>Input, Uses Prandtl-Glauert Correction | -1                     | ID   | 0    | 0     | (NSTRIP+1)           | a.                 |
|                                                                              | $c_{l\alpha_i}$<br>Input, for All m's on MKAERO Entry     | 1                      | ID   | 0    | 0     | (NSTRIP+1)*<br>NMACH | b.                 |
| Approximate Coefficients                                                     | $b_{0i}, b_{1i}, b_{1i},$ etc.                            | 0                      | 0    | 1    | ID    | 4*NMACH              | c.                 |
|                                                                              |                                                           | 0                      | 0    | 2    | ID    | 6*NMACH              | d.                 |
|                                                                              |                                                           | 0                      | 0    | 3    | ID    | 8*NMACH              | e.                 |

Entry Format:

a.

$$AEFACT, ID, m_1, c_{l\alpha_1}, c_{l\alpha_2}, \dots, c_{l\alpha_{NSTRIP}}$$

b.

$$AEFACT, ID, m_1, c_{l\alpha_{11}}, c_{l\alpha_{21}}, \dots, c_{l\alpha_{NSTRIP1}}$$

$m_2, c_{l\alpha_{11}}, c_{l\alpha_{12}}, c_{l\alpha_{21}}, c_{l\alpha_{22}}, \dots, c_{l\alpha_{NSTRIP1}}, c_{l\alpha_{NSTRIP2}},$  for all m on MKAEROi data entry

c. AEFACT, ID,  $m_1, b_{01}, b_{11}, b_{11}, m_2, b_{02}, b_{12}, P_{12}, m_3,$  etc.

d. AEFACT, ID,  $m_1, b_{01}, b_{11}, b_{11}, b_{21}, b_{21}, m_2,$  etc.

e. AEFACT, ID,  $m_1, b_{01}, b_{11}, b_{11}, b_{21}, b_{21}, b_{31}, b_{31}, m_2,$  etc.

8. A control surface rotation is positive when the trailing edge moves in the negative z-direction of the aerodynamic element coordinate system; see the *NX Nastran Aeroelastic Analysis User's Guide*.

**1742 PAERO5**  
Aerodynamic Panel Property

**PAERO5** Aerodynamic Panel Property

Defines properties of each strip element for Piston theory.

**Format:**

| 1      | 2     | 3      | 4      | 5     | 6     | 7     | 8     | 9 | 10 |
|--------|-------|--------|--------|-------|-------|-------|-------|---|----|
| PAERO5 | PID   | NALPHA | LALPHA | NXIS  | LXIS  | NTAUS | LTAUS |   |    |
|        | CAOC1 | CAOC2  | CAOC3  | CAOC4 | CAOC5 |       |       |   |    |

**Example:**

|        |      |     |      |         |     |   |     |  |  |
|--------|------|-----|------|---------|-----|---|-----|--|--|
| PAERO5 | 7001 | 1   | 702  | 1       | 701 | 1 | 700 |  |  |
|        | 0.0  | 0.0 | 5.25 | 3.99375 | 0.0 |   |     |  |  |

**Fields:**

**Field Contents**

PID Property identification number. (Unique Integer > 0)

NALPHA Number of angle of attack ( $\alpha$ ) values to be input for each Mach number ( $m_i$ ) on the MKAERO1 or MKAERO2 entry. (Integer > 0)

| NALPHA           | Meaning                                                                                                                                                                       |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                | $\alpha$ is the same value for all strips; enter one value, in units of degrees, on the AEFACF entry for each Mach number.                                                    |
| Number of Strips | $\alpha$ is different for each strip; enter $\alpha$ 's, in units of degrees, in the following order: $m_1, \alpha_1, \alpha_2, \dots, m_2, \alpha_1, \alpha_2, \dots$ , etc. |

LALPHA ID number of the AEFACF entry that lists the  $\alpha$ 's for the strips at each Mach number in the MKAERO1 or MKAERO2 entry. (Integer > 0)

NXIS Number of dimensionless chord coordinates  $x$  to be input. (Integer  $\geq 0$ , Default = 0)

| NXIS | Meaning                           |
|------|-----------------------------------|
| 0    | No $x$ 's are required. (Default) |

| NXIS             | Meaning                                                                                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                | x's are the same for all strips; enter values for one strip on the AEFAC entry ( $x_h$ if NTHICK > 0, or $x_m$ and $x_h$ if NTHICK = 0)                                                  |
| Number of Strips | x's have to be input for each strip ( $x_{h1}, x_{h2}, \dots, x_{hNSPAN}$ , if NTHICK > 0, or $x_{m1}, x_{h1}, x_{m2}, x_{h2}, \dots, x_{mNSPAN}, x_{hNSPAN}, b_{hNSPAN}$ if NTHICK = 0) |

**LXIS** Identification number of AEFAC entry that lists the x values for the strip in order indicated by values of NXIS and NTHICK. (Integer = 0 if  $c_a = 0$  and NTHICK > 0 or LXIS > 0 if  $c_a = 0$  and/or NTHICK = 0)

**NTAUS** Parameter used to select the number of thickness ratio (t) values to be input. (Integer  $\geq 0$ , Default = 0)

| NTAUS            | Meaning                                                                                                                                                                       |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0                | No t's are required. (Default)                                                                                                                                                |
| 1                | t's are the same for all strips; enter ( $t_1, t_{h1}, t_{t1}$ ) values for one strip on AEFAC entry.                                                                         |
| Number of Strips | t's must to be input for each strip on an AEFAC entry in the following order:<br><br>( $t_1, t_{h1}, t_{t1}, t_2, t_{h2}, t_{t2}, \dots, t_{NSPAN}, t_{hNSPAN}, t_{tNSPAN}$ ) |

**LTAUS** Identification number of AEFAC entry that lists the t values for the strips. (Integer = 0 or blank if NTAUS = 0, LTAUS > 0 if NTAUS > 0)

**CAOCi**  $c_a/c =$  control surface chord divided by the strip chord. (Real  $\geq 0.0$ )

**Remarks:**

1. The continuation entry is required for Piston theory with one entry (CAOCi) per strip.
2. Embedded blank fields are not allowed on the continuation entry.
3. If CAOCi = 0.0, there is no control surface.

**1744 PAERO5**  
**Aerodynamic Panel Property**

4. Table 17-2 lists the thickness data input and AEFAC T entry format used for Piston theory.

**Table 17-2. Thickness Data Input and AEFAC T Entry Format for Piston Theory**

| Type of Input                                                    | Parameter Combinations |                   |        |                   |        |                   | Number of Words      | Entry Format Index |
|------------------------------------------------------------------|------------------------|-------------------|--------|-------------------|--------|-------------------|----------------------|--------------------|
|                                                                  | CAOC                   | NGHICK            | NXIS   | LXIS              | NTAUS  | LTAUS             |                      |                    |
| No control surfaces, Integrals input are same for all strips     | 0.0                    | ID <sup>(a)</sup> | 0      | 0                 | 0      | 0                 | 6                    | a.                 |
| With control surfaces, Integrals input, same hinge on all strips | ≠ 0.0                  | ID <sup>(b)</sup> | 1      | ID <sup>(c)</sup> | 0      | 0                 | 121                  | b.c.               |
| With control surfaces, Integrals input, variable hinge           | ≠ 0.0                  | ID <sup>(b)</sup> | NSTRIP | ID <sup>(d)</sup> | 0      | 0                 | 12NSTRIP             | b.d.               |
| No control surfaces, thickness inputs are same for all strips    | 0.0                    | 0                 | 1      | ID <sup>(f)</sup> | 1      | ID <sup>(e)</sup> | 32                   | e.f.               |
| With control surfaces, thickness inputs are same for all strips  | ≠ 0.0                  | 0                 | 1      | ID <sup>(f)</sup> | 1      | ID <sup>(e)</sup> | 32                   | e.f.               |
| With control surfaces, thickness inputs vary for strips          | ≠ 0.0                  | 0                 | NSTRIP | ID <sup>(h)</sup> | NSTRIP | ID <sup>(g)</sup> | 3*NSTRIP<br>2*NSTRIP | g.h.               |

**Entry Format**

- a. AEFAC T, ID, I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>4</sub>, I<sub>5</sub>, I<sub>6</sub>
- b. AEFAC T, ID, I<sub>1</sub>, ..., I<sub>6</sub>, J<sub>1</sub>, ..., J<sub>6</sub>I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>4</sub>, I<sub>5</sub>, I<sub>6</sub>
- c. AEFAC T, ID, x<sub>h</sub>



- d. AEFAC T, ID,  $x_{h1}, x_{h2}, x_{h3}, \dots, x_{hNSTRIP}$
  - e. AEFAC T, ID,  $t_m, t_h, t_t$
  - f. AEFAC T, ID,  $x_m, x_h$
  - g. AEFAC T, ID,  $t_{m1}, t_{h1}, t_{t1}, t_{m2}, t_{h2}, t_{t2}, \dots, t_{mNSTRIP}, t_{hNSTRIP}, t_{tNSTRIP}$   
 $t_{m1}, t_{h1}, t_{t1}, t_{m2}, t_{h2}, t_{t2}, \dots, t_{mNSTRIP}, t_{hNSTRIP}, t_{tNSTRIP}$
  - h. AEFAC T, ID,  $x_{m1}, x_{h1}, x_{m2}, x_{h2}, \dots, x_{mNSTRIP}, x_{hNSTRIP}$
5. The following table lists the angle-of-attack distribution and AEFAC T entry formats used for Piston theory.

| Type of Distribution                | Parameter Combinations |        | Number of Words      | Entry Format Index |
|-------------------------------------|------------------------|--------|----------------------|--------------------|
|                                     | NALPHA                 | LALPHA |                      |                    |
| Equal angle of attack on all strips | 1                      | ID     | 2*NMACH              | a.                 |
| Unequal angle of attack             | NSTRIP                 | ID     | (1 + NSTRIP) * NMACH | b.                 |

**Entry Format**

- a. AEFAC T, ID,  $m_1, a_1, m_2, a_2, \dots,$
- b. AEFAC T, ID,  $m_1, a_{11}, a_{21}, a_{31}, \dots, a_{NSTRIP1}, m_2, a_{12}, a_{22}, \dots, a_{NSTRIP2}, m_2,$  etc., for all m on MKAEROi entry.
- c. A control surface rotation is positive when the trailing edge moves in the negative z-direction of the aerodynamic element coordinate system; see the *NX Nastran Aeroelastic Analysis User's Guide*.

## 1746 PANEL Panel Definition for Coupled Fluid-Structural Analysis

### PANEL Panel Definition for Coupled Fluid-Structural Analysis

Selects sets of structural grid points, elements, or physical properties that define one or more panels.

#### Format:

| 1     | 2     | 3    | 4     | 5    | 6     | 7    | 8     | 9    | 10 |
|-------|-------|------|-------|------|-------|------|-------|------|----|
| PANEL | NAME1 | SID1 | NAME2 | SID2 | NAME3 | SID3 | NAME4 | SID4 |    |

#### Example:

|       |        |     |  |  |  |  |  |  |  |
|-------|--------|-----|--|--|--|--|--|--|--|
| PANEL | BKDOOR | 103 |  |  |  |  |  |  |  |
|-------|--------|-----|--|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAMEi | Panel label. (Character)                                                                                                                               |
| SIDi  | Identification number of a SET1 or SET3 bulk entry that lists the structural grid points, elements, or physical properties of the panel. (Integer > 0) |

#### Remarks:

- Panels are groups of structural grid points.
  - If a set of grid points is referenced, the set must include only structural grid points. The panel will consist of all the grid points in the referenced set. SET1 and SET3 bulk entries are used to define sets of grid points.
  - If a set of elements is referenced, the set must include only structural elements. The panel will consist of all the grid points that are connection points for these elements. SET3 bulk entries are used to define sets of elements.
  - If a set of physical property identifiers is referenced, the physical properties must be referenced by structural elements. The panel will consist of all grid points that are connection points for the structural elements referencing the physical properties included in the set. SET3 bulk entries are used to define sets of physical property identifiers.
- If the referenced SET1 or SET3 bulk entries include structural grid points, the sets must include at least four grid points for quadrilateral faces and three grid points for triangular faces.

**PANEL 1747**

**Panel Definition for Coupled Fluid-Structural Analysis**

3. It is recommended that all of the connection points for a given element belong to the same panel.
4. NAMEi is used only for labeling the output of the panel modal participation factors (refer to the MODCON and PANCON case control commands). See “Performing a Coupled Fluid-Structural Analysis” in the *NX Nastran User’s Guide*.

**1748 PARAM**  
Parameter

**PARAM** Parameter

Specifies values for parameters used in solution sequences or user-written DMAP programs.

**Format:**

|       |   |    |    |   |   |   |   |   |    |
|-------|---|----|----|---|---|---|---|---|----|
| 1     | 2 | 3  | 4  | 5 | 6 | 7 | 8 | 9 | 10 |
| PARAM | N | V1 | V2 |   |   |   |   |   |    |

**Example:**

|       |      |   |  |  |  |  |  |  |  |
|-------|------|---|--|--|--|--|--|--|--|
| PARAM | IRES | 1 |  |  |  |  |  |  |  |
|-------|------|---|--|--|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                 |
|--------|------------------------------------------------------------------------------------------|
| N      | Parameter name (one to eight alphanumeric characters, the first of which is alphabetic). |
| V1, V2 | Parameter value based on parameter type, as follows:                                     |

| Type                      | V1                    | V2                    |
|---------------------------|-----------------------|-----------------------|
| Integer                   | Integer               | Blank                 |
| Real, single-precision    | Real                  | Blank                 |
| Character                 | Character             | Blank                 |
| Real, double-precision    | Double-precision real | Blank                 |
| Complex, single-precision | Real or blank         | Real or blank         |
| Complex, double-precision | Double-precision real | Double-precision real |

**Remarks:**

1. See “[Parameters](#)” for a list of parameters used in solution sequences that may be set by the user on PARAM entries.
2. If the large field entry format is used, the second physical entry must be present, even though fields 6 through 9 are blank.

**PBAR**     Simple Beam Property

Defines the properties of a simple beam element (CBAR entry).

**Format:**

| 1    | 2   | 3   | 4   | 5  | 6  | 7  | 8   | 9  | 10 |
|------|-----|-----|-----|----|----|----|-----|----|----|
| PBAR | PID | MID | A   | I1 | I2 | J  | NSM |    |    |
|      | C1  | C2  | D1  | D2 | E1 | E2 | F1  | F2 |    |
|      | K1  | K2  | I12 |    |    |    |     |    |    |

**Example:**

|      |    |   |     |     |      |  |  |  |  |
|------|----|---|-----|-----|------|--|--|--|--|
| PBAR | 39 | 6 | 2.9 |     | 5.97 |  |  |  |  |
|      |    |   | 2.0 | 4.0 |      |  |  |  |  |

**Fields:**

| Field          | Contents                                                                                                                   |
|----------------|----------------------------------------------------------------------------------------------------------------------------|
| PID            | Property identification number. (Integer > 0)                                                                              |
| MID            | Material identification number. See Remarks 2 and 3. (Integer > 0)                                                         |
| A              | Area of bar cross section. (Real; Default = 0.0)                                                                           |
| I1, I2, I12    | Area moments of inertia. See Figure 17-2. (Real; $I1 \geq 0.0$ , $I2 \geq 0.0$ , $I1 \cdot I2 \geq I12^2$ ; Default = 0.0) |
| J              | Torsional constant. See Figure 17-2. (Real; Default = 0.0)                                                                 |
| NSM            | Nonstructural mass per unit length. (Real)                                                                                 |
| Ci, Di, Ei, Fi | Stress recovery coefficients. (Real; Default = 0.0)                                                                        |
| K1, K2         | Area factor for shear. See Remark 5. (Real; Default = 0.0)                                                                 |

**Remarks:**


- Both continuation entries may be omitted.
- For structural problems, MID must reference a MAT1 material entry.
- For heat transfer problems, MID must reference a MAT4 or MAT5 material entry.

**1750 PBAR**  
**Simple Beam Property**

4. See the CBAR entry description for a discussion of bar element geometry.
5. The transverse shear stiffnesses per unit length in planes 1 and 2 are  $K1 \cdot A \cdot G$  and  $K2 \cdot A \cdot G$ , respectively, where  $G$  is the shear modulus. When  $K1/K2$  are set to Blank or 0.0 (Default), the transverse shear flexibilities are set equal to zero (which is equivalent to  $K1/K2$  being infinite).  $K1$  and  $K2$  are ignored if  $I12 \neq 0$ .  $K1$  and  $K2$  must be blank if  $A = 0.0$ .
6. The stress recovery coefficients  $C1$  and  $C2$ , etc., are the  $y$  and  $z$  coordinates in the bar element coordinate system of a point at which stresses are computed. Stresses are computed at both ends of the bar.
7. For response spectra analysis on stress recovery coefficients, the CBEAM element entry should be used because bar element results will be inaccurate.
8. [Figure 17-2](#) describes the PBAR element coordinate system.

Note:

$$\begin{aligned}
 I1 &= I_{zz\text{elem}} \\
 I2 &= I_{yy\text{elem}} \\
 I12 &= I_{zy\text{elem}} \\
 J &= I_{xx\text{elem}}
 \end{aligned}$$

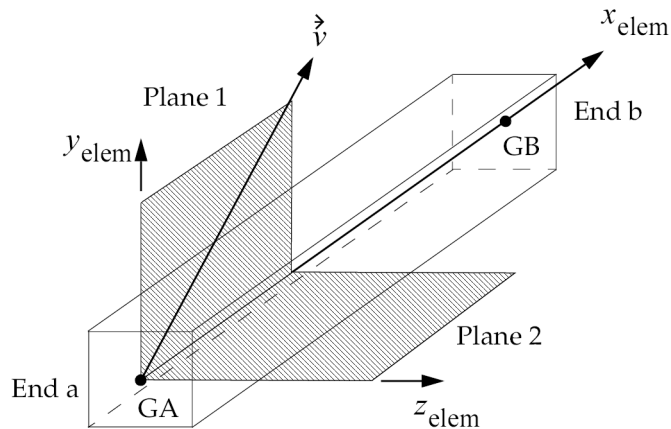

**Figure 17-2. PBAR Element Coordinate System**

9. By definition, the shear center and neutral axes coincide.

**Remarks related to SOLs 601 and 701:**

1. NSM, C1, C2, D1, D2, E1, E2, F1, F2, and I12 are ignored.
2. PBAR cannot be used for elasto-plastic beam elements. For elasto-plastic beam elements, PBARL with circular (TYPE = "ROD" or "TUBE") or rectangular (TYPE="BAR") cross sections must be used.

## 1752 PBARL Simple Beam Cross-Section Property

### PBARL Simple Beam Cross-Section Property

Defines the properties of a simple beam element (CBAR entry) by cross-sectional dimensions.

#### Format:

| 1     | 2    | 3      | 4     | 5    | 6    | 7    | 8    | 9    | 10 |
|-------|------|--------|-------|------|------|------|------|------|----|
| PBARL | PID  | MID    | GROUP | TYPE |      |      |      |      |    |
|       | DIM1 | DIM2   | DIM3  | DIM4 | DIM5 | DIM6 | DIM7 | DIM8 |    |
|       | DIM9 | -etc.- | NSM   |      |      |      |      |      |    |

#### Example:

|       |     |    |    |    |    |  |  |  |  |
|-------|-----|----|----|----|----|--|--|--|--|
| PBARL | 39  | 6  |    | I  |    |  |  |  |  |
|       | 14. | 6. | .5 | .5 | .5 |  |  |  |  |

#### Fields:

| Field | Contents                                                                                                                                                                                                                     |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                                                                                                                                                                |
| MID   | Material identification number. (Integer > 0)                                                                                                                                                                                |
| GROUP | Cross-section group. See Remarks 6 and 8. (Character; Default = "MSCBML0")                                                                                                                                                   |
| TYPE  | Cross-section type. See Remarks 6 and 8 and Figure 3. (Character: "ROD", "TUBE", "I", "CHAN", "T", "BOX", "BAR", "CROSS", "H", "T1", "I1", "CHAN1", "Z", "CHAN2", "T2", "BOX1", "HEXA", "HAT", "HAT1" for GROUP = "MSCBML0") |
| DIMi  | Cross-sectional dimensions. (Real > 0.0 for GROUP = "MSCBML0")                                                                                                                                                               |
| NSM   | Nonstructural mass per unit length. NSM is specified after the last DIMi. (Real ≥ 0; Default = 0.0)                                                                                                                          |

#### Remarks:

1. For structural problems, PBARL entries must reference a MAT1 material entry.
2. PID must be unique with respect to all other PBAR and PBARL property identification numbers.




3. See CBAR entry for a discussion of bar element geometry.
4. For heat-transfer problems, the MID must reference a MAT4 or MAT5 material entry.
5. For response spectra analysis on stress recovery coefficients, the CBEAM element should be used because results for the CBAR element will not be accurate.
6. The GROUP is associated with an FMS CONNECT statement that specifies the evaluator. A reserved GROUP name is "MSCBML0". Users may create their own cross-section types. Each of the types will require one or more subroutines to convert DIMi information to geometric property information contained on a PBAR entry and optimization information.
7. A function of this entry is to derive an equivalent PBAR entry. Any sorted echo request will also cause printout and/or punch of the derived PBAR.
8. For GROUP = "MSCBML0", the cross-sectional properties, shear flexibility factors, and stress recovery points (C, D, E, and F) are computed using the TYPE and DIMi as shown in [Figure 17-3](#). The origin of element coordinate system is centered at the shear center of the cross-section oriented as shown. The PBARL does not account for offsets between the neutral axis and the shear center. Therefore, the CHAN, CHAN1 and CHAN2 cross-sections may produce incorrect results. The PBEAML is recommended.


**Remarks related to SOLs 601 and 701:**

1. GROUP and NSM are ignored.
2. TYPE= "Z", "BOX1", "CROSS", "HEXA", "HAT", and "HAT1" are not supported.
3. No shear stiffness correction is used.
4. For elasto-plastic beam elements, circular (TYPE = "ROD" or "TUBE") or rectangular (TYPE= "BAR") cross sections must be used.


**1754 PBARL**  
**Simple Beam Cross-Section Property**




TYPE="ROD"

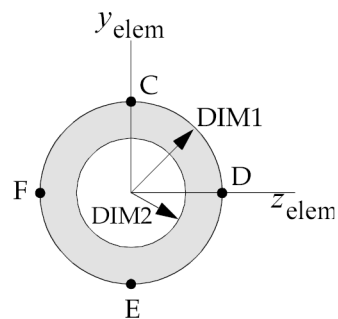

TYPE="TUBE"

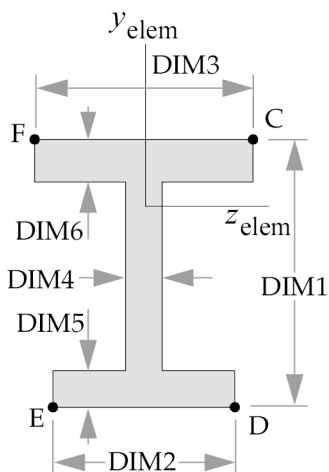


TYPE="I"

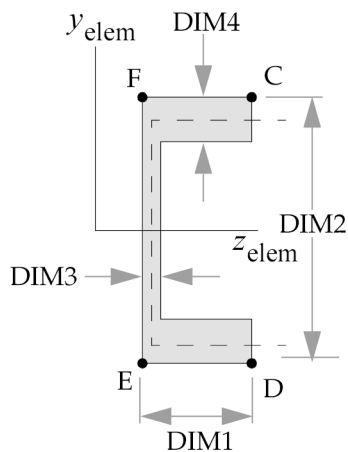


TYPE="CHAN"


**PBARL 1755**  
**Simple Beam Cross-Section Property**

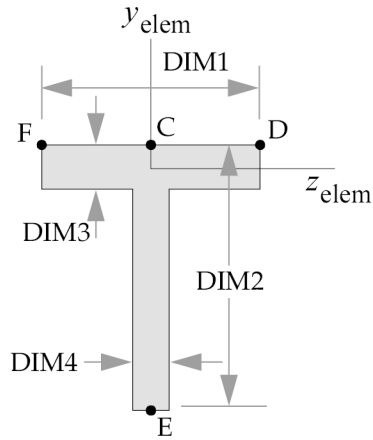


TYPE="T"

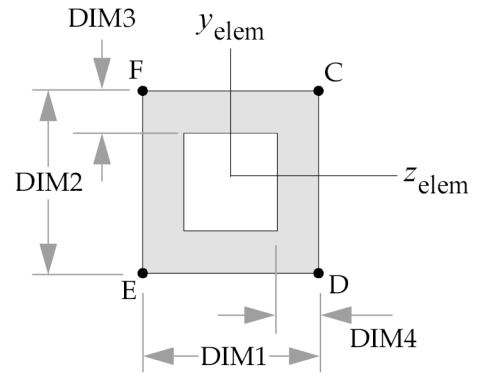


TYPE="BOX"

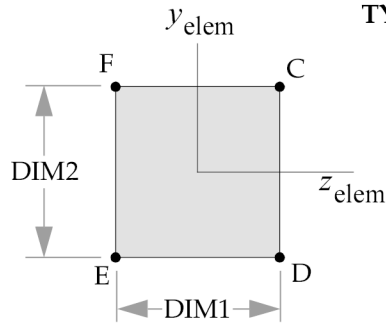

TYPE="BAR"

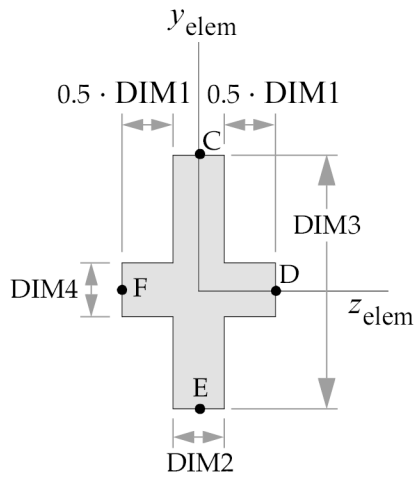


TYPE="CROSS"

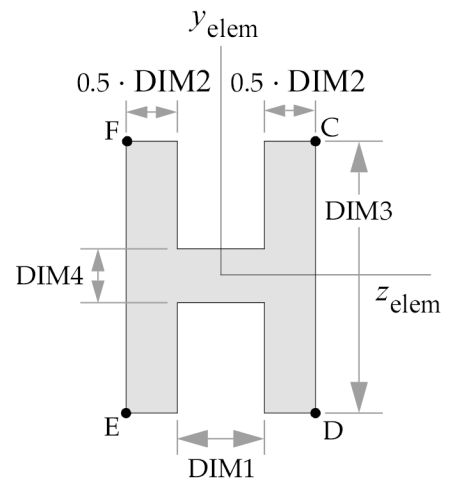


TYPE="H"


1756 **PBARL**  
Simple Beam Cross-Section Property

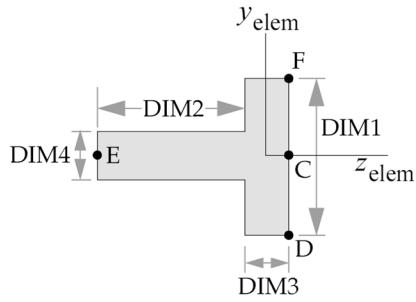


TYPE="T1"

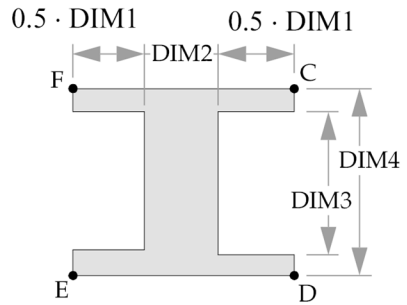


TYPE="I1"

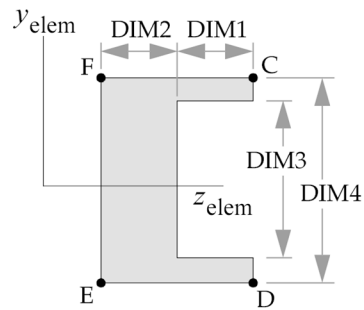


TYPE="CHAN1"

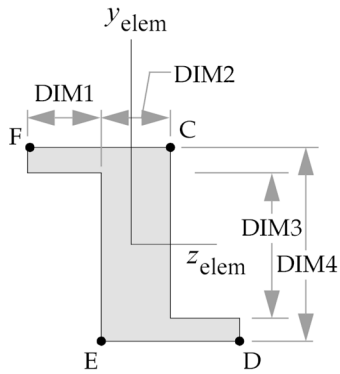


TYPE="Z"

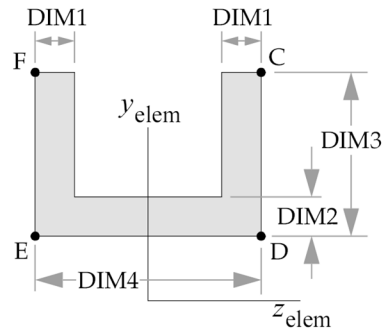


TYPE="CHAN2"

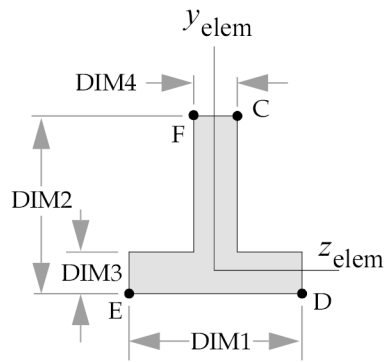


TYPE="T2"

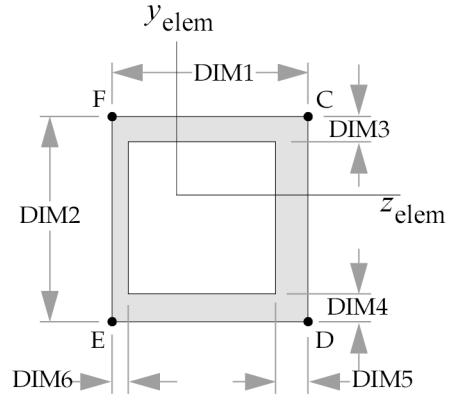


TYPE="BOX1"

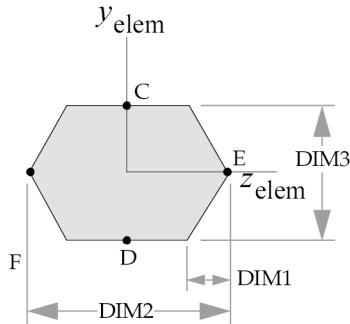

TYPE="HEXA"

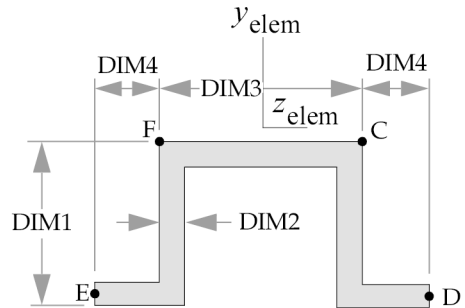

TYPE="HAT"

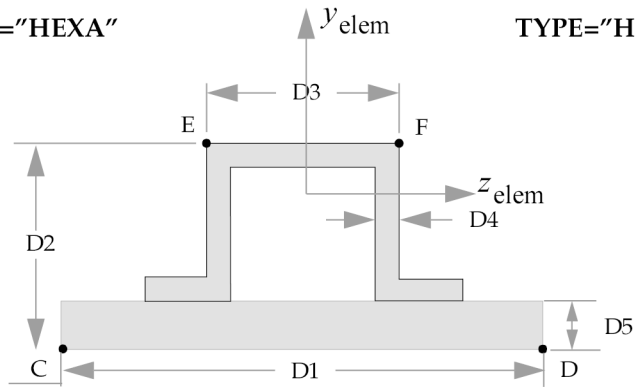

TYPE="HAT1"

Figure 17-3. Definition of Cross-Section Geometry and Stress Recovery Points for GROUP = "MSCBML0"

**1758 PBCOMP**  
**Beam Property (Alternate Form of PBEAM)**

**PBCOMP**      Beam Property (Alternate Form of PBEAM)

Alternate form of the PBEAM entry to define properties of a uniform cross-sectional beam referenced by a CBEAM entry. This entry is also used to specify lumped areas of the beam cross section for nonlinear analysis and/or composite analysis.

**Format:**

| 1      | 2      | 3   | 4  | 5    | 6  | 7   | 8      | 9   | 10 |
|--------|--------|-----|----|------|----|-----|--------|-----|----|
| PBCOMP | PID    | MID | A  | I1   | I2 | I12 | J      | NSM |    |
|        | K1     | K2  | M1 | M2   | N1 | N2  | SYMOPT |     |    |
|        | Y1     | Z1  | C1 | MID1 |    |     |        |     |    |
|        | Y2     | Z2  | C2 | MID2 |    |     |        |     |    |
|        | -etc.- |     |    |      |    |     |        |     |    |

**Example:**

|        |      |     |      |    |  |  |   |  |  |
|--------|------|-----|------|----|--|--|---|--|--|
| PBCOMP | 39   | 6   | 2.9  |    |  |  |   |  |  |
|        |      |     |      |    |  |  | 1 |  |  |
|        | -0.5 | 1.2 | 0.1  | 18 |  |  |   |  |  |
|        | 0.2  | 0.9 | 0.15 |    |  |  |   |  |  |

**Fields:**

| Field | Contents                                                                                          |
|-------|---------------------------------------------------------------------------------------------------|
| PID   | Property identification number. See Remark 1 . (Integer > 0)                                      |
| MID   | Material identification number. See Remarks 2 and 5. (Integer > 0)                                |
| A     | Area of beam cross section. (Real > 0.0)                                                          |
| I1    | Area moment of inertia in plane 1 about the neutral axis. See Remark 6 . (Real > 0.0)             |
| I2    | Area moment of inertia in plane 2 about the neutral axis. See Remark 6 . (Real > 0.0)             |
| I12   | Area product of inertia. See Remark 6 . (Real; Default = 0.0, but $I1 \cdot I2 - (I12)^2 > 0.0$ ) |
| J     | Torsional stiffness parameter. See Remark 6 . (Real > 0.0; Default = 0.0)                         |


| <b>Field</b> | <b>Contents</b>                                                                                                                                  |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| NSM          | Nonstructural mass per unit length. (Real > 0.0; Default = 0.0)                                                                                  |
| K1, K2       | Shear stiffness factor K in $K \cdot A \cdot G$ for plane 1 and plane 2. See Remark 4 . (Real > 0.0; Default = 1.0)                              |
| M1, M2       | The (y,z) coordinates of center of gravity of nonstructural mass. See the figure in the CBEAM entry description. (Real; Default = 0.0)           |
| N1, N2       | The (y,z) coordinates of neutral axis. See the figure in the CBEAM entry description. (Real; Default = 0.0)                                      |
| SYMOPT       | Symmetry option to input lumped areas for the beam cross section. See Figure 17-5 and Remark 7 . ( $0 \leq \text{Integer} \leq 5$ ; Default = 0) |
| Yi, Zi       | The (y,z) coordinates of the lumped areas in the element coordinate system. See Remark 1 . (Real)                                                |
| Ci           | Fraction of the total area for the i-th lumped area. (Real > 0.0; Default = 0.0)                                                                 |
| MIDi         | Material identification number for the i-th integration point. See Remark 5 . (Integer > 0)                                                      |

**Remarks:**

1. The PID number must be unique with respect to other PBCOMP entries as well as PBEAM entries. The second continuation entry may be repeated 18 more times. If SECTION = 5 a maximum of 21 continuation entries is allowed; i.e., a maximum of 20 lumped areas may be input. If SECTION = 1 through 4, the total number of areas input plus the total number generated by symmetry must not exceed 20. If these are not specified, the program defaults, as usual, to the elliptically distributed eight nonlinear rods. See Figure 17-4.

**1760 PBCOMP**  
**Beam Property (Alternate Form of PBEAM)**

**17**  
**Bulk O-P**

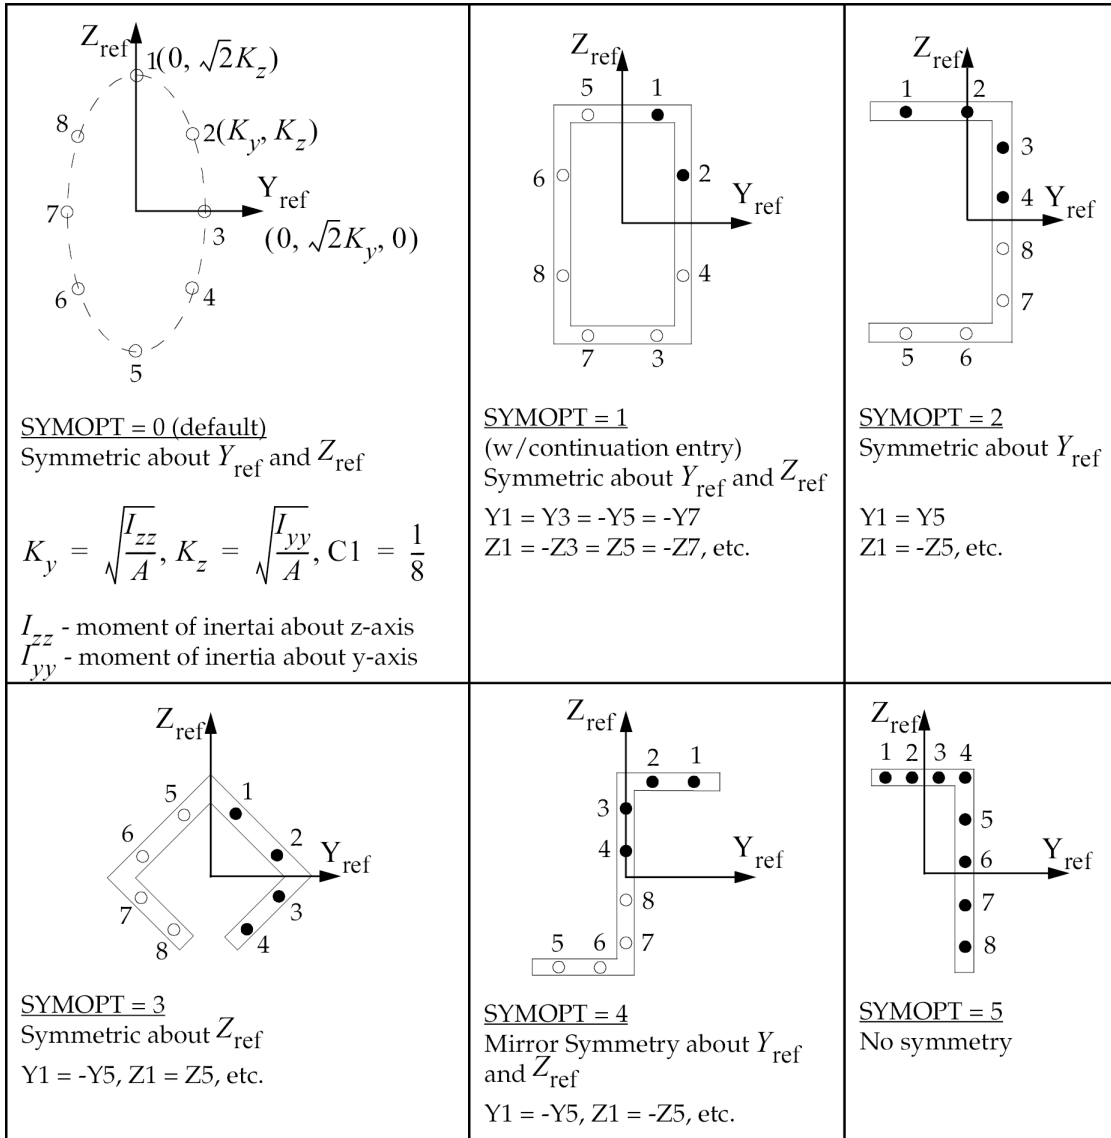

**Figure 17-4. PBCOMP Entry SYMPT Type Examples with 8 Lumped Areas**

Figure Example Notes:

Integration points (lumped area) are numbered 1 through 8.

User-specified points are denoted by • and the program default point is denoted by ○.



2. For structural problems, MID and MIDi must reference a MAT1 material entry. For material nonlinear analysis, the material should be perfectly plastic since the plastic hinge formulation is not valid for strain hardening. For heat transfer problems, MID and MIDi must reference a MAT4 or MAT5 material entry.
3. For the case where the user specifies I1, I2 and I12 on the parent entry, the stress-output location may also be specified on continuation entries. The (y,z) coordinates specified on these entries will serve as stress output locations with the corresponding Ci's set to 0. Stress output is provided at the first four lumped area locations only. If one of the symmetry options is used and fewer than four lumped areas are input explicitly, the sequence of output locations in the imaged quadrants is shown in [Figure 17-4](#). For one specific example in the model shown in [Remark 7 \(Figure 17-5\)](#), output can be obtained at points 1 and 2 and in the image points 3 and 4.
4. Blank fields for K1 and K2 are defaulted to 1.0. If a value of 0.0 is used for K1 and K2, the transverse shear stiffness becomes rigid and the transverse shear flexibilities are set to 0.0.
5. The values  $E_0$  and  $G_0$  are computed based on the value of MID on the parent entry. MID is will follow the same symmetry rules as Ci depending on the value of SECTION. If the MIDi field on a continuation entry is blank, the value will be that of MID on the parent entry. MIDi values may be input on continuations without the corresponding Yi, Zi, and Ci values to allow different stress-strain laws.
6. If the lumped cross-sectional areas are specified, fields I1, I2, and I12 will be ignored. These and other modified values will be calculated based on the input data (Yi, Zi, Ci, MIDi) as follows:

$$y_{NA} = \frac{\sum_{i=1}^n Y_i C_i E_i}{\sum_{i=1}^n C_i E_i}$$

1762 PBCOMP  
Beam Property (Alternate Form of PBEAM)

$$z_{NA} = \frac{\sum_{i=1}^n Z_i C_i E_i}{\sum_{i=1}^n C_i E_i}$$

$$\bar{A} = A \sum_{i=1}^n \frac{C_i E_i}{E_o}$$

$$\bar{I}_1 = A \sum_{i=1}^n \frac{C_i E_i (Y_i - y_{NA})^2}{E_o}$$

$$\bar{I}_2 = A \sum_{i=1}^n \frac{C_i E_i (Y_i - z_{NA})^2}{E_o}$$


$$\bar{I}_{12} = A \sum_{i=1}^n \frac{C_i E_i (Y_i - y_{NA})(Z_i - z_{NA})}{E_o}$$

$$\bar{J} = J \sum_{i=1}^n \frac{C_i G_i}{G_o}$$

where n is the number of lumped cross-sectional areas specified.

- As can be seen from [Figure 17-4](#), if the user chooses to leave the SECTION field blank, the program defaults to the elliptically distributed eight nonlinear rods, similar to the PBEAM entry. For this particular case it is illegal to supply Ci and MIDi values. For a doubly symmetric section (SECTION = 1), if the lumped areas are specified on either axis, the symmetry option will double the areas. For example, for the section shown in [Figure 17-5](#), points 2 and 4 are coincident

and so are points 6 and 8. In such cases, it is recommended that users input the value of area as half of the actual value at point 2 to obtain the desired effect.

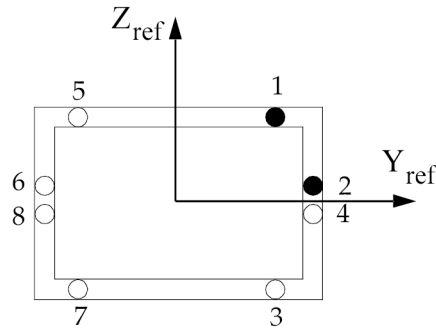

**Figure 17-5. Doubly Symmetric PBCOMP Section**

8. For SECTION = 5, at least one  $Y_i$  and one  $Z_i$  must be nonzero.

**Remarks related to SOLs 601 and 701:**

1. Only MID, A, I1, I2, J, K1, and K2 are used to define the properties of a simple beam. All other fields are ignored.
2. The neutral axis and shear center are assumed to be coincident with the element x-axis.
3. The behavior of a CBEAM element is the same as a CBAR element in SOLs 601 and 701.

**1764 PBEAM**  
Beam Property

**PBEAM** Beam Property

Defines the properties of a beam element (CBEAM entry). This element may be used to model tapered beams.

**Format:**

| 1     | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|----|
| PBEAM | PID    | MID    | A(A)   | I1(A)  | I2(A)  | I12(A) | J(A)   | NSM(A) |    |
|       | C1 (A) | C2 (A) | D1 (A) | D2 (A) | E1 (A) | E2 (A) | F1 (A) | F2 (A) |    |

The next two continuations are repeated for each intermediate station as described in Remark 5. and SO and X/XB must be specified.

|  |    |      |    |    |    |     |    |     |  |
|--|----|------|----|----|----|-----|----|-----|--|
|  | SO | X/XB | A  | I1 | I2 | I12 | J  | NSM |  |
|  | C1 | C2   | D1 | D2 | E1 | E2  | F1 | F2  |  |

The last two continuations are:

|  |       |       |       |       |        |        |       |       |  |
|--|-------|-------|-------|-------|--------|--------|-------|-------|--|
|  | K1    | K2    | S1    | S2    | NSI(A) | NSI(B) | CW(A) | CW(B) |  |
|  | M1(A) | M2(A) | M1(B) | M2(B) | N1(A)  | N2(A)  | N1(B) | N2(B) |  |

**Example: Tapered beam with A=2.9 at end A and A=5.3 at end B.**

|       |     |     |     |      |      |  |      |  |  |
|-------|-----|-----|-----|------|------|--|------|--|--|
| PBEAM | 39  | 6   | 2.9 | 3.5  | 5.97 |  |      |  |  |
|       |     |     | 2.0 | -4.0 |      |  |      |  |  |
|       | YES | 1.0 | 5.3 | 56.2 | 78.6 |  |      |  |  |
|       |     |     | 2.5 | -5.0 |      |  |      |  |  |
|       |     |     | 1.1 |      | 2.1  |  | 0.21 |  |  |
|       |     |     |     |      | 0.5  |  | 0.0  |  |  |

**Fields:**

| Field | Contents                                                           | Default Values |
|-------|--------------------------------------------------------------------|----------------|
| PID   | Property identification number. (Integer > 0)                      | Required       |
| MID   | Material identification number. See Remarks 1 and 2. (Integer > 0) | Required       |
| A(A)  | Area of the beam cross section at end A. (Real > 0.0)              | Required       |

| Field                        | Contents                                                                                                                                                                                                                                                                            | Default Values           |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| I1(A)                        | Area moment of inertia at end A for bending in plane 1 about the neutral axis. See Remarks 10 and 11. (Real > 0.0)                                                                                                                                                                  | Required                 |
| I2(A)                        | Area moment of inertia at end A for bending in plane 2 about the neutral axis. See Remarks 10 and 11. (Real > 0.0)                                                                                                                                                                  | Required                 |
| I12(A)                       | Cross product of inertia at end A. See Remarks 10 and 11. (Real ≥ 0.0)                                                                                                                                                                                                              | 0.0                      |
| J(A)                         | Torsional stiffness parameter at end A. See Remark 10. (Real ≥ 0.0 but > 0.0 if warping is present)                                                                                                                                                                                 | 0.0                      |
| NSM(A)                       | Nonstructural mass per unit length at end A. (Real)                                                                                                                                                                                                                                 | 0.0                      |
| Ci(A), Di(A)<br>Ei(A), Fi(A) | The y and z locations (i = 1 corresponds to y and i = 2 corresponds to z) in element coordinates relative to the shear center (see the diagram following the remarks) at end A for stress data recovery. (Real)                                                                     | y = z = 0.0              |
| SO                           | Stress output request option. See Remark 9. (Character)<br><br>“YES” Stresses recovered at points Ci, Di, Ei, and Fi on the next continuation.<br><br>“YESA” Stresses recovered at points with the same y and z location as end A.<br><br>“NO” No stresses or forces are recovered. | Required*                |
| X/XB                         | Distance from end A in the element coordinate system divided by the length of the element. See Figure 17-6 in Remark 10. (Real > 0.0)                                                                                                                                               | Required* See Remark 5 . |
| A, I1, I2, I12,<br>J, NSM    | Area, moments of inertia, torsional stiffness parameter, and nonstructural mass for the cross section located at x. (Real; J > 0.0 if warping is present.)                                                                                                                          | See Remark 1 .           |

**1766 PBEAM**  
Beam Property

| Field                            | Contents                                                                                                                                                                                                                                                                                                          | Default Values                                          |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Ci, Di, Ei, Fi                   | The y and z locations (i = 1 corresponds to y and i = 2 corresponds to z) in element coordinates relative to the shear center (see <a href="#">Figure 17-6</a> in Remark 10 ) for the cross section located at X/XB. The values are fiber locations for stress data recovery. Ignored for beam p-elements. (Real) |                                                         |
| K1, K2                           | Shear stiffness factor K in $K*A*G$ for plane 1 and plane 2. See Remark 13. (Real)                                                                                                                                                                                                                                | 1.0, 1.0                                                |
| S1, S2                           | Shear relief coefficient due to taper for plane1 and plane 2. Ignored for beam p-elements. (Real)                                                                                                                                                                                                                 | 0.0, 0.0                                                |
| NSI(A),<br>NSI(B)                | Nonstructural mass moment of inertia per unit length about nonstructural mass center of gravity at ends A and B. See <a href="#">Figure 17-6</a> . (Real)                                                                                                                                                         | 0.0, same as end A                                      |
| CW(A),<br>CW(B)                  | Warping coefficient for end A and end B. Ignored for beam p-elements. See Remark 12. (Real)                                                                                                                                                                                                                       | 0.0, same as end A                                      |
| M1(A),<br>M2(A),<br>M1(B), M2(B) | (y,z) coordinates of center of gravity of nonstructural mass for end A and end B. See <a href="#">Figure 17-6</a> . (Real)                                                                                                                                                                                        | 0.0 (no offset from shear center), same values as end A |
| N1(A),<br>N2(A),N1(B),<br>N2(B)  | (y,z) coordinates of neutral axis for end A and end B. See <a href="#">Figure 17-6</a> . (Real)                                                                                                                                                                                                                   | 0.0 (no offset from shear center), same values as end A |

**Remarks:**


1. For structural analysis, MID must reference a MAT1 material entry. For material nonlinear analysis, MID may also reference a MATS1 entry, but the material properties must be defined as elastic-perfectly plastic; for example, H = 0.0 on the MATS1 entry. Also, only one-eighth of the length at each end of the element abides by material nonlinear law; i.e., the element is modeled as a plastic hinge. Any other type of material property specification may yield inaccurate results.
2. For heat transfer analysis, MID must reference a MAT4 or MAT5 material entry.

3. If no stress data at end A is to be recovered and a continuation with the SO field is specified, then the first continuation entry, which contains the fields C1(A) through F2(A), may be omitted.
4. If SO is “YESA” or “NO”, the third continuation entry, which contains the fields C1 through F2, must be omitted. If SO is “YES”, the continuation for Ci, Di, Ei, and Fi must be the next entry.
5. The rules for the continuations entries are:
  - The second and third continuation entries, which contain fields SO through F2, may be repeated nine more times for intermediate X/XB values for linear beam elements. The order of these continuation pairs is independent of the X/XB value; however, one value of X/XB must be 1.0, corresponding to end B. The intermediate stress output requests will be ignored in the nonlinear solution sequences (SOLs 106 and 129).
  - The fourth and fifth continuation entries, which contain fields K1 through N2(B), are optional and may be omitted if the default values are appropriate.
  - if X/XB is not specified, then output for end A only will be generated.
6. If any fields 4 through 9 are blank on the continuation with the value of X/XB = 1.0, then the values for A, I1, I2, I12, J and NSM are set to the values given for end A. For the continuations that have intermediate values of X/XB between 0.0 and 1.0 and use the default option (any of the fields 4 through 9 are blank), a linear interpolation between the values at ends A and B is performed to obtain the missing section properties.
7. If SO is “YES”, blank fields are defaulted to 0.0.
8. Blank fields for K1, K2 are defaulted to 1.0. If a value of 0.0 is used for K1 and K2, the transverse shear flexibilities are set to 0.0 and field G on the MAT1 entry selected by MID must be nonzero.
9. If end B forces are desired, put “YESA” in the SO field even when no end A stress points are input.
10. [Figure 17-6](#) describes the PBEAM element coordinate system.

**1768 PBEAM**  
**Beam Property**

Note:

|                       |                  |                  |
|-----------------------|------------------|------------------|
| $I1 = I_{(zz)_{na}}$  | $N1(A) = y_{na}$ | $N1(B) = y_{nb}$ |
| $I2 = I_{(yy)_{na}}$  | $N2(A) = z_{na}$ | $N2(B) = z_{nb}$ |
| $I12 = I_{(zy)_{na}}$ | $M1(A) = y_{ma}$ | $M1(B) = y_{mb}$ |
| $J = I_{(xx)_{na}}$   | $M2(A) = z_{ma}$ | $M2(B) = z_{mb}$ |

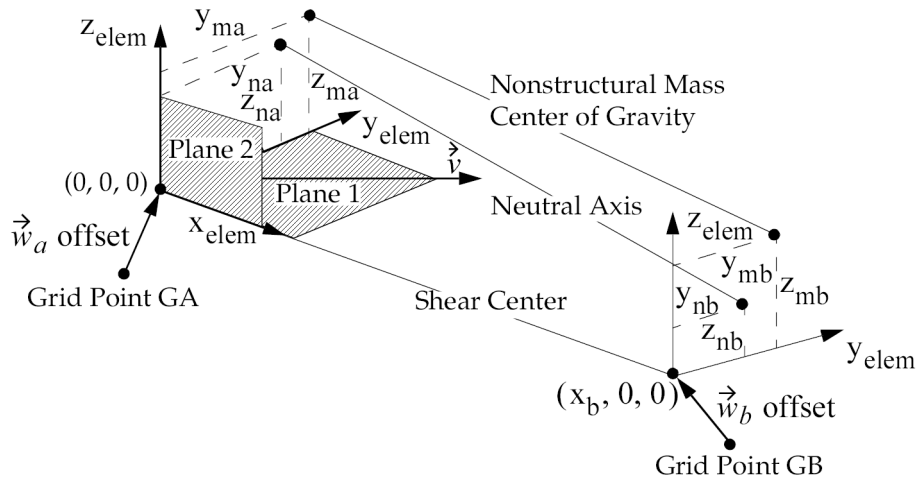

**Figure 17-6. PBEAM Element Coordinate System**

11. The product of I1 and I2 must be greater than I12 squared ( $I1 \times I2 > I12^2$ ), otherwise a fatal message is issued.
12. The warping coefficient CW is represented in the following differential equation for the torsion of a beam about the axis of the shear centers:

$$G \frac{d}{dx} \left( J \frac{d\theta}{dx} \right) - E \frac{d^2}{dx^2} \left( CW \frac{d^2\theta}{dx^2} \right) = m$$

where

- G = shear modulus
- J = torsional stiffness
- E = Young's modulus



$q$  = angle of rotation at any cross-section

$m$  = applied torsional moment per unit length

Note: CW has units of (length)<sup>6</sup>.

13. The shear stiffness factors  $K_1$  and  $K_2$  adjust the effective transverse shear cross-section area according to the Timoshenko beam theory. Their default values of 1.0 approximate the effects of shear deformation. To neglect shear deformation (i.e., to obtain the Bernoulli-Euler beam theory), the values of  $K_1$  and  $K_2$  should be set to 0.0.

**Remarks related to SOLs 601 and 701:**

1. Tapered beams are not supported. Hence, only the properties at end A are used and a constant cross section is assumed, i.e., only  $A(A)$ ,  $I1(A)$ ,  $I2(A)$ ,  $J(A)$ ,  $K1$ , and  $K2$  are used for the properties of the beam element.
2.  $I12(A)$ ,  $NSM(A)$ ,  $S1$ ,  $S2$ , and all fields for intermediate stations and end B are ignored.
3. The neutral axis and shear center are assumed to be coincident with the element x-axis.
4. The behavior of a CBEAM element is the same as a CBAR element in SOLs 601 and 701.

**1770 PBEAML**  
Beam Cross-Section Property

**PBEAML** Beam Cross-Section Property

Defines the properties of a beam element by cross-sectional dimensions.

**Format: (Note: n = number of dimensions and m = number of intermediate stations)**

| 1      | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10 |
|--------|---------|---------|---------|---------|---------|---------|---------|---------|----|
| PBEAML | PID     | MID     | GROUP   | TYPE    |         |         |         |         |    |
|        | DIM1(A) | DIM2(A) | -etc.-  | DIMn(A) | NSM(A)  | SO(1)   | X(1)/XB | DIM1(1) |    |
|        | DIM2(1) | -etc.-  | DIMn(1) | NSM(1)  | SO(2)   | X(2)/XB | DIM1(2) | DIM2(2) |    |
|        | -etc.-  | DIMn(2) | -etc.-  | NSM(m)  | SO(m)   | X(m)/XB | DIM1(m) | -etc.-  |    |
|        | DIMn(m) | NSM(m)  | SO(B)   | 1.0     | DIM1(B) | DIM2(B) | -etc.-  | DIMn(B) |    |
|        |         | NSM(B)  |         |         |         |         |         |         |    |

**Example:**

|        |     |      |     |     |     |     |     |     |  |
|--------|-----|------|-----|-----|-----|-----|-----|-----|--|
| PBEAML | 99  | 21   |     | T   |     |     |     |     |  |
|        | 12. | 14.8 | 2.5 | 2.6 |     | NO  | 0.4 | 6.  |  |
|        | 7.  | 1.2  | 2.6 |     | YES | 0.6 | 6.  | 7.8 |  |
|        | 5.6 | 2.3  |     | YES |     |     |     |     |  |

**Fields:**

| Field               | Contents                                                                                                                                                                                                       |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID                 | Property identification number. (Integer > 0)                                                                                                                                                                  |
| MID                 | Material identification number. (Integer > 0)                                                                                                                                                                  |
| GROUP               | Cross-section group. (Character; Default = "MSCBML0")                                                                                                                                                          |
| TYPE                | Cross-section shape. See Remark 4. (Character: "ROD", "TUBE", "L", "I", "CHAN", "T", "BOX", "BAR", "CROSS", "H", "T1", "I1", "CHAN1", "Z", "CHAN2", "T2", "BOX1", "HEXA", "HAT", "HAT1" for GROUP = "MSCBML0") |
| DIMi(A),<br>DIMi(B) | Cross-section dimensions at end A and B. (Real > 0.0 for GROUP = "MSCBML0")                                                                                                                                    |
| NSM(A),<br>NSM(B)   | Nonstructural mass per unit length. (Real ≥ 0.0; Default = 0.0)                                                                                                                                                |
| SO(j),SO(B)         | Stress output request option for intermediate station j and end B. (Character; Default = "YES")                                                                                                                |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                               |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | <p>YES: Stresses recovered at all points on next continuation and shown in <a href="#">Figure 17-7</a> as C, D, E, and F.</p> <p>NO: No stresses or forces are recovered.</p> |
| X(j)/XB      | Distance from end A to intermediate station j in the element coordinate system divided by the length of the element. (Real > 0.0; Default = 1.0)                              |
| NSM(j)       | Nonstructural mass per unit length at intermediate station j. (Real ≥ 0.0; Default = 0.0)                                                                                     |
| DIMi(j)      | Cross-section dimensions at intermediate station j. (Real > 0.0 for GROUP = "MSCBML0")                                                                                        |

**Remarks:**

1. For structural problems, PBEAML entries must reference a MAT1 material entry.
2. PID must be unique with respect to all other PBEAM and PBEAML property identification numbers.
3. For heat-transfer problems, the MID must reference a MAT4 or MAT5 material entry.
4. See the PBEAM entry description for a discussion of beam-element geometry.
5. If any of the fields NSM(B), DIMi(B) are blank on the continuation entry for End B, the values are set to the values given for end A. For the continuation entries that have values of X(j)/XB between 0.0 and 1.0 and use the default option (blank field), a linear interpolation between the values at ends A and B is performed to obtain the missing field.
6. The GROUP is associated with a FMS CONNECT statement, which specifies the evaluator. A reserved GROUP name is "MSCBML0". Users may create their own cross-section types. Each of the types will require a one or more subroutines to convert DIMi information to geometric property information contained on a PBEAM entry.
7. For GROUP = "MSCBML0", the cross-sectional properties, shear flexibility factors and stress recovery points are computed using the TYPE and DIMi as shown in [Figure 17-7](#). The element coordinate system is located at the shear center.

## 1772 PBEAML

### Beam Cross-Section Property


8. A function of this entry is to derive an equivalent PBEAM entry. Any sorted echo request will also cause printout and/or punch of the derived PBEAM. The equivalent PBEAM does not include warping coefficients.
9. The cross-section dimensions, DIMi, cannot be used directly as design variables in SOL 200. DEQATN entries may be used to indirectly specify cross-section dimensions as design variables.
10. The generated PBEAM entries will not contain warping coefficients.
11. Beams can have no more than 14 dimensions per station. The total number of dimensions at all stations must be less than 200. The transfer of data with the beam server is limited to 4000 words.

None of these limits are exceeded with the NX Nastran beam library, but a user defined beam library could.


There is a further limit that the NSM values input on the PBARL and PBEAML must be  $\geq 0$ . No other property types have this limit.

#### Remarks related to SOLs 601 and 701:


1. Tapered beams are not supported. Hence, only the dimensions at end A are used and a constant cross section is assumed, i.e., only DIM1(A), DIM2(A), to DIMn(A) are used for the properties of the beam element.
2. GROUP, NSM(A), and all fields for intermediate stations and end B are ignored.
3. TYPE = "L", "Z", "BOX1", "CROSS", "HEXA", "HAT", and "HAT1" are not supported.
4. No shear stiffness correction is used.
5. The neutral axis and shear center are assumed to be coincident with the element x-axis.
6. The behavior of a CBEAM element is the same as a CBAR element in SOLs 601 and 701.
7. Offsets defined between the neutral axis and the shear center are ignored.

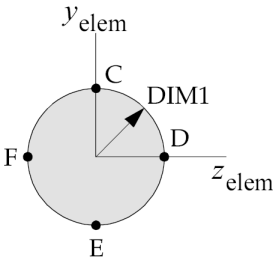


TYPE="ROD"

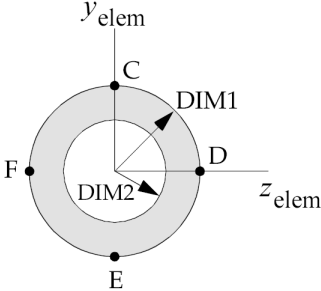


TYPE="TUBE"

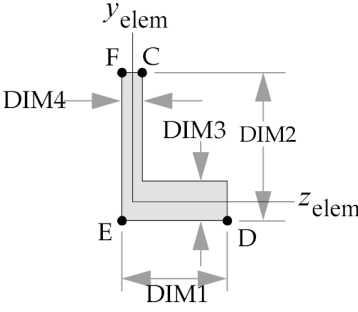

TYPE="L"

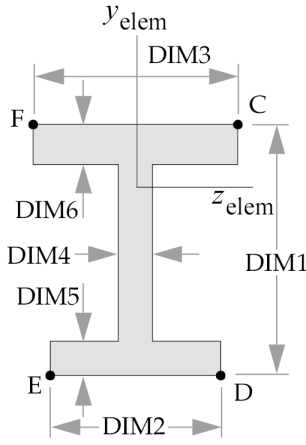


TYPE="I"

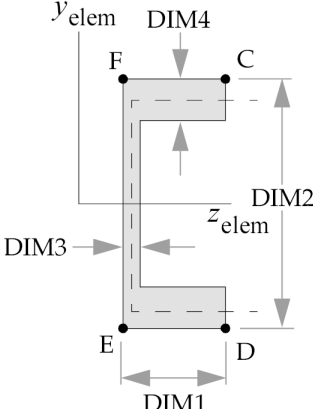


TYPE="CHAN"

**1774 PBEAML**  
**Beam Cross-Section Property**


**17**  
**Bulk O-P**

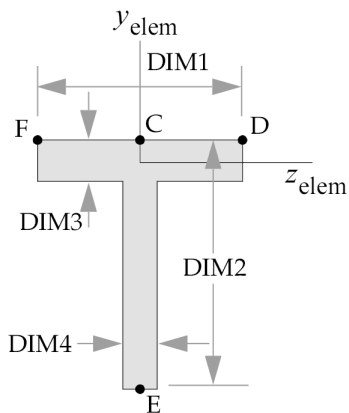


TYPE="T"

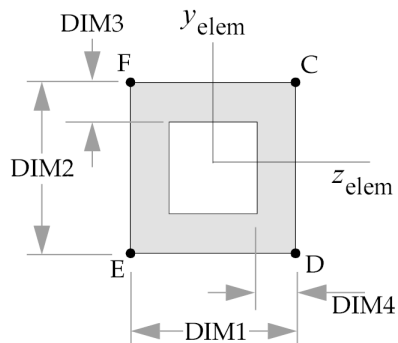


TYPE="BOX"

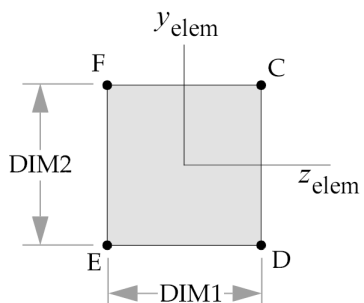


TYPE="BAR"

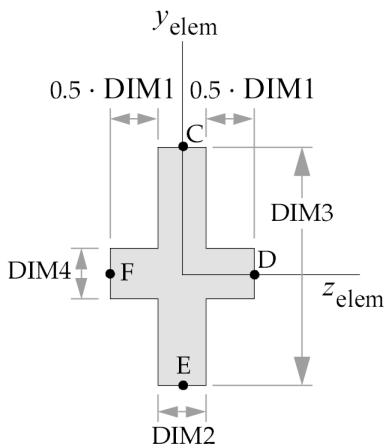


TYPE="CROSS"

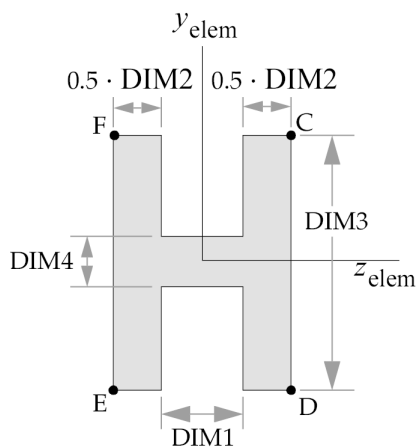


TYPE="H"

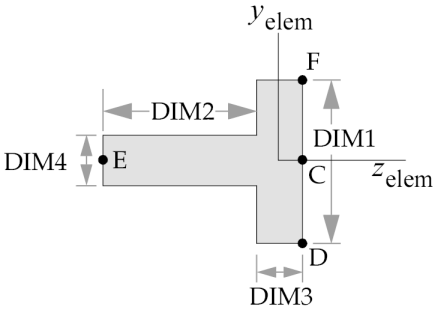


TYPE="T1"

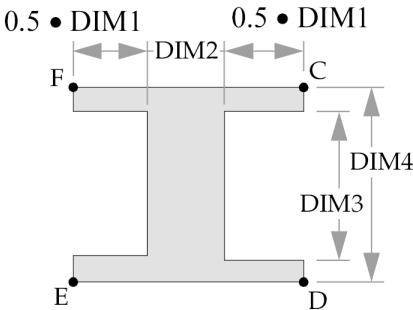


TYPE="I1"

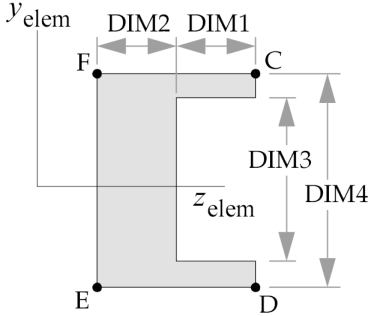

TYPE="CHAN1"

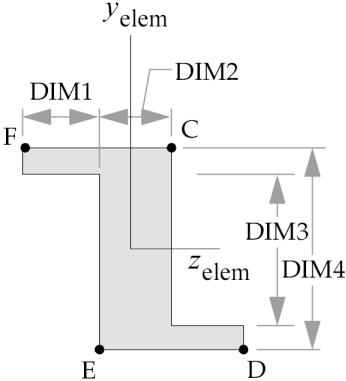


TYPE="Z"

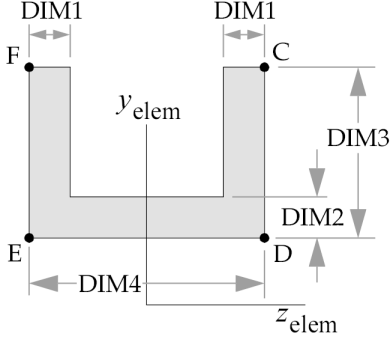


TYPE="CHAN2"

**1776 PBEAML**  
**Beam Cross-Section Property**


**17**  
**Bulk O-P**

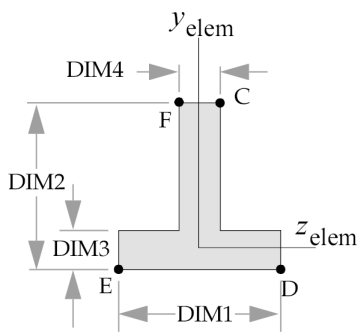


TYPE="T2"

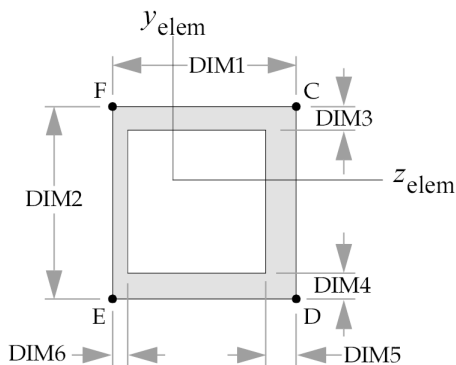


TYPE="BOX1"

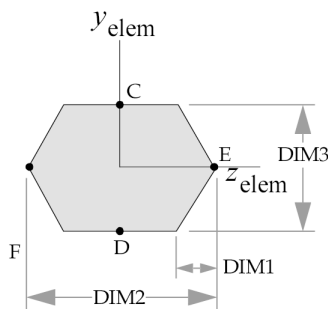

TYPE="HEXA"

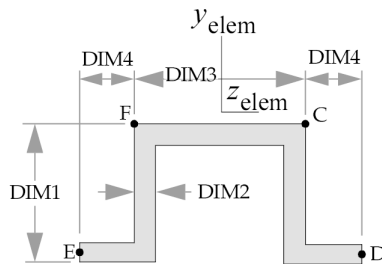

TYPE="HAT"

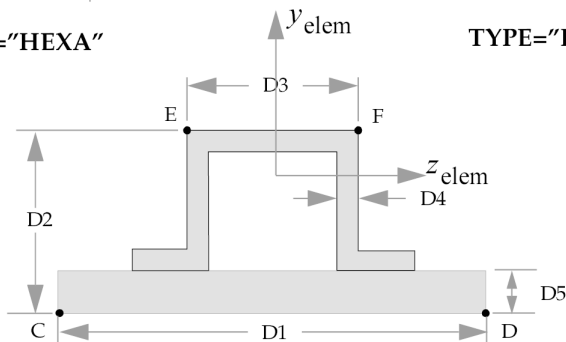

TYPE="HAT1"

**Figure 17-7. Definition of Cross-Section Geometry and Stress Recovery Points for GROUP = "MSCBML0"**



**PBEND** Curved Beam or Pipe Element Property

Defines the properties of a curved beam, curved pipe, or elbow element (CBEND entry).

**Format:**

| 1     | 2   | 3   | 4   | 5  | 6  | 7     | 8  | 9      | 10 |
|-------|-----|-----|-----|----|----|-------|----|--------|----|
| PBEND | PID | MID | A   | I1 | I2 | J     | RB | THETAB |    |
|       | C1  | C2  | DI  | D2 | E1 | E2    | F1 | F2     |    |
|       | K1  | K2  | NSM | RC | ZC | DELTA |    |        |    |

**Example:**

|       |     |     |      |      |      |      |     |  |  |
|-------|-----|-----|------|------|------|------|-----|--|--|
| PBEND | 39  | 1   | 0.8  | 0.07 | 0.04 | 0.04 | 10. |  |  |
|       | 0.5 | 0.4 | -0.5 | 0.4  |      |      |     |  |  |
|       | 0.6 | 0.6 |      |      |      | 0.1  |     |  |  |

**Alternate Format and Example for Elbows and Curved Pipes:**

|       |      |       |     |    |    |        |    |        |  |
|-------|------|-------|-----|----|----|--------|----|--------|--|
| PBEND | PID  | MID   | FSI | RM | T  | P      | RB | THETAB |  |
|       | SACL | ALPHA | NSM | RC | ZC | FLANGE |    |        |  |
|       | KX   | KY    | KZ  |    | SY | SZ     |    |        |  |

|       |    |   |   |     |      |     |     |  |  |
|-------|----|---|---|-----|------|-----|-----|--|--|
| PBEND | 39 | 1 | 1 | 0.5 | 0.02 | 10. | 10. |  |  |
|       |    |   |   |     | 0.1  |     |     |  |  |

**Fields:**

| Field  | Contents                                                           |
|--------|--------------------------------------------------------------------|
| PID    | Property identification number. (Integer > 0)                      |
| MID    | Material identification number. See Remarks 1 and 2. (Integer > 0) |
| A      | Area of the beam cross section. (Real > 0.0)                       |
| I1, I2 | Area moments of inertia in planes 1 and 2. (Real > 0.0)            |
| J      | Torsional stiffness. (Real > 0.0)                                  |

## 1778 PBEND Curved Beam or Pipe Element Property

| Field             | Contents                                                                                                                                                                            |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FSI               | Flag selecting the flexibility and stress intensification factors. See "Flexibility and stress intensification factors" in the <i>NX Nastran Element Library</i> . (Integer = 1-6)  |
| RM                | Mean cross-sectional radius of the curved pipe. (Real > 0.0)                                                                                                                        |
| T                 | Wall thickness of the curved pipe. (Real ≥ 0.0; RM + T/2 < RB)                                                                                                                      |
| P                 | Internal pressure. (Real)                                                                                                                                                           |
| RB                | Bend radius of the line of centroids. (Real. Optional, see CBEND entry.)                                                                                                            |
| THETAB            | Arc angle of element. (Real, in degrees. Optional, see CBEND entry.)                                                                                                                |
| Ci, Di, Ei,<br>Fi | The r,z locations from the geometric centroid for stress data recovery. See Remark 7. (Real)                                                                                        |
| K1, K2            | Shear stiffness factor K in $K*A*G$ for plane 1 and plane 2. (Real)                                                                                                                 |
| NSM               | Nonstructural mass per unit length. (Real)                                                                                                                                          |
| RC                | Radial offset of the geometric centroid from points GA and GB. See Figure 17-8. (Real)                                                                                              |
| ZC                | Offset of the geometric centroid in a direction perpendicular to the plane of points GA and GB and vector v. See Figure 17-8. See Remark 8. (Real)                                  |
| DELTAN            | Radial offset of the neutral axis from the geometric centroid, positive is toward the center of curvature. See Figure 17-8. See Remark 8. (Real; Default is described in Remark 4.) |
| SACL              | Miter spacing at center line. See Figure 17-11 and Remark 9. (Real > 0.0)                                                                                                           |
| ALPHA             | One-half angle between the adjacent miter axes (Degrees). (Real) Required for FSI=5 with miter bend. See Figure 17-11 and Remark 9.                                                 |
| FLANGE            | For FSI=5, defines the number of flanges attached. See Remark 10. (Integer; Default=0)                                                                                              |
| KX                | For FSI=6, the user defined flexibility factor for the torsional moment. (Real ≥ 1.0) See Remark 11.                                                                                |

| Field | Contents                                                                                                        |
|-------|-----------------------------------------------------------------------------------------------------------------|
| KY    | For FSI=6, the user defined flexibility factor for the out-of-plane bending moment. (Real ≥ 1.0) See Remark 11. |
| KZ    | For FSI=6, the user defined flexibility factor for the in-plane bending moment. (Real ≥ 1.0) See Remark 11.     |
| SY    | For FSI=6, the user defined stress intensification factor for the out-of-plane bending. (Real ≥ 1.0)            |
| SZ    | For FSI=6, the user defined stress intensification factor for the in-plane bending. (Real ≥ 1.0)                |

**Remarks:**

1. For structural problems, MID must reference a MAT1 material entry.
2. For heat transfer problems, MID must reference a MAT4 or MAT5 material entry.
3. The transverse shear stiffness in planes 1 and 2 are  $K1 \cdot A \cdot G$  and  $K2 \cdot A \cdot G$ , respectively. The default values for K1 and K2 on the first format are zero, which means the transverse shear flexibilities ( $1/Ki \cdot A \cdot G$ ) are set equal to zero. Transverse shear stiffness for the alternate format are automatically calculated for the curved pipe.
4. The neutral axis radial offset from the geometric centroid is default to the

$$\Delta N = \frac{I1}{A \cdot RB}$$

It is recommended that the default be used whenever

$$\frac{(RB)^2 A}{I1} < 15$$

in which case the default value of  $\Delta N$  is within 5% of the exact expression for circular or rectangular cross sections. For the alternate format, the neutral axis offset is calculated from an analytical expression for a hollow or solid circular cross section.

The user may compute an exact value for  $N$  as follows:

**1780 PBEND**  
**Curved Beam or Pipe Element Property**

$$\Delta N = \frac{RB}{1 + \frac{(RB)^2 A}{Z}}$$


where

$$Z = \int \frac{r^2 dA}{1 + \frac{r}{RB}}$$


The integration is carried out over the cross section of the element.

5. If T is zero, a solid circular cross section of radius RM is assumed and FSI must be 1.
6. If the first format is used, third-order moments are neglected for the consistent mass matrix. These moments are zero whenever the cross section of the beam is symmetric about both the r and z axes.
7. If the circular cross-sectional property entry format is used, the stress points are automatically located at the points indicated in [Figure 17-8](#).
8. Offset vectors are treated like rigid elements and are therefore subject to the same limitations.
  - Offset vectors are not affected by thermal loads.
  - The specification of offset vectors is not recommended in solution sequences that compute differential stiffness because the offset vector remains parallel to its original orientation. (Differential stiffness is computed in buckling analysis provided in SOLs 105 and 200 and also nonlinear analysis provided in SOLs 106, 129, 153, and 159 with PARAM,LGDISP,1.)
9. For FSI=5, an elbow bend will be assumed if ALPHA is not defined (i.e. blank). If ALPHA is defined and SACL is not defined, then the widely spaced miter bend factors will be used. When both SACL and ALPHA are defined, the closely spaced miter bend factors will be used if the spacing at center line is less than  $RM*(1+\tan(\text{ALPHA}))$  where RM is the mean cross-sectional radius of the curved pipe.
10. The FLANGE option is only supported when FSI=5 for elbow and closely spaced miter bend.

11. If a value less than 1 is entered for KX, KY, or KZ, its value will be reset to 1.0, a warning will be issued and the solve will continue.

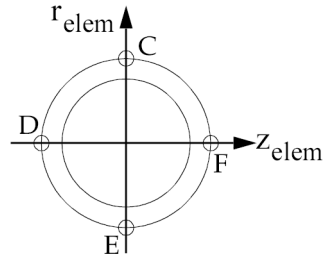


**Figure 17-8. PBEND Circular Cross Section**

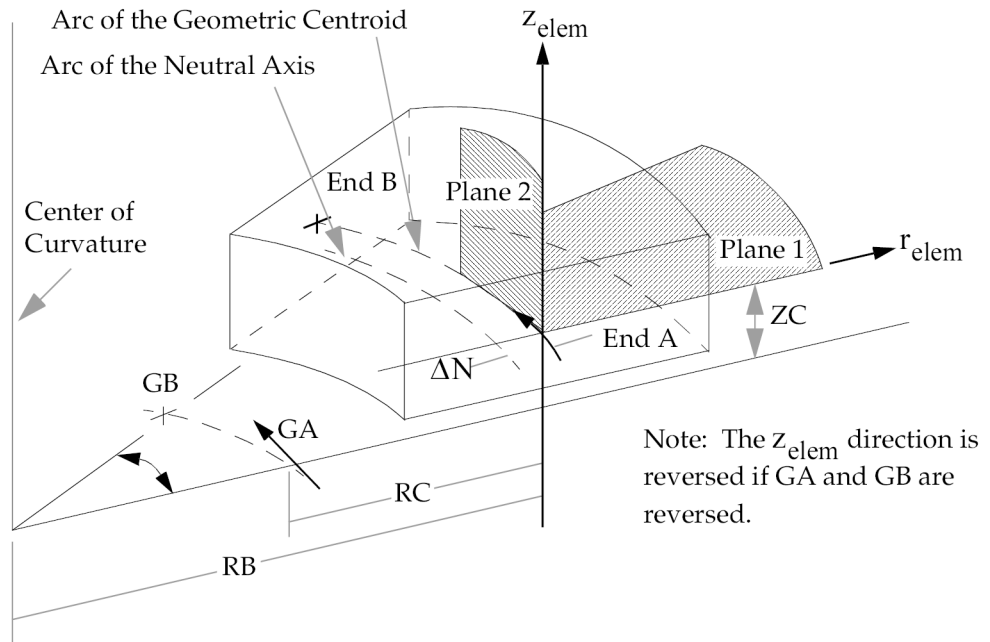


**Figure 17-9. PBEND Element Coordinate System**

**1782 PBEND**  
**Curved Beam or Pipe Element Property**

**17**  
**Bulk O-P**

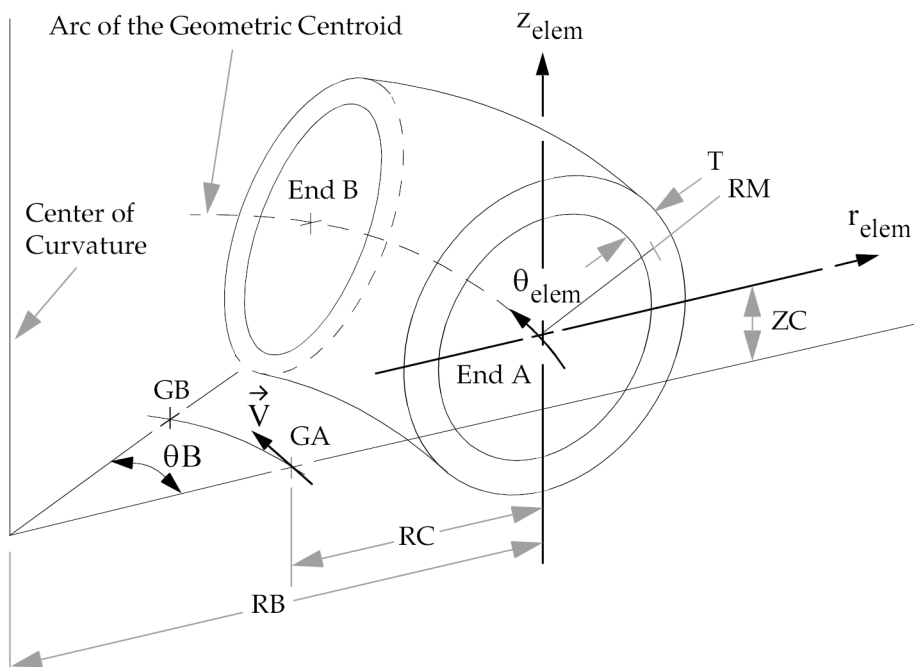

**Figure 17-10. PBEND Circular Cross Section Element Coordinate System**

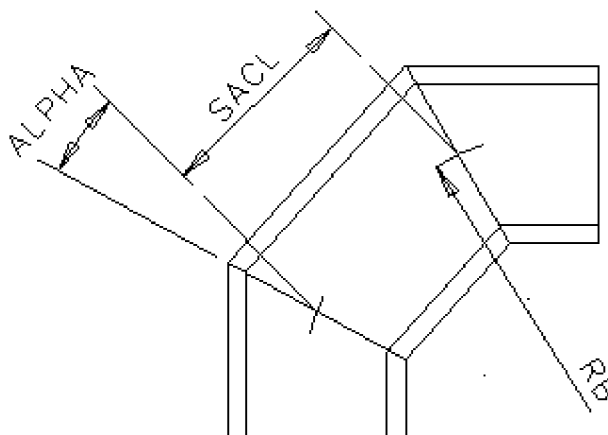

**Figure 17-11. Definition of SACL and ALPHA**

Where:

for a closely spaced miter:

$$R_B = \frac{(SACL) \cot(\text{ALPHA})}{2}$$

for a widely spaced miter:

$$R_B = \frac{R_M(1 + \cot(\text{ALPHA}))}{2}$$

## 1784 PBUSH Generalized Spring-and-Damper Property

### PBUSH Generalized Spring-and-Damper Property

Defines the nominal property values for a generalized spring-and-damper structural element.

#### Format:

| 1     | 2   | 3     | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-------|-----|-----|-----|-----|-----|-----|----|
| PBUSH | PID | "K"   | K1  | K2  | K3  | K4  | K5  | K6  |    |
|       |     | "B"   | B1  | B2  | B3  | B4  | B5  | B6  |    |
|       |     | "GE"  | GE1 | GE2 | GE3 | GE4 | GE5 | GE6 |    |
|       |     | "RCV" | SA  | ST  | EA  | ET  |     |     |    |

#### Example 1: Stiffness and structural damping are specified.

|       |    |     |      |     |  |  |  |     |  |
|-------|----|-----|------|-----|--|--|--|-----|--|
| PBUSH | 35 | K   | 4.35 | 2.4 |  |  |  | 3.1 |  |
|       |    | GE  | .06  |     |  |  |  |     |  |
|       |    | RCV | 7.3  | 3.3 |  |  |  |     |  |

#### Example 2: Damping force per unit velocity is specified.

|       |    |   |     |  |  |  |  |  |  |
|-------|----|---|-----|--|--|--|--|--|--|
| PBUSH | 35 | B | 2.3 |  |  |  |  |  |  |
|-------|----|---|-----|--|--|--|--|--|--|

#### Example 3: All damping types are specified.

|       |   |     |        |     |        |  |  |  |  |
|-------|---|-----|--------|-----|--------|--|--|--|--|
| PBUSH | 2 | K   | 1000.0 |     | 1000.0 |  |  |  |  |
|       |   | B   | 0.02   |     | 0.02   |  |  |  |  |
|       |   | GE  | 0.01   |     | 0.02   |  |  |  |  |
|       |   | RCV | 1.0    | 1.0 |        |  |  |  |  |

#### Fields:

| Field | Contents                                                                                                                                             |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                                                                                        |
| "K"   | Flag indicating that the next 1 to 6 fields are stiffness values in the element coordinate system. (Character)                                       |
| Ki    | Nominal stiffness values in directions 1 through 6. See Remarks <a href="#">2</a> , <a href="#">3</a> and <a href="#">10</a> . (Real; Default = 0.0) |



| Field | Contents                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------|
| “B”   | Flag indicating that the next 1 to 6 fields are force-per-velocity damping. (Character)                |
| Bi    | Nominal damping coefficient in units of force per unit velocity. See Remark 3. (Real; Default = 0.0)   |
| “GE”  | Flag indicating that the next fields, 1–6, are structural damping constants. See Remark 7. (Character) |
| GEi   | Nominal structural damping constant in directions 1–6. See Remarks 2 and 3. (Real; Default = 0.0)      |
| “RCV” | Flag indicating that the next 1 to 4 fields are stress or strain coefficients. (Character)             |
| SA    | Stress recovery coefficient in the translational component numbers 1 through 3. (Real; Default = 1.0)  |
| ST    | Stress recovery coefficient in the rotational component numbers 4 through 6. (Real; Default = 1.0)     |
| EA    | Strain recovery coefficient in the translational component numbers 1 through 3. (Real; Default = 1.0)  |
| ET    | Strain recovery coefficient in the rotational component numbers 4 through 6. (Real; Default = 1.0)     |

**Remarks:**

1.  $K_i$ ,  $B_i$ , or  $GE_i$  may be made frequency dependent for both direct and modal frequency response by use of the PBUSHT entry.
2. The nominal values are used for all analysis types except frequency response. For modal frequency response, the normal modes are computed using the nominal  $K_i$  values. The frequency-dependent values are used at every excitation frequency.
3. If PARAM,W4 is not specified,  $GE_i$  is ignored in transient analysis.
4. The element stresses are computed by multiplying the stress coefficients with the recovered element forces.
5. The element strains are computed by multiplying the strain coefficients with the recovered element displacements.
6. The “K”, “B”, “GE”, or “RCV” entries may be specified in any order.

**1786 PBUSH**  
**Generalized Spring-and-Damper Property**

7. To obtain the damping coefficient  $GE$ , multiply the critical damping ratio  $C/C_0$  by 2.0.
8. Applicable fields refer to directions in the element's coordinate system.
9. For upward computability, if ONLY  $GE1$  is specified on ALL PBUSH entries and  $GE_i$ ,  $i=2 - 6$  are blank on ALL PBUSH entries, then a single structural damping for each PBUSH applied to all defined  $K_i$  for each PBUSH is assumed. If ANY PBUSH entry has a  $GE_i$ ,  $i=2 - 6$  specified, then the  $GE_i$  fields are considered variable on ALL PBUSH entries.
10. Rotational stiffness should be specified as moment per radian.

**PBUSH1D** Rod Type Spring-and-Damper Property

Defines linear and nonlinear properties of a one-dimensional spring and damper element (CBUSH1D entry).

**Format:**

| 1       | 2        | 3    | 4     | 5     | 6      | 7     | 8     | 9     | 10 |
|---------|----------|------|-------|-------|--------|-------|-------|-------|----|
| PBUSH1D | PID      | K    | C     | M     |        | SA    | SE    |       |    |
|         | “SHOCKA” | TYPE | CVT   | CVC   | EXPVT  | EXPVC | IDTS  |       |    |
|         |          |      | IDETS | IDECS | IDETSD | IDECS |       |       |    |
|         | “SPRING” | TYPE | IDT   | IDC   | IDTDU  | IDCDU |       |       |    |
|         | “DAMPER” | TYPE | IDT   | IDC   | IDTDV  | IDCDV |       |       |    |
|         | “GENER”  |      | IDT   | IDC   | IDTDU  | IDCDU | IDTDV | IDCDV |    |

**Example:**

|         |        |       |      |      |    |  |     |  |  |
|---------|--------|-------|------|------|----|--|-----|--|--|
| PBUSH1D | 35     | 3000. | 200. | 300. |    |  |     |  |  |
|         | SHOCKA | TABLE | 2.2  | 1.2  | 1. |  | 200 |  |  |

The continuation entries are optional. The four options, SHOCKA, SPRING, DAMPER, and GENER can appear in any order

**Fields:**

| Field | Contents                                            | Default              |
|-------|-----------------------------------------------------|----------------------|
| PID   | Property identification number. (Integer > 0).      | Required             |
| K     | Stiffness. (Real ≥ 0).                              | See Remark 1 .       |
| C     | Viscous damping. (Real ≥ 0).                        | See Remarks 1 and 2. |
| M     | Total mass of the element. (Real ≥ 0).              | Blank                |
| SA    | Stress recovery coefficient [1/area]. (Real ≥ 0).   | Blank                |
| SE    | Strain recovery coefficient [1/length]. (Real ≥ 0). | Blank                |

**1788 PBUSH1D**  
**Rod Type Spring-and-Damper Property**

| Field  | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Default                            |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| SHOCKA | <p>Character string specifying that the next 10 fields are coefficients of the following force versus velocity/displacement relationship. (Character).</p> $F(u, v) = C_v \cdot S(u) \cdot \text{sign}(v) \cdot  v ^{\text{EXPV}}$ <p>The force F, the displacement u, and the velocity v, are in the axial direction of the damper. The axis of the damper is defined by the two connecting grid points GA and GB on the CBUSH1D Bulk Data entry. The displacement u and the velocity v, are the relative displacement and the relative velocity with respect to the grid point GA. The scale factor S(u) must be defined with a table or with an equation.</p> |                                    |
| TYPE   | <p>Character string indicating the type of definition. (Character). For TYPE = EQUAT, the fields IDETS, IDECS, IDETSD, and IDECSD are identification numbers of DEQATN entries. For TYPE = TABLE the field IDTS is an identification number of a TABLEDi entry. If no character string is provided (blanks), TYPE = TABLE is set.</p>                                                                                                                                                                                                                                                                                                                            | TABLE                              |
| CVT    | <p>Viscous damping coefficient <math>C_V</math> for tension <math>v &gt; 0</math>, force per unit velocity. (Real).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Required for SHOCKA                |
| CVC    | <p>Viscous damping coefficient <math>C_V</math> for compression <math>v &lt; 0</math>, force per unit velocity. (Real).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | CVT                                |
| EXPVT  | <p>Exponent of velocity EXPV for tension <math>v &gt; 0</math>. (Real).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1.                                 |
| EXPVC  | <p>Exponent of velocity EXPV for compression <math>v &lt; 0</math>. (Real).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | EXPVT                              |
| IDTS   | <p>Identification number of a TABLEDi entry for tension and compression if TYPE = TABLE. The TABLEDi entry defines the scale factor S, versus displacement u.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Required for SHOCKA and TYPE=TABLE |

| Field  | Contents                                                                                                                                                                                                                                       | Default                            |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| IDETS  | Identification number of a DEQATN entry for tension if TYPE = EQUAT. The DEQATN entry defines the scale factor S, versus displacement u, for tension u > 0.                                                                                    | Required for SHOCKA and TYPE=EQUAT |
| IDECS  | Identification number of a DEQATN entry for compression if TYPE = EQUAT. The DEQATN entry defines the scale factor S, versus displacement u, for compression u < 0.                                                                            | IDETS                              |
| IDETSD | Identification number of a DEQATN entry for tension if TYPE = EQUAT. The DEQATN entry defines the derivative of the scale factor S, with respect to the displacement u, for tension u>0.                                                       | Required for SHOCKA and TYPE=EQUAT |
| IDECS  | Identification number of a DEQATN entry for compression if TYPE = EQUAT. The DEQATN entry defines the derivative of the scale factor S, with respect to the displacement u, for compression u < 0.                                             | IDETSD                             |
| SPRING | Character string specifying that the next 5 fields define a nonlinear elastic spring element in terms of a force versus displacement relationship. (Character).<br><br>$F(u) = F_T(u)$ <p>Tension is u &gt; 0 and compression is u &lt; 0.</p> |                                    |
| DAMPER | Character string specifying that the next 5 fields define a nonlinear viscous element in terms of a force versus velocity relationship. (Character).<br><br>$F(v) = F_T(u)$ <p>Tension is v &gt; 0 and compression is v &lt; 0.</p>            |                                    |

**1790 PBUSH1D**  
**Rod Type Spring-and-Damper Property**

| Field | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Default                                |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| GENER | <p>Character string specifying that the next 7 fields define a general nonlinear elastic spring and viscous damper element in terms of a force versus displacement and velocity relationship. (Character). For this element, the relationship can only be defined with TYPE = EQUAT.</p> $F(u, v) = F_T(u, v)$ <p>Tension is <math>u &gt; 0</math> and compression is <math>u &lt; 0</math>. For SPRING, DAMPER, and GENER, the remaining fields are</p> |                                        |
| TYPE  | <p>Character string indicating the type of definition. (Character). For TYPE = EQUAT the following fields are identification numbers of DEQATN entries. For TYPE = TABLE the following field is an identification number of a TABLEDi entry. TYPE is ignored for GENER.</p>                                                                                                                                                                              | Required for SPRING or DAMPER          |
| IDT   | <p>Identification number of a DEQATN entry for tension if TYPE = EQUAT. Identification number of a TABLEDi entry for tension and compression if TYPE = TABLE.</p>                                                                                                                                                                                                                                                                                        | Required for SPRING, DAMPER, and GENER |
| IDC   | <p>Identification number of a DEQATN entry for compression if TYPE = EQUAT. Is ignored for TYPE = TABLE.</p>                                                                                                                                                                                                                                                                                                                                             | IDT                                    |
| IDTDU | <p>Identification number of a DEQATN entry for tension if TYPE = EQUAT. The DEQATN entry defines the derivative of the force F with respect to the displacement u, for tension <math>u &gt; 0</math>. For SPRING and GENER only.</p>                                                                                                                                                                                                                     | Required if TYPE=EQUAT                 |
| IDCDU | <p>Identification number of a DEQATN entry for compression if TYPE = EQUAT. The DEQATN entry defines the derivative of the force F with respect to the displacement u, for compression <math>u &lt; 0</math>. For SPRING and GENER only.</p>                                                                                                                                                                                                             | IDTDU                                  |

| Field | Contents                                                                                                                                                                                                             | Default                |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| IDTDV | Identification number of a DEQATN entry for tension if TYPE = EQUAT. The DEQATN entry defines the derivative of the force F with respect to the velocity v, for tension $v > 0$ . For DAMPER and GENER only.         | Required if TYPE=EQUAT |
| IDCDV | Identification number of a DEQATN entry for compression if TYPE = EQUAT. The DEQATN entry defines the derivative of the force F with respect to the velocity v, for compression $v < 0$ . For DAMPER and GENER only. | IDCDT                  |

**Remarks:**

1. Either the stiffness K or the damping C must be specified.
2. The damping C and mass M are ignored in static solution sequences.
3. The parameters defined on the continuation entries are used in nonlinear solution sequences only.
4. The linear parameters K and C are used in all solution sequences unless parameters on continuation entries are defined and a nonlinear solution sequence is used. Then, the parameters K and C are used for initial values in the first iteration of the first load step and the parameters from continuation entries overwrite the linear parameters thereafter. When SHOCKA, SPRING or GENER are specified, K is overwritten. When SHOCKA, DAMPER or GENER is specified, C is overwritten.
5. PBUSH1D may only be referenced by CBUSH1D elements in the residual structure which do not attach to omitted degrees-of-freedom.
6. The continuation entries SHOCKA, SPRING, DAMPER and GENER may be specified in any order. If more than one continuation entry is defined, then the forces of SHOCKA, SPRING, etc. are added. Multiple continuation entries of the same kind are not allowed, for example, multiple SPRING continuation entries.
7. For TYPE = TABLE, values on the TABLEDi entry are for tension and compression. If table values  $f(u)$  are provided only for positive values  $u > 0$ , then it is assumed that  $f(-u) = -f(u)$ .
8. For TYPE = EQUAT, the equations for tension and compression can be different. If the identification numbers for compression are left blank, it is assumed that the equation for tension is also valid for compression.

**1792 PBUSH1D**  
**Rod Type Spring-and-Damper Property**

**Remarks related to SOLs 601 and 701**

1. Only “SPRING” continuation entry line is supported. Warning is issued for other continuation entry lines.
2. Only the following fields are supported: PID, K, C, M, SA, TYPE and IDT in “SPRING”. Hence, the spring stiffness may be nonlinear but the damping is linear.
3. Only TYPE=TABLE (or blank) is supported. Otherwise, a fatal error is issued.



Frequency Dependent or Nonlinear Force Deflection Spring and Damper Property

**PBUSHT** Frequency Dependent or Nonlinear Force Deflection Spring and Damper Property

Defines the frequency dependent properties or the stress dependent properties for a generalized spring and damper structural element.

**Format:**

| 1      | 2   | 3    | 4      | 5      | 6      | 7      | 8      | 9      | 10 |
|--------|-----|------|--------|--------|--------|--------|--------|--------|----|
| PBUSHT | PID | “K”  | TKID1  | TKID2  | TKID3  | TKID4  | TKID5  | TKID6  |    |
|        |     | “B”  | TBID1  | TBID2  | TBID3  | TBID4  | TBID5  | TBID6  |    |
|        |     | “GE” | TGEID1 | TGEID2 | TGEID3 | TGEID4 | TGEID5 | TGEID6 |    |
|        |     | “KN” | TKNID1 | TKIND2 | TKNID3 | TKIND4 | TKIND5 | TKIND6 |    |

**Example:**

|        |   |    |     |     |  |  |  |  |  |
|--------|---|----|-----|-----|--|--|--|--|--|
| PBUSHT | 2 | K  | 100 | 101 |  |  |  |  |  |
|        |   | B  | 102 | 103 |  |  |  |  |  |
|        |   | GE | 104 | 105 |  |  |  |  |  |

**Fields:**

| Field             | Contents                                                                                                                                                     |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID               | Property identification number that matches the identification number on a PBUSH entry. (Integer > 0)                                                        |
| “K”               | Flag indicating that the next 1 to 6 fields are stiffness frequency table identification numbers. (Character)                                                |
| TKID <sub>i</sub> | Identification number of a TABLED <sub>i</sub> entry that defines the stiffness vs. frequency relationship. See Remark 9. (Integer ≥ 0; Default = 0.)        |
| “B”               | Flag indicating that the next 1 to 6 fields are force per velocity frequency table identification numbers. (Character)                                       |
| TBID <sub>i</sub> | Identification number of a TABLED <sub>i</sub> entry that defines the force per unit velocity damping vs. frequency relationship. (Integer ≥ 0; Default = 0) |
| “GE”              | Flag indicating that the next fields 1–6 are structural damping frequency table identification numbers. (Character)                                          |

## 1794 PBUSHT Frequency Dependent or Nonlinear Force Deflection Spring and Damper Property

| Field  | Contents                                                                                                                                                  |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| TGEIDi | Identification number of a TABLEDi entry that defines the non-dimensional structural damping vs. frequency relationship. (Integer $\geq 0$ ; Default = 0) |
| “KN”   | Flag indicating that the next 1 to 6 entries are nonlinear force-deflection table identification numbers. (Character)                                     |
| TKNIDi | Identification number of a TABLEDi entry that defines the force vs. deflection relationship. (Integer $\geq 0$ ; Default = 0)                             |

### Remarks:

1. The “K”, “B”, and “GE” entries are associated with same entries on the PBUSH entry.
2. PBUSHT may only be referenced by CBUSH elements in the residual structure which do not attach to any omitted degrees-of-freedom.
3. The nominal values are used for all analysis types except frequency response and nonlinear analyses. For frequency dependent modal frequency response the system modes are computed using the nominal Ki values. The frequency-dependent values are used at every excitation frequency.
4. The “K”, “B”, “GE” or “KN” entries may be specified in any order.
5. The PBUSHT entry is ignored in all solution sequences except frequency response or nonlinear analyses.
6. For nonlinear analysis, only the “KN” field is used.
7. For frequency responses, only the “K”, “B” and/or “GE” fields are used.
8. For upward computability, if ONLY TGEID1 is specified on ALL PBUSHT entries and TGEIDi,  $i=2 - 6$  are blank on ALL PBUSHT entries, then a single structural damping table for each PBUSHT applied to all defined Ki for each PBUSH is assumed. If ANY PBUSH entry has a TGEIDi,  $i=2 - 6$  specified, then the GEi fields on the PBUSH and the TGEIDi fields on the PBUSHT are considered variable on ALL PBUSH and PBUSHT entries.
9. Rotational stiffness should be specified as moment per radian.

**PCOMP** Layered Composite Element Property

Defines the properties of an n-ply composite material laminate.

**Format:**

| 1     | 2    | 3  | 4      | 5     | 6      | 7    | 8      | 9     | 10 |
|-------|------|----|--------|-------|--------|------|--------|-------|----|
| PCOMP | PID  | Z0 | NSM    | SB    | FT     | TREF | GE     | LAM   |    |
|       | MID1 | T1 | THETA1 | SOUT1 | MID2   | T2   | THETA2 | SOUT2 |    |
|       | MID3 | T3 | THETA3 | SOUT3 | -etc.- |      |        |       |    |

**Example:**

|       |     |        |      |         |      |  |     |  |  |
|-------|-----|--------|------|---------|------|--|-----|--|--|
| PCOMP | 181 | -0.224 | 7.45 | 10000.0 | HOFF |  |     |  |  |
|       | 171 | 0.056  | 0.   | YES     |      |  | 45. |  |  |
|       |     |        | -45. |         |      |  | 90. |  |  |

**Fields:**

**Field      Contents**

- PID**      Property identification number. (0 < Integer < 10000000)
- Z0**      Distance from the reference plane to the bottom surface. See Remark 11 . (Real; Default = -0.5 times the element thickness.)
- NSM**      Nonstructural mass per unit area. (Real)
- SB**      Allowable shear stress of the bonding material (allowable interlaminar shear stress). Required if FT is also specified. (Real > 0.0) See Remark 9 .
- FT**      Failure theory. The following theories are allowed (Character or blank. If blank, then no failure calculation will be performed):
- “HILL” for the Hill theory.
- “HOFF” for the Hoffman theory.
- “TSAI” for the Tsai-Wu theory.
- “STRN” for the Maximum Strain theory.
- See the Laminates chapter in the *NX Nastran User's Guide* for a detailed explanation of each theory.

## 1796 PCOMP Layered Composite Element Property

| Field    | Contents                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TREF     | Reference temperature. See Remark 3 . (Real; Default = 0.0)                                                                                                                                                                                                                                                                                                                                                  |
| GE       | Damping coefficient. See Remarks 4 and 13. (Real; Default = 0.0)                                                                                                                                                                                                                                                                                                                                             |
| LAM      | Laminate Options. (Character or blank, Default = blank). See Remark 14 .                                                                                                                                                                                                                                                                                                                                     |
| “Blank”  | All plies must be specified and all stiffness terms are developed.                                                                                                                                                                                                                                                                                                                                           |
| “SYM”    | Only plies on one side of the element centerline are specified. The plies are numbered starting with 1 for the bottom layer. If an odd number of plies are desired, the center ply thickness (T1 or TN) should be half the actual thickness.                                                                                                                                                                 |
| “MEM”    | All plies must be specified, but only membrane terms (MID1 on the derived PSHELL entry) are computed.                                                                                                                                                                                                                                                                                                        |
| “BEND”   | All plies must be specified, but only bending terms (MID2 on the derived PSHELL entry) are computed.                                                                                                                                                                                                                                                                                                         |
| “SMEAR”  | All plies must be specified, stacking sequence is ignored, MID1=MID2 on the derived PSHELL entry and MID3, MID4 and TS/T and 12I/T**3 terms are set to zero.                                                                                                                                                                                                                                                 |
| “SMCORE” | All plies must be specified, with the last ply specifying core properties and the previous plies specifying face sheet properties. The stiffness matrix is computed by placing half the face sheet thicknesses above the core and the other half below, with the result that the laminate is symmetric about the midplane of the core. Stacking sequence is ignored in calculating the face sheet stiffness. |
| MIDi     | Material ID of the various plies. The plies are identified by serially numbering them from 1 at the bottom layer. The MIDs must refer to MAT1, MAT2, MAT8, or MATSMA (SOL 601 only) bulk entries. See Remark 1 . (Integer > 0 or blank, except MID1 must be specified.)                                                                                                                                      |
| Ti       | Thicknesses of the various plies. See Remark 1 . (Real or blank, except T1 must be specified.)                                                                                                                                                                                                                                                                                                               |

**Field      Contents**

- THETAi** Orientation angle of the longitudinal direction of each ply with the material axis of the element. (If the material angle on the element connection entry is 0.0, the material axis and side 1-2 of the element coincide.) The plies are to be numbered serially starting with 1 at the bottom layer. The bottom layer is defined as the surface with the largest -Z value in the element coordinate system. (Real; Default = 0.0)
- SOUTi** Controls individual ply stress and strain print or punch output. See Remarks 5 and 6. (Character: “YES” or “NO”; Default = “NO”)

**Remarks:**

1. The default for MIDi+1, ..., MIDn is the last defined MIDi. In the example above, MID(PLY1) is the default for MID(PLY2), MID(PLY3), and MID(PLY4). The same logic applies to Ti.
2. At least one of the four values (MIDi, Ti, THETAi, SOUTi) must be present for a ply to exist. The minimum number of plies is one.
3. The TREF specified on the material entries referenced by plies are not used. Instead TREF on the PCOMP entry is used for all plies of the element. If not specified, it defaults to “0.0.”

If the PCOMP references temperature dependent material properties, then the TREF given on the PCOMP will be used as the temperature to determine material properties.

TEMPERATURE Case Control commands are ignored for deriving the equivalent PSHELL and MATi entries used to describe the composite element.

4. GE given on the PCOMP entry will be used for the element and the values supplied on material entries for individual plies are ignored. The user is responsible for supplying the equivalent damping value on the PCOMP entry. If PARAM,W4 is not specified GE is ignored in transient analysis. See “Parameters” .
5. The parameter NOCOMPS determines if stress and/or strain recovery is at the composite ply layers (default), on the equivalent PSHELL, or both. See the NOCOMPS parameter for details. The STRESS and/or STRAIN case control commands are required for any of these recovery options. When ply results are requested, stress and/or strain are computed at the middle of each ply. To print the ply stress and/or strain results, the case control command request must include the “PRINT” option (default). To punch these results, the case control command request must include the “PUNCH” option. SOUTi=YES should

## 1798 PCOMP Layered Composite Element Property

then be defined on any ply definitions in which you would like print or punch output. The SOUTi entry is not used in the computing or printing of failure indices. See Remark 7.

6. Stress and strain output for individual plies are available in all superelement static and normal modes analysis and requested by the STRESS and STRAIN case control commands.
7. To compute STRESS failure index, the following must be present:
  - a. STRESS case control command.
  - b. SB and FT (= to HILL, HOFF or TSAI) on the PCOMP bulk entry.
  - c. Stress allowables Xt, Xc, Yt, Yc, and S on all referenced MAT8 bulk entries.
  - d. Stress allowables ST, SC, and SS on all referenced MAT1 bulk entries.

To compute STRAIN failure index, the following must be present:

- a. STRAIN case control command.
  - b. SB and FT (= STRN) on the PCOMP bulk entry.
  - c. Strain allowables Xt, Xc, Yt, Yc, S, and STRN=1.0 on all referenced MAT8 bulk entries.
8. To output strength ratio, the failure index output conditions listed in Remark 7 must exist, and the parameter SRCOMPS must equal "YES".
9. The failure index of the bonding material is calculated by:  
$$FI_{\text{bonding}} = (t_{1z}, t_{2z}) / \text{allowable bonding stress}.$$

The allowable bonding stress is defined on the SB field. The strength ratio for the bonding material is:

$$SR_{\text{bonding}} = (1 / FI_{\text{bonding}}).$$
10. A function of this entry is to derive equivalent internal PSHELL and MATi entries to describe the composite element. Any sorted echo request will also cause printout and/or punch of the derived PSHELL and MATi entries in User Information Message 4379 and/or the punch file. However, if these equivalent PSHELL and MAT2 entries are input, then stress or strain output for individual plies is not available and PARAM,NOCOMPS,-1 must be supplied.
11. If the value specified for Z0 is not equal to -0.5 times the thickness of the element and PARAM,NOCOMPS,-1 is specified, then the homogeneous element stresses are incorrect, while lamina stresses and element forces and strains are correct.

For correct homogeneous stresses, use ZOFFS on the corresponding connection entry.

12. An unsymmetrical layup or the use of Z0 to specify an unsymmetrical layup, is not recommended in buckling analysis or the calculation of differential stiffness. Also, Z0 should not be used to specify an unsymmetrical layup.
13. To obtain the damping coefficient  $GE$ , multiply the critical damping ratio  $C/C_0$  by 2.0.
14. The SYM option for the LAM option computes the complete stiffness properties while specifying half the plies. The MEM, BEND, SMEAR and SMCORE options provide the following special purpose stiffness calculations: MEM option only considers membrane effects, BEND option only considers bending effects, SMEAR ignores stacking sequence and is intended for cases where the sequence is not yet known, SMCORE allows simplified modeling of a sandwich panel with equal face sheets and a central core.
15. Element output for the SMEAR and SMCORE options are produced using the PARAM NOCOMPS -1 methodology that suppresses ply stress/strain results and prints results for the equivalent homogeneous element.
16. When the PCOMP or PCOMPG bulk entries are included in a distributed parallel method, the gpart keyword used for selecting the partitioning method must be gpart=1.

**Remarks related to SOL 601:**

1. Z0, NSM, SB, FT, TREF, GE, LAM, and SOUTi are ignored.
2. Large strain formulation is not available for multi-layered shell elements.

**1800 PCOMPG**  
Layered Composite Element Property with global ply IDs

**PCOMPG** Layered Composite Element Property with global ply IDs

Defines the properties of an n-ply composite material laminate which includes global ply IDs.

**Format:**

| 1      | 2       | 3    | 4   | 5      | 6     | 7    | 8  | 9   | 10 |
|--------|---------|------|-----|--------|-------|------|----|-----|----|
| PCOMPG | PID     | Z0   | NSM | SB     | FT    | TREF | GE | LAM |    |
|        | GPLYID1 | MID1 | T1  | THETA1 | SOUT1 |      |    |     |    |
|        | GPLYID2 | MID2 | T2  | THETA2 | SOUT2 |      |    |     |    |

**Example:**

|        |     |        |       |       |      |  |  |  |  |
|--------|-----|--------|-------|-------|------|--|--|--|--|
| PCOMPG | 73  | -2.E-4 | 0.    | 8.E+7 | TSAI |  |  |  |  |
|        | 101 | 1      | 1.E-4 | 0.    | YES  |  |  |  |  |
|        | 102 |        | 1.E-4 | 0.    | YES  |  |  |  |  |
|        | 103 |        | 1.E-4 | 0.    | YES  |  |  |  |  |
|        | 104 |        | 1.E-4 | 0.    | YES  |  |  |  |  |

**Fields:**

**Field Contents**

PID Property identification number. (0 < Integer < 10000000)

GPLYIDi Global ply IDs. See Remark 1.(Integer > 0)

Z0 Distance from the reference plane to the bottom surface. See Remark 12. (Real; Default = -0.5 times the element thickness.)

NSM Nonstructural mass per unit area. (Real)

SB Allowable shear stress of the bonding material (allowable interlaminar shear stress). Required if FT is also specified. (Real > 0.0) See Remark 10.



| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FT           | <p>Failure theory. The following theories are allowed (Character or blank. If blank, then no failure calculation will be performed):</p> <p>“HILL” for the Hill theory.</p> <p>“HOFF” for the Hoffman theory.</p> <p>“ TSAI” for the Tsai-Wu theory.</p> <p>“STRN” for the Maximum Strain theory.</p> <p>See the Laminates chapter in the <i>NX Nastran User’s Guide</i> for a detailed explanation of each theory.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| TREF         | Reference temperature. See Remark 4. (Real; Default = 0.0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| GE           | Damping coefficient. See Remarks 5 and 14. (Real; Default = 0.0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| LAM          | <p>Laminate Options. (Character or blank, Default = blank). See Remark 15 .</p> <p>“Blank” All plies must be specified and all stiffness terms are developed.</p> <p>“MEM” All plies must be specified, but only membrane terms (MID1 on the derived PSHELL entry) are computed.</p> <p>“BEND” All plies must be specified, but only bending terms (MID2 on the derived PSHELL entry) are computed.</p> <p>“SMEAR” All plies must be specified, stacking sequence is ignored, MID1=MID2 on the derived PSHELL entry and MID3, MID4 and TS/T and 12I/T**3 terms are set to zero.</p> <p>“SMCORE” All plies must be specified, with the last ply specifying core properties and the previous plies specifying face sheet properties. The stiffness matrix is computed by placing half the face sheet thicknesses above the core and the other half below, with the result that the laminate is symmetric about the midplane of the core. Stacking sequence is ignored in calculating the face sheet stiffness.</p> |

## 1802 PCOMPG Layered Composite Element Property with global ply IDs

| Field  | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MIDi   | Material ID of the various plies. The plies are identified by serially numbering them from 1 at the bottom layer. The MIDi must refer to MAT1, MAT2, or MAT8 Bulk Data entries. See Remark 2. (Integer > 0 or blank, except MID1 must be specified.)                                                                                                                                                                                              |
| Ti     | Thicknesses of the various plies. See Remark 2. (Real or blank, except T1 must be specified.)                                                                                                                                                                                                                                                                                                                                                     |
| THETAi | Orientation angle of the longitudinal direction of each ply with the material axis of the element. (If the material angle on the element connection entry is 0.0, the material axis and side 1-2 of the element coincide.) The plies are to be numbered serially starting with the first listed at the bottom layer. The bottom layer is defined as the surface with the largest -Z value in the element coordinate system. (Real; Default = 0.0) |
| SOUTi  | Controls individual ply stress and strain print or punch output. See Remarks 6 and 7. (Character: "YES" or "NO"; Default = "NO")                                                                                                                                                                                                                                                                                                                  |

### Remarks:

- Each global ply identification number GPLYIDi in a single PCOMPG entry should be unique.  
  
The global ply identification numbers (GPLYIDi) are reused across different PCOMPG bulk entries in order to post-process relative ply layers with common GPLYIDi.
- The default for MIDi+1, ..., MIDn is the last defined MIDi. In the example above, MID(PLY1) is the default for MID(PLY2), MID(PLY3), and MID(PLY4). The same logic applies to Ti.
- At least one of the four values (MIDi, Ti, THETAi, SOUTi) must be present for a ply to exist. The minimum number of plies is one.
- The TREF specified on the material entries referenced by plies are not used. Instead TREF on the PCOMPG entry is used for all plies of the element. If not specified, it defaults to "0.0."

If the PCOMPG references temperature dependent material properties, then the TREF given on the PCOMPG will be used as the temperature to determine material properties.

TEMPERATURE Case Control commands are ignored for deriving the equivalent PSHELL and MATi entries used to describe the composite element.

5. GE given on the PCOMPG entry will be used for the element and the values supplied on material entries for individual plies are ignored. The user is responsible for supplying the equivalent damping value on the PCOMPG entry. If PARAM,W4 is not specified GE is ignored in transient analysis. See “Parameters”.
6. The parameter NOCOMPS determines if stress and/or strain recovery is at the composite ply layers (default), on the equivalent PSHELL, or both. See the NOCOMPS parameter for details. The STRESS and/or STRAIN case control commands are required for any of these recovery options. When ply results are requested, stress and/or strain are computed at the middle of each ply. To print the ply stress and/or strain results, the case control command request must include the “PRINT” option (default). To punch these results, the case control command request must include the “PUNCH” option. SOUTi=YES should then be defined on any ply definitions in which you would like print or punch output. The SOUTi entry is not used in the computing or printing of failure indices. See Remark 8.
7. Stress and strain output for individual plies are available in all superelement static and normal modes analysis and requested by the STRESS and STRAIN case control commands.
8. To output STRESS failure index, the following must be present:
  - a. STRESS case control command.
  - b. SB and FT (= to HILL, HOFF or TSAI) on the PCOMPG Bulk Data entry.
  - c. Stress allowables Xt, Xc, Yt, Yc, and S on all referenced MAT8 Bulk Data entries.
  - d. Stress allowables ST, SC, and SS on all referenced MAT1 Bulk Data entries.To output STRAIN failure index, the following must be present:
  - a. STRAIN case control command.
  - b. SB and FT (= STRN) on the PCOMPG Bulk Data entry.
  - c. Strain allowables Xt, Xc, Yt, Yc, S, and STRN=1.0 on all referenced MAT8 Bulk Data entries.
9. To output strength ratio, the failure index output conditions listed in Remark 8 must exist, and the parameter SRCOMPS must equal “YES”.

## 1804 PCOMPG

### Layered Composite Element Property with global ply IDs

10. The failure index of the bonding material is calculated by:  
$$FI_{\text{bonding}} = (t_{1z}, t_{2z}) / \text{allowable bonding stress}.$$
The allowable bonding stress is defined on the SB field. The strength ratio for the bonding material is:  
$$SR_{\text{bonding}} = (1 / FI_{\text{bonding}}).$$
11. A function of this entry is to derive equivalent internal PSHELL and MATi entries to describe the composite element. Any sorted echo request will also cause printout and/or punch of the derived PSHELL and MATi entries in User Information Message 4379 and/or the punch file. However, if these equivalent PSHELL and MAT2 entries are input, then stress or strain output for individual plies is not available and PARAM,NOCOMPS,-1 must be supplied.
12. If the value specified for Z0 is not equal to -0.5 times the thickness of the element and PARAM,NOCOMPS,-1 is specified, then the homogeneous element stresses are incorrect, while lamina stresses and element forces and strains are correct. For correct homogeneous stresses, use ZOFFS on the corresponding connection entry.
13. An unsymmetrical layup or the use of Z0 to specify an unsymmetrical layup, is not recommended in buckling analysis or the calculation of differential stiffness. Also, Z0 should not be used to specify an unsymmetrical layup.
14. To obtain the damping coefficient GE, multiply the critical damping ratio C/C<sub>0</sub> by 2.0.
15. The MEM, BEND, SMEAR and SMCORE options provide the following special purpose stiffness calculations: MEM option only considers membrane effects, BEND option only considers bending effects, SMEAR ignores stacking sequence and is intended for cases where the sequence is not yet known, SMCORE allows simplified modeling of a sandwich panel with equal face sheets and a central core.
16. Element output for the SMEAR and SMCORE options are produced using the PARAM NOCOMPS -1 methodology that suppresses ply stress/strain results and prints results for the equivalent homogeneous element.
17. When the PCOMP or PCOMPG bulk entries are included in a distributed parallel method (DMP), the gpart keyword used for selecting the partitioning method must be gpart=1.

**PCONEAX** Conical Shell Element Property

Defines the properties of a conical shell element described on a CCONEAX entry.

**Format:**

| 1       | 2    | 3    | 4    | 5     | 6     | 7     | 8     | 9     | 10 |
|---------|------|------|------|-------|-------|-------|-------|-------|----|
| PCONEAX | ID   | MID1 | T1   | MID2  | I     | MID3  | T2    | NSM   |    |
|         | Z1   | Z2   | PHI1 | PHI2  | PHI3  | PHI4  | PHI5  | PHI6  |    |
|         | PHI7 | PHI8 | PHI9 | PHI10 | PHI11 | PHI12 | PHI13 | PHI14 |    |

**Example:**

|         |       |        |      |      |      |   |     |     |  |
|---------|-------|--------|------|------|------|---|-----|-----|--|
| PCONEAX | 2     | 4      | 1.0  | 6    | 16.3 | 8 | 2.1 | 0.5 |  |
|         | 0.001 | -0.002 | 23.6 | 42.9 |      |   |     |     |  |

**Fields:**

| Field            | Contents                                                                                  |
|------------------|-------------------------------------------------------------------------------------------|
| ID               | Property identification number. (Unique Integer > 0)                                      |
| MID <sub>i</sub> | Material identification number for membrane, bending, and transverse shear. (Integer ≥ 0) |
| T1               | Membrane thickness. (Real > 0.0 if MID1 = 0)                                              |
| T2               | Transverse shear thickness. (Real > 0.0 if MID3 = 0)                                      |
| I                | Moment of inertia per unit width. (Real)                                                  |
| NSM              | Nonstructural mass per unit area. (Real)                                                  |
| Z1, Z2           | Fiber distances from the middle surface for stress recovery. (Real)                       |
| PHI <sub>i</sub> | Azimuthal coordinates (in degrees) for stress recovery. (Real)                            |

**Remarks:**

1. PCONEAX is allowed only if an AXIC entry is also present.
2. PCONEAX entries may reference MAT1 or MAT2 material entries. However, only orthotropic material properties are consistent with axisymmetry. Therefore, G13 and G23 values on the MAT2 entry referenced by MID1 or MID2 and the G12 value on the MAT2 entry referenced by MID3 should be set to 0.0. In

## 1806 PCONEAX Conical Shell Element Property

addition, the MID3 entry, if it references a MAT2 material matrix, should be of size 2 x 2.

3. If either MID1 = 0 or blank or T1 = 0.0 or blank, then both must be zero or blank.
4. If either MID2 = 0 or blank or I = 0.0 or blank, then both must be zero or blank.
5. If either MID3 = 0 or blank or T2 = 0.0 or blank, then both must be zero or blank.
6. A maximum of 14 azimuthal coordinates (PHIi) for stress recovery may be specified.
7. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
8. The following elastic relationships are assumed:

- In-plane forces per unit width

$$\{F\} = T1[G_1]\{\epsilon\}$$

where  $\{\epsilon\}$  is the vector of strains in the middle surface.

- Bending moments per unit width

$$\{M\} = I[G_2]\{\chi\}$$

where  $\{\chi\}$  is the vector of curvatures.

- Transverse shear forces per unit width

$$\{V\} = T2[G_3]\{\gamma\}$$

where  $\{\gamma\}$  is the vector of transverse shear strains.

$[G_1]$ ,  $[G_2]$  and  $[G_3]$  are the stress-strain matrices defined by MID1, MID2, and MID3, respectively.

## PCONV Convection Property Definition

Specifies the free convection boundary condition properties of a boundary condition surface element used for heat transfer analysis.

### Format:

| 1     | 2      | 3   | 4    | 5    | 6 | 7 | 8 | 9 | 10 |
|-------|--------|-----|------|------|---|---|---|---|----|
| PCONV | PCONID | MID | FORM | EXPF |   |   |   |   |    |

### Example:

|       |   |   |   |     |  |  |  |  |  |
|-------|---|---|---|-----|--|--|--|--|--|
| PCONV | 3 | 2 | 0 | .25 |  |  |  |  |  |
|-------|---|---|---|-----|--|--|--|--|--|

### Fields:

| Field  | Contents                                                                                                                                    |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------|
| PCONID | Convection property identification number. (Integer > 0)                                                                                    |
| MID    | Material property identification number. (Integer > 0)                                                                                      |
| FORM   | Type of formula used for free convection. (Integer 0, 1, 10, 11, 20, or 21; Default = 0)                                                    |
| EXPF   | Free convection exponent as implemented within the context of the particular form that is chosen. See Remark 3. (Real ≥ 0.0; Default = 0.0) |

### Remarks:

- Every surface to which free convection is to be applied must reference a PCONV entry. PCONV is referenced on the CONV Bulk Data entry.
- MID is used to supply the convection heat transfer coefficient (H).
- EXPF is the free convection temperature exponent.
  - If FORM = 0, 10, or 20, EXPF is an exponent of (T – TAMB), where the convective heat transfer is represented as

$$q = H \cdot u_{\text{CNTRLND}} \cdot (T - T_{\text{AMB}})^{\text{EXPF}} \cdot (T - T_{\text{AMB}}) .$$

- If FORM = 1, 11, or 21,

## 1808 PCONV Convection Property Definition

$$q = H \cdot u_{\text{CNTRLND}} \cdot (T^{\text{EXPF}} - \text{TAMB}^{\text{EXPF}})$$

where T represents the elemental grid point temperatures and TAMB is the associated ambient temperature.

4. FORM specifies the formula type and the reference temperature location used in calculating the convection film coefficient if FLMND = 0.
  - If FORM = 0 or 1, the reference temperature is the average of element grid point temperatures (average) and the ambient point temperatures (average).
  - If FORM = 10 or 11, the reference temperature is the surface temperature (average of element grid point temperatures).
  - If FORM = 20 or 21, the reference temperature is the ambient temperature (average of ambient point temperatures).

### Remarks related to SOL 601:

1. FORM and EXPF are ignored.
2. The convective heat transfer is represented as:
  - $q = H \cdot (T - \text{TAMB}), \text{CNTRLND} = 0$
  - $q = (H \cdot u_{\text{CNTRLND}})(T - \text{TAMB}), \text{CNTRLND} \neq 0$
3. In calculating the convection film coefficient, SOL 601 uses the surface temperatures at the integration points of the element (closest to FORM=10).



**PCONVM**      Forced Convection Property Definition

Specifies the forced convection boundary condition properties of a boundary condition surface element used for heat transfer analysis.

**Format:**

| 1      | 2      | 3   | 4    | 5    | 6    | 7    | 8     | 9     | 10 |
|--------|--------|-----|------|------|------|------|-------|-------|----|
| PCONVM | PCONID | MID | FORM | FLAG | COEF | EXPR | EXPPI | EXPPO |    |

**Example:**

|        |   |   |   |   |      |      |      |      |  |
|--------|---|---|---|---|------|------|------|------|--|
| PCONVM | 3 | 2 | 1 | 1 | .023 | 0.80 | 0.40 | 0.30 |  |
|--------|---|---|---|---|------|------|------|------|--|

**Fields:**

| Field  | Contents                                                                                                   |
|--------|------------------------------------------------------------------------------------------------------------|
| PCONID | Convection property identification number. (Integer > 0)                                                   |
| MID    | Material property identification number. (Integer > 0)                                                     |
| FORM   | Type of formula used for convection. (Integer = 0, 1, 10, 11, 20, or 21; Default = 0)                      |
| FLAG   | Flag for mass flow convection. (Integer = 0 or 1; Default = 0)                                             |
| COEF   | Constant coefficient used for forced convection. (Real > 0.0)                                              |
| EXPR   | Reynolds number convection exponent. (Real ≥ 0.0; Default = 0.0)                                           |
| EXPPI  | Prandtl number convection exponent for heat transfer into the working fluid. (Real ≥ 0.0; Default = 0.0)   |
| EXPPO  | Prandtl number convection exponent for heat transfer out of the working fluid. (Real ≥ 0.0; Default = 0.0) |

**Remarks:**

1. Every surface to which forced convection is applied must reference a PCONVM entry. PCONVM is referenced on the CONVM entry.
2. MID specifies material properties of the working fluid at the temperature of the point FLMND. FLMND is specified on the CONVM entry.
3. The material properties are used in conjunction with the average diameter and mass flow rate (mdot). MID references the material properties and supplies the

## 1810 PCONVM Forced Convection Property Definition

fluid conductivity ( $k$ ), heat capacity ( $cp$ ), and viscosity ( $\mu$ ) needed to compute the Reynolds ( $Re$ ) and Prandtl ( $Pr$ ) numbers as follows:

$$Re = (4 \cdot |\dot{m}|) / (\pi \cdot \text{diameter} \cdot \mu)$$

$$Pr = cp \cdot \mu / k$$

4. FORM controls the type of formula used in determination of the forced convection film coefficient  $h$ . There are two cases:
  - If FORM = 0, 10, or 20 then  $h = \text{coef} \cdot Re^{\text{EXPR}} \cdot Pr^{\text{EXPP}}$ .
  - If FORM = 1, 11, or 21 then the above  $h$  is multiplied by  $k$  and divided by the average hydraulic diameter.
  - FORM also specifies the reference temperature used in calculating material properties for the fluid if FLMND = 0.
  - If FORM = 0 or 1, the reference temperature is the average of element grid point temperatures (average) and the ambient point temperature (average).
  - If FORM = 10 or 11, the reference temperature is the surface temperature (average of element grid point temperatures).
  - If FORM = 20 or 21, the reference temperature is the ambient temperature (average of ambient point temperature).
5. In the above expression, EXPP is EXPPI or EXPPO, respectively, for heat flowing into or out of the working fluid. This determination is performed internally.
6. FLAG controls the convective heat transfer into the downstream point (the second point as identified on the CHBDYi statement is downstream if  $\dot{m}$  is positive).
  - FLAG = 0, no convective flow (stationary fluid).
  - FLAG = 1, convective energy flow that is consistent with the Streamwise Upwind Petrov Galerkin (SUPG) element formulation.
7. No phase change or internal heat generation capabilities exist for this element.

**PDAMP**      Scalar Damper Property

Specifies the damping value of a scalar damper element using defined CDAMP1 or CDAMP3 entries.

**Format:**

| 1     | 2    | 3  | 4    | 5  | 6    | 7  | 8    | 9  | 10 |
|-------|------|----|------|----|------|----|------|----|----|
| PDAMP | PID1 | B1 | PID2 | B2 | PID3 | B3 | PID4 | B4 |    |

**Example:**

|       |    |     |   |     |  |  |  |  |  |
|-------|----|-----|---|-----|--|--|--|--|--|
| PDAMP | 14 | 2.3 | 2 | 6.1 |  |  |  |  |  |
|-------|----|-----|---|-----|--|--|--|--|--|

**Fields:**

| Field | Contents                                      |
|-------|-----------------------------------------------|
| PIDi  | Property identification number. (Integer > 0) |
| Bi    | Force per unit velocity. (Real)               |

**Remarks:**

1. Damping values are defined directly on the CDAMP2 and CDAMP4 entries, and therefore do not require a PDAMP entry.
2. A structural viscous damper, CVISC, may also be used for geometric grid points.
3. Up to four damping properties may be defined on a single entry.
4. For a discussion of scalar elements, see “Overview of 0D (Scalar) Elements” in the *NX Nastran Element Library*.

**1812 PDAMP5**  
Scalar Damper Property for CDAMP5

**PDAMP5**      Scalar Damper Property for CDAMP5

Defines the damping multiplier and references the material properties for damping. CDAMP5 is intended for heat transfer analysis only.

**Format:**

| 1      | 2   | 3   | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------|-----|-----|---|---|---|---|---|---|----|
| PDAMP5 | PID | MID | B |   |   |   |   |   |    |

**Example:**

|        |   |   |     |  |  |  |  |  |  |
|--------|---|---|-----|--|--|--|--|--|--|
| PDAMP5 | 2 | 3 | 4.0 |  |  |  |  |  |  |
|--------|---|---|-----|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                              |
|-------|-----------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                         |
| MID   | Material identification number of a MAT4 or MAT5 entry. (Integer > 0) |
| B     | Damping multiplier. (Real > 0.0)                                      |

**Remarks:**

1. B is the mass that multiplies the heat capacity CP on the MAT4 or MAT5 entry.

**PDAMPT**      Frequency-Dependent Damper Property

Defines the frequency-dependent properties for a PDAMP Bulk Data entry.

**Format:**

|        |      |       |   |   |   |   |   |   |    |
|--------|------|-------|---|---|---|---|---|---|----|
| 1      | 2    | 3     | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| PDAMPT | PID1 | TBID1 |   |   |   |   |   |   |    |

**Example:**

|        |    |    |  |  |  |  |  |  |  |
|--------|----|----|--|--|--|--|--|--|--|
| PDAMPT | 12 | 34 |  |  |  |  |  |  |  |
|--------|----|----|--|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                            |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number that matches the identification number on a PDAMP entry. (Integer > 0)                                               |
| TBID1 | Identification number of a TABLEDi entry that defines the damping force per-unit velocity versus frequency relationship. (Integer ≥ 0; Default = 0) |

**Remarks:**

1. PDAMPT may only be referenced by CDAMP1 or CDAMP3 elements in the residual structure, which do not attach to any omitted degrees-of-freedom.
2. The PDAMPT entry is ignored in all solution sequences except frequency response analysis.

## 1814 PDUMi Dummy Element Property

### PDUMi      Dummy Element Property

Defines the properties of a dummy element ( $1 \leq i \leq 9$ ). Referenced by the CDUMi entry.

#### Format:

| 1     | 2   | 3      | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|-------|-----|--------|----|----|----|----|----|----|----|
| PDUMi | PID | MID    | A1 | A2 | A3 | A4 | A5 | A6 |    |
|       | A7  | -etc.- |    |    |    |    |    |    |    |

#### Example:

|       |     |   |     |     |      |     |  |     |  |
|-------|-----|---|-----|-----|------|-----|--|-----|--|
| PDUM3 | 108 | 2 | 2.4 | 9.6 | 1.E4 | 15. |  | 3.5 |  |
|       | 5   |   | 2   |     |      |     |  |     |  |

#### Fields:

| Field | Contents                                      |
|-------|-----------------------------------------------|
| PID   | Property identification number. (Integer > 0) |
| MID   | Material identification number. (Integer > 0) |
| Aj    | Additional fields. (Real or Integer)          |

#### Remarks:

1. The additional fields are defined in the user-written element subroutines.

## PELAS     Scalar Elastic Property

Specifies the stiffness, damping coefficient, and stress coefficient of a scalar elastic (spring) element (CELAS1 or CELAS3 entry).

### Format:

| 1     | 2    | 3  | 4   | 5  | 6    | 7  | 8   | 9  | 10 |
|-------|------|----|-----|----|------|----|-----|----|----|
| PELAS | PID1 | K1 | GE1 | S1 | PID2 | K2 | GE2 | S2 |    |

### Example:

|       |   |      |      |      |    |      |        |  |  |
|-------|---|------|------|------|----|------|--------|--|--|
| PELAS | 7 | 4.29 | 0.06 | 7.92 | 27 | 2.17 | 0.0032 |  |  |
|-------|---|------|------|------|----|------|--------|--|--|

### Fields:

| Field            | Contents                                                 |
|------------------|----------------------------------------------------------|
| PID <sub>i</sub> | Property identification number. (Integer > 0)            |
| K <sub>i</sub>   | Elastic property value. See Remark 8. (Real)             |
| GE <sub>i</sub>  | Damping coefficient, $g_e$ . See Remarks 5 and 6. (Real) |
| S <sub>i</sub>   | Stress coefficient. (Real)                               |

### Remarks:

1. Be careful using negative spring values.
2. Spring values are defined directly on the CELAS2 and CELAS4 entries, and therefore do not require a PELAS entry.
3. One or two elastic spring properties may be defined on a single entry.
4. For a discussion of scalar elements, see “*Overview of OD (Scalar) Elements*” in the *NX Nastran Element Library*.
5. If PARAM,W4 is not specified, GE<sub>i</sub> is ignored in transient analysis. See “[Parameters](#)” .
6. To obtain the damping coefficient GE, multiply the critical damping ratio  $C/C_0$  by 2.0.
7. If PELAST is used in conjunction with PELAS,  $K_i > 0$ .

**1816 PELAS**  
**Scalar Elastic Property**

8. Rotational stiffness should be specified as moment per radian.

**Remarks related to SOLs 601 and 701:**

GEi and Si are ignored.



**PELAST**      Frequency Dependent Elastic Property

Defines the frequency dependent properties for a PELAS Bulk Data entry.

**Format:**

|        |     |      |       |       |   |   |   |   |    |
|--------|-----|------|-------|-------|---|---|---|---|----|
| 1      | 2   | 3    | 4     | 5     | 6 | 7 | 8 | 9 | 10 |
| PELAST | PID | TKID | TGEID | TKNID |   |   |   |   |    |

**Example:**

|        |    |    |  |  |  |  |  |  |  |
|--------|----|----|--|--|--|--|--|--|--|
| PELAST | 44 | 38 |  |  |  |  |  |  |  |
|--------|----|----|--|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                       |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number that matches the identification number on a PELAS entry. (Integer > 0)                                                          |
| TKID  | Identification number of a TABLEDi entry that defines the force per unit displacement vs. frequency relationship. (Integer > 0; Default = 0)                   |
| TGEID | Identification number of a TABLEDi entry that defines the nondimensional structural damping coefficient vs. frequency relationship. (Integer > 0; Default = 0) |
| TKNID | Identification number of a TABLEDi entry that defines the nonlinear force vs. displacement relationship. (Integer > 0; Default = 0)                            |

**Remarks:**

1. The PELAST entry may only be referenced by CELAS1 or CELAS3 elements in the residual structure which do not attach to any omitted degrees-of-freedom.
2. For frequency dependent modal frequency response the modes are computed using the nominal Ki values as specified on the PELAS entry.
3. The following table summarizes the usage PELAST entry in various solution sequences.

| Field | Frequency Response | Nonlinear | Linear (Non-Frequency Response) |
|-------|--------------------|-----------|---------------------------------|
| TKID  | Used               | Ignored   | Ignored                         |

**1818 PELAST**  
**Frequency Dependent Elastic Property**

| <b>Field</b> | <b>Frequency Response</b> | <b>Nonlinear</b> | <b>Linear (Non-Frequency Response)</b> |
|--------------|---------------------------|------------------|----------------------------------------|
| TGEID        | Used                      | Ignored          | Ignored                                |
| TKNID        | Ignored                   | Used             | Ignored                                |

4. The PELAST entry is ignored in all solution sequences except frequency response or nonlinear analyses.

**Remarks related to SOLs 601 and 701:**

1. TKID and TGEID are ignored.

**PFAST** Defines properties for CFAST connector

**Format:**

| 1     | 2   | 3   | 4    | 5     | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|------|-------|-----|-----|-----|-----|----|
| PFAST | PID | D   | MCID | MFLAG | KT1 | KT2 | KT3 | KR1 |    |
|       | KR2 | KR3 | MASS | GE    |     |     |     |     |    |

**Example:**

| 1     | 2  | 3   | 4  | 5 | 6      | 7     | 8     | 9 | 10 |
|-------|----|-----|----|---|--------|-------|-------|---|----|
| PFAST | 44 | .85 | 11 |   | 130000 | 54000 | 11500 |   |    |

**Fields:**

| Field           | Contents                                                                                                                                                                                                              |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID             | Property identification number of a PFAST bulk data entry (Integer > 0).                                                                                                                                              |
| D               | Diameter of the virtual connector. Used to locate the virtual grids on the shell element patch. (Real > 0)                                                                                                            |
| MCID            | Specifies a material coordinate system in which KT <sub>i</sub> and KR <sub>i</sub> are applied. (Integer >= -1 or blank. Default = -1) Remark 1.                                                                     |
| MFLAG           | Determines MCID is treated as absolute or relative. (Integer 0 or 1, Default = 0)<br><br>When MFLAG = 0, MCID is a relative coordinate system.<br><br>When MFLAG = 1, MCID is an absolute coordinate system. Remark 1 |
| KT <sub>i</sub> | X,Y,Z translational stiffness values. (Real, Default = 0.0)                                                                                                                                                           |
| KR <sub>i</sub> | X,Y,Z rotational stiffness values. (Real, Default = 0.0)                                                                                                                                                              |
| MASS            | Mass of connector. (Real, Default = 0.0)                                                                                                                                                                              |
| GE              | Structural damping. (Real, Default = 0.0)                                                                                                                                                                             |

**Remarks:**

1. The CFAST element coordinates and stiffness directions depend on how MCID and MFLAG are defined:

## 1820 PFAST

Defines properties for CFAST connector

A. When  $MCID = -1$  (default),  $MFLAG$  is ignored. The element x-axis is defined from GA to GB. If zero length (GA and GB are coincident), the element x-axis is defined by the normal from shell A. Similar to the CWELD element, the element y-axis is perpendicular to the element x-axis, and is oriented relative to the closest basic coordinate axis. If two basic coordinate axis are equally close, the first of x, y, then z is taken. The element z-axis is the cross product of the element x- and y-axis.  $KT1$ ,  $KT2$ , and  $KT3$  are applied in the element x-, y-, and z- axis, respectively.

B. When  $MCID > 0$  and  $MFLAG=0$ , the element x-axis is defined as described in "A". The cross product of the element x-axis into the  $MCID$  y-axis determines the element z-axis. The element y-axis is the cross product of the element z- and x-axis.  $KT1$ ,  $KT2$ , and  $KT3$  are applied in the element x-, y-, and z- axis, respectively.

C. When  $MCID \geq 0$  and  $MFLAG = 1$  (absolute), the element stiffness values  $KT1$ ,  $KT2$ , and  $KT3$  are applied in the material coordinates, although, the element forces are computed in the coordinates as described in "A".

## PGAP      Gap Element Property

Defines the properties of the gap element (CGAP entry).

### Format:

| 1    | 2    | 3   | 4     | 5  | 6  | 7  | 8   | 9   | 10 |
|------|------|-----|-------|----|----|----|-----|-----|----|
| PGAP | PID  | U0  | F0    | KA | KB | KT | MU1 | MU2 |    |
|      | TMAX | MAR | TRMIN |    |    |    |     |     |    |

### Example:

|      |   |      |     |      |  |      |      |      |  |
|------|---|------|-----|------|--|------|------|------|--|
| PGAP | 2 | .025 | 2.5 | 1.E6 |  | 1.E6 | 0.25 | 0.25 |  |
|------|---|------|-----|------|--|------|------|------|--|

### Fields:

| Field | Contents                                                                                                                                                                                                                                                                                                                 |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                                                                                                                                                                                                                                                            |
| U0    | Initial gap opening. See <a href="#">Figure 17-13</a> . (Real; Default = 0.0)                                                                                                                                                                                                                                            |
| F0    | Preload. See <a href="#">Figure 17-13</a> . (Real ≥ 0.0; Default = 0.0)                                                                                                                                                                                                                                                  |
| KA    | Axial stiffness for the closed gap; i.e., $U_a - U_b > U_0$ . See <a href="#">Figure 17-13</a> . (Real ≥ 0.0)                                                                                                                                                                                                            |
| KB    | Axial stiffness for the open gap; i.e., $U_a - U_b < U_0$ . See <a href="#">Figure 17-13</a> . See <a href="#">Remark 2</a> . (Real ≥ 0.0; Default = 1.0E-14 · KA)                                                                                                                                                       |
| KT    | Transverse stiffness when the gap is closed. See <a href="#">Figure 17-14</a> . It is recommended that $KT \geq (0.1 \cdot KA)$ . (Real ≥ 0.0; Default = MUI · KA)                                                                                                                                                       |
| MU1   | Coefficient of static friction ( $\mu_s$ ) for the adaptive gap element or coefficient of friction in the y transverse direction ( $\mu_y$ ) for the nonadaptive gap element. See <a href="#">Remark 3</a> and <a href="#">Figure 17-14</a> . (Real ≥ 0.0; Default = 0.0)                                                |
| MU2   | Coefficient of kinetic friction ( $\mu_k$ ) for the adaptive gap element or coefficient of friction in the z transverse direction ( $\mu_z$ ) for the nonadaptive gap element. See <a href="#">Remark 3</a> and <a href="#">Figure 17-14</a> . (Real ≥ 0.0 for the adaptive gap element, $MU2 \leq MU1$ ; Default = MU1) |

## 1822 PGAP Gap Element Property

| Field | Contents                                                                                                                                                               |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TMAX  | Maximum allowable penetration used in the adjustment of penalty values. The positive value activates the penalty value adjustment. See Remark 4 (Real; Default = 0.0). |
| MAR   | Maximum allowable adjustment ratio for adaptive penalty values KA and KT. See Remark 5 (1.0 < Real < 10 <sup>6</sup> ; Default = 100.0).                               |
| TRMIN | Fraction of TMAX defining the lower bound for the allowable penetration. See Remark 6. (0.0 ≤ Real ≤ 1.0; Default = 0.001)                                             |

### 17 Bulk O-P

#### Remarks:

1. [Figure 17-12](#), [Figure 17-13](#), and [Figure 17-14](#) show the gap element and the force-displacement curves used in the stiffness and force computations for the element.
2. For most contact problems, KA (penalty value) should be chosen to be three orders of magnitude higher than the stiffness of the neighboring grid points. A much larger KA value may slow convergence or cause divergence, while a much smaller KA value may result in inaccurate results. The value is adjusted as necessary if TMAX > 0.0.
3. When the gap is open, there is no transverse stiffness. When the gap is closed and there is friction, the gap has the elastic stiffness (KT) in the transverse direction until the friction force is exceeded and slippage starts to occur.
4. There are two kinds of gap elements: adaptive gap and nonadaptive gap. If TMAX ≥ 0.0, the adaptive gap element is selected by the program. When TMAX = 0.0, penalty values will not be adjusted, but other adaptive features will be active (i.e., the gap-induced stiffness update, gap-induced bisection, and subincremental process). The value of TMAX = -1.0 selects the nonadaptive (old) gap element. The recommended allowable penetration TMAX is about 10% of the element thickness for plates or the equivalent thickness for other elements that are connected to the gap.
5. The maximum adjustment ratio MAR is used only for the adaptive gap element. Upper and lower bounds of the adjusted penalty are defined by

$$\frac{K^{init}}{MAR} \leq K \leq K^{init} \cdot MAR$$

where  $K^{init}$  is either KA or KT.

6. TRMIN is used only for the penalty value adjustment in the adaptive gap element. The lower bound for the allowable penetration is computed by TRMIN \* TMAX. The penalty values are decreased if the penetration is below the lower bound.

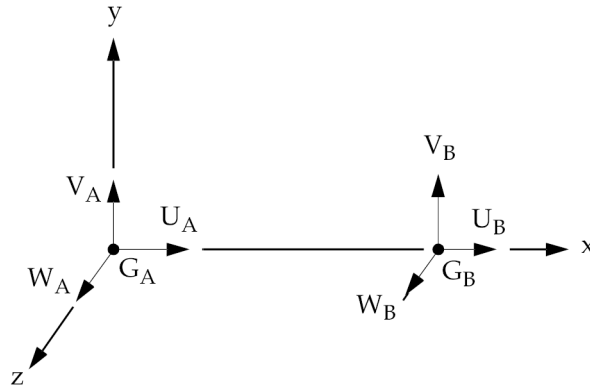


Figure 17-12. The CGAP Element Coordinate System


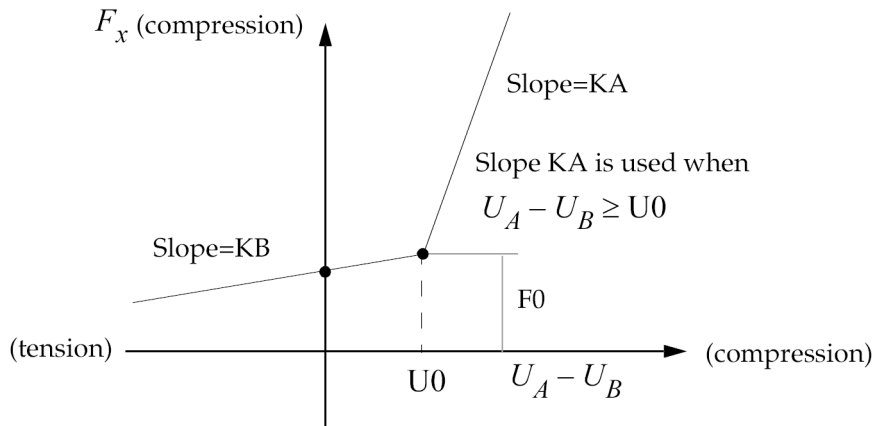


Figure 17-13. CGAP Element Force-Deflection Curve for Nonlinear Analysis

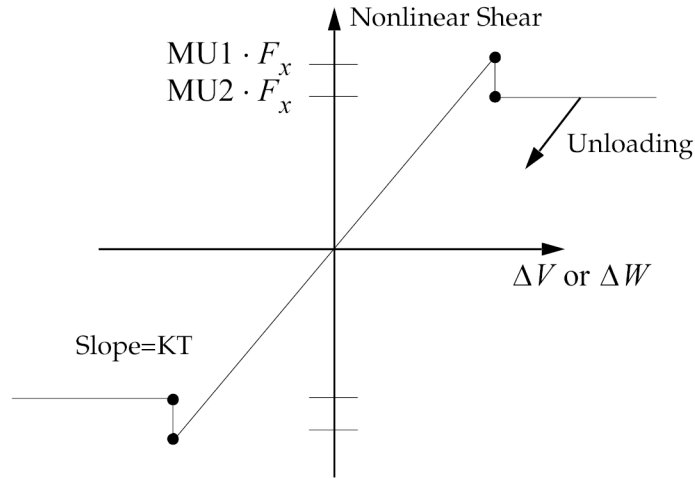

**Figure 17-14. Shear Force for CGAP Element**

7. If U0 is specified negative and GA and GB are not coincident, then the direction for closing must be controlled by the use of the CID field on the CGAP entry.

**Remarks related to SOLs 601 and 701:**

1. The gap element is simulated by a nonlinear spring element in SOLs 601 and 701 where the axial properties are represented but the transverse properties are ignored.
2. KT, MU1, MU2, TMAX, MAR, and TRMIN are ignored.

**Remarks related to contact in SOL 101 and consecutive solutions 103, 111 and 112:**

1. For contact in a linear solution, the CGAP element will use U0, MU1, KA, and KT. The following rules apply to KA and KT:
  - If KA is zero or blank, the value for KB is used for the normal stiffness as long as KB is nonzero.
  - If KA and KB are both zero and/or blank, the normal stiffness is calculated from the PENN and PENT fields on the associated BCTPARAM. The automatic penalty factor calculation used for surface-to-surface contact does not apply to CGAP elements.
  - If KA and KB are both zero and/or blank, and PENN and PENT are undefined, the values PENN=10 and PENT=1 will be used. PENTYP=2 should not be used in this case.



- If KT is zero or blank, the transverse stiffness is calculated from the PENT and PENTYP fields on the associated BCTPARM.

When NASTRAN SYSTEM(464) = 1, the CGAP normal and tangential stiffness will use PENN and PENT defined on the BCTPARM bulk data entry.

2. MU1 is used as the coefficient of friction in both transverse directions.
3. F0, MU2, TMAX, MAR and TRMIN are ignored.

**1826 PHBDY**  
**CHBDYP Geometric Element Definition**

**PHBDY** CHBDYP Geometric Element Definition

A property entry referenced by CHBDYP entries to give auxiliary geometric information for boundary condition surface elements.

**Format:**

| 1     | 2   | 3  | 4  | 5  | 6 | 7 | 8 | 9 | 10 |
|-------|-----|----|----|----|---|---|---|---|----|
| PHBDY | PID | AF | D1 | D2 |   |   |   |   |    |

**Example:**

|       |   |     |     |     |  |  |  |  |  |
|-------|---|-----|-----|-----|--|--|--|--|--|
| PHBDY | 2 | .02 | 1.0 | 1.0 |  |  |  |  |  |
|-------|---|-----|-----|-----|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                                                                                                                                           |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID    | Property identification number. (Unique Integer among all PHBDY entries). (Integer > 0)                                                                                                                            |
| AF     | Area factor of the surface used only for CHBDYP element TYPE = "POINT", TYPE = "LINE", TYPE = "TUBE", or TYPE = "ELCYL". For TYPE = "TUBE", AF is the constant thickness of the hollow tube. (Real > 0.0 or blank) |
| D1, D2 | Diameters associated with the surface. Used with CHBDYP element TYPE = "ELCYL", "TUBE", and "FTUBE". (Real > 0.0 or blank; Default for D2 = D1)                                                                    |

**Remarks:**

1. The PHBDY entry is used with CHBDYP entries.
2. AF
  - For TYPE = "POINT" surfaces, AF is the area.
  - For TYPE = "LINE" or TYPE = "ELCYL" surfaces, AF is the effective width: area = AF · (length).
  - For TYPE = "FTUBE" and outer TYPE = "TUBE" surfaces

$$\text{area} = \pi \cdot \left( \frac{D1 + D2}{2} \right) \cdot \sqrt{(\text{LGTH})^2 + \left( \frac{D1 - D2}{2} \right)^2}$$

3. D1 and D2 are used only with TYPE = "ELCYL", TYPE="TUBE", and TYPE="FTUBE" surfaces.
- For TYPE="ELCYL" surfaces, D1 and D2 are the two diameters associated with the ellipse.
  - For TYPE="FTUBE" and outer TYPE="TUBE" surfaces, D1 and D2 are the diameters associated with the first and second grid points, respectively.
  - For inner TYPE="TUBE" surfaces, the diameters are reduced by twice the thickness ( $2 \cdot AF$ ).

## 1828 PINTC Properties of Geometric Interface – Curve

### PINTC Properties of Geometric Interface – Curve

Defines the properties for interface elements along curve interfaces between boundaries of multiple subdomains of p-elements.

#### Format:

| 1     | 2   | 3   | 4      | 5 | 6 | 7 | 8 | 9 | 10 |
|-------|-----|-----|--------|---|---|---|---|---|----|
| PINTC | PID | TOL | DSCALE |   |   |   |   |   |    |

#### Example:

|       |   |      |        |  |  |  |  |  |  |
|-------|---|------|--------|--|--|--|--|--|--|
| PINTC | 1 | 0.01 | 1000.0 |  |  |  |  |  |  |
|-------|---|------|--------|--|--|--|--|--|--|

#### Fields:

| Field  | Contents                                                                                                                |
|--------|-------------------------------------------------------------------------------------------------------------------------|
| PID    | Property identification number. (Integer > 0)                                                                           |
| TOL    | Tolerance for distance between interface elements and subdomain boundaries. See Remark 2 . (Real > 0.0; Default = 0.01) |
| DSCALE | Scaling parameter for Lagrange multiplier functions. See Remark 3 . (Real > 0.0; Default = 1000.0)                      |

#### Remarks:

1. All PIDs must be unique.
2. TOL may be specified for the distance between the interface element and the boundaries. If the distance is greater than TOL, a warning message will occur. If the distance is less than TOL, but greater than the tolerance used by the geometric evaluator for the GMCURV method, a warning will be issued from the geometric evaluator.
3. DSCALE does not need to be specified unless the interface elements are poorly conditioned. Poor DSCALE conditioning can be determined from the epsilon value of the linear equation solution. A good value for DSCALE is two or three orders of magnitude less than the elastic moduli of the subdomain boundaries.

**PINTS**      Properties of Geometric Interface – Surface

Defines the properties for interface elements along surface interfaces between boundaries of multiple subdomains of p-elements.

**Format:**

|       |     |     |        |   |   |   |   |   |    |
|-------|-----|-----|--------|---|---|---|---|---|----|
| 1     | 2   | 3   | 4      | 5 | 6 | 7 | 8 | 9 | 10 |
| PINTS | PID | TOL | DSCALE |   |   |   |   |   |    |

**Example:**

|       |   |      |       |  |  |  |  |  |  |
|-------|---|------|-------|--|--|--|--|--|--|
| PINTS | 1 | 0.01 | 1000. |  |  |  |  |  |  |
|-------|---|------|-------|--|--|--|--|--|--|

**Fields:**

| Field  | Contents                                                                   | Type        | Default  |
|--------|----------------------------------------------------------------------------|-------------|----------|
| PID    | Property identification number                                             | Integer > 0 | Required |
| TOL    | Tolerance for distance between interface element and subdomain boundaries. | Real > 0    | 0.01     |
| DSCALE | Scaling parameter for Lagrange multiplier functions.                       | Real > 0    | 1000.    |

**Remarks:**

1. All PIDs must be unique.
2. The TOL tolerance may be specified for the distance between the interface element and the subdomain boundaries. If the distance is greater than the TOL, a warning will be issued. If the distance is less than the TOL, but greater than the tolerance used by the geometric evaluator for the GMSURF, a warning from the geometric evaluator will be issued.
3. The DSCALE scaling parameter for the Lagrange multipliers does not need to be changed unless the interface elements are poorly conditioned. This could be determined from the epsilon value of the linear equation solution. A good value for DSCALE, which has the units of elastic modulus, is two or three orders of magnitude less than the elastic modulus of the subdomain boundaries.

**1830 PLOAD**  
**Static Pressure Load**

**PLOAD**      Static Pressure Load

Defines a uniform static pressure load on a triangular or quadrilateral surface comprised of surface elements and/or the faces of solid elements.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| PLOAD    | SID      | P        | G1       | G2       | G3       | G4       |          |          |           |

**Example:**


|       |   |      |    |    |    |  |  |  |  |
|-------|---|------|----|----|----|--|--|--|--|
| PLOAD | 1 | -4.0 | 16 | 32 | 11 |  |  |  |  |
|-------|---|------|----|----|----|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                            |
|--------------|----------------------------------------------------------------------------|
| SID          | Load set identification number. (Integer > 0)                              |
| P            | Pressure. (Real)                                                           |
| Gi           | Grid point identification numbers. (Integer > 0; G4 may be zero or blank.) |

**Remarks:**


1. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
2. The grid points define either a triangular or a quadrilateral surface to which a pressure is applied. If G4 is zero or blank, the surface is triangular.
3. In the case of a triangular surface, the assumed direction of the pressure is computed according to the right-hand rule using the sequence of grid points G1, G2, G3 illustrated in [Figure 17-15](#).

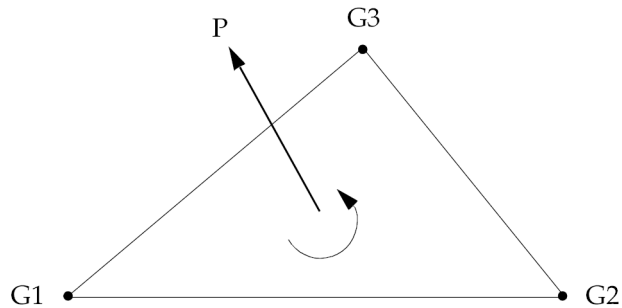

**Figure 17-15. Pressure Convention for Triangular Surface of Surface Elements and/or the Faces of Solid Elements**

The total load on the surface (see [Figure 17-16](#)),  $AP$ , is divided into three equal parts and applied to the grid points as concentrated loads. A minus sign in field 3 reverses the direction of the load.

4. In the case of a quadrilateral surface, the grid points G1, G2, G3, and G4 should form a consecutive sequence around the perimeter. The right-hand rule is applied to find the assumed direction of the pressure. Four concentrated loads are applied to the grid points in approximately the same manner as for a triangular surface. The following specific procedures are adopted to accommodate irregular and/or warped surfaces:
  - The surface is divided into two sets of overlapping triangular surfaces. Each triangular surface is bounded by two of the sides and one of the diagonals of the quadrilateral.
  - One-half of the pressure is applied to each triangle, which is then treated in the manner described in [Remark 2](#).

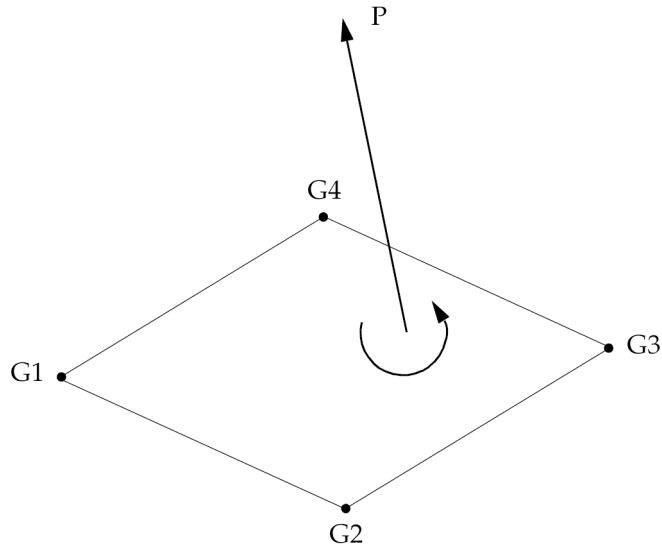

**Figure 17-16. Pressure Convention for Quadrilateral Surface of Surface Elements and/or the Faces of Solid Elements**

5. The follower force effects due to loads from this entry are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter **"FOLLOWK"** ). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with **PARAM,LGDISP,1**. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).

**Remarks related to SOLs 601 and 701:**

1. To apply a pressure load with constant magnitude, SID is selected by Case Control command **LOAD = SID** for both static and transient analyses.
2. To apply a time-dependent pressure load, SID is referenced by the field **EXCITEID = SID** in the **TLOAD1** entry. Time-dependent loads are selected by Case Control command **DLOAD**.
3. In large deformation analysis, the direction of pressure loads follows the deformation of the element by default. The use of **LOADOPT = 0** in **NXSTRAT** entry causes pressure loads to be independent of deformation, i.e., the direction of pressure loads maintains its original direction.



**PLOAD1** Applied Load on CBAR, CBEAM or CBEND Elements

Defines concentrated, uniformly distributed, or linearly distributed applied loads to the CBAR or CBEAM elements at user-chosen points along the axis. For the CBEND element, only distributed loads over an entire length may be defined.

**Format:**

| 1      | 2   | 3   | 4    | 5     | 6  | 7  | 8  | 9  | 10 |
|--------|-----|-----|------|-------|----|----|----|----|----|
| PLOAD1 | SID | EID | TYPE | SCALE | X1 | P1 | X2 | P2 |    |

**Example:**

|        |    |      |    |      |     |       |     |       |  |
|--------|----|------|----|------|-----|-------|-----|-------|--|
| PLOAD1 | 25 | 1065 | MY | FRPR | 0.2 | 2.5E3 | 0.8 | 3.5E3 |  |
|--------|----|------|----|------|-----|-------|-----|-------|--|

**Fields:**

| Field  | Contents                                                                                                         |
|--------|------------------------------------------------------------------------------------------------------------------|
| SID    | Load set identification number. (Integer > 0)                                                                    |
| EID    | CBAR, CBEAM, or CBEND element identification number. (Integer > 0)                                               |
| TYPE   | Load type. (Character: "FX", "FY", "FZ", "FXE", "FYE", "FZE", "MX", "MY", "MZ", "MXE", "MYE", "MZE")             |
| SCALE  | Determines scale factor for X1, X2. (Character: "LE", "FR", "LEPR", "FRPR")                                      |
| X1, X2 | Distances along the CBAR, CBEAM, or CBEND element axis from end A. (Real; X2 may be blank; $0 \leq X1 \leq X2$ ) |
| P1, P2 | Load factors at positions X1, X2. (Real or blank)                                                                |


**Remarks:**

1. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
2. If  $X2 \neq X1$ , a linearly varying distributed load will be applied to the element between positions X1 and X2, having an intensity per unit length of bar equal to P1 at X1 and equal to P2 at X2, except as noted in Remarks 8 and 9.

## 1834 PLOAD1

### Applied Load on CBAR, CBEAM or CBEND Elements

3. If X2 is blank or equal to X1, a concentrated load of value P1 will be applied at position X1.
4. If P1 = P2 and X2 ≠ X1, a uniform distributed load of intensity per unit length equal to P1 will be applied between positions X1 and X2 except as noted in Remarks 8 and 9.
5. Load TYPE is used as follows to define loads:
  - “FX”, “FY” or “FZ”: Force in the x, y, or z direction of the basic coordinate system.
  - “MX”, “MY” or “MZ”: Moment in the x, y, or z direction of the basic coordinate system.
  - “FXE”, “FYE” or “FZE”: Force in the x, y, or z direction of the element’s coordinate system.
  - “MXE”, “MYE” or “MZE”: Moment in the x, y, or z direction of the element’s coordinate system.
6. If SCALE = “LE” (length), the xi values are actual distances along the element axis, and, if X2 ≠ X1, then Pi are load intensities per unit length of the element.
7. If SCALE = “FR” (fractional), the xi values are ratios of the distance along the axis to the total length, and (if X2 ≠ X1) Pi are load intensities per unit length of the element.
8. If SCALE = “LEPR” (length projected), the xi values are actual distances along the element axis, and (if X2 ≠ X1) the distributed load is input in terms of the projected length of the element.

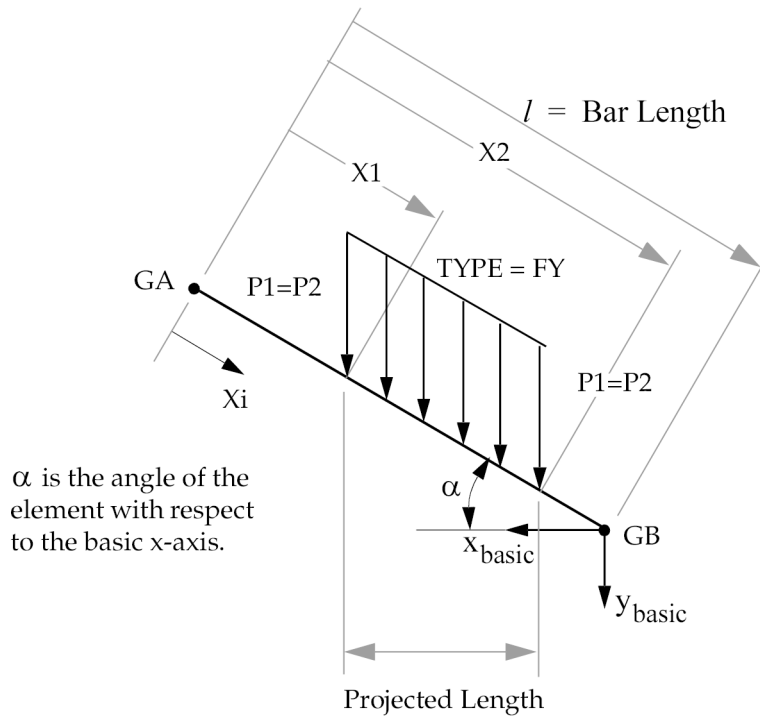

**Figure 17-17. PLOAD1 Convention on Beam or Bar Elements**

If SCALE = "LE", the total load applied to the bar is  $P1 (X2 - X1)$  in the y-basic direction.

If SCALE = "LEPR", the total load applied to the bar is  $P1 (X2 - X1)\cos\alpha$  in the y-basic direction.

9. If SCALE = "FRPR" (fractional projected), the  $X_i$  values are ratios of the actual distance to the length of the bar (CBAR entry), and if  $X2 \neq X1$ , then the distributed load is specified in terms of the projected length of the bar.
10. Element identification numbers for CBAR, CBEAM, and CBEND entries must be unique.
11. For the CBEND element, the following coordinate equivalences must be made for the element coordinates

$$R_{elem} \equiv X_{elem}$$

$$\theta_{elem} \equiv Y_{elem}$$

## 1836 PLOAD1

### Applied Load on CBAR, CBEAM or CBEND Elements

12. Only distributed loads applied over the entire length of the CBEND element may be applied.
13. Projected loads are not applicable to the CBEND element.
14. Loads on CBEAM elements defined with PLOAD1 entries are applied along the line of the shear centers.
15. If a CBARAO or PLOAD1 entry is specified and stress and/or force output is requested, then the stresses and/or forces will be calculated at each location  $X_i$  and output as a separate line. The force and stress locations  $X_i=0$  and  $X_i=l$  will always be output. This output format will be used for all beam and bar elements.
16. If on the TYPE field of the PLOAD1 entry, the element coordinate system direction (e.g. TYPE = FYE) option is selected, then the projection (i.e. SCALE = FRPR or LEPR) option is ignored and the result is the same as the SCALE = FR (or LE) option.

#### Remarks related to SOLs 601 and 701:

1. TYPE = FXE, MXE, MYE, or MZE is not supported. Only SCALE = "FR" is supported.
2. TYPE = MX, MY, or MZ is only supported if X2 = X1 or X2 is blank, i.e., as concentrated load.
3. TYPE = FYE or FZE is only supported if X2 is not equal to X1, i.e. as distributed load.
4. If X2 is not equal to X1, a distributed load will be applied over the entire length of the element, i.e., only X1 = 0.0 and X2 = 1.0 is allowed.
5. If X2 = X1 or X2 is blank, a concentrated load of value P1 will be applied at the X1 location and only X1=0.0 or X1=1.0 is allowed.
6. To apply a load with constant magnitude (with respect to time), SID is selected by Case Control command LOAD = SID for both static and transient analyses.
7. To apply a time-dependent load, SID is referenced by the field EXCITEID = SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.
8. In large deformation analysis, the direction of distributed loads (TYPE = FYE or FZE only) follows the deformation of the element by default. The use of LOADOPT = 0 in NXSTRAT entry causes distributed loads to be independent of deformation, i.e., the direction of distributed loads maintains its original direction.

**PLOAD2** Uniform Normal Pressure Load on a Surface Element

Defines a uniform static pressure load applied to CQUAD4, CSHEAR, or CTRIA3 two-dimensional elements.

**Format:**

| 1      | 2   | 3 | 4    | 5    | 6    | 7    | 8    | 9    | 10 |
|--------|-----|---|------|------|------|------|------|------|----|
| PLOAD2 | SID | P | EID1 | EID2 | EID3 | EID4 | EID5 | EID6 |    |

**Example:**

|        |    |      |  |   |    |  |   |  |  |
|--------|----|------|--|---|----|--|---|--|--|
| PLOAD2 | 21 | -3.6 |  | 4 | 16 |  | 2 |  |  |
|--------|----|------|--|---|----|--|---|--|--|



**Alternate Format and Example:**

|        |     |      |      |        |      |  |  |  |  |
|--------|-----|------|------|--------|------|--|--|--|--|
| PLOAD2 | SID | P    | EID1 | “THRU” | EID2 |  |  |  |  |
| PLOAD2 | 1   | 30.4 | 16   | THRU   | 48   |  |  |  |  |

**Fields:**

| Field            | Contents                                                                                   |
|------------------|--------------------------------------------------------------------------------------------|
| SID              | Load set identification number. (Integer > 0)                                              |
| P                | Pressure value. (Real)                                                                     |
| EID <sub>i</sub> | Element identification number. (Integer ≥ 0 or blank; for the “THRU” option, EID1 < EID2.) |

**Remarks:**

1. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
2. At least one positive EID must be present on each PLOAD2 entry.
3. If the alternate form is used, all elements EID1 through EID2 must be two-dimensional.
4. The direction of the pressure is computed according to the right-hand rule using the grid point sequence specified on the element entry. Refer to the PLOAD entry.

## 1838 PLOAD2

### Uniform Normal Pressure Load on a Surface Element

5. All referenced elements must exist (closed list) for residual only runs and are not required to exist (open list) for superelement runs; and they cannot be hyperelastic for either.
6. The follower force effects due to loads from this entry are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter **"FOLLOWK"**). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with PARAM,LGDISP,1. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).
7. The PLOAD2 entry may not be applied to p-elements. The PLOAD4 must be used.

#### Remarks related to SOLs 601 and 701:

1. To apply a pressure load with constant magnitude, SID is selected by Case Control command LOAD = SID for both static and transient analyses.
2. To apply a time-dependent pressure load, SID is referenced by the field EXCITEID = SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.
3. In large deformation analysis, the direction of pressure loads follows the deformation of the element by default. The use of LOADOPT = 0 in NXSTRAT entry causes pressure loads to be independent of deformation, i.e., the direction of pressure loads maintains its original direction.

**PLOAD4 1839**  
**Pressure Load on Surface and Faces of Solid Elements**

**PLOAD4** Pressure Load on Surface and Faces of Solid Elements

Defines a pressure load on a face of a CHEXA, CPENTA, CTETRA, CPYRAM, CTRIA3, CTRIA6, CTRIAR, CQUAD4, CQUAD8, or CQUADR element.

**Format:**

| 1      | 2   | 3   | 4  | 5  | 6  | 7  | 8  | 9        | 10 |
|--------|-----|-----|----|----|----|----|----|----------|----|
| PLOAD4 | SID | EID | P1 | P2 | P3 | P4 | G1 | G3 or G4 |    |
|        | CID | N1  | N2 | N3 |    |    |    |          |    |

**Example:**

|        |   |      |      |     |     |  |    |  |  |
|--------|---|------|------|-----|-----|--|----|--|--|
| PLOAD4 | 2 | 1106 | 10.0 | 8.0 | 5.0 |  | 48 |  |  |
|        | 6 | 0.0  | 1.0  | 0.0 |     |  |    |  |  |

**Alternate Format and Example**

(See Remark 8):

|        |     |      |    |    |    |    |        |      |  |
|--------|-----|------|----|----|----|----|--------|------|--|
| PLOAD4 | SID | EID1 | P1 | P2 | P3 | P4 | “THRU” | EID2 |  |
|        | CID | N1   | N2 | N3 |    |    |        |      |  |

|        |   |      |      |     |     |  |      |      |  |
|--------|---|------|------|-----|-----|--|------|------|--|
| PLOAD4 | 2 | 1106 | 10.0 | 8.0 | 5.0 |  | THRU | 1143 |  |
|        | 6 | 0.0  | 1.0  | 0.0 |     |  |      |      |  |

**Fields:**

| Field             | Contents                                                                                                                               |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| SID               | Load set identification number. (Integer > 0)                                                                                          |
| EID EID1<br>EID2  | Element identification number. (Integer > 0; for the “THRU” option, EID1 < EID2)                                                       |
| P1, P2, P3,<br>P4 | Load per unit surface area (pressure) at the corners of the face of the element. (Real or blank; Default for P2, P3, and P4 is P1.)    |
| G1                | Identification number of a grid point connected to a corner of the face. Required data for solid elements only. (Integer > 0 or blank) |

## 1840 PLOAD4

### Pressure Load on Surface and Faces of Solid Elements

| Field      | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| G3         | <p>For CHEXA, CPYRAM, or CPENTA quadrilateral faces, G3 is the identification number of a grid point connected to a corner diagonally opposite to G1. Required for quadrilateral faces of CHEXA, CPYRAM and CPENTA elements only.</p> <p>For CPYRAM element triangle faces, G1 and G3 are adjacent corner nodes on the quadrilateral face, and the load is applied on the triangular face which includes those grids.</p> <p>For CPENTA element triangle faces, G3 must be omitted.</p> |
| G4         | <p>Identification number of the CTETRA grid point located at the corner; this grid point may not reside on the face being loaded. This is required data and is used for CTETRA elements only. (Integer &gt; 0)</p>                                                                                                                                                                                                                                                                      |
| CID        | <p>Coordinate system identification number. See Remark 2. (Integer <math>\geq 0</math>; Default = 0)</p>                                                                                                                                                                                                                                                                                                                                                                                |
| N1, N2, N3 | <p>Components of vector measured in coordinate system defined by CID. Used to define the direction (but not the magnitude) of the load intensity. See Remark 2. (Real)</p>                                                                                                                                                                                                                                                                                                              |

#### Remarks:

1. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
2. The continuation entry is optional. If fields 2, 3, 4, and 5 of the continuation entry are blank, the load is assumed to be a pressure acting normal to the face. If these fields are not blank, the load acts in the direction defined in these fields. Note that if CID is a curvilinear coordinate system, the direction of loading may vary over the surface of the element. The load intensity is the load per unit of surface area, not the load per unit of area normal to the direction of loading.
3. For the faces of solid elements, the direction of positive pressure (defaulted continuation) is inward. For triangular and quadrilateral faces, the load intensity P1 acts at grid point G1 and load intensities P2, P3, (and P4) act at the other corners in a sequence determined by applying the right-hand rule to the outward normal.



## Pressure Load on Surface and Faces of Solid Elements

4. For plate elements, the direction of positive pressure (defaulted continuation) is in the direction of positive normal, determined by applying the right-hand rule to the sequence of connected grid points. The load intensities P1, P2, P3, (and P4) act respectively at corner points G1, G2, G3, (and G4) for triangular and quadrilateral elements. (See plate connection entries.)
5. If P2, P3, and P4 are blank fields, the load intensity is uniform and equal to P1. P4 has no meaning for a triangular face and may be left blank in this case.
6. Equivalent grid point loads are computed by linear or bilinear interpolation of load intensity followed by numerical integration using isoparametric shape functions. Note that a uniform load intensity will not necessarily result in equal equivalent grid point loads.
7. G1 and G3 are ignored for CTRIA3, CTRIA6, CTRIAR, CQUAD4, CQUAD8, and CQUADR elements.
8. The alternate format is available only for CTRIA3, CTRIA6, CTRIAR, CQUAD4, CQUAD8, and CQUADR elements. The continuation entry may be used in the alternate format.
9. For triangular faces of CPENTA elements, G1 is an identification number of a corner grid point that is on the face being loaded and the G3 or G4 field is left blank. For faces of CTETRA elements, G1 is an identification number of a corner grid point that is on the face being loaded and G4 is an identification number of the corner grid point that is not on the face being loaded. Since a CTETRA has only four corner points, this point G4 will be unique and different for each of the four faces of a CTETRA element.
10. All referenced elements must exist (closed list) for residual only runs and are not required to exist (open list) for superelement runs; and they cannot be hyperelastic for either.
11. If fields 3 through 5 of the continuation entry are not blank, the load is assumed to have a fixed direction. If fields 2 through 5 of the continuation entry are left blank, the load is assumed to be a pressure load. In this case, follower force effects are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter “**FOLLOWK**”). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with PARAM,LGDISP,1. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).

## 1842 PLOAD4

### Pressure Load on Surface and Faces of Solid Elements

#### Remarks related to SOLs 601 and 701:

1. To apply a pressure load with constant magnitude (with respect to time), SID is selected by Case Control command LOAD = SID for both static and transient analyses.
2. To apply a time-dependent pressure load, SID is referenced by the field EXCITEID = SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.
3. In large deformation analysis, the direction of normal pressure loads (i.e., CID, N1, N2 and N3 not specified) follows the deformation of the element by default. The use of LOADOPT = 0 in NXSTRAT entry causes pressure loads to be independent of deformation, i.e., the direction of pressure loads maintains its original direction.
4. CID, if specified, must be a rectangular coordinate system. Otherwise an error message will be issued.

**PLOADX1**      Pressure Load on Axisymmetric Element

Defines surface traction to be used with the CTRAX3, CTRAX6, CQUADX4, CQUADX8, CQUADX, CTRIAX, and CTRIAX6 axisymmetric elements.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6  | 7  | 8     | 9 | 10 |
|---------|-----|-----|----|----|----|----|-------|---|----|
| PLOADX1 | SID | EID | PA | PB | GA | GB | THETA |   |    |

**Example:**

|         |     |    |     |      |    |    |     |  |  |
|---------|-----|----|-----|------|----|----|-----|--|--|
| PLOADX1 | 200 | 35 | 3.5 | 10.5 | 10 | 30 | 20. |  |  |
|---------|-----|----|-----|------|----|----|-----|--|--|

**Fields:**

| Field  | Contents                                                                                            |
|--------|-----------------------------------------------------------------------------------------------------|
| SID    | Load set identification number. (Integer > 0)                                                       |
| EID    | Element identification number. (Integer > 0)                                                        |
| PA     | Surface traction at grid point GA. (Real)                                                           |
| PB     | Surface traction at grid point GB. (Real; Default = PA)                                             |
| GA, GB | Corner grid points. GA and GB are any two adjacent corner grid points of the element. (Integer > 0) |
| THETA  | Angle between surface traction and inward normal to the line segment. (Real; Default = 0.0)         |

**Remarks:**

1. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
2. The surface traction is assumed to vary linearly along the element side between GA and GB.
3. The surface traction is input as force per unit area.
4. THETA is measured counter-clockwise from the inward normal of the straight line between GA and GB, to the vector of the applied load, as shown in [Figure](#)

1844 PLOADX1  
Pressure Load on Axisymmetric Element

17-18 and Figure 17-19. Positive pressure is in the direction of inward normal to the line segment.

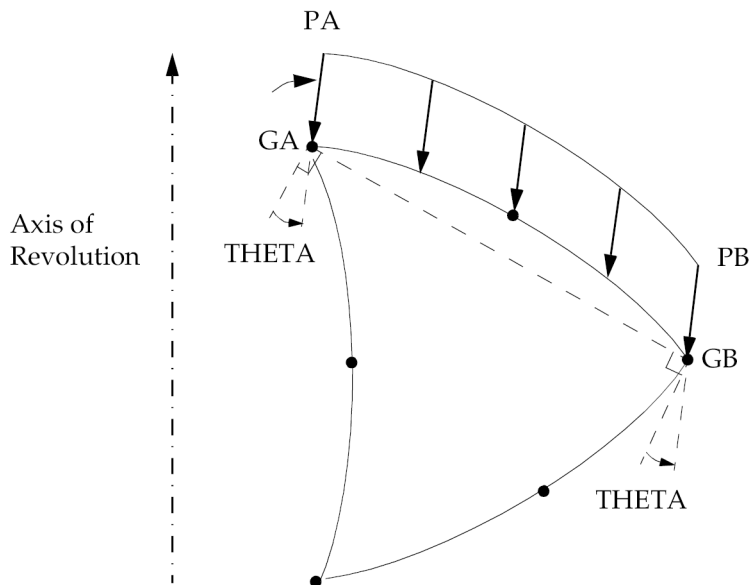


Figure 17-18. Pressure Load on CTRIA6 or CTRIA3 Element

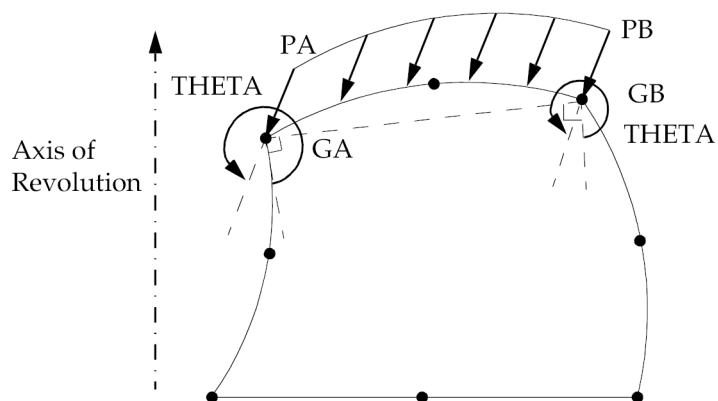


Figure 17-19. Pressure Load on CQUADX Element

**Remarks related to SOL 601:**

1. To apply a pressure load with constant magnitude (with respect to time), SID is selected by Case Control command LOAD = SID for both static and transient analyses.
2. To apply a time-dependent pressure load, SID is referenced by the field EXCITEID = SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.
3. In large deformation analysis, the direction of pressure loads follows the deformation of the element by default. The use of LOADOPT = 0 in NXSTRAT entry causes pressure loads to be independent of deformation, i.e., the direction of pressure loads maintains its original direction.

**1846 PLOTEL**  
**Dummy Plot Element Definition**

**PLOTEL**      Dummy Plot Element Definition

Defines a one-dimensional dummy element for use in plotting.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| PLOTEL   | EID      | G1       | G2       |          |          |          |          |          |           |

**Example:**

|        |    |    |    |  |  |  |  |  |  |
|--------|----|----|----|--|--|--|--|--|--|
| PLOTEL | 29 | 35 | 16 |  |  |  |  |  |  |
|--------|----|----|----|--|--|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                |
|--------------|--------------------------------------------------------------------------------|
| EID          | Element identification number. (Integer > 0)                                   |
| G1, G2       | Grid point identification numbers of connection points. (Integer > 0; G1 ≠ G2) |

**Remarks:**

1. This element is not used in the model during any of the solution phases of a problem. It is used to simplify plotting of structures with large numbers of colinear grid points, where the plotting of each grid point along with the elements connecting them would result in a confusing plot.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. Only one PLOTEL element may be defined on a single entry.
4. In superelement analysis, PLOTELS, as well as other elements such as CBAR, CQUAD4, etc., will affect the formation of the superelement tree. The PLOTEL EIDs will also appear in the superelement map output; see the description of PARAM,SEMAPPRT in [“Parameters”](#).
5. Only grid points connected by structural elements appear on structure plots. This does not include points connected only by rigid or general elements or MPCs. A plot element in parallel with elements that do not plot will cause these points to be present.



## 1848 PLPLANE

### Fully Nonlinear Plane Element Properties

4. Axisymmetric hyperelastic elements must lie on the x-y plane of the basic coordinate system. CID may not be specified and stresses and strains are output in the basic coordinate system.
5. The plane stress (CPLSTSx) and plane strain (CPLSTNx) elements do not support CID and STR.

#### Remarks related to SOL 601:

1. CID is not supported. Stresses and strains are output in the basic coordinate system.
2. The plane stress and plane strain hyperelastic elements CPLSTN3, CPLSTN4, CPLSTN6, CPLSTN8, CPLSTS3, CPLSTS4, CPLSTS6, CPLSTS8 must lie on the x-z plane of the basic coordinate system.
3. STR is ignored. Stresses and strains are output at grid points.
4. In a model where there are many plane stress elements with different thicknesses, it is recommended that the thickness values be specified in the element entries (Ti value in CPLSTS3, CPLSTS4, CPLSTS6, CPLSTS8) instead of assigning one PLPLANE entry to one thickness value and resulting in many PLPLANE entries.



**PLSOLID** Fully Nonlinear Solid Element Properties

Defines a fully nonlinear (i.e., large strain and large rotation) hyperelastic solid element.

**Format:**

| 1       | 2   | 3   | 4   | 5 | 6 | 7 | 8 | 9 | 10 |
|---------|-----|-----|-----|---|---|---|---|---|----|
| PLSOLID | PID | MID | STR |   |   |   |   |   |    |

**Example:**

|         |    |    |  |  |  |  |  |  |  |
|---------|----|----|--|--|--|--|--|--|--|
| PLSOLID | 20 | 21 |  |  |  |  |  |  |  |
|---------|----|----|--|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                              |
|-------|---------------------------------------------------------------------------------------|
| PID   | Element property identification number. (Integer > 0)                                 |
| MID   | Identification number of a MATHP or MATHE entry. See remark 3. (Integer > 0)          |
| STR   | Location of stress and strain output. (Character: "GAUS" or "GRID", Default = "GRID") |

**Remarks:**

1. PLSOLID can be referenced by a CHEXA, CPENTA, CPYRAM (SOL 601 only), CTETRA, CTRAX3, CTRAX6, CQUADX4, or CQUADX8 entry.
2. Stress and strain are output in the basic coordinate system.
3. For SOL 106, MID must refer to a MATHP entry.

**Remarks related to SOL 601:**

1. STR is ignored. Stresses and strains are output at grid points.

## 1850 PMASS

Scalar Mass Property

### PMASS Scalar Mass Property

Specifies the mass value of a scalar mass element (CMASS1 or CMASS3 entries).

#### Format:

| 1     | 2    | 3  | 4    | 5  | 6    | 7  | 8    | 9  | 10 |
|-------|------|----|------|----|------|----|------|----|----|
| PMASS | PID1 | M1 | PID2 | M2 | PID3 | M3 | PID4 | M4 |    |

#### Example:

|       |   |      |   |      |  |  |  |  |  |
|-------|---|------|---|------|--|--|--|--|--|
| PMASS | 7 | 4.29 | 6 | 13.2 |  |  |  |  |  |
|-------|---|------|---|------|--|--|--|--|--|

#### Fields:

| Field | Contents                                      |
|-------|-----------------------------------------------|
| PIDi  | Property identification number. (Integer > 0) |
| Mi    | Value of scalar mass. (Real)                  |

#### Remarks:

1. Mass values are defined directly on the CMASS2 and CMASS4 entries, and therefore do not require a PMASS entry.
2. Up to four mass values may be defined by this entry.
3. For a discussion of scalar elements, see “Overviewof0D(Scalar)Elements” in the *NX Nastran Element Library*.

**POINT**      Edge Point for FEEDGE Entry

Define edge point for FEEDGE entry.

**Format:**

|       |    |    |    |    |    |   |   |   |    |
|-------|----|----|----|----|----|---|---|---|----|
| 1     | 2  | 3  | 4  | 5  | 6  | 7 | 8 | 9 | 10 |
| POINT | ID | CP | X1 | X2 | X3 |   |   |   |    |

**Example:**

|       |    |   |    |    |    |  |  |  |  |
|-------|----|---|----|----|----|--|--|--|--|
| POINT | 12 | 1 | 1. | 2. | 5. |  |  |  |  |
|-------|----|---|----|----|----|--|--|--|--|

**Fields:**

| Field         | Contents                                                                              | Type             | Default  |
|---------------|---------------------------------------------------------------------------------------|------------------|----------|
| ID            | Point identification number.                                                          | Integer $\geq 0$ | Required |
| CP            | Identification number of coordinate system in which the location of point is defined. | Integer $\geq 0$ | 0        |
| X1, X2,<br>X3 | Location of the point in coordinate system CP.                                        | Real             | 0.0      |

**Remarks:**

1. POINT is used only to specify additional geometric points for edges and can be only used by p-elements. There are no degrees-of-freedom assigned to a point.
2. Only an FEEDGE entry can refer to POINT entries.
3. ID of POINTs must be unique with respect to ID of GRID entries.

## 1852 POINTAX Conical Shell Point

### POINTAX Conical Shell Point

Defines the location of a point on an axisymmetric shell ring at which loads may be applied via the FORCE or MOMENT entries and at which displacements may be requested. These points are not subject to constraints via MPCAX, SPCAX, or OMITAX entries.

#### Format:

| 1       | 2  | 3   | 4   | 5 | 6 | 7 | 8 | 9 | 10 |
|---------|----|-----|-----|---|---|---|---|---|----|
| POINTAX | ID | RID | PHI |   |   |   |   |   |    |

#### Example:

|         |   |   |      |  |  |  |  |  |  |
|---------|---|---|------|--|--|--|--|--|--|
| POINTAX | 2 | 3 | 30.0 |  |  |  |  |  |  |
|---------|---|---|------|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                               |
|-------|--------------------------------------------------------|
| ID    | Point identification number. (Unique Integer > 0)      |
| RID   | Identification number of a RINGAX entry. (Integer > 0) |
| PHI   | Azimuthal angle in degrees. (Real)                     |

#### Remarks:

1. This entry is allowed only if an AXIC entry is also present.
2. POINTAX identification numbers must be unique with respect to all other POINTAX, RINGAX, and SECTAX identification numbers.
3. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.

**PPLANE 1853**  
**Properties of Plane Stress or Plane Strain Elements (SOL 601 only)**

**PPLANE** Properties of Plane Stress or Plane Strain Elements (SOL 601 only)

Defines the properties of plane stress elements or plane strain elements.

**Format:**

| 1       | 2   | 3   | 4 | 5   | 6 | 7 | 8 | 9 | 10 |
|---------|-----|-----|---|-----|---|---|---|---|----|
| PPPLANE | PID | MID | T | NSM |   |   |   |   |    |

**Example:**

|         |     |     |      |  |  |  |  |  |  |
|---------|-----|-----|------|--|--|--|--|--|--|
| PPPLANE | 203 | 204 | 0.11 |  |  |  |  |  |  |
|---------|-----|-----|------|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                    |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Element property identification number. (Integer > 0)                                                                                                                                                                       |
| MID   | Material identification number. (Integer >0)                                                                                                                                                                                |
| T     | Thickness for plane stress elements. If T is blank or zero then the thickness must be specified for Ti on the CPLSTS3, CPLSTS4, CPLSTS6, and CPLSTS8 entries. T is ignored for plane strain elements. (Real ≥ 0.0 or blank) |
| NSM   | Nonstructural mass per unit area. Currently not supported. (Real)                                                                                                                                                           |

**Remarks:**

1. All PPLANE property entries should have unique identification numbers with respect to all other property entries.
2. The entry is referenced by the CPLSTS3, CPLSTS4, CPLSTS6, CPLSTS8, CPLSTN3, CPLSTN4, CPLSTN6, and CPLSTN8 entries via PID.
3. For structural problems, MID must reference a MAT1, MAT8 or MATSMA material property entry.
4. For heat transfer problems, MID must reference a MAT4 or MAT5 material property entry.
5. In a model where there are many plane stress elements with different thicknesses, it is recommended that the thickness values be specified in the element entries (Ti value in CPLSTS3, CPLSTS4, CPLSTS6, CPLSTS8) instead

**1854 PPLANE**  
**Properties of Plane Stress or Plane Strain Elements (SOL 601 only)**

of assigning one PPLANE entry to one thickness value and resulting in many PPLANE entries.

## PRAC2D CRAC2D Element Property

Defines the properties and stress evaluation techniques to be used with the CRAC2D structural element.

### Format:

| 1      | 2   | 3   | 4 | 5      | 6   | 7     | 8   | 9 | 10 |
|--------|-----|-----|---|--------|-----|-------|-----|---|----|
| PRAC2D | PID | MID | T | IPLANE | NSM | GAMMA | PHI |   |    |

### Example:

|        |     |   |      |   |     |     |      |  |  |
|--------|-----|---|------|---|-----|-----|------|--|--|
| PRAC2D | 108 | 2 | 0.10 | 0 | .17 | .50 | 180. |  |  |
|--------|-----|---|------|---|-----|-----|------|--|--|

### Fields:

| Field  | Contents                                                                                                                                           |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| PID    | Property identification number. (Integer > 0)                                                                                                      |
| MID    | Material identification number. (Integer > 0)                                                                                                      |
| T      | Element thickness. (Real > 0.0)                                                                                                                    |
| IPLANE | Plane strain or plane stress option. Use 0 for plane strain; 1 for plane stress. (Integer = 0 or 1)                                                |
| NSM    | Nonstructural mass per unit area. (Real ≥ 0.0; Default = 0)                                                                                        |
| GAMMA  | Exponent used in the displacement field. See Remark 4. (Real; Default = 0.5)                                                                       |
| PHI    | Angle (in degrees) relative to the element x-axis along which stress intensity factors are to be calculated. See Remark 4. (Real; Default = 180.0) |

### Remarks:

1. All PRAC2D property entries should have unique identification numbers with respect to all other property entries.
2. PRAC2D entry may refer to MAT1, MAT2, or MAT8 material property entries.
3. For plane strain analysis, only MAT1 type data should be used.

**1856 PRAC2D**  
**CRAC2D Element Property**

4. Nondefault values for GAMMA and PHI have not been tested. Therefore, the default value should be used.



## PRAC3D CRAC3D Element Property

Defines the properties of the CRAC3D structural element.

### Format:

| 1      | 2   | 3   | 4     | 5   | 6 | 7 | 8 | 9 | 10 |
|--------|-----|-----|-------|-----|---|---|---|---|----|
| PRAC3D | PID | MID | GAMMA | PHI |   |   |   |   |    |

### Example:

|        |     |   |     |      |  |  |  |  |  |
|--------|-----|---|-----|------|--|--|--|--|--|
| PRAC3D | 108 | 2 | .50 | 180. |  |  |  |  |  |
|--------|-----|---|-----|------|--|--|--|--|--|

**17**  
Bulk O-P

### Fields:

| Field | Contents                                                                                                                                           |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                                                                                      |
| MID   | Material identification number. (Integer > 0)                                                                                                      |
| GAMMA | Exponent used in the displacement field. See Remark 3. (Real; Default = 0.5)                                                                       |
| PHI   | Angle (in degrees) relative to the element x axis along which stress intensity factors are to be calculated. See Remark 3. (Real; Default = 180.0) |

### Remarks:

1. All PRAC3D property entries should have unique identification numbers with respect to all other property entries.
2. Either isotropic (MAT1) or anisotropic (MAT9) material entries may be referenced.
3. Nondefault values for GAMMA and PHI have not been tested. Therefore, the default value should be used.

**1858 PRESAX**  
Conical Shell Pressure Load

**PRESAX** Conical Shell Pressure Load

Defines the static pressure loading on a conical shell element.

**Format:**

| 1      | 2   | 3 | 4    | 5    | 6    | 7    | 8 | 9 | 10 |
|--------|-----|---|------|------|------|------|---|---|----|
| PRESAX | SID | P | RID1 | RID2 | PHI1 | PHI2 |   |   |    |

**Example:**

|        |   |      |   |   |      |      |  |  |  |
|--------|---|------|---|---|------|------|--|--|--|
| PRESAX | 3 | 7.92 | 4 | 3 | 20.6 | 31.4 |  |  |  |
|--------|---|------|---|---|------|------|--|--|--|

**Fields:**

| Field      | Contents                                                     |
|------------|--------------------------------------------------------------|
| SID        | Load set identification number. (Integer > 0)                |
| P          | Pressure value. (Real)                                       |
| RID1, RID2 | Ring identification numbers. See RINGAX entry. (Integer > 0) |
| PHI1, PHI2 | Azimuthal angles in degrees. (Real; PHI2 > PHI1)             |

**Remarks:**

1. PRESAX is allowed only if an AXIC entry is also present.
2. Load sets must be selected with the Case Control command LOAD = SID.
3. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
4. For axisymmetric loading over 360 degrees, use PHI1 = 0.0 and PHI2 = 360.0.

**PRESPT** Fluid Pressure Point

Defines the location of pressure points in the fluid for recovery of pressure data.

**Format:**

| 1      | 2   | 3 | 4    | 5    | 6    | 7    | 8    | 9    | 10 |
|--------|-----|---|------|------|------|------|------|------|----|
| PRESPT | IDF |   | IDP1 | PHI1 | IDP2 | PHI2 | IDP3 | PHI3 |    |

**Example:**

|        |    |  |     |     |  |  |     |      |  |
|--------|----|--|-----|-----|--|--|-----|------|--|
| PRESPT | 14 |  | 141 | 0.0 |  |  | 142 | 90.0 |  |
|--------|----|--|-----|-----|--|--|-----|------|--|

**Fields:**

| Field | Contents                                                                               |
|-------|----------------------------------------------------------------------------------------|
| IDF   | Fluid point (RINGFL entry) identification number. (Integer > 0)                        |
| IDPi  | Pressure point identification number. (Integer > 0)                                    |
| PHIi  | Azimuthal position on fluid point referenced by IDF in fluid coordinate system. (Real) |

**Remarks:**

1. PRESPT is allowed only if an AXIF entry is also present.
2. All pressure point identification numbers must be unique with respect to other scalar, structural, and fluid points.
3. The pressure points are used primarily for the identification of output data. They may also be used as points at which to measure pressure for input to control devices (see "Performing a Coupled Fluid-Structural Analysis" in the *NX Nastran User's Guide*).
4. One, two, or three pressure points may be defined per entry.
5. Output requests for velocity and acceleration of these degrees-of-freedom will result in derivatives of pressure with respect to time.

**1860 PROD**  
Rod Property

**PROD** Rod Property

Defines the properties of a rod element (CROD entry).

**Format:**

| 1    | 2   | 3   | 4 | 5 | 6 | 7   | 8 | 9 | 10 |
|------|-----|-----|---|---|---|-----|---|---|----|
| PROD | PID | MID | A | J | C | NSM |   |   |    |

**Example:**

|      |    |    |      |       |        |     |  |  |  |
|------|----|----|------|-------|--------|-----|--|--|--|
| PROD | 17 | 23 | 42.6 | 17.92 | 4.2356 | 0.5 |  |  |  |
|------|----|----|------|-------|--------|-----|--|--|--|

**Fields:**

| Field | Contents                                                           |
|-------|--------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                      |
| MID   | Material identification number. See Remarks 2 and 3. (Integer > 0) |
| A     | Area of the rod. (Real)                                            |
| J     | Torsional constant. (Real)                                         |
| C     | Coefficient to determine torsional stress. (Real; Default = 0.0)   |
| NSM   | Nonstructural mass per unit length. (Real)                         |

**Remarks:**

1. PROD entries must all have unique property identification numbers.
2. For structural problems, MID must reference a MAT1 material entry.
3. For heat transfer problems, MID must reference a reference MAT4 or MAT5 entry.
4. The formula used to calculate torsional stress is

$$\tau = \frac{CM_{\theta}}{J}$$

where  $M_{\theta}$  is the torsional moment.

**Remarks related to SOLs 601 and 701:**

1. J, C, and NSM are ignored.
2. CROD defines a truss element with no torsional stiffness, i.e., only axial force is transmitted by the element.
3. For structural problems, MID can reference a MAT1 or MATSMA material entry.
4. For heat transfer problems, MID must reference a MAT4 entry.

## 1862 PSET p-Version Element Polynomial Distribution

### PSET p-Version Element Polynomial Distribution

Describes polynomial order distribution and is selected by the ADAPT Case Control command.

#### Format:

| 1    | 2   | 3     | 4     | 5     | 6   | 7      | 8  | 9 | 10 |
|------|-----|-------|-------|-------|-----|--------|----|---|----|
| PSET | SID | POLY1 | POLY2 | POLY3 | CID | SETTYP | ID |   |    |

#### Example:

|      |     |   |   |   |  |  |    |  |  |
|------|-----|---|---|---|--|--|----|--|--|
| PSET | 127 | 1 | 2 | 1 |  |  | 12 |  |  |
|------|-----|---|---|---|--|--|----|--|--|

#### Fields:

| Field  | Contents                                                                                    | Type             | Default    |
|--------|---------------------------------------------------------------------------------------------|------------------|------------|
| SID    | ID selected in the ADAPT Case Control command.                                              | Integer > 0      | Required   |
| CID    | Coordinate system used to specify polynomial values in different directions. See Remark 1 . | Integer $\geq$ 0 | Remark 2 . |
| POLYi  | Polynomial order in 1, 2, 3 directions of the CID system.                                   | Integer > 0      | Remark 3 . |
| SETTYP | Type of set provided (“SET” or “ELID”)                                                      | Character        | “SET”      |
| ID     | SET ID or element ID with this p-value specification.                                       | Integer > 0      | 999999     |

#### Remarks:

1. CID facilitates the specification of the p-order in curvilinear systems. For example, when modeling a thin cylinder, the user can restrict the p-order through the thickness of all elements to be 2 or 3 without specifically checking the connectivity of each element.

2. If the CID system is blank, the element's topology is used to establish the 1, 2, 3 directions. The 1 direction is from the first to the second grid of the element, the 2 direction is from the first to the fourth, and, the 3 direction is from the first to the fifth. If CID is not blank then the following algorithm will be used to determine the p-order of each edge: a vector will be defined in the CID system from the first to the second grid of every edge. (Curvilinear systems are evaluated at the midpoint of this vector.) The p-level of each edge is now determined by the nearest integer to

$$p = \sqrt{(n_1 \cdot \text{POLY1})^2 + (n_2 \cdot \text{POLY2})^2 + (n_3 \cdot \text{POLY3})^2}$$

where  $(n_1, n_2, n_3)$  are the components of this unit vector in the CID system.

3. The default value for POLY2 and POLY3 is POLY1.
4. Any overlap of the PSET specification will result in a warning message and the use of the PSET with the highest pi entry.
5. Whenever SETTYP = "SET", a SET command must be defined in the SETS DEFINITION section of the Case Control Section.
6. SET = 999999 is a reserved set that includes all elements.
7. Whenever there are more than one PSET entries for a given element, then:
  - If CID on the PSET entries are the same, the entry with the maximum POLYi will be used.
  - If CID on the PSET entries are different, a fatal message is issued.

## 1864 PSHEAR Shear Panel Property

### PSHEAR Shear Panel Property

Defines the properties of a shear panel (CSHEAR entry).

#### Format:

| 1      | 2   | 3   | 4 | 5   | 6  | 7  | 8 | 9 | 10 |
|--------|-----|-----|---|-----|----|----|---|---|----|
| PSHEAR | PID | MID | T | NSM | F1 | F2 |   |   |    |

#### Example:

|        |    |    |      |       |       |     |  |  |  |
|--------|----|----|------|-------|-------|-----|--|--|--|
| PSHEAR | 17 | 23 | 42.6 | 17.92 | 4.236 | 0.5 |  |  |  |
|--------|----|----|------|-------|-------|-----|--|--|--|


#### Fields:

| Field | Contents                                                                                                         |
|-------|------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                                                    |
| MID   | Material identification number of a MAT1 entry. (Integer > 0)                                                    |
| T     | Thickness of shear panel. (Real ≠ 0.0)                                                                           |
| NSM   | Nonstructural mass per unit area. (Real)                                                                         |
| F1    | Effectiveness factor for extensional stiffness along edges 1-2 and 3-4. See Remark 2 (Real ≥ 0.0; Default = 0.0) |
| F2    | Effectiveness factor for extensional stiffness along edges 2-3 and 1-4. See Remark 2 (Real ≥ 0.0; Default = 0.0) |

#### Remarks:

- All PSHEAR entries should have unique identification numbers with respect to all other property entries.
- The effective extensional area is defined by means of equivalent rods on the perimeter of the element. If  $F1 \leq 1.01$ , the areas of the rods on edges 1-2 and 3-4 are set equal to  $(F1 \cdot T \cdot PA)/(L12 + L34)$  where PA is the panel surface area-half the vector cross product area of the diagonals-and L12, L34 are the lengths of sides 1-2 and 3-4. Thus, if  $F1 = 1.0$ , the panel is fully effective for extension in the 1-2 direction. If  $F1 > 1.01$ , the areas of the rods on edges 1-2 and 3-4 are each set equal to  $0.5 \cdot F1 \cdot T^2$ .



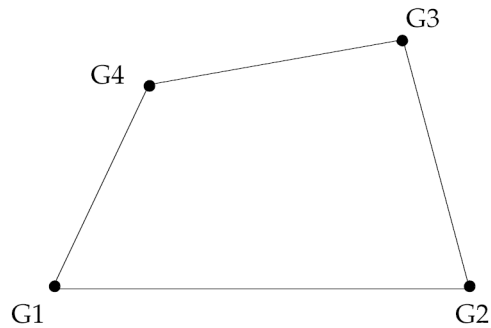

**Figure 17-20. Extensional Area for Shear Panel**

Thus, if  $F1 = 30$ , the effective width of skin contributed by the panel to the flanges on edges 1-2 and 3-4 is equal to  $15T$ . The significance of  $F2$  for edges 2-3 and 1-4 is similar.

3. Poisson's ratio coupling for extensional effects is ignored.

**1866 PSHELL**  
Shell Element Property

**PSHELL** Shell Element Property

Defines the membrane, bending, transverse shear, and coupling properties of thin shell elements.

**Format:**

| 1      | 2   | 3    | 4    | 5    | 6        | 7    | 8    | 9   | 10 |
|--------|-----|------|------|------|----------|------|------|-----|----|
| PSHELL | PID | MID1 | T    | MID2 | 12I/T**3 | MID3 | TS/T | NSM |    |
|        | Z1  | Z2   | MID4 |      |          |      |      |     |    |

**Example:**

|        |       |       |      |     |     |     |     |      |  |
|--------|-------|-------|------|-----|-----|-----|-----|------|--|
| PSHELL | 203   | 204   | 1.90 | 205 | 1.2 | 206 | 0.8 | 6.32 |  |
|        | + .95 | - .95 |      |     |     |     |     |      |  |

**Fields:**

| Field    | Contents                                                                                                                                                                                                                                                  |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID      | Property identification number. (Integer > 0)                                                                                                                                                                                                             |
| MID1     | Material identification number for the membrane. (Integer ≥ 0 or blank)                                                                                                                                                                                   |
| T        | Default membrane thickness for Ti on the connection entry. If T is blank then the thickness must be specified for Ti on the CQUAD4, CTRIA3, CQUAD8, and CTRIA6 entries. (Real or blank)                                                                   |
| MID2     | Material identification number for bending. (Integer ≥ -1 or blank)                                                                                                                                                                                       |
| 12I/T**3 | Bending moment of inertia ratio, $12I/T^3$ . Ratio of the actual bending moment inertia of the shell, $I$ , to the bending moment of inertia of a homogeneous shell, $T^3/12$ . The default value is for a homogeneous shell. (Real > 0.0; Default = 1.0) |
| MID3     | Material identification number for transverse shear. (Integer > 0 or blank; unless MID2 > 0, must be blank.)                                                                                                                                              |
| TS/T     | Transverse shear thickness ratio, $T_s/T$ . Ratio of the shear thickness, ( $T_s$ ), to the membrane thickness of the shell, $T$ . The default value is for a homogeneous shell. (Real > 0.0; Default = .833333)                                          |
| NSM      | Nonstructural mass per unit area. (Real)                                                                                                                                                                                                                  |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Z1, Z2       | Fiber distances for stress calculations. The positive direction is determined by the right-hand rule, and the order in which the grid points are listed on the connection entry. See Remark 11 . for defaults. (Real or blank) |
| MID4         | Material identification number for membrane-bending coupling. See Remark 6. (Integer > 0 or blank, must be blank unless MID1 > 0 and MID2 > 0, may not equal MID1 or MID2.)                                                    |

**Remarks:**

1. All PSHELL property entries should have unique identification numbers with respect to all other property entries.
2. The structural mass is calculated from the density using the membrane thickness and membrane material properties.
3. The results of leaving an MID field blank (or MID2 = -1) are:
 

|         |                                                                                                |
|---------|------------------------------------------------------------------------------------------------|
| MID1    | No membrane or coupling stiffness                                                              |
| MID2    | No bending, coupling, or transverse shear stiffness                                            |
| MID3    | No transverse shear flexibility                                                                |
| MID4    | No membrane-bending coupling unless ZOFFS is specified on the connection entry. See Remark 6 . |
| MID2=-1 | See Remark 12 .                                                                                |

Note: MID1 and MID2 must be specified if the ZOFFS field is also specified on the connection entry.
4. The continuation entry is not required.
5. The structural damping (GE on the MATi entry) is obtained from MID1 material.
6. The following should be considered when using MID4.
  - The MID4 field should be left blank if the material properties are symmetric with respect to the middle surface of the shell. If the element centerline is offset from the plane of the grid points but the material properties are symmetric, the preferred method for modeling the offset is by use of the ZOFFS field on the connection entry. Although the MID4 field may be used for this purpose, it may produce ill-conditioned stiffness matrices (negative terms on factor diagonal) if done incorrectly.

## 1868 PSHELL Shell Element Property

- Only one of the options MID4 or ZOFFS should be used; if both methods are specified the effects are cumulative. Since this is probably not what the user intended, unexpected answers will result. Note that the mass properties are not modified to reflect the existence of the offset when the ZOFFS and MID4 methods are used. If the weight or mass properties of an offset plate are to be used in an analysis, the RBAR method must be used to represent the offset. See “Plate and Shell Elements” in the *NX Nastran Element Library*.
- The effects of MID4 are not considered in the calculation of differential stiffness. Therefore, it is recommended that MID4 be left blank in buckling analysis.

### 17 Bulk O-P

7. This entry is referenced by the CTRIA3, CTRIA6, CTRIAR, CQUAD4, CQUAD8, and CQUADR entries via PID.
8. For structural problems, MIDi must reference a MAT1, MAT2, or MAT8 material property entry.
9. If the transverse shear material MID3 references a MAT2 entry, then G33 must be zero. If MID3 references a MAT8 entry, then G1Z and G2Z must not be zero.
10. For heat transfer problems, MIDi must reference a MAT4 or MAT5 material property entry.
11. The default for Z1 is  $-T/2$ , and for Z2 is  $+T/2$ . T is the local plate thickness defined either by T on this entry or by membrane thicknesses at connected grid points, if they are input on connection entries.
12. For plane strain analysis, set MID2=-1 and set MID1 to reference a MAT1 entry. In-plane loads applied to plain strain elements are interpreted as line-loads with a value equal to the load divided by the thickness. Thus, if a thickness of “1.0” is used, the value of the line-load equals the load value. Pressure can be approximated with multiple line loads where the pressure value equals the line-load divided by the length between the loads.
13. MIDi greater than or equal to  $10^8$  are typically used for internally generated MIDs when converting a PCOMP to a PSHELL with MID1, MID2, MID3 and possibly MID4. When a MID1 on a PSHELL is greater than or equal to  $10^8$ , only ply stresses are attempted to be recovered. In order to compute the equivalent homogeneous stresses on a PSHELL with MID1 greater than  $10^8$  (whether user specified or generated internally from a PCOMP), the PARAM, NOCOMPS must be set to -1 (default = +1).
14. For a material nonlinear property, MID1 must reference a MATS1 entry and be the same as MID2, unless a plane strain (MID2 = -1) formulation is desired. Also, MID3 cannot reference a MATS1 entry.

15. If transverse shear flexibility is specified for a model with curved shells where the loading is dominated by twist, results will not converge and may be inaccurate. PARAM,SNORM should be set for this unique model condition.

**Remarks related to SOLs 601 and 701:**

1.  $12I/T^{**3}$ , MID3, TS/T, NSM, Z1, Z2, and MID4 are ignored.
2. MID1 must be specified and must be greater than 0. MID1 is used to evaluate all material properties of the element and must reference a MAT1, MAT2, MAT8, or MATSMA material property entry.
3. The shell element includes membrane, bending and transverse shear effects. Membrane and bending effects are always coupled.
4. For SOL 601, MID2 is used only to check for the condition MID2=-1 for plane strain analysis. Plane strain elements must lie in the X-Y plane. For SOL 701, plane strain is not supported.
5. By default, incompatible modes are used for 4-node shell elements in SOL 601 but not in SOL 701. The use of incompatible modes for 4-node shell elements can be set by the ICMODE parameter in NXSTRAT entry. Note that incompatible modes are not used for 4-node plane strain (i.e., MID2=-1) quadrilateral elements.
6. In a model where there are many shell elements with different thicknesses, it is recommended that the thickness values be specified in the element entries (Ti values in CQUAD4, CQUAD8, CTRIA3, CTRIA6) instead of assigning one PSHELL entry to one thickness value and resulting in many PSHELL entries.

## 1870 PSOLID Properties of Solid Elements

### PSOLID Properties of Solid Elements

Defines the properties of solid elements (CHEXA, CPENTA, CPYRAM, CQUADX4, CQUADX8, CTETRA, CTRAX3, and CTRAX6 entries).

#### Format:

| 1      | 2   | 3   | 4     | 5  | 6      | 7    | 8    | 9 | 10 |
|--------|-----|-----|-------|----|--------|------|------|---|----|
| PSOLID | PID | MID | CORDM | IN | STRESS | ISOP | FCTN |   |    |

#### Example:

|        |   |     |   |     |      |         |  |  |  |
|--------|---|-----|---|-----|------|---------|--|--|--|
| PSOLID | 2 | 100 | 6 | TWO | GRID | REDUCED |  |  |  |
|--------|---|-----|---|-----|------|---------|--|--|--|

#### Fields:

| Field  | Contents                                                                                                                                       |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------|
| PID    | Property identification number. (Integer > 0)                                                                                                  |
| MID    | Identification number of a MAT1, MAT3, MAT4, MAT5, MAT9, MAT10, or MAT11 entry. (Integer > 0) See Remark 2.                                    |
| CORDM  | Identification number of the material coordinate system. See Remarks 3, 4, and 6. (Integer; Default = 0, which is the basic coordinate system) |
| IN     | Integration network. See Remarks 7, 8, 9, and 10. (Integer, Character, or blank)                                                               |
| STRESS | Location selection for stress and strain output. See Remarks 6, 7, and 11. (Integer, Character, or blank)                                      |
| ISOP   | Integration scheme. See Remarks 7, 8, 9, and 10. (Integer, Character, or blank)                                                                |
| FCTN   | Fluid element flag. (Character: "PFLUID" indicates a fluid element, "SMECH" indicates a structural element; Default = "SMECH.")                |

#### Remarks:

1. PSOLID entries should have unique identification numbers with respect to all other property entries.

2. Isotropic (MAT1 or MAT4), axisymmetric solid orthotropic (MAT3), anisotropic (MAT5, MAT9), fluid (MAT10), and 3-D solid orthotropic (MAT11) material properties may be referenced. If FCTN="PFLUID", then MID must reference a MAT10 entry.
3. See the CHEXA, CPENTA, CPYRAM or CTETRA entry for the definition of the element coordinate system. The material coordinate system (CORDM) may be the basic system (0 or blank), any defined system (Integer > 0), or the element coordinate system (-1). The default value for CORDM is zero unless it is overridden by the NASTRAN statement with the CORDM keyword. See ["nastran Command and NASTRAN Statement"](#).
4. If MID references a MAT9 or MAT11 entry, then CORDM defines the material property coordinate system for Cij.
5. The initial element coordinate system for the CQUADX4, CQUADX8, CTRAX3, and CTRAX6 elements is the basic coordinate system. The material coordinate system on these elements is defined by "TH" on the element definition, and not by CORDM.
6. Components of stress are output in the material coordinate system except:
  - a. Stress output labeled "NONLINEAR STRESSES", which is output in the element coordinate system. For SOL 106 geometry nonlinear analysis, the nonlinear stresses are output in deformed element coordinate system.
  - b. Hyperelastic element stress, which is always output in the basic coordinate system, including when in the stress output labeled "NONLINEAR STRESSES". See SOL 601/701 remarks 1 and 4 for Advanced Nonlinear exceptions.
7. The [tables](#) following the PSOLID remarks indicate the allowed options and combination of options. If a combination not found in the table is used, then a warning message will be issued and default values will be assigned for all options.
8. For CHEXA and CPENTA elements with no midside nodes, reduced shear integration with bubble functions (ISOP = blank or "REDUCED" and IN = blank or "BUBBLE") is the default. This is recommended because it minimizes shear locking and Poisson's ratio locking and does not cause modes of deformation that lead to no strain energy. The effects of using nondefault values are as follows:
  - a. IN = "THREE" or 3 produces an overly stiff element.
  - b. If IN = "TWO" or 2 and the element has midside nodes, modes of deformation may occur that lead to no strain energy.
  - c. Standard isoparametric integration (ISOP = "FULL" or 1 and IN = "TWO" or 2; or "THREE" or 3) produces an element overly stiff in shear. This type of integration is more suited to nonstructural problems.

## 1872 PSOLID

### Properties of Solid Elements

9. IN = "BUBBLE" is not allowed for CTETRA elements or for CHEXA and CPENTA elements with midside nodes.
10. For CTETRA and fluid elements (FCTN = "PFLUID"), standard isoparametric integration (ISOP = "FULL" or 1 and IN = "TWO" or 2; or "THREE" or 3) is the default and the only option available.
11. For linear solutions: Stress and strain output may be requested at the Gauss points (STRESS = "GAUSS" or 1) on the CHEXA and CPENTA elements with no midside grids, on the CTETRA and CPYRAM elements with or without midside grids, and on the CTRAX3, CTRAX6, CQUADX4, CQUADX8 elements.  
  
For nonlinear solutions 106 and 129: Stress and strain output may be requested at the Gauss points on the CHEXA, CPENTA, CPYRAM and CTETRA elements with or without midside grids.
12. The gauss point locations for the solid elements are documented in "Elements for Nonlinear Analysis" in the *NX Nastran Basic Nonlinear Analysis User's Guide*.

#### Remarks related to SOLs 601 and 701:

1. For structural problems, MID is the identification number of a MAT1, MAT9, MATG, or MATSMA entry for 3D solid element and a MAT1, MAT3, or MATSMA entry for axisymmetric element. For 3D solid elements in linear analysis, CORDM is ignored if MID does not reference a MAT9 entry and stresses are output in the basic coordinate system. For axisymmetric elements in linear analysis, if MID does not reference a MAT3 entry, stresses are output in the basic coordinate system.
2. For geometric nonlinear analysis, it is recommended not to use incompatible modes by setting IN=2 or 3. If bending behavior is significant, it is highly recommended that elements with midside nodes be used.
3. For SOL 701, IN=2 is the default, i.e. incompatible modes are not used by default for SOL 701. To use incompatible modes in SOL 701, IN=BUBBLE must be specified.
4. By default, stresses labeled "NONLINEAR STRESSES" are output in the undeformed element coordinate system. However, for 3D solid elements which reference a MAT9 entry, ELRESCS=1 may be specified in NXSTRAT entry to request the output of these stress results in the material property coordinate system with CORDM=-1 being treated as basic coordinate system. For 3D solid elements which do not reference a MAT9 entry, ELRESCS=1 may be specified to output stresses in the basic coordinate system. Hyperelastic element stress is always output in the basic coordinate system.
5. STRESS is ignored. Stresses and strains are output at grid points of element.



6. ISOP is ignored. 2x2x2 integration (and equivalent) is used for elements with no midside nodes. 3x3x3 integration (and equivalent) is used for elements with midside nodes.
7. FCTN is not supported.

**CHEXA Entry Options**

| <b>CHEXA Entry Options – Linear Solutions<sup>1</sup></b>                                                                                                                                                               |                                                    |                                    |                                  |                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------|----------------------------------|-----------------------------------------------|
| <b>CHEXA</b>                                                                                                                                                                                                            | <b>Integration</b>                                 | <b>IN</b>                          | <b>STRESS<br/>(Default:GRID)</b> | <b>ISOP</b>                                   |
| 8 Node                                                                                                                                                                                                                  | 2x2x2 Reduced Shear with Bubble Function (Default) | BUBBLE or Blank or 0 (Default)     | Blank or GRID                    | Blank or 0 or REDUCED (Default <sup>2</sup> ) |
|                                                                                                                                                                                                                         | 2x2x2 Reduced Shear Only                           | TWO or 2                           |                                  |                                               |
|                                                                                                                                                                                                                         | 2x2x2 Standard Isoparametric                       |                                    |                                  | FULL or 1                                     |
|                                                                                                                                                                                                                         | 3x3x3 Reduced Shear Only                           | THREE or 3                         |                                  | Blank or 0 or REDUCED                         |
|                                                                                                                                                                                                                         | 3x3x3 Standard Isoparametric                       |                                    |                                  | FULL or 1                                     |
| 9 -20 Node                                                                                                                                                                                                              | 2x2x2 Reduced Shear Only                           | TWO or 2                           | Blank or GRID                    | Blank or 0 or REDUCED                         |
|                                                                                                                                                                                                                         | 2x2x2 Standard Isoparametric                       |                                    |                                  | FULL or 1                                     |
|                                                                                                                                                                                                                         | 3x3x3 Reduced Shear Only                           | Blank or 0 or THREE or 3 (Default) |                                  | Blank or 0 or REDUCED (Default <sup>2</sup> ) |
|                                                                                                                                                                                                                         | 3x3x3 Standard Isoparametric                       | THREE or 3                         |                                  | FULL or 1                                     |
| <ol style="list-style-type: none"> <li>1. All solutions except SOLs 106, 129, 153/159 with ANALYSIS=STRUCTURE, 601, and 701.</li> <li>2. REDUCED is the default only for structural elements (FCTN="SMECH").</li> </ol> |                                                    |                                    |                                  |                                               |

| <b>CHEXA Entry Options – Basic Nonlinear Solutions<sup>1</sup></b> |                    |           |                                  |             |
|--------------------------------------------------------------------|--------------------|-----------|----------------------------------|-------------|
| <b>CHEXA</b>                                                       | <b>Integration</b> | <b>IN</b> | <b>STRESS<br/>(Default:GRID)</b> | <b>ISOP</b> |

# 1874 PSOLID

## Properties of Solid Elements

|                                       |                                                    |                                |                             |                                               |
|---------------------------------------|----------------------------------------------------|--------------------------------|-----------------------------|-----------------------------------------------|
| 8 Node <sup>3</sup>                   | 2x2x2 Reduced Shear with Bubble Function (Default) | BUBBLE or Blank or 0 (Default) | Blank or GRID or GAUSS or 1 | Blank or 0 or REDUCED (Default <sup>2</sup> ) |
|                                       | 2x2x2 Reduced Shear Only                           | TWO or 2                       |                             | FULL or 1                                     |
|                                       | 2x2x2 Standard Isoparametric                       |                                |                             | Not Used <sup>4</sup>                         |
| 9 -20 Node (Geometric Nonlinear Only) | 3x3x3 Standard Isoparametric                       | Not Used <sup>4</sup>          |                             | Not Used <sup>4</sup>                         |

1. SOLs 106, 129, and 153/159 with ANALYSIS=STRUCTURE. When running a linear solution (geometric nonlinearity off and no nonlinear material), the [CHEXA Entry Options – Linear Solutions](#) table should be used.
2. REDUCED is the default only for structural elements (FCTN="SMECH").
3. If IN=3 is specified, a value of IN = 0 will be used instead as IN=3 is not supported. A warning message will also be issued in the f06 file.
4. A valid entry must be specified since the PSOLID entry may be used by other element types.

**17**  
**Bulk O-P**

| CHEXA Entry Options – Advanced Nonlinear Solutions <sup>1</sup> |                                                                |                                                |         |         |
|-----------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------------|---------|---------|
| CHEXA                                                           | Integration                                                    | IN                                             | STRESS  | ISOP    |
| 8 Node                                                          | 2x2x2 Standard Isoparametric with Incompatible Modes (Default) | BUBBLE or Blank or 0 (Default <sup>2,3</sup> ) | Ignored | Ignored |
|                                                                 | 2x2x2 Standard Isoparametric                                   | TWO or 2                                       |         |         |
|                                                                 | 2x2x2 U/P Formulation <sup>3</sup>                             |                                                |         |         |
| 20 Node <sup>4</sup>                                            | 3x3x3 Standard Isoparametric                                   | Ignored                                        |         |         |
|                                                                 | 3x3x3 U/P Formulation <sup>3</sup>                             |                                                |         |         |

1. SOLs 601 and 701.
2. For SOL 701, IN=2 is the default, i.e. incompatible modes are not used by default for SOL 701. To use incompatible modes in SOL 701, IN=BUBBLE must be specified.
3. U/P formulation can be set by UPFORM parameter entry in NXSTRAT. When U/P formulation is used, it will overwrite IN=BUBBLE option.
4. SOL 701 only supports 8 grid CHEXA.

### CPENTA Entry Options

| <b>CPENTA Entry Options – Linear Solutions<sup>1</sup></b>                                                                                                                                                              |                                                  |                                    |                                               |                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------|-----------------------------------------------|-----------------------------------------------|
| <b>CPENTA</b>                                                                                                                                                                                                           | <b>Integration</b>                               | <b>IN</b>                          | <b>STRESS (Default: GRID)</b>                 | <b>ISOP</b>                                   |
| 6 Node                                                                                                                                                                                                                  | 2x3 Reduced Shear with Bubble Function (Default) | Blank or 0 or BUBBLE (Default)     | GAUSS or 1 or Blank or GRID                   | Blank or 0 or REDUCED (Default <sup>2</sup> ) |
|                                                                                                                                                                                                                         | 2x3 Reduced Shear Only                           | TWO or 2                           | Blank or GRID                                 |                                               |
|                                                                                                                                                                                                                         | 2x3 Standard Isoparametric                       |                                    |                                               | FULL or 1                                     |
|                                                                                                                                                                                                                         | 3x7 Reduced Shear Only                           | THREE or 3                         |                                               | Blank or 0 or REDUCED                         |
|                                                                                                                                                                                                                         | 3x7 Standard Isoparametric                       |                                    |                                               | FULL or 1                                     |
| 7-15 Node                                                                                                                                                                                                               | 2x3 Reduced Shear Only                           | TWO or 2                           |                                               | Blank or GRID                                 |
|                                                                                                                                                                                                                         | 2x3 Standard Isoparametric                       |                                    | FULL or 1                                     |                                               |
|                                                                                                                                                                                                                         | 3x7 Reduced Shear Only (Default)                 | Blank or 0 or THREE or 3 (Default) | Blank or 0 or REDUCED (Default <sup>2</sup> ) |                                               |
|                                                                                                                                                                                                                         | 3x7 Standard Isoparametric                       | THREE or 3                         | FULL or 1                                     |                                               |
| <ol style="list-style-type: none"> <li>1. All solutions except SOLs 106, 129, 153/159 with ANALYSIS=STRUCTURE, 601, and 701.</li> <li>2. REDUCED is the default only for structural elements (FCTN="SMECH").</li> </ol> |                                                  |                                    |                                               |                                               |

**CPENTA Entry Options – Basic Nonlinear Solutions<sup>1</sup>**

# 1876 PSOLID

## Properties of Solid Elements

**17**  
Bulk O-P

| CPENTA                               | Integration                                      | IN                             | STRESS (Default: GRID)      | ISOP                                          |
|--------------------------------------|--------------------------------------------------|--------------------------------|-----------------------------|-----------------------------------------------|
| 6 Node <sup>3</sup>                  | 2x3 Reduced Shear with Bubble Function (Default) | Blank or 0 or BUBBLE (Default) | GAUSS or 1 or Blank or GRID | Blank or 0 or REDUCED (Default <sup>2</sup> ) |
|                                      | 2x3 Reduced Shear Only                           | TWO or 2                       |                             |                                               |
|                                      | 2x3 Standard Isoparametric                       |                                |                             | FULL or 1                                     |
| 7-15 Node (Geometric Nonlinear Only) | 3x7 Standard Isoparametric                       | Not used <sup>4</sup>          |                             | Not used <sup>4</sup>                         |

1. SOLs 106, 129, and 153/159 with ANALYSIS=STRUCTURE. When running a linear solution (geometric nonlinearity off and no nonlinear material), the CPENTA Entry Options – Linear Solutions table should be used.
2. REDUCED is the default only for structural elements (FCTN="SMECH").
3. If IN=3 is specified, a value of IN = 0 will be used instead as IN=3 is not supported. A warning message will also be issued in the F06 file.
4. A valid entry must be specified because the PSOLID card may be used by other element types.

| CPENTA Entry Options – Advanced Nonlinear Solutions <sup>1</sup> |                                                                |                                                |         |         |
|------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------------|---------|---------|
| CPENTA                                                           | Integration                                                    | IN                                             | STRESS  | ISOP    |
| 6 Node                                                           | 2x2x2 Standard Isoparametric with Incompatible Modes (Default) | Blank or 0 or BUBBLE (Default <sup>2,3</sup> ) | Ignored | Ignored |
|                                                                  | 2x2x2 Standard Isoparametric                                   | TWO or 2                                       |         |         |
|                                                                  | 2x2x2 U/P Formulation <sup>3</sup>                             |                                                |         |         |
| 15 Node <sup>4</sup>                                             | 3x3x3 Standard Isoparametric                                   | Ignored                                        |         |         |
|                                                                  | 3x3x3 U/P Formulation <sup>3</sup>                             |                                                |         |         |

1. SOLs 601 and 701.
2. For SOL 701, IN=2 is the default, i.e. incompatible modes are not used by default for SOL 701. To use incompatible modes in SOL 701, IN=BUBBLE must be specified.
3. U/P formulation can be set by UPFORM parameter entry in NXSTRAT. When U/P formulation is used, it will overwrite IN=BUBBLE option.
4. SOL 701 only supports 6 node CPENTA.

### CPYRAM Entry Options

| <b>CPYRAM Entry Options – Linear Solutions<sup>1</sup></b> |                              |                              |                      |                                  |                                        |
|------------------------------------------------------------|------------------------------|------------------------------|----------------------|----------------------------------|----------------------------------------|
| <b>CPYRAM</b>                                              | <b>Integration</b>           |                              | <b>IN</b>            | <b>STRESS<br/>(Default:GRID)</b> | <b>ISOP</b>                            |
|                                                            | <b>Structural</b>            | <b>Heat Transfer</b>         |                      |                                  |                                        |
| 5 Node                                                     | 2x2x2 Standard Isoparametric | 2x2x2 Standard Isoparametric | Blank or 0 (Default) | GAUSS or 1 or Blank or GRID      | Blank or 2 or 0 (Default) <sup>2</sup> |
|                                                            | 3x3x3 Standard Isoparametric |                              | 1 See Note 3         |                                  |                                        |
| 6–13 Node                                                  | 2x2x2 Standard Isoparametric | 3x3x3 Standard Isoparametric | Blank or 0 (Default) |                                  |                                        |
|                                                            | 3x3x3 Standard Isoparametric |                              | 1 See Note 3         |                                  |                                        |

1. All solutions except SOLs 106, 129, 153/159 with ANALYSIS=STRUCTURE, 601, and 701.
2. The default value of Blank or 0 uses a standard formulation. A value of 2 specifies the B-BAR option for nearly incompressible materials.
3. For CPYRAM, IN=1 produces an overly stiff element.

| <b>CPYRAM Entry Options – Basic Nonlinear Solutions<sup>1</sup></b> |                              |                      |                              |                                        |
|---------------------------------------------------------------------|------------------------------|----------------------|------------------------------|----------------------------------------|
| <b>CPYRAM</b>                                                       | <b>Integration</b>           | <b>IN</b>            | <b>STRESS (Default:GRID)</b> | <b>ISOP</b>                            |
| 5 Node<br>(Geometric Nonlinear Only)                                | 2x2x2 Standard Isoparametric | Blank or 0 (Default) | GAUSS or 1 or Blank or GRID  | Blank or 2 or 0 (Default) <sup>2</sup> |
|                                                                     | 3x3x3 Standard Isoparametric | 1 See Note 3         |                              |                                        |
| 6–13 Node<br>(Geometric Nonlinear Only)                             | 2x2x2 Standard Isoparametric | Blank or 0 (Default) |                              |                                        |
|                                                                     | 3x3x3 Standard Isoparametric | 1 See Note 3         |                              |                                        |

## 1878 PSOLID Properties of Solid Elements

1. SOLs 106, 129, and 153/159 with ANALYSIS=STRUCTURE. Only for geometric nonlinearity. When geometric nonlinearity is off, the [CPYRAM Entry Options – Linear Solutions](#) table should be used.
2. The default value of Blank or 0 uses a standard formulation. A value of 2 specifies the B-BAR option for nearly incompressible materials.
3. For CPYRAM, IN = 1 produces an overly stiff element.

### CPYRAM Entry Options – Advanced Nonlinear Solutions<sup>1</sup>

| CPYRAM                 | Integration                                                    | IN                                             | STRESS  | ISOP    |
|------------------------|----------------------------------------------------------------|------------------------------------------------|---------|---------|
| 5 Node                 | 2x2x2 Standard Isoparametric with Incompatible Modes (Default) | Blank or 0 or BUBBLE (Default <sup>2,3</sup> ) | Ignored | Ignored |
|                        | 2x2x2 Standard Isoparametric                                   | TWO or 2                                       |         |         |
|                        | 2x2x2 U/P Formulation <sup>3</sup>                             |                                                |         |         |
| 6-13 Node <sup>4</sup> | 3x3x3 Standard Isoparametric                                   | Ignored                                        |         |         |
|                        | 3x3x3 U/P Formulation <sup>3</sup>                             |                                                |         |         |

1. SOLs 601 and 701.
2. For SOL 701, IN=2 is the default, i.e. incompatible modes are not used by default for SOL 701. To use incompatible modes in SOL 701, IN=BUBBLE must be specified.
3. U/P formulation can be set by UPFORM parameter entry in NXSTRAT. When U/P formulation is used, it will overwrite IN=BUBBLE option.
4. SOL 701 only supports 5 node CPYRAM.

### CTETRA Entry Options

#### CTETRA Entry Options – Linear Solutions<sup>1</sup>

| CTETRA | Integration | IN | STRESS<br>(Default:GRID) | ISOP |
|--------|-------------|----|--------------------------|------|
|--------|-------------|----|--------------------------|------|

|           |                                          |                                  |                             |               |
|-----------|------------------------------------------|----------------------------------|-----------------------------|---------------|
| 4 Node    | 1-Point Standard Isoparametric (Default) | Blank or 0 or TWO or 2 (Default) | GAUSS or 1 or Blank or GRID | Blank or FULL |
|           | 5-Point Standard Isoparametric           | THREE or 3                       |                             |               |
| 5–10 Node | 5-Point Standard Isoparametric           | Not used <sup>2</sup>            |                             |               |

1. All solutions except SOLs 106, 129, 153/159 with ANALYSIS=STRUCTURE, 601, and 701.
2. A valid entry must be specified because the PSOLID card may be used by other element types.

**CTETRA Entry Options – Basic Nonlinear Solutions<sup>1</sup>**

| CTETRA    | Integration                              | IN                               | STRESS (Default:GRID)       | ISOP          |
|-----------|------------------------------------------|----------------------------------|-----------------------------|---------------|
| 4 Node    | 1-Point Standard Isoparametric (Default) | Blank or 0 or TWO or 2 (Default) | GAUSS or 1 or Blank or GRID | Blank or FULL |
|           | 5-Point Standard Isoparametric           | THREE or 3                       |                             |               |
| 5–10 Node | 5-Point Standard Isoparametric           | Not used <sup>2</sup>            |                             |               |

1. SOLs 106, 129, and 153/159 with ANALYSIS=STRUCTURE. When running a linear solution (geometric nonlinearity off and no nonlinear material), the [CTETRA Entry Options – Linear Solutions](#) table should be used.
2. A valid entry must be specified because the PSOLID card may be used by other element types.

**CTETRA Entry Options – Advanced Nonlinear Solutions<sup>1</sup>**

| CTETRA                 | Integration                           | IN      | STRESS  | ISOP    |
|------------------------|---------------------------------------|---------|---------|---------|
| 4 Node                 | 1-Point Standard Isoparametric        | Ignored | Ignored | Ignored |
| 5–10 Node <sup>3</sup> | 17-Point Standard Isoparametric       |         |         |         |
|                        | 17-Point U/P Formulation <sup>2</sup> |         |         |         |

# 1880 PSOLID

## Properties of Solid Elements

1. SOLs 601 and 701.
2. U/P formulation can be set by UPFORM parameter entry in NXSTRAT.
3. SOL 701 only supports 5 node CTETRA.

### Axisymmetric Options for CQUADX4

#### CQUADX4 Entry Options – Linear Solutions<sup>1</sup>

| Integration                                             | IN                   | STRESS (default=GRID)                | Nonlinear Capability |
|---------------------------------------------------------|----------------------|--------------------------------------|----------------------|
| Full Integration using internal shape functions         | Blank or 0 (default) | Blank or GRID (corner) or Gauss or 1 | No                   |
| Full Integration without using internal shape functions | 1                    |                                      | No                   |
| Mean Dilatational formulation                           | 2                    |                                      | No                   |
| 1. All solutions except SOLs 601 and 701.               |                      |                                      |                      |

#### CQUADX4 Entry Options – Advanced Nonlinear Solutions<sup>1</sup>

| Integration                                 | IN                             | STRESS  | ISOP    |
|---------------------------------------------|--------------------------------|---------|---------|
| Full Integration with incompatible modes    | Blank or 0 or BUBBLE (Default) | Ignored | Ignored |
| Full Integration without incompatible modes | 1, 2 or 3                      |         |         |
| 1. SOL 601.                                 |                                |         |         |

### Axisymmetric Options for CQUADX8, CTRAX3, and CTRAX6

#### CQUADX8, CTRAX3, and CTRAX6 Entry Options – Linear Solutions<sup>1</sup>

| Integration                               | IN                   | STRESS (default=GRID)                | Nonlinear Capability |
|-------------------------------------------|----------------------|--------------------------------------|----------------------|
| Full Integration                          | Blank or 0 (default) | Blank or GRID (corner) or Gauss or 1 | No                   |
| Mean Dilatational formulation             | 2                    |                                      | No                   |
| 1. All solutions except SOLs 601 and 701. |                      |                                      |                      |



**CQUADX8, CTRAX3, and CTRAX6 Entry Options – Advanced Nonlinear Solutions**

The IN, STRESS, and ISOP fields are ignored by the CQUADX8, CTRAX3, and CTRAX6 elements in a SOL 601 solution.

## 1882 PTUBE Tube Property

### PTUBE Tube Property

Defines the properties of a thin-walled cylindrical tube element (CTUBE entry).

#### Format:

| 1     | 2   | 3   | 4  | 5 | 6   | 7   | 8 | 9 | 10 |
|-------|-----|-----|----|---|-----|-----|---|---|----|
| PTUBE | PID | MID | OD | T | NSM | OD2 |   |   |    |

#### Example:

|       |   |   |      |      |  |  |  |  |  |
|-------|---|---|------|------|--|--|--|--|--|
| PTUBE | 2 | 6 | 6.29 | 0.25 |  |  |  |  |  |
|-------|---|---|------|------|--|--|--|--|--|

#### Fields:

| Field | Contents                                                                        |
|-------|---------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                   |
| MID   | Material identification number. See Remarks 3 and 4. (Integer > 0)              |
| OD    | Outside diameter of tube. (Real > 0.0)                                          |
| T     | Thickness of tube. (Real; $T \leq OD/2.0$ )                                     |
| NSM   | Nonstructural mass per unit length. (Real)                                      |
| OD2   | Diameter of tube at second grid point (G2) on CTUBE entry. (Real; Default = OD) |

#### Remarks:

1. If T is zero, a solid circular rod is assumed.
2. PTUBE entries must all have unique property identification numbers.
3. For structural problems, MID must reference a MAT1 material entry.
4. For heat transfer problems, MID must reference a MAT4 or MAT5 material entry.
5. Tapered OD tubes with constant wall thickness are available for heat transfer only. The effective diameter is given by:

$$D_{effective} = T + \frac{D_2 - D_1}{\log_e \left( \frac{D_2 - T}{D_1 - T} \right)}$$

where:

$$D_1 = OD$$

$$D_2 = \begin{cases} OD2 & \text{if } OD2 \neq 0 \\ OD & \text{if } OD2 = 0 \text{ or blank} \end{cases}$$

## 1884 PVAL p-Version Element Polynomial Order Distribution

### PVAL p-Version Element Polynomial Order Distribution

Describes polynomial order distribution and is selected by the ADAPT Bulk Data entry.

#### Format:

| 1    | 2  | 3     | 4     | 5     | 6   | 7      | 8  | 9 | 10 |
|------|----|-------|-------|-------|-----|--------|----|---|----|
| PVAL | ID | POLY1 | POLY2 | POLY3 | CID | SETTYP | ID |   |    |

#### Example:

|      |     |   |   |   |  |  |  |  |  |
|------|-----|---|---|---|--|--|--|--|--|
| PVAL | 127 | 1 | 2 | 1 |  |  |  |  |  |
|------|-----|---|---|---|--|--|--|--|--|

#### Fields:

| Field             | Contents                                                                                    | Type        | Default    |
|-------------------|---------------------------------------------------------------------------------------------|-------------|------------|
| ID                | ID selected in ADAPT Bulk Data entry.                                                       | Integer > 0 | Required   |
| CID               | Coordinate system used to specify polynomial values in different directions. See Remark 1 . | Integer ≥ 0 | Remark 2 . |
| POLY <sub>i</sub> | Polynomial order in 1, 2, 3 directions of the CID system.                                   | Integer > 0 | Remark 3 . |
| SETTYP            | Type of set provided (SET or ELID). See Remark 6 .                                          | Character   | “SET”      |
| ID                | SET ID or Element ID with these p value specifications. See Remark 6 .                      | Integer > 0 | 999999     |

#### Remarks:

1. CID facilitates the specification of the p-order in curvilinear systems. For example, when modeling a thin cylinder, the user can restrict the p-order through the thickness of all elements to be 2 or 3 without specifically checking the connectivity of each element.
2. If the CID system is blank, the element's topology is used to establish the 1, 2, 3 directions. The 1 direction is from the first to the second grid of the element, the 2 direction is from the first to the fourth, and, the 3 direction is from the first to the fifth. If CID is not blank then the following algorithm will be used to determine the p-order of each edge: a vector will be defined in the CID

system from the first to the second grid of every edge. (Curvilinear systems are evaluated at the mid point of this vector). The p-level of each edge is now determined by the nearest integer to:

$$p = \sqrt{(n_1 \cdot \text{POLY1})^2 + (n_2 \cdot \text{POLY2})^2 + (n_3 \cdot \text{POLY3})^2}$$

where  $(n_1, n_2, n_3)$  are the components of this unit vector in the CID system.

3. For accuracy and efficiency the recommended minimum p-order is 3. The default value for POLY2 and POLY3 is POLY1.
4. Each finite element has to have a unique PVAL for PSTRTID, PMINID, PMAXID. Any overlap of the PVAL specification will result in a warning message and the use of the PVAL with the highest  $p_i$  entry.
5. The intermediate PVAL entries generated will have an identification number starting with ADGEN.
6. Whenever SETTYP = "SET", a SET command must be defined under the SETS DEFINITION command in the Case Control Section.
7. SET = 999999 is a reserved set that includes all elements.
8. If there are more than one PVAL entries for a given element, then
  - If CID on the PVALs are the same, the entry with the maximum POLYi will be used.
  - If CID on the PVALs are different, a fatal message is issued.

**1886 PVISC**  
**Viscous Damping Element Property**

**PVISC** Viscous Damping Element Property

Defines properties of a one-dimensional viscous damping element (CVISC entry).

**Format:**

| 1     | 2    | 3   | 4   | 5 | 6    | 7   | 8   | 9 | 10 |
|-------|------|-----|-----|---|------|-----|-----|---|----|
| PVISC | PID1 | CE1 | CR1 |   | PID2 | CE2 | CR2 |   |    |

**Example:**

|       |   |     |      |  |  |  |  |  |  |
|-------|---|-----|------|--|--|--|--|--|--|
| PVISC | 3 | 6.2 | 3.94 |  |  |  |  |  |  |
|-------|---|-----|------|--|--|--|--|--|--|

**Fields:**

| Field    | Contents                                                                         |
|----------|----------------------------------------------------------------------------------|
| PIDi     | Property identification number. (Integer > 0)                                    |
| CE1, CE2 | Viscous damping values for extension in units of force per unit velocity. (Real) |
| CR1, CR2 | Viscous damping values for rotation in units of moment per unit velocity. (Real) |

**Remarks:**

1. Viscous properties are material independent; in particular, they are temperature independent.
2. One or two viscous element properties may be defined on a single entry.

**PWELD** WELD Element Property

Defines the properties of connector (CWELD) elements.

**Format:**

| 1     | 2     | 3     | 4 | 5 | 6 | 7    | 8 | 9    | 10 |
|-------|-------|-------|---|---|---|------|---|------|----|
| PWELD | PID   | MID   | D |   |   | MSET |   | TYPE |    |
|       | LDMIN | LDMAX |   |   |   |      |   |      |    |

**Example:**

|       |     |   |     |  |  |  |  |  |  |
|-------|-----|---|-----|--|--|--|--|--|--|
| PWELD | 100 | 3 | 1.0 |  |  |  |  |  |  |
|-------|-----|---|-----|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                              |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PID   | Property identification number. (Integer > 0)                                                                                                                         |
| MID   | Material identification number. See Remark 1 . (Integer > 0)                                                                                                          |
| D     | Diameter of the connector. See Remark 1 . (Real > 0)                                                                                                                  |
| MSET  | Flag to eliminate m-set degrees of freedom. See Remark 2 . (Character: "ON" or "OFF"; Default= "ON").                                                                 |
| TYPE  | Character string indicating the type of connection. See Remark 3 . (Character: "SPOT" or blank; Default=blank, "SPOT"= spot weld connector, blank= general connector) |
| LDMIN | Smallest ratio of weld length to diameter. See Remark 4 . (Real > 0; Default=0.2)                                                                                     |
| LDMAX | Largest ratio of weld length to diameter. See Remark 4 . (Real > 0; Default=5.0)                                                                                      |

**Remarks:**

1. Material MID, diameter D, and the weld length are used to calculate the stiffness of the connector in 6 directions. MID can only refer to the MAT1 Bulk Data entry.

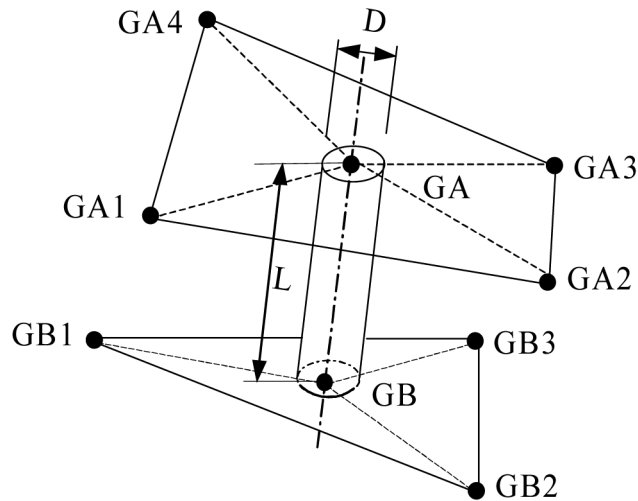


Figure 17-21. Length and Diameter of the Weld Connector

2. MSET is only used for formats "GRIDID" and "ELEMID". MSET="ON" (default) generates explicit m-set constraints. MSET="OFF" incorporates constraints at the element stiffness matrix level avoiding explicit m-set constraint equations. For example, if a patch-to-patch connection is specified with the formats "GRIDID" or "ELEMID" on the CWELD entry, and MSET=ON is specified, 2x6 explicit constraints are generated which connect the 6 degrees of freedom of GA to the translational degrees of freedom of GAI and the 6 degrees of freedom of GB to GBI. The 2x6 degrees of freedom of GA and GB are put into the m-set. The constraints are labeled "RWELD". The identification numbers of the generated RWELD constraint elements start with an offset specified on PARAM, OSWELM. If MSET=OFF is specified, the 2x6 constraint equations are built into the stiffness matrix of the CWELD element thereby condensing the 2x6 degrees of freedom of GA and GB. MSET=OFF is only available for the patch-to-patch connection (GRIDID or ELEMID).
3. When TYPE= "SPOT", and the format on the CWELD entry is either "ELEMID", "ELPAT", or "PARTPAT", the effective length for the stiffness of the CWELD element is set to  $L_e=1/2(t_A+t_B)$  regardless of the distance GA to GB.  $t_A$  and  $t_B$  are the shell thicknesses of shell A and B respectively. For all other cases, the effective length of the CWELD element is equal to the true length, the distance of GA to GB, as long as the ratio of length to diameter is in the range  $0.2 \leq L/D \leq 5.0$ . If  $L$  is below the range, the effective length is set to  $L_e=0.2D$  and if  $L$  is above the range, the effective length is set to  $L_e=5.0D$ .
4. When TYPE is blank, the weld length is the distance from GA to GB, as long as the  $L/D$  ratio is within  $LDMIN \leq L/D \leq LDMAX$ . If the ratio is below LDMIN,



the weld length is set to  $L_{MIN} \cdot D$ , and if the ratio is above  $L_{MAX}$ , the weld length is set to  $L_{MAX} \cdot D$ .

**1890 PWELD**  
**WELD Element Property**

**17**

**Bulk O-P**

Chapter

# 18 Bulk Data Entries Q—S

Bulk data entries QBDY1—SWLDPRM

**1892 QBDY1**  
**Boundary Heat Flux Load for CHBDYj Elements, Form 1**

**QBDY1**      Boundary Heat Flux Load for CHBDYj Elements, Form 1

Defines a uniform heat flux into CHBDYj elements.

**Format:**

| 1     | 2   | 3  | 4    | 5    | 6    | 7    | 8    | 9    | 10 |
|-------|-----|----|------|------|------|------|------|------|----|
| QBDY1 | SID | Q0 | EID1 | EID2 | EID3 | EID4 | EID5 | EID6 |    |

**Example:**

|       |     |      |     |  |  |  |  |  |  |
|-------|-----|------|-----|--|--|--|--|--|--|
| QBDY1 | 109 | 1.-5 | 721 |  |  |  |  |  |  |
|-------|-----|------|-----|--|--|--|--|--|--|

**Alternate Format and Example:**

|       |     |      |      |        |      |  |  |  |  |
|-------|-----|------|------|--------|------|--|--|--|--|
| QBDY1 | SID | Q0   | EID1 | “THRU” | EID2 |  |  |  |  |
| QBDY1 | 109 | 1.-5 | 725  | THRU   | 735  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                      |
|-------|-----------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)                                                 |
| Q0    | Heat flux into element. (Real)                                                                |
| EIDi  | CHBDYj element identification numbers. (Integer ≥ 0 or “THRU”. For “THRU” option EID2 >EID1.) |

**Remarks:**

1. QBDY1 entries must be selected with the Case Control command LOAD=SID in order to be used in static analysis. The total power into an element is given by the equation:

$$P_{in} = (\text{Effective area}) \cdot Q0$$

2. QBDY1 entries must be referenced on a TLOAD entry for use in transient analysis. The total power into an element is given by the equation:

$$P_{in}((t) = (\text{Effective area}) \cdot Q0 \cdot F(t - \tau))$$

where the function of time  $F(t-\tau)$  is specified on a TLOAD1 or TLOAD2 entry.

3. The sign convention for  $Q_0$  is positive for heat input.

**1894 QBDY2**  
**Boundary Heat Flux Load for CHBDYj Elements, Form 2**

**QBDY2**      Boundary Heat Flux Load for CHBDYj Elements, Form 2

Defines grid point heat flux into CHBDYj elements.

**Format:**

| 1     | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| QBDY2 | SID | EID | Q01 | Q02 | Q03 | Q04 | Q05 | Q06 |    |
|       | Q07 | Q08 |     |     |     |     |     |     |    |

**Example:**

|       |     |     |      |      |      |      |  |  |  |
|-------|-----|-----|------|------|------|------|--|--|--|
| QBDY2 | 109 | 721 | 1.-5 | 1.-5 | 2.-5 | 2.-5 |  |  |  |
|-------|-----|-----|------|------|------|------|--|--|--|

**Fields:**

**Field      Contents**

SID      Load set identification number. (Integer >0)

EID      Identification number of an CHBDYj element. (Integer > 0)

Q0i      Heat flux at the i-th grid point on the referenced CHBDYj element. (Real or blank)

**Remarks:**

1. QBDY2 entries must be selected with the Case Control command LOAD=SID in order to be used in static analysis. The total power into each point i on an element is given by

$$P_i = AREA_i \cdot Q0i$$

2. QBDY2 entries must be referenced on a TLOAD entry for use in transient analysis. All connected grid points will have the same time function but may have individual delays. The total power into each point i on an element is given by

$$P_i(t) = AREA_i \cdot Q0i \cdot F(t - \tau_i)$$

where  $F(t-\tau_i)$  is a function of time specified on a TLOAD1 or TLOAD2 entry.

3. The sign convention for Q0i is positive for heat flux input to the element.

**Remarks related to SOL 601:**

1. Heat flux values on midside grid points are not supported. Q05 to Q08 are ignored.
2. Equivalent grid point loads are computed by linear or bilinear interpolation of load intensity followed by numerical integration using isoparametric shape functions (similar to PLOAD4 load application).

**1896 QBDY3**  
**Boundary Heat Flux Load for a Surface**

**QBDY3**      Boundary Heat Flux Load for a Surface

Defines a uniform heat flux load for a boundary surface.

**Format:**

| 1     | 2    | 3    | 4       | 5    | 6    | 7    | 8    | 9    | 10 |
|-------|------|------|---------|------|------|------|------|------|----|
| QBDY3 | SID  | Q0   | CNTRLND | EID1 | EID2 | EID3 | EID4 | EID5 |    |
|       | EID6 | etc. |         |      |      |      |      |      |    |

**Example:**

|       |   |      |    |   |      |    |    |   |  |
|-------|---|------|----|---|------|----|----|---|--|
| QBDY3 | 2 | 20.0 | 10 | 1 | THRU | 50 | BY | 2 |  |
|-------|---|------|----|---|------|----|----|---|--|

**Fields:**

| Field   | Contents                                                                                        |
|---------|-------------------------------------------------------------------------------------------------|
| SID     | Load set identification number. (Integer > 0)                                                   |
| Q0      | Thermal heat flux load, or load multiplier. Q0 is positive for heat flow into a surface. (Real) |
| CNTRLND | Control point for thermal flux load. (Integer ≥ 0; Default=0)                                   |
| EIDi    | CHBDYj element identification numbers. (Integer > 0 or “THRU” or “BY”)                          |

**Remarks:**

- QBDY3 entries must be selected in Case Control (LOAD=SID) to be used in steady state. The total power into a surface is given by the equation:
  - if  $CNTRLND \leq 0$  then  $P_{in} = (\text{Effective area}) \cdot Q0$
  - if  $CNTRLND > 0$  then  $P_{in} = (\text{Effective area}) \cdot Q0 \cdot u_{CNTRLND}$

where  $u_{CNTRLND}$  is the temperature of the control point and is used as a load multiplier.
- In transient analysis SID is referenced by a TLOADi Bulk Data entry through the DAREA entry. A function of time  $F(t-t)$  defined on the TLOADi multiplies the general load, with t specifying time delay. The load set identifier on the TLOADi entry must be selected in Case Control (DLOAD=SID) for use in transient analysis. If multiple types of transient loads exist, they must be combined by the DLOAD Bulk Data entry.



**QBDY3 1897**  
**Boundary Heat Flux Load for a Surface**

3. The CNTRLND multiplier cannot be used with any higher-order elements.
4. When using “THRU” or “BY”, all intermediate CHBDYE, CHBDYG, or CHBDYP elements must exist.

**Remarks related to SOL 601:**

1. CNTRLND is ignored.

**1898 QHBDY**  
**Boundary Heat Flux Load**

**QHBDY**      Boundary Heat Flux Load

Defines a uniform heat flux into a set of grid points.

**Format:**

| 1     | 2   | 3    | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|-------|-----|------|----|----|----|----|----|----|----|
| QHBDY | SID | FLAG | Q0 | AF | G1 | G2 | G3 | G4 |    |
|       | G5  | G6   | G7 | G8 |    |    |    |    |    |

**Example:**

|       |   |       |      |  |     |     |     |     |  |
|-------|---|-------|------|--|-----|-----|-----|-----|--|
| QHBDY | 2 | AREA4 | 20.0 |  | 101 | 102 | 104 | 103 |  |
|-------|---|-------|------|--|-----|-----|-----|-----|--|

**Fields:**

| Field | Contents                                                                                                         |
|-------|------------------------------------------------------------------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)                                                                    |
| FLAG  | Type of face involved (must be one of the following: "POINT", "LINE", "REV", "AREA3", "AREA4", "AREA6", "AREAS") |
| Q0    | Magnitude of thermal flux into face. Q0 is positive for heat into the surface. (Real)                            |
| AF    | Area factor depends on type. (Real > 0.0 or blank)                                                               |
| Gi    | Grid point identification of connected grid points. (Integer > 0 or blank)                                       |

**Remarks:**

1. The continuation entry is optional.
2. For use in steady state analysis, the load set is selected in the Case Control Section (LOAD=SID).
3. In transient analysis SID is referenced by a TLOADi Bulk Data entry through the DAREA entry. A function of time defined on the TLOADi entry multiplies the general load. specifies time delay. The load set identifier on the TLOADi entry must be selected in Case Control (DLOAD=SID) for use in transient analysis. If multiple types of transient loads exist, they must be combined by the DLOAD Bulk Data entry.
4. The heat flux applied to the area is transformed to loads on the points. These points need not correspond to an HBDY surface element.

5. The flux is applied to each point  $i$  by the equation

$$P_i = AREA_i \cdot Q0$$

6. The number of connected points for the types are 1 (POINT), 2 (LINE, REV), 3 (AREA3), 4 (AREA4), 4-6 (AREA6), 5-8 (AREA8).
7. The area factor AF is used to determine the effective area for the POINT and LINE types. It equals the area and effective width, respectively. It is not used for the other types, which have their area defined implicitly and must be left blank.
8. The type of face (FLAG) defines a surface in the same manner as the CHBDYi data entry. For physical descriptions of the geometry involved, see the CHBDYG discussion.

**Remarks related to SOL 601:**

1. AF is used only for POINT type.

**1900 QSET**  
**Generalized Degrees-of-Freedom**

**QSET**      Generalized Degrees-of-Freedom

Defines generalized degrees-of-freedom (q-set) to be used for component mode synthesis.

**Format:**

| 1    | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|------|-----|----|-----|----|-----|----|-----|----|----|
| QSET | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

**Example:**

|      |    |        |   |   |   |   |     |   |  |
|------|----|--------|---|---|---|---|-----|---|--|
| QSET | 15 | 123456 | 1 | 7 | 9 | 2 | 105 | 6 |  |
|------|----|--------|---|---|---|---|-----|---|--|

**Fields:**

| Field | Contents                                                                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                                  |
| Ci    | Component number. (Integer zero or blank for scalar points or any unique combination of the Integers 1 through 6 for grid points with no embedded blanks.) |

**Remarks:**

1. Degrees-of-freedom specified on this entry form members of the mutually exclusive q-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
2. Degrees-of-freedom specified on QSET and QSET1 entries are automatically placed in the a-set.
3. When ASET, ASET1, QSET, and/or QSET1 entries are present, all degrees-of-freedom not otherwise constrained (e.g., SPCi or MPC entries) will be placed in the omitted set (o-set).

**QSET1 1901**  
**Generalized Degrees-of-Freedom (Alternate Form of QSET Entry)**

**QSET1** Generalized Degrees-of-Freedom (Alternate Form of QSET Entry)

Defines generalized degrees-of-freedom (q-set) to be used for component mode synthesis.

**Format:**

| 1     | 2   | 3   | 4      | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|-----|--------|-----|-----|-----|-----|-----|----|
| QSET1 | C   | ID1 | ID2    | ID3 | ID4 | ID5 | ID6 | ID7 |    |
|       | ID8 | ID9 | -etc.- |     |     |     |     |     |    |

**Example:**

|       |        |    |   |   |    |     |   |    |  |
|-------|--------|----|---|---|----|-----|---|----|--|
| QSET1 | 123456 | 1  | 7 | 9 | 22 | 105 | 6 | 22 |  |
|       | 52     | 53 |   |   |    |     |   |    |  |

**Alternate Format and Example:**

|       |   |     |        |     |  |  |  |  |  |
|-------|---|-----|--------|-----|--|--|--|--|--|
| QSET1 | C | ID1 | “THRU” | ID2 |  |  |  |  |  |
| QSET1 | 0 | 101 | THRU   | 110 |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C     | Component number. (Integer zero or blank for scalar points or any unique combination of the Integers 1 through 6 for grid points with no embedded blanks.) |
| IDi   | Grid or scalar point identification number. (Integer > 0; For THRU option, ID1 < ID2.)                                                                     |

**Remarks:**

- Degrees-of-freedom specified on this entry form members of the mutually exclusive q-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
- Degrees-of-freedom specified on QSET and QSET1 entries are automatically placed in the a-set.
- When ASET, ASET1, QSET, and/or QSET1 entries are present, all degrees-of-freedom not otherwise constrained (e.g., SPCi or MPC entries) will be placed in the omitted set (o-set).

**1902 QVECT**  
**Thermal Vector Flux Load**

**QVECT** Thermal Vector Flux Load

Defines thermal vector flux from a distant source into a face of one or more CHBDYi boundary condition surface elements.

**Format:**

| 1     | 2    | 3    | 4      | 5  | 6          | 7          | 8          | 9       | 10 |
|-------|------|------|--------|----|------------|------------|------------|---------|----|
| QVECT | SID  | Q0   | TSOUR  | CE | E1 or TID1 | E2 or TID2 | E3 or TID3 | CNTRLND |    |
|       | EID1 | EID2 | -etc.- |    |            |            |            |         |    |

**Example:**

|       |    |      |        |    |     |     |     |     |  |
|-------|----|------|--------|----|-----|-----|-----|-----|--|
| QVECT | 10 | 20.0 | 1000.0 |    | 1.0 | 1.0 | 1.0 | 101 |  |
|       | 20 | 21   | 22     | 23 |     |     |     |     |  |

**Fields:**

| Field   | Contents                                                                                                      |
|---------|---------------------------------------------------------------------------------------------------------------|
| SID     | Load set identification number. (Integer > 0)                                                                 |
| Q0      | Magnitude of thermal flux vector into face. (Real or blank)                                                   |
| TSOUR   | Temperature of the radiant source. (Real or blank)                                                            |
| CE      | Coordinate system identification number for thermal vector flux. (Integer ≥ 0 or blank)                       |
| Ei      | Vector components (direction cosines in coordinate system CE) of the thermal vector flux. (Real; Default=0.0) |
| TIDi    | TABLEDi entry identification numbers defining the components as a function of time. (Integer > 0)             |
| CNTRLND | Control point. (Integer ≥ 0; Default=0)                                                                       |
| EIDi    | Element identification number of a CHBDYE, CHBDYG, or CHBDYP entry. (Integer ≠ 0 or "THRU")                   |

**Remarks:**

1. The continuation entry is required.
2. If the coordinate system CE is not rectangular, then the thermal vector flux is in different directions for different CHBDYi elements. The direction of the thermal

vector flux over an element is aligned to be in the direction of the flux vector at the geometric center of the element. The geometric center is measured using the grid points and includes any DISLIN specification on the VIEW entry for TYPE=LINE CHBDYi elements. The flux is presumed to be uniform over the face of each element; i.e., the source is relatively distant.

3. For use in steady-state analysis, the load set is selected in the Case Control Section (LOAD=SID). The total power into an element is given by:

- If CNTRLND=0 then,  $P_{in} = -aA (\vec{e} \cdot \vec{n}) \cdot Q0$ .
- If CNTRLND > 0 then,  $P_{in} = -aA (\vec{e} \cdot \vec{n}) \cdot Q0 \cdot u_{CNTRLND}$ .

where

a = face absorptivity (supplied from a RADM statement).

A = face area as determined from a CHBDYi surface element.

$\vec{e}$  = vector of direction cosines E1, E2, E3.

$\vec{n}$  = face normal vector. See CHBDYi entries.

$\vec{e} \cdot \vec{n}$  = 0 if the vector product is positive, (i.e., the flux is coming from behind the face).

$u_{cntrlnd}$  = temperature value of the control point used as a load multiplier.

4. If the absorptivity is constant, its value is supplied by the ABSORP field on the RADM entry. If the absorptivity is not a constant, the thermal flux is assumed to have a wavelength distribution of a black body at the temperature TSOUR.
- For a temperature-dependent absorptivity, the element temperature is used to determine a.
  - For a wavelength-dependent absorptivity, the integration of the flux times is computed for each wavelength band. The sum of the integrated thermal fluxes over all the wavelength bands is Q0. The wave bands are specified with the RADBND entry.
  - The user has the responsibility of enforcing Kirchhoff's laws.
5. In transient analysis, SID is referenced by a TLOADi Bulk Data entry through the DAREA specification. A function of time  $F(t-t)$  defined on the TLOADi entry multiplies the general load. t provides any required time delay.  $F(t-t)$  is a function of time specified on the TLOADi entry. The value of is calculated for each loaded grid point. The load set identifier on the TLOADi entry must be selected

## 1904 QVECT Thermal Vector Flux Load

in Case Control (DLOAD=SID) for use in transient analysis. If multiple types of transient loads exist, they must be combined by the DLOAD Bulk Data entry.

The total power into an element is given by:

- If CNTRLND=0 then,  $P_{in} = -aA(\dot{\vec{e}}(t) \cdot \vec{n}) \cdot Q0 \cdot F(t-t)$ .
- If CNTRLND > 0 then,

$$P_{in} = -aA(\dot{\vec{e}}(t) \cdot \vec{n}) \cdot F(t-t)Q0 \cdot u_{CNTRLND}$$

6. If the referenced face is of TYPE=ELCYL, the power input is an exact integration over the area exposed to the thermal flux vector.
7. If the referenced face is of TYPE=REV, the thermal flux vector must be parallel to the axis of symmetry if an axisymmetric boundary condition is to be maintained.
8. When applied to a surface element associated with a radiation enclosure cavity, any incident energy that is not absorbed ( $a < 1.0$ ) is lost from the system and is not accounted for in a reflective sense ( $a + r = 1.0$ ).



**QVOL**      Volume Heat Addition

Defines a rate of volumetric heat addition in a conduction element.

**Format:**

| 1    | 2    | 3    | 4       | 5    | 6    | 7    | 8    | 9    | 10 |
|------|------|------|---------|------|------|------|------|------|----|
| QVOL | SID  | QVOL | CNTRLND | EID1 | EID2 | EID3 | EID4 | EID5 |    |
|      | EID6 | etc. |         |      |      |      |      |      |    |

**Example:**

|      |   |      |     |    |    |    |   |  |  |
|------|---|------|-----|----|----|----|---|--|--|
| QVOL | 5 | 10.0 | 101 | 10 | 12 | 11 | 9 |  |  |
|------|---|------|-----|----|----|----|---|--|--|

**Fields:**

| Field   | Contents                                                                     |
|---------|------------------------------------------------------------------------------|
| SID     | Load set identification. (Integer > 0)                                       |
| QVOL    | Power input per unit volume produced by a heat conduction element. (Real)    |
| CNTRLND | Control point used for controlling heat generation. (Integer ≥ 0; Default=0) |
| EIDi    | A list of heat conduction elements. (Integer > 0 or “THRU” or “BY”)          |

**Remarks:**

- EIDi has material properties (MAT4) that include HGEN, the element material property for heat generation, which may be temperature dependent. This association is made through the element EID. If HGEN is temperature dependent, it is based on the average element temperature.
- QVOL provides either the constant volumetric heat generation rate or the load multiplier. QVOL is positive for heat generation. For steady-state analysis, the total power into an element is
  - If CNTRLND=0, then  $P_{in} = \text{volume} \cdot \text{HGEN} \cdot \text{QVOL}$ .
  - If CNTRLND > 0, then  $P_{in} = \text{volume} \cdot \text{HGEN} \cdot \text{QVOL} \cdot u_{\text{CNTRLND}}$ .
 where  $u_{\text{CNTRLND}}$  is the temperature multiplier.

## 1906 QVOL

### Volume Heat Addition

3. For use in steady-state analysis, the load set is selected in the Case Control Section (LOAD=SID).
4. In transient analysis SID is referenced by a TLOADi Bulk Data entry. A function of time  $F [t - t]$  defined on the TLOADi entry multiplies the general load where  $t$  specifies time delay. The load set identifier on the TLOADi entry must be selected in Case Control (DLOAD=SID) for use in transient analysis. If multiple types of transient loads exist, they must be combined by the DLOAD Bulk Data entry.
5. For “THRU” or “BY”, all intermediate referenced heat conduction elements must exist.
6. The CNTRLND multiplier cannot be used with any higher-order elements.

#### Remarks related to SOL 601:

1. CNTRLND is ignored.

## RADBC Space Radiation Specification

Specifies an CHBDYi element face for application of radiation boundary conditions.

### Format:

| 1     | 2      | 3    | 4       | 5    | 6    | 7    | 8      | 9 | 10 |
|-------|--------|------|---------|------|------|------|--------|---|----|
| RADBC | NODAMB | FAMB | CNTRLND | EID1 | EID2 | EID3 | -etc.- |   |    |

### Example:

|       |   |     |     |    |  |  |  |  |  |
|-------|---|-----|-----|----|--|--|--|--|--|
| RADBC | 5 | 1.0 | 101 | 10 |  |  |  |  |  |
|-------|---|-----|-----|----|--|--|--|--|--|

### Fields:

| Field   | Contents                                                                         |
|---------|----------------------------------------------------------------------------------|
| NODAMB  | Ambient point for radiation exchange. (Integer > 0)                              |
| FAMB    | Radiation view factor between the face and the ambient point. (Real $\geq 0.0$ ) |
| CNTRLND | Control point for radiation boundary condition. (Integer $\geq 0$ ; Default=0)   |
| EIDi    | CHBDYi element identification number. (or "THRU" or "BY")                        |

### Remarks:

- The basic exchange relationship is:
  - if CNTRLND=0, then  $q=s \cdot FAMB \cdot (\epsilon_e T_e^4 - a_e T_{amb}^4)$
  - if CNTRLND > 0, then  $q=s \cdot FAMB \cdot u_{CNTRLND} \cdot (\epsilon_e T_e^4 - a_e T_{amb}^4)$
- NODAMB is treated as a black body with its own ambient temperature for radiation exchange between the surface element and space. No surface element that is a member of a radiation enclosure cavity may also have a radiation boundary condition applied to it.
- Two PARAM entries are required when stipulating radiation heat transfer:
  - TABS defines the absolute temperature scale; this value is added internally to any specified temperature given in the problem. Upon solution completion, this value is subtracted internally from the solution vector.

## 1908 RADBC Space Radiation Specification

- SIGMA (s) is the Stefan-Boltzmann constant.
4. RADBC allows for surface radiation to space in the absence of any cavity behavior. The emissivity and absorptivity are supplied from a RADM entry.
  5. When using “THRU” or “BY”, all intermediate referenced CHBDYi surface elements must exist.

### Remarks related to SOL 601:

1. CNTRLND is ignored.
2. The basic radiation heat exchange is:  
$$q = s \cdot FAMB \cdot \epsilon (T^4 - T_{amb}^4)$$
3. Note that absorptivity is assumed to be equal to emissivity.
4. The temperature on NODAMB must be prescribed on a TEMPBC or SPC entry.

**RADBND** Radiation Wavelength Band Definition

Specifies Planck's second radiation constant and the wavelength breakpoints used for radiation exchange problems.

**Format:**

| 1      | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10 |
|--------|---------|---------|---------|---------|---------|---------|---------|---------|----|
| RADBND | NUMBER  | PLANCK2 | LAMBDA1 | LAMBDA2 | LAMBDA3 | LAMBDA4 | LAMBDA5 | LAMBDA6 |    |
|        | LAMBDA7 | etc.    |         |         |         |         |         |         |    |

**Example:**

|        |   |         |     |     |     |     |      |  |  |
|--------|---|---------|-----|-----|-----|-----|------|--|--|
| RADBND | 6 | 14388.0 | 1.0 | 2.0 | 4.0 | 8.0 | 12.0 |  |  |
|--------|---|---------|-----|-----|-----|-----|------|--|--|

**Fields:**

| Field               | Contents                                                            |
|---------------------|---------------------------------------------------------------------|
| NUMBER              | Number of radiation wave bands. See Remarks. (Integer > 1)          |
| PLANCK2             | Planck's second radiation constant. See Remarks. (Real > 0.0)       |
| LAMBDA <sub>i</sub> | Highest wavelength of the i-th wave band. See Remarks. (Real ≥ 0.0) |

**Remarks:**

1. Only one RADBND entry may be specified in the Bulk Data Section and must always be used in conjunction with the RADM entry.
2. PLANCK2 has the units of wavelength times temperature. The same units of length must be used for LAMBDA<sub>i</sub> as for PLANCK2. The units of temperature must be the same as those used for the radiating surfaces. For example: 25898. μm °R or 14388. μm °K.
3. The first wavelength band extends from 0 to LAMBDA1 and the last band extends from LAMBDA<sub>n</sub> to infinity, where n=NUMBER - 1.
4. Discontinuous segments in the emissivity versus wavelength piecewise linear curve must be treated as a wavelength band of zero width.
5. LAMBDA<sub>i</sub> must be specified in ascending order, and all LAMBDA<sub>i</sub> fields where i is greater than or equal to NUMBER must be blank.

**1910 RADCAV**  
Radiation Cavity Identification

**RADCAV** Radiation Cavity Identification

Identifies the characteristics of each radiant enclosure.

**Format:**

| 1      | 2       | 3      | 4      | 5     | 6      | 7     | 8    | 9 | 10 |
|--------|---------|--------|--------|-------|--------|-------|------|---|----|
| RADCAV | ICAVITY | ELEAMB | SHADOW | SCALE | PRTPCB | NFECE | RMAX |   |    |
|        | SET11   | SET12  | SET21  | SET22 | SET31  | SET32 | etc. |   |    |

**Example:**

|        |   |   |   |   |   |   |     |  |  |
|--------|---|---|---|---|---|---|-----|--|--|
| RADCAV | 1 | 1 |   |   |   |   | .99 |  |  |
|        | 3 | 5 | 4 | 5 | 7 | 5 |     |  |  |

**Fields:**

| Field   | Contents                                                                                                                                                                                                                |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ICAVITY | Unique cavity identification number associated with enclosure radiation. (Integer > 0)                                                                                                                                  |
| ELEAMB  | CHBDYi surface element identification number for radiation if the view factors add up to less than 1.0. (Unique Integer > 0 among all CHBDYi elements or blank.)                                                        |
| SHADOW  | Flag to control third body shading calculation during view factor calculation for each identified cavity. (Character="YES" or "NO"; Default="YES")                                                                      |
| SCALE   | View factor that the enclosure sum will be set to if a view factor is greater than 1.0. (0.0 ≤ Real ≤ 1.0; Default=0.0)                                                                                                 |
| PRTPCB  | Facilitates the blocking of view factor printing and punching onto RADLST and RADMTX entries. (Integer=0, 1, 2, or 3; Default=0):                                                                                       |
| NFECE   | Controls whether finite difference or contour integration methods are to be used in the calculation of view factors in the absence of a VIEW3D Bulk Data entry. (Character="FD" or "CONT"; See Remark 4 . for default.) |
| RMAX    | Subelement area factor. See Remark 5 . (Real ≥ 0.0; Default=0.1)                                                                                                                                                        |
| SETij   | Set identification pairs for the calculation of global view factors. Up to 30 pairs may be specified (i=1 to 2 and j=1 to 30). (Integer > 0)                                                                            |

| PRTPCH      | Print/Punch       |
|-------------|-------------------|
| 0 (default) | print and punch   |
| 1           | no print          |
| 2           | no punch          |
| 3           | no print or punch |

**Remarks:**

1. For the surfaces of an incomplete enclosure (view factors add up to less than 1.0), a complete enclosure may be achieved (SUM=1.0) by specifying an ambient element, ELEAMB. When multiple cavities are defined, each cavity must have a unique ambient element if ambient elements are desired. No elements can be shared between cavities.
2. Third-body shadowing is ignored in the cavity if SHADOW="NO". In particular, if it is known a priori that there is no third-body shadowing, SHADOW=NO overrides KSHD and KBSD fields on the VIEW Bulk Data entry as well as reduces the calculation time immensely.
3. The view factors for a complete enclosure may add up to slightly more than 1.0 due to calculation inaccuracies. SCALE can be used to adjust all the view factors proportionately to acquire a summation equal to the value specified for SCALE. If SCALE is left blank or set to 0.0, no scaling is performed.
4. If the VIEW3D Bulk Data entry is not specified, the view factors are calculated using finite difference and contour integration methods. If NFECI="FD", then all view factors are calculated using the finite difference technique. NFECI="CONT" invokes contour integration for all view factor calculations. If NFECI is blank, the program selects a method to use between any two particular elements based on RMAX.
5. The comparison value for RMAX is equal to  $A_s / d_{rs}^2$  where  $A_s$  is the area of a subelement and  $d_{rs}$  is the distance between two subelements r and s for which view factors are being computed. When NFECI is blank, the program selects the contour integral method only if  $A_s / d_{rs}^2 > RMAX$ .
6. When a number of elements are grouped together and considered as a conglomerate surface, view factors can be calculated between these groups. These are referred to as global view factors. The SET1 Bulk Data entry is used to define the conglomerate. When using this feature, negative EIDs are not allowed.

## 1912 RADCAV

### Radiation Cavity Identification

7. If a RADLST and RADMTX entry exists for this cavity ID, new view factors are not computed and the existing RADLST and RADMTX are used in the thermal analysis.



**RADLST** Listing of Enclosure Radiation Faces

Identifies the individual CHBDYi surface elements that comprise the entire radiation enclosure.

**Format:**

| 1      | 2       | 3      | 4    | 5    | 6    | 7    | 8    | 9    | 10 |
|--------|---------|--------|------|------|------|------|------|------|----|
| RADLST | ICAVITY | MTXTYP | EID1 | EID2 | EID3 | EID4 | EID5 | EID6 |    |
|        | EID7    | -etc.- |      |      |      |      |      |      |    |

**Example:**

|        |   |   |   |   |   |   |   |   |  |
|--------|---|---|---|---|---|---|---|---|--|
| RADLST | 2 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |  |
|--------|---|---|---|---|---|---|---|---|--|

**Fields:**

| Field   | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ICAVITY | Unique cavity identification number that links a radiation exchange matrix with its listing of enclosure radiation faces. (Integer > 0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| MTXTYP  | Type of radiation exchange matrix used for this cavity. (Integer ≤ 4 and ≠ 0; Default=1 for an enclosure without an ambient element. Default=4 for an enclosure with an ambient element as specified on the RADCAV entry.) <ul style="list-style-type: none"> <li>1: Symmetric view factor matrix [F] and nonconservative radiation matrix [R].</li> <li>2: Symmetric exchange factor matrix [S] and conservative radiation matrix [R].</li> <li>3: Unsymmetrical exchange factor matrix [S] and conservative radiation matrix [R].</li> <li>4: Symmetric view factor matrix [F] and conservative radiation matrix [R].</li> <li>-n: The first n CHBDYi elements may lose energy to space but the remainder may not. Symmetric exchange factor matrix [F] and nonconservative radiation matrix [R].</li> </ul> |
| EIDi    | Identification numbers for the CHBDYi elements in this radiation cavity. (Integer ≠ 0 or "THRU")                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## 1914 RADLST

### Listing of Enclosure Radiation Faces

#### Remarks:

1. A radiation EIDi list isolates those CHBDYi surface element faces that are to communicate in a radiation enclosure. View-factor calculation and RADMTX formation for an enclosure is performed only for (or among) those faces identified within the same RADCAV.
2. A radiation exchange matrix (RADMTX) can only reference one radiative face list (RADLST). The companion RADCAV, RADLST, and RADMTX must share a unique ICAVITY.
3. For each EIDi, the appropriate CHBDYi element is located, and the proper RADM entry ID field found.
4. If the radiation exchange matrix or any radiation boundary conditions are available from an external source, the RADMTX must be user generated.
5. Multiple RADLST entries may be specified.

**RADM**      Radiation Boundary Material Property

Defines the radiation properties of a boundary element for heat transfer analysis.

**Format:**

| 1    | 2      | 3      | 4     | 5     | 6     | 7     | 8     | 9     | 10 |
|------|--------|--------|-------|-------|-------|-------|-------|-------|----|
| RADM | RADMID | ABSORP | EMIS1 | EMIS2 | EMIS3 | EMIS4 | EMIS5 | EMIS6 |    |
|      | EMIS7  | -etc.- |       |       |       |       |       |       |    |

**Example:**

|      |    |  |     |     |     |     |     |     |  |
|------|----|--|-----|-----|-----|-----|-----|-----|--|
| RADM | 11 |  | .45 | .33 | .29 | .20 | .17 | .13 |  |
|------|----|--|-----|-----|-----|-----|-----|-----|--|

**Fields:**

| Field             | Contents                                                                                                                                                                                       |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RADMID            | Material identification number. (Integer > 0)                                                                                                                                                  |
| ABSORP            | Surface absorptivity or the temperature function curve multiplier if ABSORP is variable. See Remark 2. ( $0.0 \leq \text{Real} \leq 1.0$ )                                                     |
| EMIS <sub>i</sub> | Surface emissivity at wavelength LAMBDA <sub>i</sub> or the temperature function curve multiplier if EMIS <sub>i</sub> is variable (See the RADBND entry.) ( $0.0 \leq \text{Real} \leq 1.0$ ) |

**Remarks:**

- The RADM entry is directly referenced only by one of the CHBDYE, CHBDYG, or CHBDYP type surface element entries.
- For radiation enclosure problems, ABSORP is set equal to emissivity. For QVECT loads, absorptivity is specified by ABSORP.
- If there is more than one EMIS<sub>i</sub>, then:
  - There must be a RADBND entry.
  - The number of EMIS<sub>i</sub> may not exceed the number of LAMBDA<sub>i</sub> on the RADBND entry.
  - The emissivity values are given for a wavelength specified by the corresponding LAMBDA<sub>i</sub> on the RADBND entry. Within each discrete wavelength band, the emissivity is assumed to be constant.

## 1916 **RADM** Radiation Boundary Material Property

- At any specific wavelength and surface temperature, the absorptivity is exactly equal to the emissivity.
4. To perform any radiation heat transfer exchange, the user must furnish PARAM entries for:
    - TABS to define the absolute temperature scale.
    - SIGMA s to define the Stefan-Boltzmann constant in appropriate units.

### **Remarks related to SOL 601:**

1. Only RADMID and EMIS1 are supported.
2. Note that absorptivity is assumed to be equal to emissivity.

**RADMT 1917**  
**Radiation Boundary Material Property Temperature Dependence**

**RADMT** Radiation Boundary Material Property Temperature Dependence

Specifies table references for temperature dependent RADM entry radiation boundary properties.

**Format:**

| 1     | 2                 | 3      | 4                 | 5                 | 6                 | 7                 | 8                 | 9                 | 10 |
|-------|-------------------|--------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|----|
| RADMT | RADMID            | T(A)   | T( $\epsilon_1$ ) | T( $\epsilon_2$ ) | T( $\epsilon_3$ ) | T( $\epsilon_4$ ) | T( $\epsilon_5$ ) | T( $\epsilon_6$ ) |    |
|       | T( $\epsilon_7$ ) | -etc.- |                   |                   |                   |                   |                   |                   |    |

**Example:**

|       |    |  |   |   |   |   |   |   |  |
|-------|----|--|---|---|---|---|---|---|--|
| RADMT | 11 |  | 1 | 2 | 3 | 4 | 5 | 6 |  |
|-------|----|--|---|---|---|---|---|---|--|

**Fields:**

| Field             | Contents                                                                 |
|-------------------|--------------------------------------------------------------------------|
| RADMID            | Material identification number. (Integer > 0)                            |
| T(A)              | TABLEMj identifier for surface absorptivity. (Integer $\geq 0$ or blank) |
| T( $\epsilon_i$ ) | TABLEMj identifiers for surface emissivity. (Integer $\geq 0$ or blank)  |

**Remarks:**

1. The basic quantities on the RADM entry of the same RADMID are always multiplied by the corresponding tabular function.
2. Tables T(A) and T( $\epsilon_i$ ) have an upper bound that is less than or equal to one and a lower bound that is greater than or equal to zero.
3. The TABLEMj enforces the element temperature as the independent variable. Blank or zero fields means there is no temperature dependence of the referenced property on the RADM entry.

**Remarks related to SOL 601:**

1. Only RADMID and T( $\epsilon_1$ ) are supported.
2. Note that absorptivity is assumed to be equal to emissivity.

## 1918 RADMTX Radiation Exchange Matrix

### RADMTX Radiation Exchange Matrix

Provides the  $F_{ji}=A_j f_{ji}$  exchange factors for all the faces of a radiation enclosure specified in the corresponding RADLST entry.

#### Format:

| 1      | 2           | 3      | 4         | 5           | 6           | 7           | 8           | 9           | 10 |
|--------|-------------|--------|-----------|-------------|-------------|-------------|-------------|-------------|----|
| RADMTX | ICAVITY     | INDEX  | $F_{i,j}$ | $F_{i+1,j}$ | $F_{i+2,j}$ | $F_{i+3,j}$ | $F_{i+4,j}$ | $F_{i+5,j}$ |    |
|        | $F_{i+6,j}$ | -etc.- |           |             |             |             |             |             |    |

#### Example:

|        |   |   |     |     |     |     |     |     |  |
|--------|---|---|-----|-----|-----|-----|-----|-----|--|
| RADMTX | 2 | 1 | 0.0 | 0.1 | 0.2 | 0.2 | 0.3 | 0.2 |  |
|--------|---|---|-----|-----|-----|-----|-----|-----|--|

#### Fields:

| Field     | Contents                                                                                                                                                                                                                                      |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ICAVITY   | Unique cavity identification number that links a radiation exchange matrix with its listing of enclosure radiation surface elements. (Integer > 0)                                                                                            |
| INDEX     | Column number in the matrix. (Integer > 0)                                                                                                                                                                                                    |
| $F_{k,j}$ | If symmetric, the matrix values start on the diagonal ( $i=j$ ) and continue down the column ( $k=i + 1, i + 2, \text{etc.}$ ). If unsymmetrical, the values start in row ( $i=1$ ). $i$ refers to EIDI on the RADLST entry. (Real $\geq 0$ ) |

#### Remarks:

1. If the matrix is symmetric, only the lower triangle is input, and  $i=j=$ INDEX. If the matrix is unsymmetrical,  $i=1$ , and  $j=$ INDEX.
2. Only one ICAVITY may be referenced for those faces that are to be included in a unique radiation matrix.
3. Coefficients are listed by column with the number of columns equal to the number of entries in the RADLST.
4. All faces involved in any radiation enclosure must be defined with an CHBDYi element.

**RADSET 1919**  
Identifies a Set of Radiation Cavities

**RADSET** Identifies a Set of Radiation Cavities

Specifies which radiation cavities are to be included for radiation enclosure analysis.

**Format:**

| 1      | 2        | 3        | 4        | 5        | 6        | 7        | 8        | 9        | 10 |
|--------|----------|----------|----------|----------|----------|----------|----------|----------|----|
| RADSET | ICAVITY1 | ICAVITY2 | ICAVITY3 | ICAVITY4 | ICAVITY5 | ICAVITY6 | ICAVITY7 | ICAVITY8 |    |
|        | ICAVITY9 | -etc.-   |          |          |          |          |          |          |    |

**Example:**

|        |   |   |   |   |  |  |  |  |  |
|--------|---|---|---|---|--|--|--|--|--|
| RADSET | 1 | 2 | 3 | 4 |  |  |  |  |  |
|--------|---|---|---|---|--|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                   |
|----------|------------------------------------------------------------------------------------------------------------|
| ICAVITYi | Unique identification number for a cavity to be considered for enclosure radiation analysis. (Integer > 0) |

**Remarks:**

- For multiple radiation cavities, RADSET specifies which cavities are to be included in the analysis.

**1920 RANDPS**  
Power Spectral Density Specification

**RANDPS** Power Spectral Density Specification

Defines load set power spectral density factors for use in random analysis having the frequency dependent form

$$S_{jk}(F) = (X + iY)G(F)$$

**Format:**

| 1      | 2   | 3 | 4 | 5 | 6 | 7   | 8 | 9 | 10 |
|--------|-----|---|---|---|---|-----|---|---|----|
| RANDPS | SID | J | K | X | Y | TID |   |   |    |

**Example:**

|        |   |   |   |     |     |   |  |  |  |
|--------|---|---|---|-----|-----|---|--|--|--|
| RANDPS | 5 | 3 | 7 | 2.0 | 2.5 | 4 |  |  |  |
|--------|---|---|---|-----|-----|---|--|--|--|

**Fields:**

| Field | Contents                                                                     |
|-------|------------------------------------------------------------------------------|
| SID   | Random analysis set identification number. (Integer > 0)                     |
| J     | Subcase identification number of the excited load set. (Integer > 0)         |
| K     | Subcase identification number of the applied load set. (Integer ≥ 0; K ≥ J)  |
| X, Y  | Components of the complex number. (Real)                                     |
| TID   | Identification number of a TABRNDi entry that defines $G(F)$ . (Integer ≥ 0) |

**Remarks:**

1. Set identification numbers must be selected with the Case Control command (RANDOM=SID).
2. For auto spectral density, J=K, X must be greater than zero and Y must be equal to zero.
3. For TID=0,  $G(F)=1.0$ .
4. RANDPS may only reference subcases included within a single loop (a change in direct matrix input is not allowed).



5. See the *NX Nastran Advanced Dynamic Analysis User's Guide* for a discussion of random analysis.
6. In the case of cyclic symmetry Solution Sequence 118, J and K must refer to the coded subcase IDs. See "Using Cyclic Symmetry" in the *NX Nastran User's Guide* for the coding procedure.
7. In superelement analysis, J and K must refer to the superelement subcases. For example, if superelement 10 has SUBCASEs 1 and 2 and superelement 20 has SUBCASEs 3 and 4, then a separate RANDPS entry is required for each superelement, even though X, Y, and TID may be identical.
8. For uncoupled PSDF (no  $J < K$  entries) only one  $J=K$  entry is allowed for unique value of J. For coupled PSDF (some  $J < K$  entries) any number of entries are allowed.

**1922 RANDT1**  
**Autocorrelation Function Time Lag**

**RANDT1** Autocorrelation Function Time Lag

Defines time lag constants for use in random analysis autocorrelation function calculation.

**Format:**

| 1      | 2   | 3 | 4  | 5    | 6 | 7 | 8 | 9 | 10 |
|--------|-----|---|----|------|---|---|---|---|----|
| RANDT1 | SID | N | T0 | TMAX |   |   |   |   |    |

**Example:**

|        |   |    |     |     |  |  |  |  |  |
|--------|---|----|-----|-----|--|--|--|--|--|
| RANDT1 | 5 | 10 | 3.2 | 9.6 |  |  |  |  |  |
|--------|---|----|-----|-----|--|--|--|--|--|

**Fields:**

| Field | Contents                                                 |
|-------|----------------------------------------------------------|
| SID   | Random analysis set identification number. (Integer > 0) |
| N     | Number of time lag intervals. (Integer > 0)              |
| T0    | Starting time lag. (Real ≥ 0.0)                          |
| TMAX  | Maximum time lag. (Real > T0)                            |

**Remarks:**

1. Time lag sets must be selected with the Case Control command RANDOM=SID.
2. At least one RANDPS entry must be present with the same set identification number.
3. The time lags defined on this entry are given by

$$T_i = T0 + \frac{TMAX - T0}{N}(i - 1), i = 1, N + 2$$

4. See the *NX Nastran Advanced Dynamic Analysis User's Guide* for a discussion of random analysis.

**RBAR** Rigid Bar

Defines a rigid bar with six degrees-of-freedom at each end.

**Format:**

| 1    | 2   | 3  | 4  | 5   | 6   | 7   | 8   | 9     | 10 |
|------|-----|----|----|-----|-----|-----|-----|-------|----|
| RBAR | EID | GA | GB | CNA | CNB | CMA | CMB | ALPHA |    |

**Example:**

|      |   |   |   |     |     |  |  |  |  |
|------|---|---|---|-----|-----|--|--|--|--|
| RBAR | 5 | 1 | 2 | 234 | 123 |  |  |  |  |
|------|---|---|---|-----|-----|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                                                                                   |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID      | Element identification number.                                                                                                                                                                                             |
| GA, GB   | Grid point identification number of connection points. (Integer > 0)                                                                                                                                                       |
| CNA, CNB | Component numbers of independent degrees-of-freedom in the global coordinate system for the element at grid points GA and GB. See Remark 1. (Integers 1 through 6 with no embedded blanks, or zero or blank.)              |
| CMA, CMB | Component numbers of dependent degrees-of-freedom in the global coordinate system assigned by the element at grid points GA and GB. See Remarks 2 and 3. (Integers 1 through 6 with no embedded blanks, or zero or blank.) |
| ALPHA    | Thermal expansion coefficient.                                                                                                                                                                                             |

**Remarks:**

1. The total number of components in CNA and CNB must equal six; for example, CNA=1236, CNB=34. Furthermore, they must jointly be capable of representing any general rigid body motion of the element.
2. If both CMA and CMB are zero or blank, all of the degrees-of-freedom not in CNA and CNB will be made dependent; i.e., they will be made members of the m-set.
3. The m-set coordinates specified on this entry may not be specified on other entries that define mutually exclusive sets. See “Degree-of-Freedom Sets” for a list of these entries.

## 1924 RBAR Rigid Bar

4. Element identification numbers should be unique with respect to all other element identification numbers.
5. Rigid elements, unlike MPCs, are not selected through the Case Control Section.
6. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
7. Rigid elements are ignored in heat transfer problems.
8. See “R-Type Elements” in the *NX Nastran Element Library* for a discussion of rigid elements.
9. The RIGID case control command must be assigned to “LAGRAN” to use ALPHA for the calculation of thermal expansion. See the RIGID case control command for details.
10. The TEMP(LOAD) and TEMP(INIT) value used on RBAR, RROD, and RTRPLT elements is an average calculated from the grid point values. On RBE1, RBE2 and RBE3 elements, an average TEMP(LOAD) and TEMP(INIT) is calculated for each leg of the element using the values on the independent/dependent grid pairs such that each leg can have a different thermal strain if the temperatures vary at the grids.

The rigid element thermal strains are calculated by  
 $\epsilon_{\text{thermal}} = \alpha(\text{AVGTEMP(LOAD)} - \text{AVGTEMP(INIT)})$ .

If TEMP(LOAD) or TEMP(INIT) are not defined, they are assumed to be zero.

### Remarks related to SOL 601 and 701:

1. For SOL 601, RBAR may be simulated by rigid link, constraint equations, beam element or spring elements depending on whether it is a large displacement analysis and the parameter EQRBAR in the NXSTRAT entry. The values of CNA, CNB, CMA, and CMB also determine how RBAR is treated. See Section 2.7 of Advanced Nonlinear Theory and Modeling Guide for details on how the RBAR element is handled.
2. For SOL 701, RBAR is always treated as rigid, i.e., as rigid link or constraint equations.
3. No output of forces of multipoint constraint may be requested.
4. By default, a dependent degree-of-freedom may not be assigned as independent by a rigid link (from RBE2 or another RBAR entry) or multipoint constraint (from MPC, RBE2, RBE3 or another RBAR entry). An error message will be issued in such a case. However, if GENMPC=1 is specified in the NXSTRAT entry, a dependent degree-of-freedom of a multipoint constraint can (MPC option,

see section 2.7.1 of the Advanced Nonlinear Theory and Modeling Guide) be assigned as independent by a rigid link or another multipoint constraint.

5. When an RBAR is simulated by a beam element or spring elements, no dependent degree-of-freedom is created for the RBAR.

**1926 RBE1**  
Rigid Body Element, Form 1

**RBE1** Rigid Body Element, Form 1

Defines a rigid body connected to an arbitrary number of grid points.

**Format:**

| 1    | 2    | 3   | 4   | 5      | 6     | 7   | 8   | 9 | 10 |
|------|------|-----|-----|--------|-------|-----|-----|---|----|
| RBE1 | EID  | GN1 | CN1 | GN2    | CN2   | GN3 | CN3 |   |    |
|      |      | GN4 | CN4 | GN5    | CN5   | GN6 | CN6 |   |    |
|      | "UM" | GM1 | CM1 | GM2    | CM2   | GM3 | CM3 |   |    |
|      |      | GM4 | CM4 | -etc.- | ALPHA |     |     |   |    |

**Example:**

|      |    |    |     |    |     |  |  |  |  |
|------|----|----|-----|----|-----|--|--|--|--|
| RBE1 | 59 | 59 | 123 | 60 | 456 |  |  |  |  |
|      | UM | 61 | 246 |    |     |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                                 |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                                             |
| GNi   | Grid points at which independent degrees-of-freedom for the element are assigned. (Integer > 0)                                                                          |
| CNi   | Independent degrees-of-freedom in the global coordinate system for the rigid element at grid point(s) GNi. See Remark 1. (Integers 1 through 6 with no embedded blanks.) |
| "UM"  | Indicates the start of the degrees-of-freedom belonging to m-set. (Character)                                                                                            |
| GMj   | Grid points at which dependent degrees-of-freedom are assigned. (Integer > 0)                                                                                            |
| CMj   | Dependent degrees-of-freedom in the global coordinate system at grid point(s) GMj. (Integers 1 through 6 with no embedded blanks.)                                       |
| ALPHA | Thermal expansion coefficient.                                                                                                                                           |

**Remarks:**

1. The total number of components in CN1 to CN6 must equal six; for example, CN1=123, CN2=3, CN3=2, CN4=3. Furthermore, they must jointly be capable of representing any general rigid body motion of the element.
2. The first continuation entry is not required if there are fewer than four GN points.
3. Dependent degrees-of-freedom assigned by one rigid element may not also be assigned dependent by another rigid element or by a multipoint constraint.
4. A degree-of-freedom cannot be both independent and dependent for the same element. However, both independent and dependent components can exist at the same grid point.
5. Element identification numbers should be unique with respect to all other element identification numbers.
6. Rigid elements, unlike MPCs, are not selected through the Case Control Section.
7. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
8. Rigid elements are ignored in heat transfer problems.
9. See R-Type Elements in the *NX Nastran Element Library* for a discussion of rigid elements.
10. The m-set coordinates specified on this entry may not be specified on other entries that define mutually exclusive sets. See “[Degree-of-Freedom Sets](#)” for a list of these entries.
11. The RIGID case control command must be assigned to “LAGRAN” to use ALPHA for the calculation of thermal expansion. See the RIGID case control command for details.
12. The TEMP(LOAD) and TEMP(INIT) value used on RBAR, RROD, and RTRPLT elements is an average calculated from the grid point values. On RBE1, RBE2 and RBE3 elements, an average TEMP(LOAD) and TEMP(INIT) is calculated for each leg of the element using the values on the independent/dependent grid pairs such that each leg can have a different thermal strain if the temperatures vary at the grids.

The rigid element thermal strains are calculated by  
 $\epsilon_{\text{thermal}} = a(\text{AVGTEMP(LOAD)} - \text{AVGTEMP(INIT)})$ .

If TEMP(LOAD) or TEMP(INIT) are not defined, they are assumed to be zero.

**1928 RBE2**  
Rigid Body Element, Form 2

**RBE2** Rigid Body Element, Form 2

Defines a rigid body with independent degrees-of-freedom that are specified at a single grid point and with dependent degrees-of-freedom that are specified at an arbitrary number of grid points.

**Format:**

| 1    | 2   | 3   | 4   | 5      | 6     | 7   | 8   | 9   | 10 |
|------|-----|-----|-----|--------|-------|-----|-----|-----|----|
| RBE2 | EID | GN  | CM  | GM1    | GM2   | GM3 | GM4 | GM5 |    |
|      | GM6 | GM7 | GM8 | -etc.- | ALPHA |     |     |     |    |

**Example:**

|      |    |   |    |    |    |    |    |    |  |
|------|----|---|----|----|----|----|----|----|--|
| RBE2 | 9  | 8 | 12 | 10 | 12 | 14 | 15 | 16 |  |
|      | 20 |   |    |    |    |    |    |    |  |

**Fields:**

| Field | Contents                                                                                                                                                  |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                              |
| GN    | Identification number of grid point to which all six independent degrees-of-freedom for the element are assigned. (Integer > 0)                           |
| CM    | Component numbers of the dependent degrees-of-freedom in the global coordinate system at grid points GMi. (Integers 1 through 6 with no embedded blanks.) |
| GMi   | Grid point identification numbers at which dependent degrees-of-freedom are assigned. (Integer > 0)                                                       |
| ALPHA | Thermal expansion coefficient.                                                                                                                            |

**Remarks:**

1. The components indicated by CM are made dependent (members of the m-set) at all grid points GMi.
2. Dependent degrees-of-freedom assigned by one rigid element may not also be assigned dependent by another rigid element or by a multipoint constraint.
3. Element identification numbers should be unique with respect to all other element identification numbers.



4. Rigid elements, unlike MPCs, are not selected through the Case Control Section.
5. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
6. Rigid elements are ignored in heat transfer problems.
7. See R-Type Elements in the *NX Nastran Element Library* for a discussion of rigid elements.
8. The m-set coordinates specified on this entry may not be specified on other entries that define mutually exclusive sets. See “[Degree-of-Freedom Sets](#)” for a list of these entries.
9. The RIGID case control command must be assigned to “LAGRAN” to use ALPHA for the calculation of thermal expansion. See the RIGID case control command for details.
10. The TEMP(LOAD) and TEMP(INIT) value used on RBAR, RROD, and RTRPLT elements is an average calculated from the grid point values. On RBE1, RBE2 and RBE3 elements, an average TEMP(LOAD) and TEMP(INIT) is calculated for each leg of the element using the values on the independent/dependent grid pairs such that each leg can have a different thermal strain if the temperatures vary at the grids.

The rigid element thermal strains are calculated by  
 $\epsilon_{\text{thermal}} = a(\text{AVGTEMP}(\text{LOAD}) - \text{AVGTEMP}(\text{INIT})).$

If TEMP(LOAD) or TEMP(INIT) are not defined, they are assumed to be zero.

**Remarks related to SOLs 601 and 701:**

1. For SOL 601, RBE2 may be simulated by rigid links, constraint equations, beam elements or spring elements depending on whether it is a large displacement analysis and the parameter EQRBE2 in the NXSTRAT entry. See Section 2.7 of the Advanced Nonlinear Theory and Modeling Guide for details on how the RBE2 element is handled.
2. For SOL 701, RBE2 is always treated as a rigid, i.e., as a rigid link or constraint equations.
3. No output of forces of multipoint constraint may be requested.
4. By default, a dependent degree-of-freedom may not be assigned as independent by a rigid link (from RBAR or another RBE2 entry) or multipoint constraint (from MPC, RBAR, RBE3 or another RBE2 entry). An error message will be issued in such a case. However, if GENMPC=1 is specified in the NXSTRAT entry, a dependent degree-of-freedom of a multipoint constraint (MPC option,

**1930 RBE2**  
**Rigid Body Element, Form 2**

see section 2.7.1 of the Advanced Nonlinear Theory and Modeling Guide) can be assigned as independent by a rigid link or another multipoint constraint.

5. When an RBE2 is simulated by beam or spring elements, no dependent degree-of-freedom is created for the RBAR.

**RBE3** Interpolation Constraint Element

Defines the motion at a reference grid point as the weighted average of the motions at a set of other grid points.

**Format:**

| 1    | 2       | 3     | 4       | 5    | 6    | 7      | 8    | 9      | 10 |
|------|---------|-------|---------|------|------|--------|------|--------|----|
| RBE3 | EID     |       | REFGRID | REFC | WT1  | C1     | G1,1 | G1,2   |    |
|      | G1,3    | WT2   | C2      | G2,1 | G2,2 | -etc.- | WT3  | C3     |    |
|      | G3,1    | G3,2  | -etc.-  | WT4  | C4   | G4,1   | G4,2 | -etc.- |    |
|      | "UM"    | GM1   | CM1     | GM2  | CM2  | GM3    | CM3  |        |    |
|      |         | GM4   | CM4     | GM5  | CM5  | -etc.- |      |        |    |
|      | "ALPHA" | ALPHA |         |      |      |        |      |        |    |

**Example:**

|      |       |         |     |      |     |     |     |   |  |
|------|-------|---------|-----|------|-----|-----|-----|---|--|
| RBE3 | 14    |         | 100 | 1234 | 1.0 | 123 | 1   | 3 |  |
|      | 5     | 4.7     | 1   | 2    | 4   | 6   | 5.2 | 2 |  |
|      | 7     | 8       | 9   | 5.1  | 1   | 15  | 16  |   |  |
|      | UM    | 100     | 14  | 5    | 3   | 7   | 2   |   |  |
|      | ALPHA | 17.3E-6 |     |      |     |     |     |   |  |

**Fields:**

| Field   | Contents                                                                                                                    |
|---------|-----------------------------------------------------------------------------------------------------------------------------|
| EID     | Element identification number. Unique with respect to other rigid elements. (Integer > 0)                                   |
| REFGRID | Reference grid point identification number. (Integer > 0)                                                                   |
| REFC    | Component numbers at the reference grid point. (Any of the Integers 1 through 6 with no embedded blanks.)                   |
| WTi     | Weighting factor for components of motion on the following entry at grid points Gi,j. (Real)                                |
| Ci      | Component numbers with weighting factor WTi at grid points Gi,j. (Any of the Integers 1 through 6 with no embedded blanks.) |
| Gi,j    | Grid points with components Ci that have weighting factor WTi in the averaging equations. (Integer > 0)                     |

## 1932 RBE3 Interpolation Constraint Element

| Field   | Contents                                                                                                                                                    |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “UM”    | Indicates the start of the degrees-of-freedom belonging to the m-set. The default action is to assign only the components in REFC to the m-set. (Character) |
| GMi     | Identification numbers of grid points with degrees-of-freedom in the m-set. (Integer > 0)                                                                   |
| CMi     | Component numbers of GMi to be assigned to the m-set. (Any of the Integers 1 through 6 with no embedded blanks.)                                            |
| “ALPHA” | Indicates that the next the next field is the coefficient of thermal expansion. (Character)                                                                 |
| ALPHA   | Coefficient of thermal expansion. See Remark 10.                                                                                                            |

### Remarks:

1. It is recommended that for most applications only the translation components 123 be used for Ci. An exception is the case where the Gi,j are colinear. A rotation component may then be added to one grid point to stabilize its associated rigid body mode for the element.
2. Blank spaces may be left at the end of a Gi,j sequence.
3. The default for “UM” should be used except in cases where the user wishes to include some or all REFC components in displacement sets exclusive from the m-set. If the default is not used for “UM”:
  - The total number of components in the m-set (i.e., the total number of dependent degrees-of-freedom defined by the element) must be equal to the number of components in REFC (four components in the example).
  - The components specified after “UM” must be a subset of the components specified under REFC and (Gi,j, Ci).
  - The coefficient matrix  $[R_m]$  described in “Multipoint Constraint Operations in SubDMAPs SEKR and SEMR2 and SEMRB” in the *NX Nastran User’s Guide* must be nonsingular. PARAM,CHECKOUT in SOLs 101 through 200 may be used to check for this condition.
4. Dependent degrees-of-freedom assigned by one rigid element may not also be assigned dependent by another rigid element or by a multipoint constraint.
5. Rigid elements, unlike MPCs, are not selected through the Case Control Section.

6. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
7. Rigid elements are ignored in heat transfer problems.
8. The m-set coordinates specified on this entry may not be specified on other entries that define mutually exclusive sets. See “[Degree-of-Freedom Sets](#)” for a list of these entries.
9. The formulation for the RBE3 element was changed in MSC.Nastran Version 70.7. This change allowed the element to give consistent answers that are not dependent upon the units of the model. Only models that connected rotation degrees of freedom for Ci were affected. Note that these models are ignoring the recommendation in Remark 1 . The formulation prior to MSC.Nastran Version 70.7 may be obtained by setting SYSTEM(310)=1.
10. The RIGID case control command must be assigned to “LAGRAN” to use ALPHA for the calculation of thermal expansion. See the RIGID case control command for details.
11. The TEMP(LOAD) and TEMP(INIT) value used on RBAR, RROD, and RTRPLT elements is an average calculated from the grid point values. On RBE1, RBE2 and RBE3 elements, an average TEMP(LOAD) and TEMP(INIT) is calculated for each leg of the element using the values on the independent/dependent grid pairs such that each leg can have a different thermal strain if the temperatures vary at the grids.

The rigid element thermal strains are calculated by  
 $\epsilon_{\text{thermal}} = a(\text{AVGTEMP}(\text{LOAD}) - \text{AVGTEMP}(\text{INIT})).$

If TEMP(LOAD) or TEMP(INIT) are not defined, they are assumed to be zero.

**Remarks related to SOLs 601 and 701:**

1. All GMi and CMi are ignored.
2. No output of forces of multipoint constraint may be requested.
3. By default, a dependent degree-of-freedom may not be assigned as independent by a rigid link (from RBAR or RBE2 entry) or multipoint constraint (from MPC, RBAR, RBE2 or another RBE3 entry). An error message will be issued in such a case. However, if GENMPC=1 is specified in the NXSTRAT entry, a dependent degree-of-freedom of a multipoint constraint can be assigned as independent by a rigid link or another multipoint constraint.

## 1934 RCROSS Cross-Power Spectral Density and Cross-Correlation Function Output

**RCROSS** Cross-Power Spectral Density and Cross-Correlation Function Output

Defines a pair of response quantities for computing the cross-power spectral density and cross-correlation functions in random analysis.

### Format:

| 1      | 2   | 3      | 4   | 5     | 6      | 7   | 8     | 9     | 10 |
|--------|-----|--------|-----|-------|--------|-----|-------|-------|----|
| RCROSS | SID | RTYPE1 | ID1 | COMP1 | RTYPE2 | ID2 | COMP2 | CURID |    |

### Example:

|        |    |      |    |   |        |     |   |   |  |
|--------|----|------|----|---|--------|-----|---|---|--|
| RCROSS | 20 | DISP | 50 | 2 | STRESS | 150 | 8 | 4 |  |
|--------|----|------|----|---|--------|-----|---|---|--|

### Fields:

| Field              | Contents                                                                                                                |
|--------------------|-------------------------------------------------------------------------------------------------------------------------|
| SID                | Case control RCROSS identification number for cross-power spectral density and cross-correlation functions. (Integer>0) |
| RTYPE <sub>i</sub> | Type of response quantity. At least one field must be selected. See remark 2. (Character or blank)                      |
| ID <sub>i</sub>    | Element, grid, or scalar point identification number. (Integer > 0)                                                     |
| COMP <sub>i</sub>  | Component code (item) identification number. See remark 3. (Integer > 0)                                                |
| CURID              | Curve identification number. See remark 4. (Integer > 0 or blank)                                                       |

### Remarks:

1. This entry is required for computing the cross-power spectral density and cross-correlation functions. SID must be selected with the case control command (RCROSS=SID). Fields RTYPE1, ID1, and COMP1 represent the first response quantity; fields RTYPE2, ID2, and COMP2 represent the second response quantity.

2. The keywords for field RTYPE<sub>i</sub> are listed as follows:

| <b>Table 18-1.</b> |                                      |
|--------------------|--------------------------------------|
| <b>Keyword</b>     | <b>Meaning</b>                       |
| DISP               | Displacement Vector                  |
| VELO               | Velocity Vector                      |
| ACCEL              | Acceleration Vector                  |
| OLOAD              | Applied Load Vector                  |
| SPCF               | Single-point Constraint Force Vector |
| MPCF               | Multi-point Constraint Force Vector  |
| STRESS             | Element Stress                       |
| STRAIN             | Element Strain                       |
| FORCE              | Element Force                        |

If either RTYPE1 or RTYPE2 is blank, then the blank field takes the default from the defined field.

3. For elements, the item code COMP<sub>i</sub> represents a component of the element stress, strain or force and is described in Tables “Element Stress-Strain Item Codes” and “Element Force Item Codes”. For an item having both a real and imaginary part, the code of the real part must be selected. This is required for computing both the cross-power spectral density function and cross-correlation function.

For grid points, the item code is one of 1,2,3,4,5, and 6, which represent the mnemonics T1, T2, T3, R1, R2, and R3, respectively. For scalar points, always use 1.

4. Field CURID is optional. It is for your convenience to identify the output by using a single index.

**1936 RELEASE**  
**Superelement Boundary Grid Point Release**

**RELEASE**      Superelement Boundary Grid Point Release

Defines degrees-of-freedom for superelement exterior grid points that are not connected to the superelement.

**Format:**

| 1       | 2    | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|------|----|--------|----|----|----|----|----|----|
| RELEASE | SEID | C  | G1     | G2 | G3 | G4 | G5 | G6 |    |
|         | G7   | G8 | -etc.- |    |    |    |    |    |    |

**Example:**

|         |     |     |   |   |    |   |     |   |  |
|---------|-----|-----|---|---|----|---|-----|---|--|
| RELEASE | 15  | 456 | 3 | 7 | 11 | 2 | 156 | 9 |  |
|         | 152 | 162 |   |   |    |   |     |   |  |

**Alternate Formats and Example:**

|         |      |   |    |        |     |  |  |  |  |
|---------|------|---|----|--------|-----|--|--|--|--|
| RELEASE | SEID | C | G1 | “THRU” | G2  |  |  |  |  |
| RELEASE | 6    | 2 | 15 | THRU   | 127 |  |  |  |  |

|         |      |     |       |  |  |  |  |  |  |
|---------|------|-----|-------|--|--|--|--|--|--|
| RELEASE | SEID | C   | “ALL” |  |  |  |  |  |  |
| RELEASE | 127  | 156 | ALL   |  |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                        |
|-------|-------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. (Integer > 0)                                               |
| C     | Component number. (Any unique combination of the Integers 1 through 6 with no embedded blanks.) |
| Gi    | Grid point identification numbers. (Integer > 0, “THRU”, or “ALL”; For THRU option, G1 < G2.)   |

**Remarks:**

1. A grid point referenced on this entry must be an exterior grid point of the superelement referenced on the entry.
2. In the first alternate format, all grid points in the sequence G1 through G2 are not required to be exterior grid points. Such grid points will collectively produce a warning message but will otherwise be ignored.



**RELEASE 1937**  
**Superelement Boundary Grid Point Release**

3. If the "ALL" option is used, all exterior grid points are released for the referenced degrees-of-freedom.
4. The RELEASE entry is applicable to only the superelement solution sequences (SOLs 101 through 200). It may not reference the residual structure (SEID=0).
5. This entry is not supported for partitioned superelements.

**1938 RFORCE**  
Rotational Force

**RFORCE** Rotational Force

Defines a static loading condition due to an angular velocity and/or acceleration.

**Format:**

| 1      | 2    | 3  | 4   | 5 | 6  | 7  | 8  | 9      | 10 |
|--------|------|----|-----|---|----|----|----|--------|----|
| RFORCE | SID  | G  | CID | A | R1 | R2 | R3 | METHOD |    |
|        | RACC | MB |     |   |    |    |    |        |    |

**Example:**

|        |     |   |  |      |     |     |     |   |  |
|--------|-----|---|--|------|-----|-----|-----|---|--|
| RFORCE | 2   | 5 |  | -6.4 | 0.0 | 0.0 | 1.0 | 2 |  |
|        | 1.0 |   |  |      |     |     |     |   |  |

**Fields:**

| Field      | Contents                                                                                                                                   |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| SID        | Load set identification number. (Integer > 0)                                                                                              |
| G          | Grid point identification number through which the rotation vector acts. (Integer ≥ 0)                                                     |
| CID        | Coordinate system defining the components of the rotation vector. See Remark 16 . (Integer ≥ 0, Default=0)                                 |
| A          | Scale factor of the angular velocity in revolutions per unit time. (Real)                                                                  |
| R1, R2, R3 | Rectangular components of rotation vector<br>$\vec{R}$ . The vector defined will pass through point G. (Real; $R1^2 + R2^2 + R3^2 > 0.0$ ) |
| METHOD     | Method used to compute centrifugal forces due to angular velocity. For angular acceleration, see Remark 13 . (Integer=1 or 2; Default=1)   |
| RACC       | Scale factor of the angular acceleration in revolutions per unit time squared. (Real; Default=0.0)                                         |

| Field | Contents                                                                                                                                                                                                                                                                                                                                |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MB    | Indicates whether the CID coordinate system is defined in the main Bulk Data Section (MB=-1) or the partitioned superelement Bulk Data Section (MB=0). Coordinate systems referenced in the main Bulk Data Section are considered stationary with respect to the assembly basic coordinate system. See Remark 15 . (Integer; Default=0) |

**Remarks:**

- In [Figure 18-1](#), the force vector at grid point  $G_i$  is given by

$$\{\vec{F}\}_i = [m]_i [\vec{\omega} \times (\vec{\omega} \times (\vec{r}_i - \vec{r}_a)) + \vec{\alpha} \times (\vec{r}_i - \vec{r}_a)]$$


where

$$\text{angular velocity} = \vec{\omega} = 2\pi A \cdot \vec{R} \text{ (radians/unit time)}$$

$$\text{angular acceleration} = \vec{\alpha} = 2\pi RACC \cdot \vec{R}$$

$$[m]_i = 3 \times 3 \text{ translational mass matrix at grid point } G_i$$

Note: The equation for  $\vec{F}_i$  will have additional terms if the mass is offset and METHOD=1 is selected.

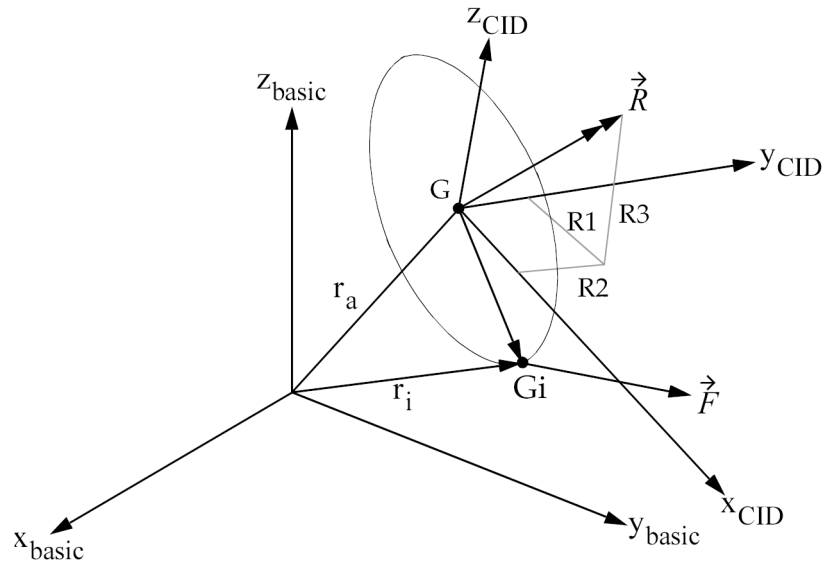

**Figure 18-1. RFORCE Vector at Grid Point Gi**

2. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
3. G=0 signifies that the rotation vector acts through the origin of the basic coordinate system.
4. CID=0 (Default) signifies that the rotation vector is defined in the basic coordinate system.
5. The load vector generated by this entry can be printed with an OLOAD command in the Case Control Section.
6. METHOD=1 yields correct results only when there is no coupling in the mass matrix. This occurs when the lumped mass option is used with or without the ZOFFS option (see the CQUAD4 entry for a description of ZOFFS). METHOD=2 yields correct results for lumped or consistent mass matrix only if the ZOFFS option is not used. The acceleration terms due to the mass offset (X1, X2, X3) on the CONM2 entry are not computed with METHOD=2. All the possible combinations of mass matrices and offset and the correct method to be used are shown below.

|         | No Offset               | Offset   |
|---------|-------------------------|----------|
| Lumped  | METHOD=1 or<br>METHOD=2 | METHOD=1 |
| Coupled | METHOD=2                | Neither  |

7. In cyclic symmetry analyses, the T3 axis of the basic coordinate system must be coincident with the axis of symmetry. In the DIH type of cyclic symmetry, the T1 axis also must be parallel to side 1 of segment 1R of the model.
8. For superelement analysis, G should reference a residual structure point that is exterior to all superelements. If it is not exterior to a superelement, then centrifugal loads will not be generated for that superelement. However, in cyclic analysis, User Fatal Message 4347 will be issued.
9. In a geometric nonlinear static analysis (SOL 106 when PARAM LDGISP is set to +1), this type of loading is a follower force type of loading. However, the orientation of coordinate system CID is not updated.
10. In nonlinear static solutions when there is more than one increment (INC) specified on the NLPARM entry for a given subcase, the load vector resulting from the RFORCE input (and not the angular velocity vector) is scaled linearly. This means that loading by increments in the angular velocity can only be achieved by having subcases where the RFORCE loading is applied in a single increment.
11. The continuation entry is optional.
12. Forces due to angular acceleration (RACC) are computed with METHOD=2 even if METHOD=1 is specified.
13. Loads derived from this entry do not include effects due to mass specified for scalar points.
14. The follower force effects due to loads from this entry are included in the stiffness in all linear solution sequences that calculate a differential stiffness. The solution sequences are SOLs 103, 105, 107 to 112, 115 and 116 (see also the parameter **"FOLLOWK"**). In addition, follower force effects are included in the force balance in the nonlinear static and nonlinear transient dynamic solution sequences, SOLs 106, 129, 153, and 159, if geometric nonlinear effects are turned on with PARAM,LGDISP,1. The follower force stiffness is included in the nonlinear static solution sequences (SOLs 106 and 153) but not in the nonlinear transient dynamic solution sequences (SOLs 129 and 159).
15. The coordinate systems in the main Bulk Data Section are defined relative to the assembly basic coordinate system which is fixed. This feature is useful when a

## 1942 RFORCE

### Rotational Force

superelement defined by a partitioned Bulk Data Section is rotated or mirrored and the gravity load is more conveniently defined in terms of coordinates which are fixed.

16. If CID is not a rectangular coordinate system, RFORCE will treat it as if it were and unexpected answers may result.
17. Follower force stiffness (param, followk, yes) is supported for method 2 only.

#### Remarks related to SOLs 601 and 701:

1. METHOD, RACC and MB are ignored.
2. To apply rotational force with constant magnitude (not considering magnitude change due to large deformation, see Remark 4), SID is selected by Case Control command LOAD=SID for both static and transient analyses.
3. To apply a time-dependent rotational load, SID is referenced by the field EXCITEID=SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.
4. By default, in large deformation analysis, the magnitude of the rotational force changes due to the deformation. The use of LOADOPT=0 in NXSTRAT entry causes the rotational load to be independent of deformation.
5. Only one RFORCE can be applied in an analysis.
6. CID must be a rectangular coordinate system.

## RINGAX      Conical Shell Ring

Defines a ring for conical shell problems.

### Format:

| 1      | 2  | 3 | 4 | 5 | 6 | 7 | 8  | 9 | 10 |
|--------|----|---|---|---|---|---|----|---|----|
| RINGAX | ID |   | R | Z |   |   | PS |   |    |

### Example:

|        |   |  |     |       |  |  |     |  |  |
|--------|---|--|-----|-------|--|--|-----|--|--|
| RINGAX | 3 |  | 2.0 | -10.0 |  |  | 162 |  |  |
|--------|---|--|-----|-------|--|--|-----|--|--|

### Fields:

| Field | Contents                                                                                                          |
|-------|-------------------------------------------------------------------------------------------------------------------|
| ID    | Ring identification number. See Remark 6. (Integer > 0)                                                           |
| R     | Ring radius. (Real > 0.0)                                                                                         |
| Z     | Ring axial location. (Real)                                                                                       |
| PS    | Permanent single-point constraints. (Any unique combination of the Integers 1 through 6 with no embedded blanks.) |

### Remarks:

1. RINGAX is allowed only if an AXIC entry is also present.
2. The number of degrees-of-freedom defined is  $(6 - \text{NPS}) \cdot H$  where  $H$  is the harmonic count and NPS is the number of digits in field 8. (See “AXIC”).
3. RINGAX identification numbers must be unique with respect to all other POINTAX, RINGAX, and SECTAX identification numbers.
4. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
5. Constraints may be necessary to avoid matrix singularities. The CONEAX element has no stiffness for rotation about the normal. In addition, there is no stiffness for rotation about V (see Figure 18-2) when transverse shear flexibility is not included.

1944 RINGAX  
Conical Shell Ring

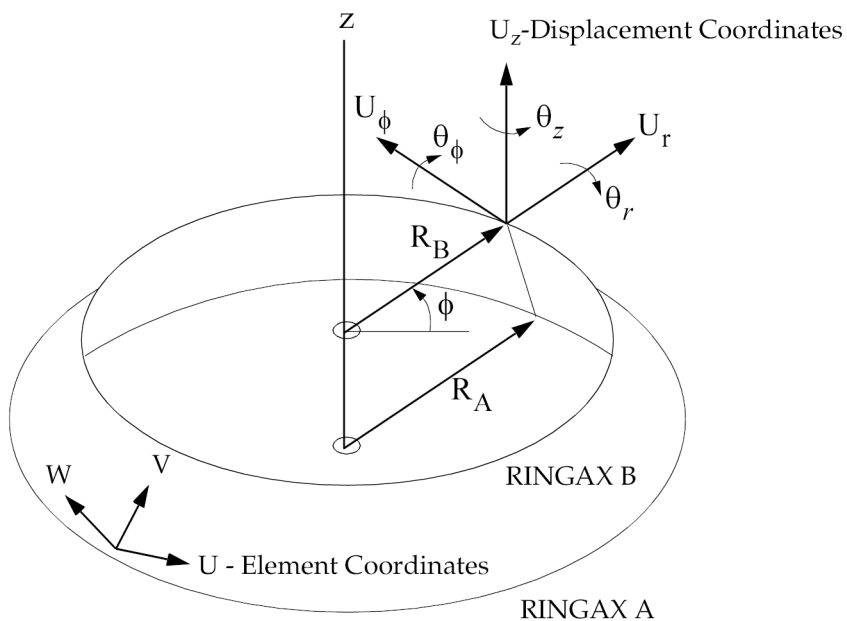


Figure 18-2. RINGAX Coordinate System

6. In order to reference this entry on a SET Case Control command, the ID must be modified by  $ID(n) = ID + 1000000 \cdot n$  where  $n$  is the harmonic number plus one and  $ID(n)$  is the value specified on the SET entry.



**RINGFL**     Axisymmetric Fluid Point

Defines a circle (fluid point) in an axisymmetric fluid model.

**Format:**

| 1      | 2    | 3   | 4   | 5   | 6    | 7   | 8   | 9   | 10 |
|--------|------|-----|-----|-----|------|-----|-----|-----|----|
| RINGFL | IDFA | XA1 | XA2 | XA3 | IDFB | XB1 | XB2 | XB3 |    |

**Example:**

|        |   |     |  |      |  |  |  |  |  |
|--------|---|-----|--|------|--|--|--|--|--|
| RINGFL | 3 | 1.0 |  | 30.0 |  |  |  |  |  |
|--------|---|-----|--|------|--|--|--|--|--|

**Fields:**

| Field         | Contents                                                                                                         |
|---------------|------------------------------------------------------------------------------------------------------------------|
| IDFA,<br>IDFB | Unique identification number of the fluid points. (0 < Integer < 500000)                                         |
| XAi, XBi      | Coordinates of the point defined in the coordinate system specified on the AXIF entry. (Real; XA1 and XB1 > 0.0) |

**Remarks:**

1. RINGFL is allowed only if an AXIF entry is also present.
2. All fluid point identification numbers must be unique with respect to other scalar, structural, and fluid points.
3. X1, X2, X3 are (r, f, z) for a cylindrical coordinate system and (r, q, f) for a spherical coordinate system. q is in degrees. The value of f must be blank or zero.
4. One or two fluid points may be defined per entry.

**1946 RLOAD1**  
**Frequency Response Dynamic Excitation, Form 1**

**RLOAD1**      Frequency Response Dynamic Excitation, Form 1

Defines a frequency-dependent dynamic load of the form

$$\{P(f)\} = \{A[C(f) + iD(f)]e^{i\{\theta - 2\pi f\tau\}}\}$$

for use in frequency response problems.

**Format:**

| 1      | 2   | 3        | 4     | 5      | 6  | 7  | 8    | 9 | 10 |
|--------|-----|----------|-------|--------|----|----|------|---|----|
| RLOAD1 | SID | EXCITEID | DELAY | DPHASE | TC | TD | TYPE |   |    |

**Example:**

|        |   |   |  |  |   |  |  |  |  |
|--------|---|---|--|--|---|--|--|--|--|
| RLOAD1 | 5 | 3 |  |  | 1 |  |  |  |  |
|--------|---|---|--|--|---|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                                                                   |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID      | Set identification number. (Integer > 0)                                                                                                                                                                   |
| EXCITEID | Identification number of a set entry for DAREA, SPCD, static load, or thermal load (for heat transfer analysis). The scale factor <i>A</i> is defined by these entries. See Remarks 5 and 6. (Integer > 0) |
| DELAY    | Identification number of the DELAY entry set that defines <i>t</i> . (Integer ≥ 0)                                                                                                                         |
| DPHASE   | Identification number of the DPHASE entry set that defines <i>q</i> . (Integer ≥ 0)                                                                                                                        |
| TC       | Set identification number of the TABLEDi entry that gives <i>C(f)</i> . See Remark 2. (Integer ≥ 0)                                                                                                        |
| TD       | Set identification number of the TABLEDi entry that gives <i>D(f)</i> . See Remark 2. (Integer ≥ 0)                                                                                                        |
| TYPE     | Defines the type of the dynamic excitation. See Remarks 5 and 6. (Integer, character or blank; Default=0)                                                                                                  |

**Remarks:**

1. Dynamic excitation sets must be selected with the Case Control command DLOAD=SID.
2. If any of DELAY, DPHASE, TC, or TD fields are blank or zero, the corresponding  $t$ ,  $q$ ,  $C(f)$ , or  $D(f)$  will both be zero. Either TC or TD may be blank or zero, but not both.
3. RLOAD1 excitations may be combined with RLOAD2 excitations only by specification on a DLOAD entry. That is, the SID on a RLOAD1 entry must not be the same as that on a RLOAD2 entry.
4. SID must be unique for all RLOAD1, RLOAD2, TLOAD1, TLOAD2, and ACSRCE entries.
5. The type of the dynamic excitation is specified by TYPE (field 8) according to the following table:

| TYPE                  | TYPE of Dynamic Excitation                |
|-----------------------|-------------------------------------------|
| 0, L, LO, LOA or LOAD | Applied load (force or moment) (Default)  |
| 1, D, DI, DIS or DISP | Enforced displacement using SPC/SPCD data |
| 2, V, VE, VEL or VELO | Enforced velocity using SPC/SPCD data     |
| 3, A, AC< ACC or ACCE | Enforced acceleration SPC/SPCD data       |

6. TYPE (field 8) also determines the manner in which EXCITEID (field 3) is used by the program as described below:

Excitation specified by TYPE is applied load

- There is no LOADSET request in Case Control  
EXCITEID may also reference DAREA, static and thermal load set entries.
- There is a LOADSET request in Case Control  
The program may also reference static and thermal load set entries specified by the LID or TID field in the selected LSEQ entries corresponding to the EXCITEID.

Excitation specified by TYPE is enforced motion

- There is no LOADSET request in Case Control  
EXCITEID will reference SPCD entries.

**1948 RLOAD1**  
**Frequency Response Dynamic Excitation, Form 1**

- There is a LOADSET request in Case Control

The program will reference SPCD entries specified by the LID field in the selected LSEQ entries corresponding to the EXCITEID.

**RLOAD2** Frequency Response Dynamic Excitation, Form 2

Defines a frequency-dependent dynamic excitation of the form.

$$\{P(f)\} = \{A \cdot B(f)e^{i\{\phi(f) + \theta - 2\pi f\tau\}}\}$$

for use in frequency response problems.

**Format:**

|        |     |          |       |        |    |    |      |   |    |
|--------|-----|----------|-------|--------|----|----|------|---|----|
| 1      | 2   | 3        | 4     | 5      | 6  | 7  | 8    | 9 | 10 |
| RLOAD2 | SID | EXCITEID | DELAY | DPHASE | TB | TP | TYPE |   |    |

**Example:**

|        |   |   |  |  |   |  |  |  |  |
|--------|---|---|--|--|---|--|--|--|--|
| RLOAD2 | 5 | 3 |  |  | 7 |  |  |  |  |
|--------|---|---|--|--|---|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                                                            |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID      | Set identification number. (Integer > 0)                                                                                                                                                            |
| EXCITEID | Identification number of a set entry for DAREA, SPCD, static load, or thermal load (for heat transfer analysis). The scale factor A is defined by these entries. See Remarks 5 and 6. (Integer > 0) |
| DELAY    | Identification number of the DELAY entry set that defines t. (Integer ≥ 0)                                                                                                                          |
| DPHASE   | Identification number of the DPHASE entry set that defines q in degrees. (Integer ≥ 0)                                                                                                              |
| TB       | Set identification number of the TABLEDi entry that gives B(f). (Integer > 0)                                                                                                                       |
| TP       | Set identification number of the TABLEDi entry that gives f (f) in degrees. (Integer ≥ 0)                                                                                                           |
| TYPE     | Defines the type of the dynamic excitation. See Remarks 5 and 6. (Integer, character or blank; Defaults=0)                                                                                          |

## 1950 RLOAD2 Frequency Response Dynamic Excitation, Form 2

### Remarks:

1. Dynamic excitation sets must be selected with the Case Control command DLOAD=SID.
2. If any of DELAY, DPHASE, or TP fields are blank or zero, the corresponding  $t$ ,  $q$ , or  $f$  ( $f$ ) will be zero.
3. RLOAD2 excitations may be combined with RLOAD1 excitations only by specification on a DLOAD entry. That is, the SID on a RLOAD2 entry must not be the same as that on a RLOAD1 entry.
4. SID must be unique for all RLOAD1, RLOAD2, TLOAD1, TLOAD2, and ACSRCE entries.
5. The type of the dynamic excitation is specified by TYPE (field 8) according to the following table:

| TYPE                  | TYPE of Dynamic Excitation                |
|-----------------------|-------------------------------------------|
| 0, L, LO, LOA or LOAD | Applied load (force or moment) (Default)  |
| 1, D, DI, DIS or DISP | Enforced displacement using SPC/SPCD data |
| 2, V, VE, VEL or VELO | Enforced velocity using SPC/SPCD data     |
| 3, A, AC< ACC or ACCE | Enforced acceleration SPC/SPCD data       |

6. TYPE (field 8) also determines the manner in which EXCITEID (field 3) is used by the program as described below:

Excitation specified by TYPE is applied load

- There is no LOADSET request in Case Control  
EXCITEID may also reference DAREA, static and thermal load set entries.

- There is a LOADSET request in Case Control

The program may also reference static and thermal load set entries specified by the LID or TID field in the selected LSEQ entries corresponding to the EXCITEID.

Excitation specified by TYPE is enforced motion

- There is no LOADSET request in Case Control  
EXCITEID will reference SPCD entries.

**RLOAD2 1951**

**Frequency Response Dynamic Excitation, Form 2**

- There is a LOADSET request in Case Control

The program will reference SPCD entries specified by the LID field in the selected LSEQ entries corresponding to the EXCITEID.

**1952 ROTORB**  
**Bearing Grids Selection**

**ROTORB** Bearing Grids Selection

Defines bearing grids for the rotating portion of a model in a rotor dynamics solution.

**Format 1: (Formats 1 and 2 cannot be combined on the same line)**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| ROTORB   | RSETID   | G1       | G2       | G3       | G4       | G5       | G6       | G7       |           |

**Format 2:**

|        |        |    |        |    |      |     |  |  |  |
|--------|--------|----|--------|----|------|-----|--|--|--|
| ROTORB | RSETID | G1 | "THRU" | G2 | "BY" | INC |  |  |  |
|--------|--------|----|--------|----|------|-----|--|--|--|

**Continuation Format 1: (Continuation formats 1 and 2 cannot be combined on a single continuation line)**

|  |    |    |     |     |        |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|
|  | G8 | G9 | G10 | G11 | -etc.- |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|

**Continuation Format 2:**

|  |    |        |    |      |     |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|
|  | G8 | "THRU" | G9 | "BY" | INC |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|

**Example:**

|        |     |      |      |     |    |    |  |  |  |
|--------|-----|------|------|-----|----|----|--|--|--|
| ROTORB | 14  | 101  | THRU | 190 | BY | 5  |  |  |  |
|        | 46  | 23   | 57   | 82  | 9  | 16 |  |  |  |
|        | 201 | THRU | 255  |     |    |    |  |  |  |
|        | 93  | 94   | 95   | 97  |    |    |  |  |  |

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                          |
|--------------|------------------------------------------------------------------------------------------|
| RSETID       | Identification number of rotor. References a RSETi on the ROTORD bulk entry. (Integer>0) |
| GRIDi        | Grids defining bearing locations on a rotor. (Integer>0)                                 |
| THRU         | Specifies a range of grid ID's (Optional)                                                |
| BY           | Specifies an increment when using THRU option.                                           |
| INC          | Increment used with THRU option. (Integer>0)                                             |



**Remarks:**

1. By default, there are no bearing locations on a rotor. The RSETID field is referred to by the RSETi field on the ROTORD bulk data entry. If a model contains multiple rotors, use separate ROTORB entries for each rotor.

**1954 ROTORD**  
 Defines rotor dynamics solution options (SOLs 107–112).

**ROTORD** Defines rotor dynamics solution options (SOLs 107–112).

Defines rotor dynamics solution options for (SOLs 107–112).

**Format:**

| 1      | 2      | 3      | 4        | 5       | 6      | 7      | 8        | 9     | 10 |
|--------|--------|--------|----------|---------|--------|--------|----------|-------|----|
| ROTORD | SID    | RSTART | RSTEP    | NUMSTEP | REFSYS | CMOUT  | RUNIT    | FUNIT | +  |
| +      | ZSTEIN | ORBEPS | ROTPRT   | SYNC    | ETYPES | EORDER |          |       |    |
| +      | RID1   | RSET1  | RSPEED1  | RCORD1  | W3_1   | W4_1   | RFORCE1  |       |    |
| +      | RID2   | RSET2  | RSPEED2  | RCORD2  | W3_2   | W4_2   | RFORCE2  |       |    |
| ....   |        |        |          |         |        |        |          |       |    |
| +      | RID10  | RSET10 | RSPEED10 | RCORD10 | W3_10  | W4_10  | RFORCE10 |       |    |

**Example:**

|        |     |     |        |    |     |      |     |  |      |
|--------|-----|-----|--------|----|-----|------|-----|--|------|
| ROTORD | 998 | 0.0 | 5000.0 | 58 | fix | -1.0 | cps |  | +r0  |
| +r0    | no  |     |        |    |     |      |     |  | +r1  |
| +r1    | 1   | 11  |        | 1  | 0.0 | 0.0  | 1   |  | +r2  |
| +r2    | 2   | 12  |        | 1  | 0.0 | 0.0  |     |  | +r3  |
| +r3    | 3   | 13  |        | 1  | 0.0 | 0.0  |     |  | +r4  |
| +r4    | 4   | 14  |        | 1  | 0.0 | 0.0  |     |  | +r5  |
| +r5    | 5   | 15  | 2      | 1  | 0.0 | 0.0  |     |  | +r6  |
| +r6    | 6   | 16  |        | 1  | 0.0 | 0.0  |     |  | +r7  |
| +r7    | 7   | 17  |        | 1  | 0.0 | 0.0  |     |  | +r8  |
| +r8    | 8   | 18  |        | 1  | 0.0 | 0.0  |     |  | +r9  |
| +r9    | 9   | 19  |        | 1  | 0.0 | 0.0  |     |  | +r10 |
| +r10   | 10  | 20  |        | 1  | 0.0 | 0.0  | 10  |  |      |

**Fields:**

| Field   | Contents                                                                                 |
|---------|------------------------------------------------------------------------------------------|
| SID     | Set identifier for all rotors. Must be selected in the case control deck by RMETHOD=SID. |
| RSTART  | Starting value of rotor speed. (Real $\geq$ 0.0)                                         |
| RSTEP   | Step-size of rotor speed. (Real $>$ 0.0)                                                 |
| NUMSTEP | Number of steps for rotor speed including RSTART. (Integer $>$ 0)                        |

**Defines rotor dynamics solution options (SOLs 107–112).**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REFSYS       | Reference system. (Default='ROT')<br>= 'FIX' analysis is performed in the fixed reference system.<br>= 'ROT' analysis is performed in the rotational reference system.                                                                                                                                 |
| CMOUT        | Rotor speed for complex mode output request. (Real $\geq$ 0.0)<br>= -1.0 output complex modes and whirl direction for all RPM.<br>= 0.0 no complex modes and no whirl direction are output. (Default)<br>> 0.0 rotor speed value for which complex modes will be calculated and written to F06 or OP2. |
| RUNIT        | Units used for rotor speed input (RSTART and RSTEP) and output (units for output list and Campbell's diagram output).<br>= 'RPM' revolutions per minute. (Default)<br>= 'CPS' cycles per second.<br>= 'HZ' cycles per second.<br>= 'RAD' radians per second.                                           |
| FUNIT        | Units used for frequency output (Campbell's diagram output).<br>= 'RPM' revolutions per minute. (Default)<br>= 'CPS' cycles per second.<br>= 'HZ' cycles per second.<br>= 'RAD' radians per second.                                                                                                    |
| ZSTEIN       | Option to incorporate Steiner's inertia terms. (Default='NO')<br>= 'YES' Steiner's inertia terms are included.<br>= 'NO' Steiner's inertia terms are not included.                                                                                                                                     |
| ORBEPS       | Threshold value for detection of whirl direction. (Real > 0.0; Default=1.E-6)                                                                                                                                                                                                                          |

## 1956 ROTORD

Defines rotor dynamics solution options (SOLs 107–112).

| Field   | Contents                                                                                                                                                                                                                                                      |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ROTPRT  | Controls .f06 output options. (Integer)<br>= 0 no print. (Default)<br>= 1 print generalized matrices.<br>= 2 print eigenvalue summary and eigenvectors at each RPM.<br>= 3 combination of 1 & 2.                                                              |
| SYNC    | Option to select synchronous or asynchronous analysis for frequency response. (Integer)<br>=1 synchronous (Default)<br>=0 asynchronous                                                                                                                        |
| ETYPE   | Excitation type. (Integer)<br>=1 Mass unbalanced (Default). Specify mass unbalance = $m \times r$ on DLOAD bulk entry and the program will multiply by $\Omega^2$ .<br>=0 Force excitation. Specify force = $m \times r \times \Omega^2$ on DLOAD bulk entry. |
| EORDER  | Excitation order. (Real)<br>= 1.0 (Default) (modes crossing with 1P line in the fixed system)<br>= 0.0 Forward whirl (modes crossing with 0P line in the rotating system)<br>= 2.0 Backward whirl (modes crossing with 2P line in the rotating system)        |
| RIDi    | Rotor ID (Integer; Default=i); must be unique with respect to all other RIDi values.                                                                                                                                                                          |
| RSETi   | Refers to a RSETID value on a ROTORG bulk entry. Each ROTORG bulk entry specifies the grids for a single rotor. (Defaults to all grid points if only one rotor; no default for multiple rotors.) (Integer)                                                    |
| RSPEEDi | Relative rotor speed for rotor i. (Real; Default = 1.0).                                                                                                                                                                                                      |
| RCORDi  | Points to CORD** entry specifying rotation axis of rotor i as z. (Integer; Default=0 for global z axis)                                                                                                                                                       |

**Defines rotor dynamics solution options (SOLs 107–112).**

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                 |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| W3_i         | Reference frequency for structural damping defined by PARAM G for rotor i. (Real; Default=0.0)                                                                                  |
| W4_i         | Reference frequency for structural damping defined on material card for rotor i. (Real; Default=0.0)                                                                            |
| RFORCEi      | Points to RFORCE bulk data entry for rotor i. (Integer; Default=0 for no rotational force applied; a rotational force is required for differential stiffness to be calculated.) |

**Remarks:**

1. Any entries where defaults exist are optional. Thus, if the defaults are acceptable for a particular model, then a continuation card would not be needed.
2. There is a maximum limit of 10 rotors (i.e. 11 continuation cards).
3. The Steiner’s term option (ZSTEIN) should only be used for analyzing the “stiff” part of the rotor. In the rotating system analysis, there is a stiffening effect of the centrifugal forces. The gyroscopic matrix is calculated in the fixed system.
4. The W3 parameter defines the reference frequency for the structural damping defined by PARAM G.
5. The W4 parameter defines the reference frequency for the structural damping defined on the material cards.
6. The W3 and W4 parameters are required for all direct solutions. In the modal solutions, the eigenvalues are used. If the W3 and W4 parameters are defined for modal analysis, they will be used. These parameters are not recommended for modal solutions.
7. The static centrifugal force is calculated for unit speed measured in rad/sec. On the RFORCE card, the unit of Hz is used, thus the conversion  $1/2(\pi)=0.159155$  must be used.
8. For calculating the modal frequency response using synchronous analysis, the rotation speeds are defined by the RSTART, RSTEP and NUMSTEP fields on the ROTORD bulk entry. The frequencies corresponding to these rotation speeds are computed and the dynamic loads are calculated accordingly.
9. For calculating the frequency or transient response using asynchronous analysis, the unique rotation speed is defined by the RSTART field on the ROTORD bulk entry. The RSTEP and NUMSTEP fields in this case will be ignored. The

## 1958 ROTORD

Defines rotor dynamics solution options (SOLs 107–112).

frequency and dynamic load definitions are defined with the standard `FREQ`, `DLOAD`, `RLOAD`, etc. bulk entries for frequency response, and with the `TSTEP`, `DLOAD`, `TLOAD`, etc. bulk entries for transient response.

10. The rotor speed defined by `RSTART`, `RSTEP` and `NUMSTEP` are called the nominal rotor speed. Rotors with relative speed defined by `RSPEED` will spin at the defined factor multiplied by the nominal rotor speed.

## ROTORG Rotor Grids Selection

Defines the rotating portion of a model in a rotor dynamics solution.

**Format 1: (Formats 1 and 2 cannot be combined on the same line)**

|        |        |    |    |    |    |    |    |    |    |
|--------|--------|----|----|----|----|----|----|----|----|
| 1      | 2      | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
| ROTORG | RSETID | G1 | G2 | G3 | G4 | G5 | G6 | G7 |    |

**Format 2:**

|        |        |    |        |    |      |     |  |  |  |
|--------|--------|----|--------|----|------|-----|--|--|--|
| ROTORG | RSETID | G1 | "THRU" | G2 | "BY" | INC |  |  |  |
|--------|--------|----|--------|----|------|-----|--|--|--|

**Continuation Format 1: (Continuation formats 1 and 2 cannot be combined on a single continuation line)**

|  |    |    |     |     |        |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|
|  | G8 | G9 | G10 | G11 | -etc.- |  |  |  |  |
|--|----|----|-----|-----|--------|--|--|--|--|

**Continuation Format 2:**

|  |    |        |    |      |     |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|
|  | G8 | "THRU" | G9 | "BY" | INC |  |  |  |  |
|--|----|--------|----|------|-----|--|--|--|--|

**Example:**

|        |     |      |      |     |    |    |  |  |  |
|--------|-----|------|------|-----|----|----|--|--|--|
| ROTORG | 14  | 101  | THRU | 190 | BY | 5  |  |  |  |
|        | 46  | 23   | 57   | 82  | 9  | 16 |  |  |  |
|        | 201 | THRU | 255  |     |    |    |  |  |  |
|        | 93  | 94   | 95   | 97  |    |    |  |  |  |

**Fields:**

| Field  | Contents                                                                                 |
|--------|------------------------------------------------------------------------------------------|
| RSETID | Identification number of rotor. References a RSETi on the ROTORD bulk entry. (Integer>0) |
| GRIDi  | Grids defining a rotor. (Integer>0)                                                      |
| THRU   | Specifies a range of grid ID's (Optional)                                                |
| BY     | Specifies an increment when using THRU option.                                           |
| INC    | Increment used with THRU option. (Integer>0)                                             |

## 1960 ROTORG

### Rotor Grids Selection

#### Remarks:

1. By default, all grids are rotating. The RSETID field is referred to by the RSETi field on the ROTORD bulk entry. If a model contains multiple rotors, use one ROTORG card for each rotor.



**RROD** Rigid Pin-Ended Element Connection

Defines a pin-ended element that is rigid in translation.

**Format:**

| 1    | 2   | 3  | 4  | 5   | 6   | 7     | 8 | 9 | 10 |
|------|-----|----|----|-----|-----|-------|---|---|----|
| RROD | EID | GA | GB | CMA | CMB | ALPHA |   |   |    |

**Example:**

|      |    |   |   |   |  |  |  |  |  |
|------|----|---|---|---|--|--|--|--|--|
| RROD | 14 | 1 | 2 | 2 |  |  |  |  |  |
|------|----|---|---|---|--|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                                                                                                               |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID      | Element identification number. (Integer > 0)                                                                                                                                                                                                           |
| GA, GB   | Grid point identification numbers of connection points. (Integer > 0)                                                                                                                                                                                  |
| CMA, CMB | Component number of one and only one dependent translational degree-of-freedom in the global coordinate system assigned by the user to either GA or GB. (Integer 1, 2, or 3. Either CMA or CMB must contain the integer, and the other must be blank.) |
| ALPHA    | Thermal expansion coefficient.                                                                                                                                                                                                                         |

**Remarks:**

1. The m-set coordinates specified on this entry may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
2. Element identification numbers should be unique with respect to all other element identification numbers.
3. Rigid elements, unlike MPCs, are not selected through the Case Control Section.
4. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
5. Rigid elements are ignored in heat transfer problems.

## 1962 RROD

### Rigid Pin-Ended Element Connection

6. The degree-of-freedom selected to be dependent must have a nonzero component along the axis of the element. This implies that the element must have finite length.
7. See R-Type Elements in the *NX Nastran Element Library* for a discussion of rigid elements.
8. The RIGID case control command must be assigned to “LAGRAN” to use ALPHA for the calculation of thermal expansion. See the RIGID case control command for details.
9. The TEMP(LOAD) and TEMP(INIT) value used on RBAR, RROD, and RTRPLT elements is an average calculated from the grid point values. On RBE1, RBE2 and RBE3 elements, an average TEMP(LOAD) and TEMP(INIT) is calculated for each leg of the element using the values on the independent/dependent grid pairs such that each leg can have a different thermal strain if the temperatures vary at the grids.

The rigid element thermal strains are calculated by  
 $\epsilon_{\text{thermal}} = \alpha(\text{AVGTEMP}(\text{LOAD}) - \text{AVGTEMP}(\text{INIT})).$

If TEMP(LOAD) or TEMP(INIT) are not defined, they are assumed to be zero.

**RSPLINE** Interpolation Constraint Element

Defines multipoint constraints for the interpolation of displacements at grid points.

**Format:**

| 1       | 2   | 3   | 4  | 5  | 6      | 7  | 8  | 9  | 10 |
|---------|-----|-----|----|----|--------|----|----|----|----|
| RSPLINE | EID | D/L | G1 | G2 | C2     | G3 | C3 | G4 |    |
|         | C4  | G5  | C5 | G6 | -etc.- |    |    |    |    |

**Example:**

|         |     |     |     |    |        |    |  |    |  |
|---------|-----|-----|-----|----|--------|----|--|----|--|
| RSPLINE | 73  | .05 | 27  | 28 | 123456 | 29 |  | 30 |  |
|         | 123 | 75  | 123 | 71 |        |    |  |    |  |

**Fields:**

| Field | Contents                                                                                                       |
|-------|----------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                   |
| D/L   | Ratio of the diameter of the elastic tube to the sum of the lengths of all segments. (Real > 0.0; Default=0.1) |
| Gi    | Grid point identification number. (Integer > 0)                                                                |
| Ci    | Components to be constrained. See Remark 2 . (Blank or any combination of the Integers 1 through 6.)           |

**Remarks:**

1. Displacements are interpolated from the equations of an elastic beam passing through the grid points.
2. A blank field for Ci indicates that all six degrees-of-freedom at Gi are independent. Since G1 must be independent, no field is provided for C1. Since the last grid point must also be independent, the last field must be a Gi, not a Ci. For the example shown G1, G3, and G6 are independent. G2 has six constrained degrees-of-freedom while G4 and G5 each have three.
3. Dependent (i.e., constrained) degrees-of-freedom assigned by one rigid element may not also be assigned dependent by another rigid element or by a multipoint constraint.

## 1964 RSPLINE

### Interpolation Constraint Element

4. Degrees-of-freedom declared to be independent by one rigid body element can be made dependent by another rigid body element or by a multipoint constraint.
5. EIDs must be unique.
6. Rigid elements (including RSPLINE), unlike MPCs, are not selected through the Case Control Section.
7. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
8. Rigid elements are ignored in heat transfer problems.
9. See R-Type Elements in the *NX Nastran Element Library* for a discussion of rigid elements.
10. The m-set coordinates specified on this entry may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
11. The constraint coefficient matrix is affected by the order of the  $G_i C_i$  pairs on the RSPLINE entry. The order of the pairs should be specified in the same order that they appear along the line that joins the two regions. If this order is not followed then the RSPLINE will have folds in it that may yield some unexpected interpolation results.
12. The independent degrees-of-freedom that are the rotation components most nearly parallel to the line joining the regions should not normally be constrained.
13. The RSPLINE has a limit of 100 grid points.

**RSSCON** Shell-to-Solid Element Connector

Defines multipoint constraints to model clamped connections of shell-to-solid elements.

**Format:**

| 1      | 2    | 3    | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|------|------|-----|-----|-----|-----|-----|-----|----|
| RSSCON | RBID | TYPE | ES1 | EA1 | EB1 | ES2 | EA2 | EB2 |    |

**Example:**

|        |     |      |    |    |    |    |    |    |  |
|--------|-----|------|----|----|----|----|----|----|--|
| RSSCON | 110 | GRID | 11 | 12 | 13 | 14 | 15 | 16 |  |
|--------|-----|------|----|----|----|----|----|----|--|

|        |     |      |    |    |    |  |  |  |  |
|--------|-----|------|----|----|----|--|--|--|--|
| RSSCON | 111 | GRID | 31 | 74 | 75 |  |  |  |  |
|--------|-----|------|----|----|----|--|--|--|--|

|        |     |      |     |     |  |  |  |  |  |
|--------|-----|------|-----|-----|--|--|--|--|--|
| RSSCON | 115 | ELEM | 311 | 741 |  |  |  |  |  |
|--------|-----|------|-----|-----|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                                                |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RBID  | Element identification number. (Integer > 0)                                                                                                                                                                            |
| TYPE  | Type of connectivity TYPE="ELEM" connection is described with element identification numbers. TYPE="GRID" connection is described with grid point identification numbers. (Character: "GRID" or "ELEM"; Default="ELEM") |
| ES1   | Shell element identification number if TYPE="ELEM". Shell grid point identification number if TYPE="GRID". See <a href="#">Figure 18-3</a> . (Integer > 0)                                                              |
| EA1   | Solid element identification number if TYPE="ELEM". Solid grid point identification number if TYPE="GRID". (Integer > 0)                                                                                                |
| EB1   | Solid grid-point identification number for TYPE="GRID" only. (Integer > 0 or blank)                                                                                                                                     |
| ES2   | Shell grid-point identification number for TYPE="GRID" only. (Integer > 0 or blank)                                                                                                                                     |
| EA2   | Solid grid-point identification number for TYPE="GRID" only. (Integer > 0 or blank)                                                                                                                                     |

## 1966 RSSCON Shell-to-Solid Element Connector


| Field | Contents                                                                               |
|-------|----------------------------------------------------------------------------------------|
| EB2   | Solid grid-point identification number for TYPE="GRID" only.<br>(Integer > 0 or blank) |

### Remarks:

1. RSSCON generates a multipoint constraint that models a clamped connection between a shell and a solid element. The shell degrees-of-freedom are put in the dependent set (m-set). The translational degrees-of-freedom of the shell edge are connected to the translational degrees-of-freedom of the upper and lower solid edge. The two rotational degrees-of-freedom of the shell are connected to the translational degrees-of-freedom of the lower and upper edges of the solid element face. Poisson's ratio effects are considered in the translational degrees-of-freedom.
2. The shell grid point must lie on the line connecting the two solid grid points. It can have an offset from this line, which can not be more than 5% of the distance between the two solid grid points. The shell grid points that are out of the tolerance will not be constrained, and a fatal message will be issued. This tolerance is adjustable. Please see PARAM,TOLRSC and PARAM,SEPIXOVR.
3. When using the TYPE="ELEM" option
  - The elements may be p-elements or h-elements. The solid elements are CHEXA, CPENTA, and CTETRA with and without midside nodes. The shell elements are CQUAD4, CTRIA3, CQUADR, CTRIAR, CQUAD8, or CTRIA6.
  - In case of p-elements, the p-value of the shell element edge is adjusted to the higher of the p-value of the upper or lower solid p-element edge. If one of the elements is an h-element, then the p-value of the adjacent edge is lowered to 1.
  - Both the shell and solid elements have to belong to the same superelement. This restriction can be bypassed using SEELT entry to reassign the downstream boundary element to an upstream superelement.
  - When a straight shell p-element edge and a solid p-element are connected, the geometry of the shell edge is not changed to fit the solid face. When a curved shell p-element edge and a solid p-element are connected, the two solid edges and solid face are not changed to match the shell edge.
  - It is not recommended to connect more than one shell element to the same solid using the ELEM option. If attempted, conflicts in the multipoint constraint relations may lead to UFM 6692.

4. When using TYPE="GRID" option
  - The GRID option does not verify that the grids used are valid shell and/or solid grids.
  - The hierarchical degrees-of-freedom of p-element edges are not constrained. The GRID option is therefore not recommended for p-elements.
  - The grids in the GRID option can be in different superelements. The shell grid must be in the upstream superelement.
5. It is recommended that the height of the solid element's face is approximately equal to the shell element's thickness of the shell. The shell edge should then be placed in the middle of the solid face.
6. The shell edge may coincide with the upper or lower edge of the solid face.
7. The RSSCON entry, unlike MPCs, cannot be selected through the Case Control Section.
8. Forces of multipoint constraints may be recovered in the linear structured solution sequences (SOLs 101 through 200) with the MPCFORCES Case Control command.
9. The RSSCON is ignored in heat-transfer problems.
10. The m-set coordinates (shell degrees-of-freedom) may not be specified on other entries that define mutually exclusive sets. See "[Degree-of-Freedom Sets](#)" for a list of these entries.

1968 **RSSCON**  
Shell-to-Solid Element Connector

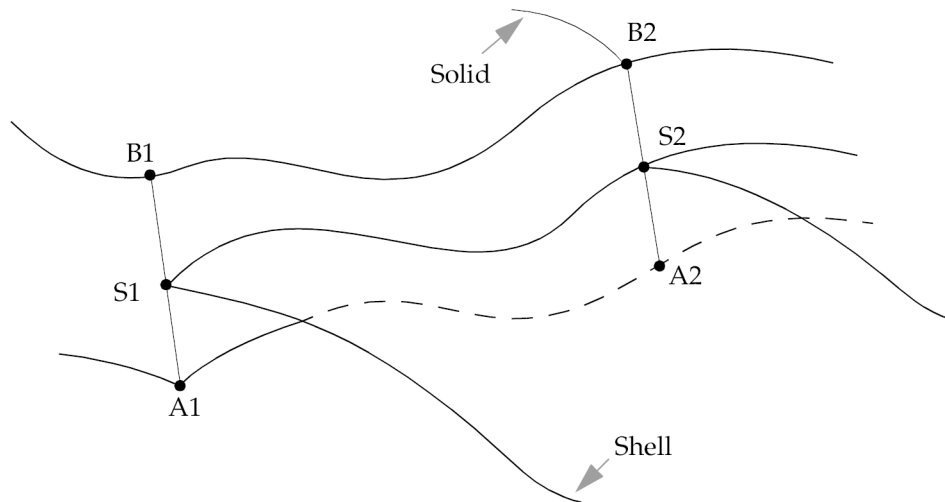

**Figure 18-3. Shell Elements Connected to the Faces of Solid Elements**



**RTRPLT** Rigid Triangular Plate

Defines a rigid triangular plate.

**Format:**

| 1      | 2   | 3   | 4   | 5     | 6   | 7   | 8   | 9 | 10 |
|--------|-----|-----|-----|-------|-----|-----|-----|---|----|
| RTRPLT | EID | GA  | GB  | GC    | CNA | CNB | CNC |   |    |
|        | CMA | CMB | CMC | ALPHA |     |     |     |   |    |

**Example:**

|        |   |   |   |   |      |   |   |  |  |
|--------|---|---|---|---|------|---|---|--|--|
| RTRPLT | 7 | 1 | 2 | 3 | 1236 | 3 | 3 |  |  |
|--------|---|---|---|---|------|---|---|--|--|

**Fields:**

| Field         | Contents                                                                                                                                                                                                                      |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID           | Element identification number.                                                                                                                                                                                                |
| GA, GB, GC    | Grid point identification number of connection points.                                                                                                                                                                        |
| CNA, CNB, CNC | Independent degrees-of-freedom in the global coordinate system for the element at grid points GA, GB, and GC, indicated by any of the Integers 1 through 6 with no embedded blanks. See Remark 1. (Integer $\geq 0$ or blank) |
| CMA, CMB, CMC | Component numbers of dependent degrees-of-freedom in the global coordinate system. (Any of the Integers 1 through 6 with no embedded blanks, or 0 or blank.)                                                                  |
| ALPHA         | Thermal expansion coefficient.                                                                                                                                                                                                |

**Remarks:**

1. The total number of components in CNA, CNB, and CNC must equal six; for example, CNA=1236, CNB=3, CNC=3. Furthermore, they must jointly be capable of representing any general rigid body motion of the element.
2. If CMA, CMB, and CMC are all zero or blank or if the continuation entry is omitted, all of the degrees-of-freedom not in CNA, CNB, and CNC will be made dependent (i.e., they will be made members of the m-set).
3. Dependent degrees-of-freedom assigned by one rigid element may not also be assigned dependent by another rigid element or by a multipoint constraint.

## 1970 RTRPLT

### Rigid Triangular Plate

4. Element identification numbers should be unique with respect to all other element identification numbers.
5. Rigid elements, unlike MPCs, are not selected through the Case Control Section.
6. Forces of multipoint constraint may be recovered in all solution sequences, except SOL 129, with the MPCFORCES Case Control command.
7. Rigid elements are ignored in heat transfer problems.
8. See R-Type Elements in the *NX Nastran Element Library* for a discussion of rigid elements.
9. The m-set coordinates specified on this entry may not be specified on other entries that define mutually exclusive sets. See “[Degree-of-Freedom Sets](#)” for a list of these entries.
10. The RIGID case control command must be assigned to “LAGRAN” to use ALPHA for the calculation of thermal expansion. See the RIGID case control command for details.
11. The TEMP(LOAD) and TEMP(INIT) value used on RBAR, RROD, and RTRPLT elements is an average calculated from the grid point values. On RBE1, RBE2 and RBE3 elements, an average TEMP(LOAD) and TEMP(INIT) is calculated for each leg of the element using the values on the independent/dependent grid pairs such that each leg can have a different thermal strain if the temperatures vary at the grids.

The rigid element thermal strains are calculated by  
 $\epsilon_{\text{thermal}} = a(\text{AVGTEMP}(\text{LOAD}) - \text{AVGTEMP}(\text{INIT})).$

If TEMP(LOAD) or TEMP(INIT) are not defined, they are assumed to be zero.

**SEBNDRY**      Superelement Boundary-Point Definition

Defines a list of grid points in a partitioned superelement for the automatic boundary search between a specified superelement or between all other superelements in the model.

**Format:**

| 1       | 2     | 3     | 4      | 5     | 6     | 7     | 8     | 9     | 10 |
|---------|-------|-------|--------|-------|-------|-------|-------|-------|----|
| SEBNDRY | SEIDA | SEIDB | GIDA1  | GIDA2 | GIDA3 | GIDA4 | GIDA5 | GIDA6 |    |
|         | GIDA7 | GIDA8 | -etc.- |       |       |       |       |       |    |

**Example 1:**

|         |     |   |    |    |    |    |  |  |  |
|---------|-----|---|----|----|----|----|--|--|--|
| SEBNDRY | 400 | 4 | 10 | 20 | 30 | 40 |  |  |  |
|---------|-----|---|----|----|----|----|--|--|--|

**Example 2:**

|         |     |     |    |    |    |      |    |  |  |
|---------|-----|-----|----|----|----|------|----|--|--|
| SEBNDRY | 400 | ALL | 10 | 20 | 30 | THRU | 40 |  |  |
|---------|-----|-----|----|----|----|------|----|--|--|

**Fields:**

| Field | Contents                                                                                                                   |
|-------|----------------------------------------------------------------------------------------------------------------------------|
| SEIDA | Partitioned superelement identification number. (Integer > 0)                                                              |
| SEIDB | Superelement identification. See Remark 2 . (Integer > 0 or Character "ALL" ; Default="ALL")                               |
| GIDAi | Identification number of a boundary grid point in superelement SEIDA. (Integer > 0 or "THRU"; For "THRU" option, G1 < G2.) |

**Remarks:**

1. SEBNDRY may only be specified in the main Bulk Data Section and is not recognized after the BEGIN SUPER=n.
2. SEIDB may reference partitioned superelements or superelements in the main Bulk Data Section.

**1972 SEBSET**  
**Fixed Boundary Degrees-of-Freedom**

**SEBSET** Fixed Boundary Degrees-of-Freedom

Defines boundary degrees-of-freedom to be fixed (b-set) during component mode synthesis calculations.

**Format:**

| 1      | 2    | 3   | 4  | 5   | 6  | 7   | 8  | 9 | 10 |
|--------|------|-----|----|-----|----|-----|----|---|----|
| SEBSET | SEID | ID1 | C1 | ID2 | C2 | ID3 | C3 |   |    |

**Example:**

|        |   |   |     |    |   |  |  |  |  |
|--------|---|---|-----|----|---|--|--|--|--|
| SEBSET | 5 | 2 | 135 | 14 | 6 |  |  |  |  |
|--------|---|---|-----|----|---|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. (Integer > 0)                                                                                                       |
| Ci    | Component number. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; Integer zero or blank for scalar points) |
| IDI   | Grid or scalar point identification numbers. (Integer > 0)                                                                                              |

**Remarks:**

1. If there are no SECSET<sub>i</sub> or SEBSET<sub>i</sub> entries present, all boundary points are, by default, fixed during component mode analysis. If only SEBSET<sub>i</sub> are entries present, any boundary degrees-of-freedom not listed are placed in the free boundary set (c-set). If both SEBSET<sub>i</sub> and SECSET<sub>i</sub> entries are present, the c-set degrees-of-freedom are defined by the SECSET<sub>i</sub> entries and any remaining boundary points are placed in the b-set.
2. Degrees-of-freedom listed on SEBSET<sub>i</sub> entries must be exterior degrees-of-freedom of the superelement and may not be specified on SECSET<sub>i</sub> entries.
3. Degrees-of-freedom specified on this entry form members of the mutually exclusive b-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:

**SEBSET 1973**  
**Fixed Boundary Degrees-of-Freedom**

- If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.
- If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**1974 SEBSET1**  
**Fixed Boundary Degrees-of-Freedom, Alternate Form of SEBSET**

**SEBSET1** Fixed Boundary Degrees-of-Freedom, Alternate Form of SEBSET

Defines boundary degrees-of-freedom to be fixed (b-set) during component mode calculations.

**Format:**

| 1       | 2    | 3  | 4  | 5      | 6  | 7  | 8  | 9  | 10 |
|---------|------|----|----|--------|----|----|----|----|----|
| SEBSET1 | SEID | C  | G1 | G2     | G3 | G4 | G5 | G6 |    |
|         | G7   | G8 | G9 | -etc.- |    |    |    |    |    |

**Example:**

|         |     |     |     |    |   |    |    |    |  |
|---------|-----|-----|-----|----|---|----|----|----|--|
| SEBSET1 | 5   | 2   | 135 | 14 | 6 | 23 | 24 | 25 |  |
|         | 122 | 127 |     |    |   |    |    |    |  |

**Alternate Format and Example:**

|         |      |   |    |        |    |  |  |  |  |
|---------|------|---|----|--------|----|--|--|--|--|
| SEBSET1 | SEID | C | G1 | "THRU" | G2 |  |  |  |  |
| SEBSET1 | 5    | 3 | 6  | THRU   | 32 |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                      |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. (Integer > 0)                                                                                             |
| C     | Component number. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points, 0 or blank for scalar points.) |
| Gi    | Grid or scalar point identification numbers. (Integer > 0 or "THRU"; for THRU option G1 < G2.)                                                |

**Remarks:**

1. If there are no SECSETi or SEBSETi entries present, all boundary points are, by default, fixed during component mode analysis. If there are only SEBSETi entries present, any boundary degrees-of-freedom not listed are placed in the free boundary set (c-set). If there are both SEBSETi and SECSETi entries present, the c-set degrees-of-freedom are defined by the SECSETi entries, and any remaining boundary points are placed in the b-set.

## Fixed Boundary Degrees-of-Freedom, Alternate Form of SEBSET

2. Degrees-of-freedom listed on SEBSET<sub>i</sub> entries must be exterior degrees-of-freedom of the superelement and may not be specified on SECSET<sub>i</sub> entries.
3. Degrees-of-freedom specified on this entry form members of the mutually exclusive b-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.
  - If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**1976 SEBULK**  
**Partitional Superelement Connection**

**SEBULK**      Partitional Superelement Connection

Defines superelement boundary search options and a repeated, mirrored, or collector superelement.

**Format:**

| 1      | 2    | 3    | 4     | 5      | 6   | 7   | 8      | 9 | 10 |
|--------|------|------|-------|--------|-----|-----|--------|---|----|
| SEBULK | SEID | TYPE | RSEID | METHOD | TOL | LOC | UNITNO |   |    |

**Example:**

|        |    |        |   |      |        |  |  |  |  |
|--------|----|--------|---|------|--------|--|--|--|--|
| SEBULK | 14 | REPEAT | 4 | AUTO | 1.0E-3 |  |  |  |  |
|--------|----|--------|---|------|--------|--|--|--|--|

**Fields:**

| Field  | Contents                                                                                                          |
|--------|-------------------------------------------------------------------------------------------------------------------|
| SEID   | Partitioned superelement identification number. (Integer > 0)                                                     |
| TYPE   | Superelement type. (Character; No Default)                                                                        |
|        | PRIMARY      Primary                                                                                              |
|        | REPEAT      Identical                                                                                             |
|        | MIRROR      Mirror                                                                                                |
|        | COLLCTR      Collector                                                                                            |
|        | EXTERNAL      External                                                                                            |
|        | EXTOP2      External using an OUTPUT2 file created in an earlier run.                                             |
|        | EXTOP4      External using an OP4 file created in an earlier run.                                                 |
| RSEID  | Identification number of the reference superelement, used if TYPE="REPEAT" and "MIRROR". (Integer ≥ 0; Default=0) |
| METHOD | Method to be used when searching for boundary grid points. (Character: "AUTO" or "MANUAL"; Default="AUTO")        |
| TOL    | Location tolerance to be used when searching for boundary grid points. (Real; Default=10E-5)                      |



| <b>Field</b> | <b>Contents</b>                                                                                                    |
|--------------|--------------------------------------------------------------------------------------------------------------------|
| LOC          | Coincident location check option for manual connection option.<br>(Character: "YES" or "NO"; Default="YES")        |
| UNITNO       | Fortran unit number for the OUTPUT2 or OP4 file (applicable and meaningful only when TYPE = "EXTOP2" or "EXTOP4"). |

**Remarks:**

1. The TYPE="REPEAT" or "MIRROR" does not include superelements upstream of the reference superelement. A repeated or mirrored superelement can have boundaries, loads, constraints, and reduction procedures that are different than the reference superelement.
2. METHOD="MANUAL" requires SECONCT entries. SEBNDRY and SEEXCLD, which reference SEID, will produce a fatal message.
3. SECONCT, SEBNDRY, and SEEXCLD entries can be used to augment the search procedure and/or override the global tolerance.
4. For combined automatic and manual boundary search, the METHOD="AUTO" should be specified and connections should be specified on a SECONCT entry.
5. TOL and LOC are the default values that can be modified between two superelements by providing the required tolerance on the SECONCT entry.
6. TYPE="MIRROR" also requires specification of a SEMPLN entry.
7. TYPE="COLLCTR" indicates a collector superelement, which does not contain any grids or scalar points.
8. For TYPE = "EXTERNAL", "EXTOP2", or "EXTOP4", see discussion under the description of the EXTSEOUT case control entry for employing external superelements using the new two-step procedure. For employing external superelements using the old three-step procedure, see discussion under the description of the EXTOUT parameter in Chapter 7.
9. This entry will only work if PART superelements (BEGIN SUPER) or external superelements created by employing the EXTSEOUT case control entry exist.

**1978 SECONCT**  
**Partitioned Superelement Boundary-Point Connection**

**SECONCT**      Partitioned Superelement Boundary-Point Connection

Explicitly defines grid and scalar point connection procedures for a partitioned superelement.

**Format:**

| 1       | 2     | 3     | 4     | 5     | 6     | 7     | 8      | 9 | 10 |
|---------|-------|-------|-------|-------|-------|-------|--------|---|----|
| SECONCT | SEIDA | SEIDB | TOL   | LOC   |       |       |        |   |    |
|         | GIDA1 | GIDB1 | GIDA2 | GIDB2 | GIDA3 | GIDB3 | -etc.- |   |    |

**Example:**

|         |      |      |        |     |      |      |  |  |  |
|---------|------|------|--------|-----|------|------|--|--|--|
| SECONCT | 10   | 20   | 1.0E-4 | YES |      |      |  |  |  |
|         | 1001 | 4001 |        |     | 2222 | 4444 |  |  |  |

**Alternate Format and Example:**

|         |       |        |       |       |        |       |  |  |  |
|---------|-------|--------|-------|-------|--------|-------|--|--|--|
| SECONCT | SEIDA | SEIDB  | TOL   | LOC   |        |       |  |  |  |
|         | GIDA1 | 'THRU' | GIDA2 | GIDB1 | 'THRU' | GIDB2 |  |  |  |

|         |     |        |     |     |        |     |  |  |  |
|---------|-----|--------|-----|-----|--------|-----|--|--|--|
| SECONCT | 10  | 20     |     |     |        |     |  |  |  |
|         | 101 | 'THRU' | 110 | 201 | 'THRU' | 210 |  |  |  |

**Fields:**

| Field | Contents                                                                                                 |
|-------|----------------------------------------------------------------------------------------------------------|
| SEIDA | Partitioned superelement identification number. (Integer > 0)                                            |
| SEIDB | Identification number of superelement for connection to SEIDA. (Integer ≥ 0)                             |
| TOL   | Location tolerance to be used when searching for or checking boundary grid points. (Real; Default=10E-5) |
| LOC   | Coincident location check option for manual connection. (Character; "YES" or "NO"; Default="YES")        |
| GIDAi | Identification number of a grid or scalar point in superelement SEIDA, which will be connected to GIDBi. |
| GIDBi | Identification number of a grid or scalar point in superelement SEIDB, which will be connected to GIDAi. |

**Remarks:**

1. SECONCT can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER=n command.
2. TOL and LOC can be used to override the default values specified on the SEBULK entries.
3. The continuation entry is optional.
4. The (GIAi, GIBi) pair must both be grids or scalar points.
5. All six degrees-of-freedom of grid points will be defined as boundary degrees-of-freedom.
6. This entry will only work if PART superelements (BEGIN SUPER) exist.
7. Blank fields are allowed after the first GIDA1-GIDB1 pair. Blank fields must also occur in pairs. This remark does not apply to the alternate format.
8. For Alternate Format 1, the thru ranges must be closed sets. That is, all IDs listed between 101 and 110 in the example must exist in the model.

**1980 SECSET**  
**Free Boundary Degrees-of-Freedom**

**SECSET**      Free Boundary Degrees-of-Freedom

Defines boundary degrees-of-freedom to be free (c-set) during component mode synthesis calculations.

**Format:**

| 1      | 2    | 3   | 4  | 5   | 6  | 7   | 8  | 9 | 10 |
|--------|------|-----|----|-----|----|-----|----|---|----|
| SECSET | SEID | ID1 | C1 | ID2 | C2 | ID3 | C3 |   |    |

**Example:**

|        |   |     |   |   |    |   |    |  |  |
|--------|---|-----|---|---|----|---|----|--|--|
| SECSET | 3 | 124 | 1 | 5 | 23 | 6 | 15 |  |  |
|--------|---|-----|---|---|----|---|----|--|--|

**Fields:**

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. (Integer > 0)                                                                                                      |
| Ci    | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; Integer 0 or blank for scalar points.) |
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                              |

**Remarks:**

1. Exterior grid and scalar points are, by default, fixed during component mode analysis and placed in the b-set unless listed on SECSETi or SESUP entries. Coordinates listed on this entry are considered free (c-set) during component mode calculations. Exterior grid and scalar points are determined by the program and listed in the SEMAP table output.
2. Degrees-of-freedom specified on this entry are assigned to the mutually exclusive c-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
3. There must be a sufficient number of degrees-of-freedom specified on SESUP entries to discard any free body modes of the superelement.
4. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.

- If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**1982 SECSET1**  
**Free Boundary Degrees-of-Freedom, Alternate Form of SECSET**

**SECSET1** Free Boundary Degrees-of-Freedom, Alternate Form of SECSET

Defines boundary degrees-of-freedom to be free (c-set) during component mode synthesis calculations.

**Format:**

| 1       | 2    | 3  | 4  | 5      | 6  | 7  | 8  | 9  | 10 |
|---------|------|----|----|--------|----|----|----|----|----|
| SECSET1 | SEID | C  | G1 | G2     | G3 | G4 | G5 | G6 |    |
|         | G7   | G8 | G9 | -etc.- |    |    |    |    |    |

**Example:**

|         |     |     |     |    |   |    |    |    |  |
|---------|-----|-----|-----|----|---|----|----|----|--|
| SECSET1 | 5   | 2   | 135 | 14 | 6 | 23 | 24 | 25 |  |
|         | 122 | 127 |     |    |   |    |    |    |  |

**Alternate Formats and Example:**

|         |      |   |    |        |    |  |  |  |  |
|---------|------|---|----|--------|----|--|--|--|--|
| SECSET1 | SEID | C | G1 | "THRU" | G2 |  |  |  |  |
| SECSET1 | 5    | 3 | 6  | THRU   | 32 |  |  |  |  |

|         |      |  |       |  |  |  |  |  |  |
|---------|------|--|-------|--|--|--|--|--|--|
| SECSET1 | SEID |  | "ALL" |  |  |  |  |  |  |
| SECSET1 | SEID |  | ALL   |  |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                                     |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. (Integer > 0)                                                                                                                            |
| C     | Component numbers of degree-of-freedoms. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; Integer 0 or blank for scalar points.) |
| Gi    | Grid or scalar point identification number. (Integer > 0)                                                                                                                    |

**Remarks:**

1. Exterior grid and scalar points are, by default, fixed during component mode analysis and placed in the b-set unless listed on SECSETi or SESUP entries. Degrees-of-freedom listed on this entry are considered free (c-set) during component mode calculations. Exterior grid and scalar points are determined automatically and listed in the SEMAP table output.

**Free Boundary Degrees-of-Freedom, Alternate Form of SECSET**

2. If the alternate formats are used, the grid points  $G_i$  are not required to exist or to be exterior degrees-of-freedom and may be listed on SECSET1 entries. Points of this type will cause one warning message but will otherwise be ignored.
3. Degrees-of-freedom specified on this entry are assigned to the mutually exclusive c-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
4. There must be a sufficient number of degrees-of-freedom specified on SESUP entries to discard any free body modes of the superelement.
5. If PARAM,AUTOSPC is YES, then singular b-set and c-set degrees-of-freedom will be reassigned as follows:
  - If there are no o-set (omitted) degrees-of-freedom, then singular b-set and c-set degrees-of-freedom are reassigned to the s-set.
  - If there are o-set (omitted) degrees-of-freedom, then singular c-set degrees-of-freedom are reassigned to the b-set. Singular b-set degrees-of-freedom are not reassigned.

**1984 SECTAX**  
Conical Shell Sector

**SECTAX** Conical Shell Sector

Defines a sector of a conical shell.

**Format:**

| 1      | 2  | 3   | 4 | 5    | 6    | 7 | 8 | 9 | 10 |
|--------|----|-----|---|------|------|---|---|---|----|
| SECTAX | ID | RID | R | PHI1 | PHI2 |   |   |   |    |

**Example:**

|        |   |   |     |      |      |  |  |  |  |
|--------|---|---|-----|------|------|--|--|--|--|
| SECTAX | 1 | 2 | 3.0 | 30.0 | 40.0 |  |  |  |  |
|--------|---|---|-----|------|------|--|--|--|--|

**Fields:**

| Field      | Contents                                                    |
|------------|-------------------------------------------------------------|
| ID         | Sector identification number. (Unique Integer > 0)          |
| RID        | Ring identification number. See RINGAX entry. (Integer > 0) |
| R          | Effective radius. (Real)                                    |
| PHI1, PHI2 | Azimuthal limits of sector in degrees. (Real)               |

**Remarks:**

1. SECTAX is allowed only if an AXIC entry is also present.
2. SECTAX identification numbers must be unique with respect to all other POINTAX, RINGAX and SECTAX identification numbers.
3. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.



**SEELT**      Superelement Boundary Element Reassignment

Reassigns superelement boundary elements to an upstream superelement.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| SEELT    | SEID     | EID1     | EID2     | EID3     | EID4     | EID5     | EID6     | EID7     |           |

**Example:**

|       |   |     |     |     |  |  |  |  |  |
|-------|---|-----|-----|-----|--|--|--|--|--|
| SEELT | 2 | 147 | 562 | 937 |  |  |  |  |  |
|-------|---|-----|-----|-----|--|--|--|--|--|

**Alternate Format and Example:**

|       |      |       |        |       |  |  |  |  |  |
|-------|------|-------|--------|-------|--|--|--|--|--|
| SEELT | SEID | EID1  | “THRU” | EID2  |  |  |  |  |  |
| SEELT | 5    | 12006 | THRU   | 12050 |  |  |  |  |  |

**Fields:**

| Field            | Contents                                                                                |
|------------------|-----------------------------------------------------------------------------------------|
| SEID             | Superelement identification number. (Integer > 0)                                       |
| EID <sub>i</sub> | Element identification numbers. (Integer > 0 or “THRU”; for “THRU” option EID1 < EID2.) |

**Remarks:**

1. Elements connected entirely to the exterior points of an upstream superelement are called boundary elements and are assigned to the downstream superelement. The SEELT entry provides the means of reassigning the element to the upstream superelement. This entry may be applied to boundary elements only.
2. Open sets are allowed with the “THRU” option.
3. Elements processed with primary superelements will also be contained in any referencing secondary superelement.
4. EID<sub>i</sub> may refer to plot elements, general elements, and structural elements.
5. This entry does not change the exterior grid point set of the superelement.
6. SEELT can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER=*n* command.

**1986 SEEXCLD**  
**Partitioned Superelement Exclusion**

**SEEXCLD**      Partitioned Superelement Exclusion

Defines grids that will be excluded during the attachment of a partitioned superelement.

**Format:**

| 1       | 2     | 3     | 4      | 5     | 6     | 7     | 8     | 9     | 10 |
|---------|-------|-------|--------|-------|-------|-------|-------|-------|----|
| SEEXCLD | SEIDA | SEIDB | GIDA1  | GIDA2 | GIDA3 | GIDA4 | GIDA5 | GIDA6 |    |
|         | GIDA7 | GIDA8 | -etc.- |       |       |       |       |       |    |

**Example1:**

|         |     |    |    |     |     |  |  |  |  |
|---------|-----|----|----|-----|-----|--|--|--|--|
| SEEXCLD | 110 | 10 | 45 | 678 | 396 |  |  |  |  |
|---------|-----|----|----|-----|-----|--|--|--|--|

**Example 2:**

|         |     |     |    |    |    |      |    |  |  |
|---------|-----|-----|----|----|----|------|----|--|--|
| SEEXCLD | 400 | ALL | 10 | 20 | 30 | THRU | 40 |  |  |
|---------|-----|-----|----|----|----|------|----|--|--|

**Fields:**

| Field | Contents                                                                                                                                                        |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEIDA | Partitioned superelement identification number. (Integer ≥ 0)                                                                                                   |
| SEIDB | Superelement identification. (Integer ≥ 0 or Character="ALL", Default="ALL")                                                                                    |
| GIDAi | Identification number of a grid in superelement SEIDA to be excluded from connection to superelement SEIDB. (Integer > 0 or "THRU"; for "THRU" option G1 < G2.) |

**Remarks:**

1. SEEXCLD can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER=n command.
2. SEIDB may reference partitioned superelements or superelements defined in the main Bulk Data Section.
3. This entry will only work if PART superelements (BEGIN SUPER) exist.

**SELABEL**      Superelement Output Label

Defines a label or name to be printed in the superelement output headings.

**Format:**

| 1       | 2    | 3     | 4 | 5 | 6 | 7 | 8 | 9 | 10 |  |
|---------|------|-------|---|---|---|---|---|---|----|--|
| SELABEL | SEID | LABEL |   |   |   |   |   |   |    |  |

**Example:**

|         |    |                                 |  |
|---------|----|---------------------------------|--|
| SELABEL | 10 | LEFT REAR FENDER, MODEL XYZ2000 |  |
|---------|----|---------------------------------|--|

**Fields:**

| Field | Contents                                                                 |
|-------|--------------------------------------------------------------------------|
| SEID  | Partitioned superelement identification number. (Integer > 0)            |
| LABEL | Label associated with superelement SEID for output headings. (Character) |

**Remarks:**

1. SELABEL can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER=n command.
2. Only one SELABEL per superelement may be specified.
3. The label will appear in all superelement output headings. However, in some headings the label may be truncated.
4. This entry will only work if PART superelements (BEGIN SUPER) exist.

**1988 SELOC**  
**Partitioned Superelement Location**

**SELOC**      Partitioned Superelement Location

Defines a partitioned superelement relocation by listing three non-colinear points in the superelement and three corresponding points not belonging to the superelement.

**Format:**

| 1     | 2    | 3   | 4   | 5   | 6   | 7   | 8   | 9 | 10 |
|-------|------|-----|-----|-----|-----|-----|-----|---|----|
| SELOC | SEID | PA1 | PA2 | PA3 | PB1 | PB2 | PB3 |   |    |

**Example:**

|       |     |    |     |     |      |     |    |  |  |
|-------|-----|----|-----|-----|------|-----|----|--|--|
| SELOC | 110 | 10 | 100 | 111 | 1010 | 112 | 30 |  |  |
|-------|-----|----|-----|-----|------|-----|----|--|--|

**Fields:**

| Field | Contents                                                                                                                                                     |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Partitioned identification number of the partitioned superelement. (Integer > 0)                                                                             |
| PAi   | Identification numbers of three non-colinear grids which are in the partitioned superelement. (Integer > 0)                                                  |
| PBi   | Identification numbers of three grids (GRID entry) or points (POINT entry) defined in the main Bulk Data Section to which PAi will be aligned. (Integer > 0) |

**Remarks:**

1. SELOC can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER=n command.
2. The superelement will be rotated and translated for alignment of the GAI and GBi locations.
3. The PAi can be grid points only; PBi can be either GRIDs or POINTs.
4. PA1, PA2, and PA3 must be contained in superelement SEID.
5. PB1, PB2, and PB3 must be specified in the main Bulk Data Section. If they belong to a superelement that is also relocated, then the original (unmoved) positions of PB1, PB2, and PB3 are used.
6. PB1, PB2, and PB3 must have the same relative locations as PA1, PA2, and PA3.

7. Three grids or points are required even if the superelement connects to only one or two exterior grids.
8. Coordinate systems, global displacement directions, and element coordinate systems for the superelement will rotated and translated.
9. The global coordinate directions of the boundary grid points of the upstream superelement will be transformed internally to the global coordinate directions of the attachment grid points in the downstream superelement. For displacement data recovery, the output will be in the original global coordinate system.
10. The translation and rotation of the superelement to the new position is accomplished by defining local rectangular coordinate systems based on the specified grid locations:
  - The local systems have their origin at PX1 and the x-axis points from PX1 to PX2.
  - The y-axis lies in the plane containing PX1, PX2, and PX3, is perpendicular to the x-axis, and points toward PX3.
  - The z-axis is defined by the cross product of the x-axis into the y-axis.
  - The rotation and translation transformation aligns the local system defined by the superelement grids with the local system defined by the main Bulk Data Section grids.
11. This entry will only work if PART superelements (BEGIN SUPER) exist.

**1990 SEMPLN**  
**Superelement Mirror Plane**

**SEMPLN**      Superelement Mirror Plane

Defines a mirror plane for mirroring a partitioned superelement.

**Format:**

| 1      | 2    | 3       | 4  | 5  | 6  | 7 | 8 | 9 | 10 |
|--------|------|---------|----|----|----|---|---|---|----|
| SEMPLN | SEID | "PLANE" | P1 | P2 | P3 |   |   |   |    |

**Example:**

|        |     |       |    |    |      |  |  |  |  |
|--------|-----|-------|----|----|------|--|--|--|--|
| SEMPLN | 110 | PLANE | 12 | 45 | 1125 |  |  |  |  |
|--------|-----|-------|----|----|------|--|--|--|--|

**Fields:**

| Field   | Contents                                                                               |
|---------|----------------------------------------------------------------------------------------|
| SEID    | Partitioned superelement identification number. (Integer > 0)                          |
| "PLANE" | Flag indicating that the plane is defined by three non-colinear points.                |
| Pi      | GRID or POINT entry identification numbers of three non-colinear points. (Integer > 0) |

**Remarks:**

1. SEMPLN can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER=n command.
2. Grids or points referenced on this entry must be defined in the main Bulk Data Section.

**SENQSET**      Superelement Internal Generalized Degree-of-Freedom

Defines number of internally generated scalar points for superelement dynamic reduction.

**Format:**

|         |      |   |   |   |   |   |   |   |    |
|---------|------|---|---|---|---|---|---|---|----|
| 1       | 2    | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| SENQSET | SEID | N |   |   |   |   |   |   |    |

**Example:**

|         |     |    |  |  |  |  |  |  |  |
|---------|-----|----|--|--|--|--|--|--|--|
| SENQSET | 110 | 45 |  |  |  |  |  |  |  |
|---------|-----|----|--|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                             |
|-------|----------------------------------------------------------------------------------------------------------------------|
| SEID  | Partitioned superelement identification number. See Remark 3 .<br>(Integer > 0 or Character="ALL")                   |
| N     | Number of internally generated scalar points for dynamic reduction generalized coordinates. (Integer > 0; Default=0) |

**Remarks:**

1. SENQSET can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER=n command.
2. SENQSET is only required if the user wants to internally generated scalar points used for dynamic reduction.
3. SEID="ALL" will automatically generate N q-set degrees-of-freedom for all superelements, except the residual structure (SEID=0). Specifying additional SENQSET entries for specific superelements will override the value of N specified on this entry.
4. If the user manually specifies q-set degrees-of-freedom using a SEQSETi or QSETi entries, then the internally generated scalar points will not be generated.
5. See PARAM,NQSET for an alternate method of specifying QSET degree-of-freedoms.
6. This entry will only work if PART superelements (BEGIN SUPER) exist.

## 1992 SEQEP Grid and Scalar Point Resequencing

### SEQEP Grid and Scalar Point Resequencing

Redefines the sequence of extra points to optimize bandwidth.

#### Format:

| 1     | 2   | 3      | 4   | 5      | 6   | 7      | 8   | 9      | 10 |
|-------|-----|--------|-----|--------|-----|--------|-----|--------|----|
| SEQEP | IDI | SEQID1 | ID2 | SEQID2 | ID3 | SEQID3 | ID4 | SEQID4 |    |

#### Example:

|       |      |      |     |     |   |     |   |   |  |
|-------|------|------|-----|-----|---|-----|---|---|--|
| SEQEP | 5392 | 15.6 | 596 | 0.2 | 2 | 1.9 | 3 | 2 |  |
|-------|------|------|-----|-----|---|-----|---|---|--|

#### Fields:

| Field  | Contents                                               |
|--------|--------------------------------------------------------|
| IDI    | Extra point identification number. (Integer > 0)       |
| SEQIDi | Sequenced identification number. (Real or Integer > 0) |

#### Remarks:

1. The real format is used to insert a point ID between two consecutively numbered and existing point IDs. In the example above, point ID 5392 is inserted between IDs 15 and 16 by specifying 15.6 for SEQID.
2. The SEQIDi numbers must be unique and may not be the same as a point IDi that is not being changed. No extra point IDi may be referenced more than once.
3. From one to four extra points may be specified on a single entry.
4. If an extra point IDi is referenced more than once, the last reference will determine its sequence.



**SEQGP**      Grid and Scalar Point Resequencing

Used to manually order the grid points and scalar points of the problem. This entry is used to redefine the sequence of grid and scalar points to optimize bandwidth.

**Format:**

| 1     | 2   | 3      | 4   | 5      | 6   | 7      | 8   | 9      | 10 |
|-------|-----|--------|-----|--------|-----|--------|-----|--------|----|
| SEQGP | ID1 | SEQID1 | ID2 | SEQID2 | ID3 | SEQID3 | ID4 | SEQID4 |    |

**Example:**

|       |      |      |     |     |   |     |   |   |  |
|-------|------|------|-----|-----|---|-----|---|---|--|
| SEQGP | 5392 | 15.6 | 596 | 0.2 | 2 | 1.9 | 3 | 2 |  |
|-------|------|------|-----|-----|---|-----|---|---|--|

**Fields:**

| Field  | Contents                                                     |
|--------|--------------------------------------------------------------|
| IDI    | Grid or scalar point identification number. (Integer > 0)    |
| SEQIDi | Sequenced identification number. (Real > 0.0 or Integer > 0) |

**Remarks:**

1. The real format is used to insert a point ID between two consecutively numbered and existing point IDs. In the example above, point ID 5392 is inserted between IDs 15 and 16 by specifying 15.6 for SEQID.
2. The SEQIDi numbers must be unique and may not be the same as a point IDi which is not being changed. No grid point IDi may be referenced more than once.
3. From one to four grid or scalar points may be resequenced on a single entry.
4. If a point IDi is referenced more than once, the last reference will determine its sequence.
5. Automatic resequencing is also available. See [“OLDSEQ”](#) .

**1994 SEQSEP**  
**Superelement Sequences**

**SEQSEP**      Superelement Sequences

Used with the CSUPER entry to define the correspondence of the exterior grid points between an identical or mirror-image superelement and its primary superelement.

**Format:**

| 1      | 2    | 3    | 4      | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|------|------|--------|-----|-----|-----|-----|-----|----|
| SEQSEP | SSID | PSID | GP1    | GP2 | GP3 | GP4 | GP5 | GP6 |    |
|        | GP7  | GP8  | -etc.- |     |     |     |     |     |    |

**Example:**


|        |     |    |     |     |     |     |  |  |  |
|--------|-----|----|-----|-----|-----|-----|--|--|--|
| SEQSEP | 121 | 21 | 109 | 114 | 124 | 131 |  |  |  |
|--------|-----|----|-----|-----|-----|-----|--|--|--|

**Fields:**

| Field | Contents                                                                               |
|-------|----------------------------------------------------------------------------------------|
| SSID  | Identification number for secondary superelement. (Integer > 0)                        |
| PSID  | Identification number for the primary superelement. (Integer ≥ 0)                      |
| GPi   | Exterior grid point identification numbers for the primary superelement. (Integer > 0) |

**Remarks:**

1. This entry is not needed if the grid points listed on the CSUPER entry with the same SSID are in the order of the corresponding exterior grid points of the primary superelement.
2. In [Figure 18-4](#), the exterior grid points of 10, 20, and 30 of SEID=1 correspond to the points 13, 12, and 11, respectively, of image SEID=2. The CSUPER entry may be defined alone or with a SEQSEP entry as shown in [Figure 18-4](#).

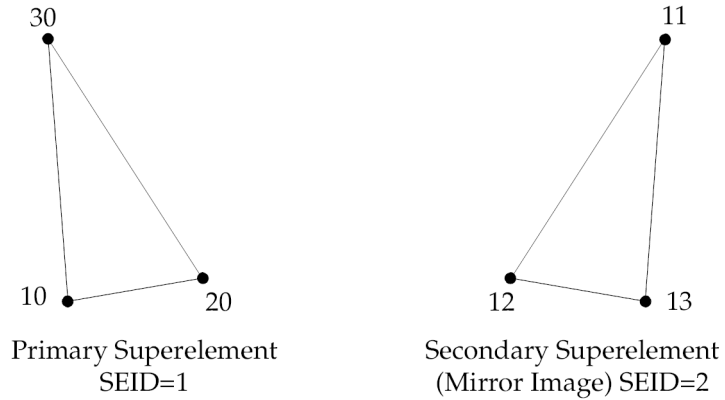

**Figure 18-4. Grid Point Correspondence Between Primary and Secondary Superelements**

CSUPER Entry Only:

| 1      | 2 | 3 | 4  | 5  | 6  | 7 | 8 | 9 | 10 |
|--------|---|---|----|----|----|---|---|---|----|
| CSUPER | 2 | 1 | 13 | 12 | 11 |   |   |   |    |

CSUPER and SEQSEP Entries:

|        |   |   |    |    |    |  |  |  |  |
|--------|---|---|----|----|----|--|--|--|--|
| CSUPER | 2 | 1 | 11 | 12 | 13 |  |  |  |  |
| SEQSEP | 2 | 1 | 30 | 20 | 10 |  |  |  |  |

**1996 SEQSET**  
**Superelement Generalized Degrees-of-Freedom**

**SEQSET**      Superelement Generalized Degrees-of-Freedom

Defines the generalized degrees-of-freedom of the superelement to be used in component mode synthesis.

**Format:**

| 1      | 2    | 3   | 4  | 5   | 6  | 7   | 8  | 9 | 10 |
|--------|------|-----|----|-----|----|-----|----|---|----|
| SEQSET | SEID | ID1 | C1 | ID2 | C2 | ID3 | C3 |   |    |

**Example:**

|        |    |   |        |   |   |    |   |  |  |
|--------|----|---|--------|---|---|----|---|--|--|
| SEQSET | 15 | 1 | 123456 | 7 | 5 | 22 | 3 |  |  |
|--------|----|---|--------|---|---|----|---|--|--|

**Fields:**

| Field           | Contents                                                                                                                                                 |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID            | Superelement identification number. Must be a primary superelement. (Integer > 0)                                                                        |
| C <sub>i</sub>  | Component number. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; Integer zero or blank for scalar points.) |
| ID <sub>i</sub> | Grid or scalar point identification numbers. Must be an exterior point. (Integer > 0)                                                                    |

**Remarks:**

1. Degrees-of-freedom specified on this entry may not be specified for another superelement.
2. Generalized degrees-of-freedom are interior to the residual structure.
3. Connectivity to the superelement is provided by this entry. There is no need to use a CSUPEXT entry for this purpose.
4. Degrees-of-freedom specified on this entry form members of the mutually exclusive q-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
5. This entry describes the set used for generalized degrees-of-freedom only for the SEID listed. Degrees-of-freedom listed on this entry must also be members of a downstream superelement. The set used for these variables in downstream superelements must be prescribed by user action using other entries. If they are

scalar points, they are automatically in the residual structure, which is the recommended procedure. If they are grid points, it is the user's responsibility to place them in a downstream superelement.

Generalized degrees-of-freedom of superelements that are also members of the residual structure are included as dynamic variables by placing them in the a-set. It is also necessary to place some or all residual structure physical degrees-of-freedom in the a-set to allow the boundary points to participate in the system mode shapes.

Grid points of downstream superelements used as generalized degrees-of-freedom may be used for advanced applications, such as omitting upstream generalized degrees-of-freedom from assembly into downstream superelements. Again, it is the user's responsibility to place these variables in the proper set in all downstream superelements of which they are members.

6. This entry may be applied only to primary superelements. The CSUPER entry automatically defines these degrees-of-freedom for secondary superelements.

**1998 SEQSET1**  
**Superelement Generalized Degrees-of-Freedom, Alternate Form**

**SEQSET1**      Superelement Generalized Degrees-of-Freedom, Alternate Form

Defines the generalized degrees-of-freedom of the superelement to be used in component mode synthesis.

**Format:**

| 1       | 2    | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|------|----|--------|----|----|----|----|----|----|
| SEQSET1 | SEID | C  | G1     | G2 | G3 | G4 | GS | G6 |    |
|         | G7   | G8 | -etc.- |    |    |    |    |    |    |

**Example:**

|         |    |        |   |   |   |    |     |   |  |
|---------|----|--------|---|---|---|----|-----|---|--|
| SEQSET1 | 15 | 123456 | 1 | 7 | 9 | 22 | 105 | 6 |  |
|         | 52 | 53     |   |   |   |    |     |   |  |

**Alternate Format and Example:**

|         |      |   |     |        |     |  |  |  |  |
|---------|------|---|-----|--------|-----|--|--|--|--|
| SEQSET1 | SEID | C | G1  | “THRU” | G2  |  |  |  |  |
| SEQSET1 | 16   | 0 | 101 | THRU   | 110 |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. Must be a primary superelement. (Integer > 0)                                                                      |
| C     | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; Integer 0 or blank for scalar points.) |
| Gi    | Grid or scalar point identification numbers. Must be exterior points. (Integer > 0 or “THRU”; for THRU option G1 < G2.)                                |

**Remarks:**

1. Degrees-of-freedom specified on this entry may not be specified for another superelement.
2. Generalized degrees-of-freedom are interior to the residual structure.
3. Connectivity to the superelement is provided by this entry. There is no need to use a CSUPEXT entry for this purpose.

## Superelement Generalized Degrees-of-Freedom, Alternate Form

4. Degrees-of-freedom specified on this entry form members of a mutually exclusive set. They may not be specified on other entries that define mutually exclusive sets. See “[Degree-of-Freedom Sets](#)” for a list of these entries.
5. This entry describes the set used for generalized degrees-of-freedom only for the SEID listed. Degrees-of-freedom listed on this entry must also be members of a downstream superelement. The set used for these variables in downstream superelements must be prescribed by user action using other entries. If they are scalar points, they are automatically in the residual structure, which is the recommended procedure. If they are grid points, it is the user’s responsibility to place them in a downstream superelement.

Generalized degrees-of-freedom of superelements that are also members of the residual structure are included as dynamic variables by placing them in the a-set. It is also necessary to place some or all residual structure physical degrees-of-freedom in the a-set, to allow the boundary points to participate in the system mode shapes.

Grid points of downstream superelements used as generalized degrees-of-freedom may be used for advanced applications, such as omitting upstream generalized degrees-of-freedom from assembly into downstream superelements. Again, it is the user’s responsibility to place these variables in the proper set in all downstream superelements of which they are members.

6. This entry may be applied only to primary superelements. The CSUPER entry automatically defines these entries for secondary superelements.

**2000 SESET**  
**Superelement Interior Point Definition**

**SESET**      Superelement Interior Point Definition

Defines interior grid points for a superelement.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| SESET    | SEID     | G1       | G2       | G3       | G4       | G5       | G6       | G7       |           |

**Example:**

|       |   |   |    |    |    |     |  |  |  |
|-------|---|---|----|----|----|-----|--|--|--|
| SESET | 5 | 2 | 17 | 24 | 25 | 165 |  |  |  |
|-------|---|---|----|----|----|-----|--|--|--|

**Alternate Format and Example:**

|       |      |    |        |     |  |  |  |  |  |
|-------|------|----|--------|-----|--|--|--|--|--|
| SESET | SEID | G1 | “THRU” | G2  |  |  |  |  |  |
| SESET | 2    | 17 | THRU   | 165 |  |  |  |  |  |

**Fields:**

| <b>Field</b> | <b>Contents</b>                                                                   |
|--------------|-----------------------------------------------------------------------------------|
| SEID         | Superelement identification number. Must be a primary superelement. (Integer ≥ 0) |
| Gi           | Grid or scalar point identification number. (0 < Integer < 1000000; G1 < G2)      |

**Remarks:**

1. Interior grid points may also be defined via field 9 of the GRID and GRIDG Bulk Data entries. The SESET entry takes precedence over the SEID field on the GRID on GRIDG entries. SESET defines grid and scalar points to be included as interior to a superelement. SESET may be used as the primary means of defining superelements or it may be used in combination with SEELT entries which define elements interior to a superelement.
2. Gi may appear on an SESET entry only once.
3. Scalar points are ignored.
4. Open sets are allowed with the “THRU” option. Missing grid points (whether in “THRU” range or mentioned explicitly) are not identified.



**SESET 2001**  
**Superelement Interior Point Definition**

5. All degrees-of-freedom for  $G_i$  are placed in the o-set of the superelement. See [“Degree-of-Freedom Sets”](#) .
6. SESET can only be specified in the main Bulk Data Section and is ignored after the BEGIN SUPER= $n$  command.

## 2002 SESUP Fictitious Support

### SESUP Fictitious Support

Defines determinate reaction superelement degrees-of-freedom in a free-body analysis.

#### Format:

| 1     | 2    | 3   | 4  | 5   | 6  | 7   | 8  | 9 | 10 |
|-------|------|-----|----|-----|----|-----|----|---|----|
| SESUP | SEID | ID1 | C1 | ID2 | C2 | ID3 | C3 |   |    |

#### Example:

|       |   |    |     |  |  |  |  |  |  |
|-------|---|----|-----|--|--|--|--|--|--|
| SESUP | 5 | 16 | 215 |  |  |  |  |  |  |
|-------|---|----|-----|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                                                                                                          |
|-------|-----------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. Must a primary superelement. (Integer > 0)                                                    |
| IDI   | Grid or scalar point identification number. Must be exterior points. (Integer > 0)                                                |
| Ci    | Component numbers. (Integer zero or blank for scalar points; Any unique combination of the Integers 1 through 6 for grid points.) |

#### Remarks:

1. The degrees-of-freedom specified on this entry form members of the mutually exclusive r-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
2. The Ci degrees-of-freedom must be exterior degrees-of-freedom of the SEID superelement.
3. See *“Rigid Body Supports”* in the *NX Nastran User’s Guide* for a discussion of supported degrees-of-freedom (members of the r-set).
4. There must be a sufficient number of degrees-of-freedom on SESUP entries to discard any free body modes of the superelement.
5. SESUP Bulk Data entries are not allowed for part (partitioned bulk data) superelements. Use the SUPORT Bulk Data records to identify component rigid body modes.

**SET1** Set Definition

Defines a list of structural grid points for aerodynamic analysis, for XY-plots with SORT1 output, and for the PANEL bulk data entry. Also defines a list of DRESPI (i=1,2,3) response IDs for the P2RSET option on the DOPTPRM bulk entry.

**Grid ID Format:**

| 1    | 2   | 3      | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|------|-----|--------|----|----|----|----|----|----|----|
| SET1 | SID | G1     | G2 | G3 | G4 | G5 | G6 | G7 |    |
|      | G8  | -etc.- |    |    |    |    |    |    |    |

**Response ID Format:**

| 1    | 2   | 3      | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|------|-----|--------|----|----|----|----|----|----|----|
| SET1 | SID | R1     | R2 | R3 | R4 | R5 | R6 | R7 |    |
|      | R8  | -etc.- |    |    |    |    |    |    |    |

**Example:**

|      |    |    |    |    |     |    |    |    |  |
|------|----|----|----|----|-----|----|----|----|--|
| SET1 | 3  | 31 | 62 | 93 | 124 | 16 | 17 | 18 |  |
|      | 19 |    |    |    |     |    |    |    |  |

**Alternate Formats and Example:**

|        |     |    |        |    |  |  |  |  |  |
|--------|-----|----|--------|----|--|--|--|--|--|
| SET1   | SID | G1 | “THRU” | G2 |  |  |  |  |  |
| - or - |     |    |        |    |  |  |  |  |  |
| SET1   | SID | R1 | “THRU” | R2 |  |  |  |  |  |
| SET1   | 6   | 32 | THRU   | 50 |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                        |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Unique identification number. (Integer > 0)                                                                                                     |
| Gi    | List of structural grid point identification numbers. (Integer > 0 or “THRU”; for the “THRU” option, G1 < G2.)                                  |
| Ri    | List of DRESPI (i=1,2,3) response IDs for the P2RSET option on the DOPTPRM bulk entry. (Integer > 0 or “THRU”; for the “THRU” option, R1 < R2.) |

## 2004 SET1 Set Definition

### Remarks:

1. SET1 entries may be referenced by the SPLINEi entries, PANEL entries, XYOUTPUT, and the P2RSET option on the DOPTPRM bulk entry.
2. When using the “THRU” option for SPLINEi or PANEL data entries, all intermediate grid points must exist.
3. When using the “THRU” option for XYOUTPUT requests, missing grid points are ignored.
4. When using the “THRU” option for DRESPI requests, missing response IDs are ignored.
5. The SID must be unique from other SET1 and SET3 SIDs.

**SET2**      Grid Point List

Defines a list of structural grid points in terms of aerodynamic macro elements.

**Format:**

| 1    | 2   | 3     | 4   | 5   | 6   | 7   | 8    | 9    | 10 |
|------|-----|-------|-----|-----|-----|-----|------|------|----|
| SET2 | SID | MACRO | SP1 | SP2 | CH1 | CH2 | ZMAX | ZMIN |    |

**Example:**


|      |   |     |     |      |     |       |      |  |  |
|------|---|-----|-----|------|-----|-------|------|--|--|
| SET2 | 3 | 111 | 0.0 | 0.75 | 0.0 | 0.667 | 3.51 |  |  |
|------|---|-----|-----|------|-----|-------|------|--|--|

**Fields:**

| Field         | Contents                                                                                                                                              |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID           | Unique identification number. (Integer > 0)                                                                                                           |
| MACRO         | Element identification number of an aerodynamic macro element. (Integer > 0)                                                                          |
| SP1, SP2      | Lower and higher span division points defining the prism containing the set. (Real)                                                                   |
| CH1, CH2      | Lower and higher chord division points defining the prism containing the set. (Real)                                                                  |
| ZMAX,<br>ZMIN | Z-coordinates of top and bottom (using right-hand rule with the order of the corners as listed on a CAEROi entry) of the prism containing set. (Real) |

**Remarks:**

1. The SET2 entry is referenced by the SPLINEi entry.
2. Every grid point within the defined prism and within the height range will be in the list. For example:

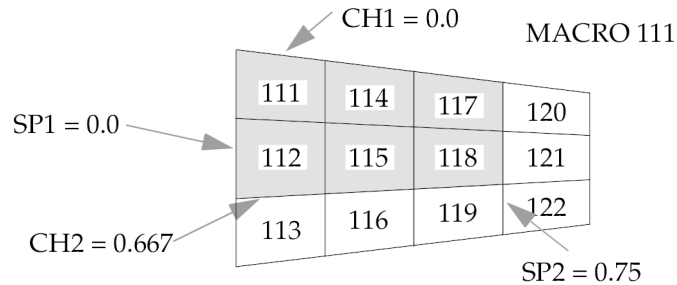

**Figure 18-5. SET2 Entry Example**

The shaded area in [Figure 18-5](#) defines the cross section of the prism for the sample data given above. Points exactly on the boundary may be missed; therefore, to get all the grid points within the area of the macro element,  $SP1 = -.01$ ,  $SP2 = 1.01$ , etc. should be used.

3. A zero value for ZMAX or ZMIN implies a value of infinity. Usually,  $ZMAX \geq 0.0$  and  $ZMIN \leq 0.0$ .
4. To print the (internal) grid IDs found, use DIAG 18.

## SET3 Set Definition

Defines a list of structural grid points, elements, or physical properties.

### Grid ID Format:

| 1    | 2   | 3      | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|------|-----|--------|-----|-----|-----|-----|-----|-----|----|
| SET3 | SID | TYPE   | ID1 | ID2 | ID3 | ID4 | ID5 | ID6 |    |
|      | ID7 | -etc.- |     |     |     |     |     |     |    |

### Example:

|      |    |      |    |    |    |    |    |    |  |
|------|----|------|----|----|----|----|----|----|--|
| SET3 | 1  | GRID | 11 | 13 | 14 | 15 | 20 | 22 |  |
|      | 34 | 41   |    |    |    |    |    |    |  |

### Alternate Formats and Example:

|      |     |      |     |        |     |  |  |  |  |
|------|-----|------|-----|--------|-----|--|--|--|--|
| SET3 | SID | TYPE | ID1 | "THRU" | ID2 |  |  |  |  |
| SET3 | 2   | ELEM | 20  | THRU   | 33  |  |  |  |  |

### Fields:

| Field | Contents                                                                                 |
|-------|------------------------------------------------------------------------------------------|
| SID   | Unique identification number. (Integer > 0)                                              |
| TYPE  | Set type. (Character: "GRID", "ELEM", "PROP")                                            |
| IDI   | Identifying numbers of structural grids, elements, or physical properties. (Integer > 0) |

### Remarks:

1. The SID must be unique from other SET1 and SET3 SIDs.
2. By specifying the GRID field, the PANEL bulk entry referencing the SET3 bulk entry interprets the IDi as structural grid point IDs.
3. By specifying the ELEM field, the PANEL bulk entry referencing the SET3 bulk entry interprets the IDi as structural element IDs.
4. By specifying the PROP field, the PANEL bulk entry referencing the SET3 bulk entry interprets the IDi as physical property IDs for structural elements.

**2008 SETREE**  
**Superelement Tree Definition (Alternate Form of DTI,SETREE)**

**SETREE**      Superelement Tree Definition (Alternate Form of DTI,SETREE)

Specifies superelement reduction order.

**Format:**


| 1      | 2     | 3     | 4      | 5     | 6     | 7     | 8     | 9     | 10 |
|--------|-------|-------|--------|-------|-------|-------|-------|-------|----|
| SETREE | SEID  | SEUP1 | SEUP2  | SEUP3 | SEUP4 | SEUP5 | SEUP6 | SEUP7 |    |
|        | SEUP8 | SEUP9 | -etc.- |       |       |       |       |       |    |

**Example:**

|        |     |    |    |    |    |  |  |  |  |
|--------|-----|----|----|----|----|--|--|--|--|
| SETREE | 400 | 10 | 20 | 30 | 40 |  |  |  |  |
|--------|-----|----|----|----|----|--|--|--|--|

**Fields:**

| Field             | Contents                                                                                         |
|-------------------|--------------------------------------------------------------------------------------------------|
| SEID              | Partitioned superelement identification number of a downstream superelement. (Integer $\geq 0$ ) |
| SEUP <sub>i</sub> | Identification number of superelements that are upstream of SEID. (Integer $>$                   |

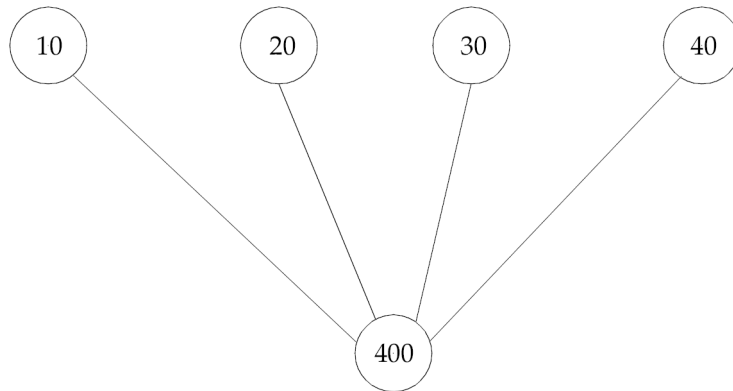

0)

**Remarks:**

1. SETREE entries or DTI,SETREE entry are required for multilevel superelement configurations.



**Superelement Tree Definition (Alternate Form of DTI,SETREE)**

2. At least one SETREE entry is required for each nontip superelement, including the residual structure (SEID=0). Multiple SETREE entries with the same SEID are allowed.
3. A superelement may appear only once in an SEUPi field on all SETREE entries.
4. If an DTI,SETREE entry is provided, then SETREE entries are not required.
5. If both SETREE entries and a DTI,SETREE entry exist, then the DTI,SETREE entry will be ignored.
6. Superelements not referenced on the SETREE or DTI,SETREE entry will not be included in the analysis unless they are attached to grid points which belong to the residual structure. These superelements will be placed in the tree immediately above the residual structure.
7. The SETREE entry will only work if PART (BEGIN SUPER) superelements exist in the model. If there are no PARTs in the model, the SETREE entries will be ignored.

## 2010 SEUSET Superelement Degree-of-Freedom Set Definition

### SEUSET      Superelement Degree-of-Freedom Set Definition

Defines a degree-of-freedom set for a superelement.

#### Format:

| 1      | 2    | 3     | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|--------|------|-------|-----|----|-----|----|-----|----|----|
| SEUSET | SEID | SNAME | ID1 | C1 | ID2 | C2 | ID3 | C3 |    |

#### Example:

|        |    |    |   |        |   |   |    |   |  |
|--------|----|----|---|--------|---|---|----|---|--|
| SEUSET | 15 | U4 | 1 | 123456 | 7 | 5 | 22 | 3 |  |
|--------|----|----|---|--------|---|---|----|---|--|

#### Fields:

| Field | Contents                                                                                                                                             |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. (Integer > 0)                                                                                                    |
| SNAME | Set name. (One to four characters or string "ZERO", followed by the set name.)                                                                       |
| IDI   | Grid or scalar point identification numbers. (Integer > 0)                                                                                           |
| Ci    | Component number. (Any unique combination of the Integers 1 through 6 with no embedded blank for grid points; Integer 0 or blank for scalar points.) |

#### Remarks:

1. SNAME may refer to any of the set names given in ["Degree-of-Freedom Sets"](#) or their new names on the DEFUSET entry. However, in the Solution Sequences 100 through 200, it is recommended that SNAME refer only to the set names "U1" through "U6" or their new names on the DEFUSET entry.
2. If SNAME="ZEROi", where i is a set name, then the degrees-of-freedom are omitted from set i.

**SEUSET1 2011**  
**Superelement Degree-of-Freedom Set Definition, Alternate Form**

**SEUSET1** Superelement Degree-of-Freedom Set Definition, Alternate Form

Defines a degree-of-freedom set for a superelement.

**Format:**

| 1       | 2    | 3     | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|------|-------|--------|----|----|----|----|----|----|
| SEUSET1 | SEID | SNAME | C      | G1 | G2 | G3 | G4 | G5 |    |
|         | G6   | G7    | -etc.- |    |    |    |    |    |    |

**Example:**

|         |    |    |   |    |    |    |    |    |  |
|---------|----|----|---|----|----|----|----|----|--|
| SEUSET1 | 15 | U4 | 1 | 12 | 15 | 17 | 22 | 25 |  |
|         | 52 | 53 |   |    |    |    |    |    |  |

**Alternate Format and Example:**

|         |      |       |   |    |        |    |  |  |  |
|---------|------|-------|---|----|--------|----|--|--|--|
| SEUSET1 | SEID | SNAME | C | G1 | “THRU” | G2 |  |  |  |
| SEUSET1 | 15   | U4    | 1 | 12 | THRU   | 27 |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEID  | Superelement identification number. (Integer > 0)                                                                                                      |
| SNAME | Set name. (One to four characters or string “ZERO”, followed by the set name.)                                                                         |
| C     | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; Integer 0 or blank for scalar points.) |
| Gi    | Grid or scalar point identification number. (Integer > 0)                                                                                              |

**Remarks:**

1. SNAME may refer to any of the set names given in [“Degree-of-Freedom Sets”](#) or their new names on the DEFUSET entry. However, in the Solution Sequences 100 through 200, it is recommended that SNAME refer only to the set names “U1” through “U6” or their new names on the DEFUSET entry.
2. If SNAME= “ZEROi”, where i is a set name, then the degrees-of-freedom are omitted from set i.

**2012 SEUSET1**

**Superelement Degree-of-Freedom Set Definition, Alternate Form**

3. If the alternate format is used, all of the points G1 through G2 are assigned to the set.

**SLBDY** Slot Boundary List

Defines a list of slot points that lie on an interface between an axisymmetric fluid and a set of evenly spaced radial slots.

**Format:**

| 1     | 2   | 3      | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-----|--------|-----|-----|-----|-----|-----|-----|----|
| SLBDY | RHO | M      | ID1 | ID2 | ID3 | ID4 | ID5 | ID6 |    |
|       | ID7 | -etc.- |     |     |     |     |     |     |    |

**Example:**

|       |       |   |    |    |    |    |    |    |  |
|-------|-------|---|----|----|----|----|----|----|--|
| SLBDY | 0.002 | 6 | 16 | 17 | 18 | 25 | 20 | 21 |  |
|       | 22    |   |    |    |    |    |    |    |  |

**Fields:**

| Field | Contents                                                                                                                |
|-------|-------------------------------------------------------------------------------------------------------------------------|
| RHO   | Density of fluid at boundary. (Real > 0.0 or blank)                                                                     |
| M     | Number of slots. (Integer ≥ 0 or blank)                                                                                 |
| IDj   | Identification numbers of GRIDS slot points at boundary with axisymmetric fluid cavity, j + 1, 2, ..., J. (Integer > 0) |

**Remarks:**

1. SLBDY is allowed only if an AXSLOT entry is also present.
2. If RHO or M is blank, the default value on the AXSLOT entry is used. The effective value must not be zero for RHO. If the effective value of M is zero, no matrices at the boundary will be generated.
3. The order of the list of points determines the topology of the boundary. The points are listed sequentially as one travels along the boundary in either direction. At least two points must be defined.

## 2014 SLOAD

Static Scalar Load

### SLOAD Static Scalar Load

Defines concentrated static loads on scalar or grid points.

**Format:**

| 1     | 2   | 3  | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|-------|-----|----|----|----|----|----|----|---|----|
| SLOAD | SID | S1 | F1 | S2 | F2 | S3 | F3 |   |    |

**Example:**

|       |    |   |     |    |      |    |       |  |  |
|-------|----|---|-----|----|------|----|-------|--|--|
| SLOAD | 16 | 2 | 5.9 | 17 | -6.3 | 14 | -2.93 |  |  |
|-------|----|---|-----|----|------|----|-------|--|--|

**Fields:**

| Field | Contents                                                  |
|-------|-----------------------------------------------------------|
| SID   | Load set identification number. (Integer > 0)             |
| Si    | Scalar or grid point identification number. (Integer > 0) |
| Fi    | Load magnitude. (Real)                                    |

**Remarks:**

1. In the static solution sequences, the load set ID (SID) is selected by the Case Control command LOAD. In the dynamic solution sequences, SID must be referenced in the LID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET.
2. Up to three loads may be defined on a single entry.
3. If Si refers to a grid point, the load is applied to component T1 of the displacement coordinate system (see the CD field on the GRID entry).

**SNORM**    Surface Normal Vector at Grid Point

Defines a surface normal vector at a grid point for CQUAD4, CQUADR, CTRIA3, and CTRIAR shell elements.

**Format:**

| 1     | 2   | 3   | 4  | 5  | 6  | 7 | 8 | 9 | 10 |
|-------|-----|-----|----|----|----|---|---|---|----|
| SNORM | GID | CID | N1 | N2 | N3 |   |   |   |    |

**Example:**

|       |   |   |    |     |    |  |  |  |  |
|-------|---|---|----|-----|----|--|--|--|--|
| SNORM | 3 | 2 | 0. | -1. | 0. |  |  |  |  |
|-------|---|---|----|-----|----|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                     |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GID   | Unique grid point identification number. (Integer > 0)                                                                                                                       |
| CID   | Identification number of coordinate system in which the components of the normal vector are defined. See Remark 3 . (Integer ≥ 0; Default=0 for the basic coordinate system) |
| Ni    | Components of normal vector. The three components of the normal need not define a unit vector. (Real; Default=0.0)                                                           |

**Remarks:**

1. The SNORM Bulk Data entry overrides any unique, internally-generated grid point normals that may have been requested with the user parameter SNORM , described in this guide.
2. The normal is used in CQUAD4, CQUADR, CTRIA3, and CTRIAR shell elements. For all other elements, the normal is ignored.
3. If CID is a cylindrical or spherical coordinate system, the components Ni are in the local tangent system at grid GID. For example, if CID=10 is a spherical coordinate system and normals must be defined pointing outwards in the radial direction of the sphere, see [Figure 18-6](#), then the SNORM entries for all grids GID on the sphere are simply

SNORM, GID, 10, 1., 0., 0.

2016 SNORM  
Surface Normal Vector at Grid Point

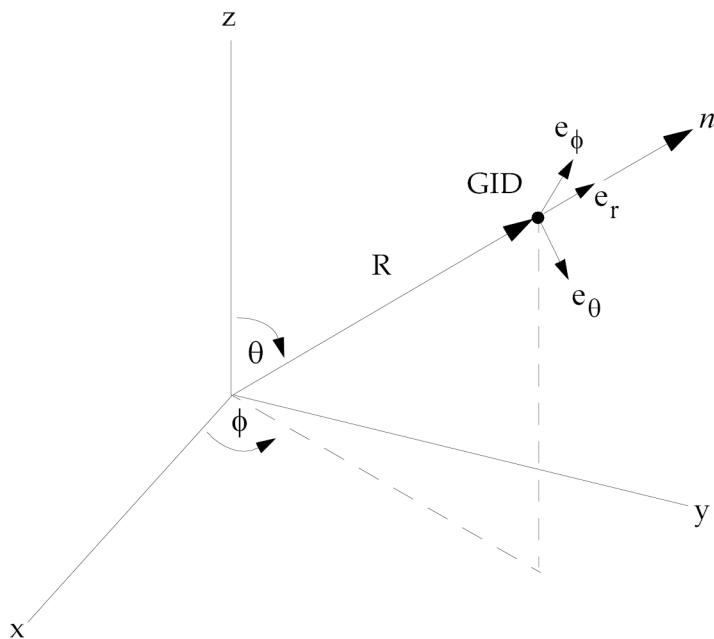


Figure 18-6.

18

Bulk Q-S



**SPC**     Single-Point Constraint

Defines a set of single-point constraints and enforced motion (enforced displacements in static analysis and enforced displacements, velocities or acceleration in dynamic analysis).

**Format:**

| 1   | 2   | 3  | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|-----|-----|----|----|----|----|----|----|---|----|
| SPC | SID | G1 | C1 | D1 | G2 | C2 | D2 |   |    |

**Example:**

|     |   |    |   |      |   |  |  |  |  |
|-----|---|----|---|------|---|--|--|--|--|
| SPC | 2 | 32 | 3 | -2.6 | 5 |  |  |  |  |
|-----|---|----|---|------|---|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                                                                            |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Identification number of the single-point constraint set. (Integer > 0)                                                                                                                             |
| Gi    | Grid or scalar point identification number. (Integer > 0)                                                                                                                                           |
| Ci    | Component number. (0 ≤ Integer ≤ 6; up to six Unique Integers, 1 through 6, may be placed in the field with no embedded blanks. 0 applies to scalar points and 1 through 6 applies to grid points.) |
| Di    | Value of enforced motion for all degrees-of-freedom designated by Gi and Ci. (Real)                                                                                                                 |

**Remarks:**

1. Single-point constraint sets must be selected with the Case Control command SPC=SID.
2. Degrees-of-freedom specified on this entry form members of the mutually exclusive s-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
3. Single-point forces of constraint are recovered during stress data recovery.
4. From 1 to 12 degrees-of-freedom may be specified on a single entry.
5. Degrees-of-freedom on this entry may be redundantly specified as permanent constraints using the PS field on the GRID entry.

**2018 SPC**  
**Single-Point Constraint**

6. For reasons of efficiency, the SPCD entry is the preferred method for applying enforced motion rather than the Di field described here.
7. Rotational degrees-of-freedom are in radians.

**Remarks related to SOLs 601 and 701:**

1. Enforced velocity or acceleration is not supported.
2. To apply enforced displacements with constant magnitude, SPC or SPCD may be used. To apply time-dependent enforced displacements, SPCD must be used. See SPCD entry.

**SPC1** Single-Point Constraint, Alternate Form

Defines a set of single-point constraints.

**Format:**

| 1    | 2   | 3  | 4  | 5      | 6  | 7  | 8  | 9  | 10 |
|------|-----|----|----|--------|----|----|----|----|----|
| SPC1 | SID | C  | G1 | G2     | G3 | G4 | G5 | G6 |    |
|      | G7  | G8 | G9 | -etc.- |    |    |    |    |    |

**Example:**

|      |   |   |   |   |    |   |   |   |  |
|------|---|---|---|---|----|---|---|---|--|
| SPC1 | 3 | 2 | 1 | 3 | 10 | 9 | 6 | 5 |  |
|      | 2 | 8 |   |   |    |   |   |   |  |

**Alternate Format and Example:**

|      |     |       |    |        |    |  |  |  |  |
|------|-----|-------|----|--------|----|--|--|--|--|
| SPC1 | SID | C     | G1 | “THRU” | G2 |  |  |  |  |
| SPC1 | 313 | 12456 | 6  | THRU   | 32 |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                                   |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Identification number of single-point constraint set. (Integer > 0)                                                                                                        |
| C     | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points. This number must be Integer 0 or blank for scalar points.) |
| Gi    | Grid or scalar point identification numbers. (Integer > 0 or “THRU”; For “THRU” option, G1 < G2.)                                                                          |

**Remarks:**

1. Single-point constraint sets must be selected with the Case Control command SPC=SID.
2. Enforced displacements are available via this entry when used with the recommended SPCD entry.
3. Degrees-of-freedom specified on this entry form members of the mutually exclusive s-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.

**2020 SPC1**  
**Single-Point Constraint, Alternate Form**

4. Degrees-of-freedom on this entry may be redundantly specified as permanent constraints using the PS field on the GRID entry.
5. If the alternate format is used, points in the sequence G1 through G2 are not required to exist. Points that do not exist will collectively produce a warning message but will otherwise be ignored.
6. Rotational degrees-of-freedom are in radians.

**Remarks related to SOLs 601 and 701:**

1. A global coordinate ( $G_i$  and  $C_i$ ) referenced on SPCD does not need to be referenced on this entry.

**SPCADD**     Single-Point Constraint Set Combination

Defines a single-point constraint set as a union of single-point constraint sets defined on SPC or SPC1 entries.

**Format:**

| 1      | 2   | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|-----|----|--------|----|----|----|----|----|----|
| SPCADD | SID | S1 | S2     | S3 | S4 | S5 | S6 | S7 |    |
|        | S8  | S9 | -etc.- |    |    |    |    |    |    |

**Example:**

|        |     |   |   |   |   |  |  |  |  |
|--------|-----|---|---|---|---|--|--|--|--|
| SPCADD | 101 | 3 | 2 | 9 | 1 |  |  |  |  |
|--------|-----|---|---|---|---|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                           |
|-------|--------------------------------------------------------------------------------------------------------------------|
| SID   | Single-point constraint set identification number. (Integer > 0)                                                   |
| Si    | Identification numbers of single-point constraint sets defined via SPC or by SPC1 entries. (Integer > 0; SID ≠ Si) |

**Remarks:**

1. Single-point constraint sets must be selected with the Case Control command SPC=SID.
2. No Si may be the identification number of a single-point constraint set defined by another SPCADD entry.
3. The Si values must be unique.
4. SPCADD entries take precedence over SPC or SPC1 entries. If both have the same set ID, only the SPCADD entry will be used.

## 2022 SPCAX Conical Shell Single-Point Constraint

### SPCAX Conical Shell Single-Point Constraint

Defines a set of single-point constraints or enforced displacements for conical shell coordinates.

#### Format:

| 1     | 2   | 3   | 4   | 5 | 6 | 7 | 8 | 9 | 10 |
|-------|-----|-----|-----|---|---|---|---|---|----|
| SPCAX | SID | RID | HID | C | D |   |   |   |    |

#### Example:

|       |   |   |   |    |     |  |  |  |  |
|-------|---|---|---|----|-----|--|--|--|--|
| SPCAX | 2 | 3 | 4 | 13 | 6.0 |  |  |  |  |
|-------|---|---|---|----|-----|--|--|--|--|

#### Fields:

| Field | Contents                                                                               |
|-------|----------------------------------------------------------------------------------------|
| SID   | Identification number of a single-point constraint set. (Integer > 0)                  |
| RID   | Ring identification number. See RINGAX entry. (Integer ≥ 0)                            |
| HID   | Harmonic identification number. (Integer ≥ 0)                                          |
| C     | Component identification number. (Any unique combination of the Integers 1 through 6.) |
| D     | Enforced displacement value. (Real)                                                    |

#### Remarks:

1. SPCAX is allowed only if an AXIC entry is also present.
2. Single-point constraint sets must be selected with the Case Control command SPC=SID.
3. Coordinates appearing on SPCAX entries may not appear on MPCAX, SUPAX, or OMITAX entries.
4. For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.

## SPCD Enforced Motion Value

Defines an enforced displacement value for static analysis and an enforced motion value (displacement, velocity or acceleration) in dynamic analysis.

### Format:

| 1    | 2   | 3  | 4  | 5  | 6  | 7  | 8  | 9 | 10 |
|------|-----|----|----|----|----|----|----|---|----|
| SPCD | SID | G1 | C1 | D1 | G2 | C2 | D2 |   |    |

### Example:

|      |     |    |     |      |   |  |     |  |  |
|------|-----|----|-----|------|---|--|-----|--|--|
| SPCD | 100 | 32 | 436 | -2.6 | 5 |  | 2.9 |  |  |
|------|-----|----|-----|------|---|--|-----|--|--|

### Fields:

| Field | Contents                                                                                                            |
|-------|---------------------------------------------------------------------------------------------------------------------|
| SID   | Set identification number of the SPCD entry. (Integer > 0)                                                          |
| Gi    | Grid or scalar point identification number. (integer > 0)                                                           |
| Ci    | Component numbers. (0 ≤ Integer ≤ 6; up to six unique Integers may be placed in the field with no embedded blanks.) |
| Di    | Value of enforced motion for at Gi and Ci. (Real)                                                                   |

### Remarks:

- In the static solution sequences, the set ID of the SPCD entry (SID) is selected by the LOAD Case Control command.
- In dynamic analysis, the selection of SID is determined by the presence of the LOADSET request in Case Control as follows:
  - There is no LOADSET request in Case Control  
SID is selected by the EXCITEID ID of an RLOAD1, RLOAD2, TLOAD1 or TLOAD2 Bulk Data entry that has enforced motion specified in its TYPE field
  - There is a LOADSET request in Case Control  
SID is selected by LID in the selected LSEQ entries that correspond to the EXCITEID entry of an RLOAD1, RLOAD2, TLOAD1 or TLOAD2 Bulk Data entry that has enforced motion specified in its TYPE field.

## 2024 SPCD Enforced Motion Value

3. A global coordinate (Gi and CI) referenced on this entry must also be referenced on a SPC or SPC1 Bulk Data entry and selected by the SPC Case Control command.
4. Values of Di will override the values specified on an SPC Bulk Data entry, if the SID is selected as indicated above.
5. The LOAD Bulk Data entry will not combine an SPCD load entry.
6. In static analysis, this method of applying enforced displacements is more efficient than the SPC entry when more than one enforced displacement condition is applied. It provides equivalent answers.
7. In dynamic analysis, this direct method of specifying enforced motion is more accurate, efficient and elegant than the large mass and Lagrange multiplier techniques.
8. Rotational degrees-of-freedom are in radians.

### Remarks related to SOLs 601 and 701:

1. Enforced velocity or acceleration is not supported.
2. To enforce displacement with constant magnitude, SID is selected by Case Control command LOAD=SID for both static and transient analysis.
3. To enforce a time dependent displacement, SID is referenced by the field EXCITEID=SID in the TLOAD1 entry with TYPE=1. Time dependent loads are selected by Case Control command DLOAD.
4. A global coordinate (Gi and Ci) referenced on this entry does not need to be referenced on a SPC or SPC1 entry.



**SPCOFF 2025**  
**Excludes Degrees-of-Freedom from the AUTOSPC Operation**

**SPCOFF** Excludes Degrees-of-Freedom from the AUTOSPC Operation

Defines a set of degrees-of-freedom to be excluded from the AUTOSPC operation. See “Constraint and Mechanism Problem Identification” in SubDMAP SEKR in the *NX Nastran User’s Guide* for a description of the AUTOSPC operation.

**Format:**

| 1      | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|--------|----|----|----|----|----|----|----|----|----|
| SPCOFF | G1 | C1 | G2 | C2 | G3 | C3 | G4 | C4 |    |

**Example:**

|        |    |     |   |   |  |  |  |  |  |
|--------|----|-----|---|---|--|--|--|--|--|
| SPCOFF | 32 | 436 | 5 | 1 |  |  |  |  |  |
|--------|----|-----|---|---|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                    |
|-------|-----------------------------------------------------------------------------------------------------------------------------|
| Gi    | Grid or scalar point identification number. (Integer > 0)                                                                   |
| Ci    | Component numbers. (Integer zero or blank for scalar points; Integers 1 through 6 with no embedded blanks for grid points.) |

**Remarks:**

1. Degrees-of-freedom specified on this entry are to be excluded from the AUTOSPC operation. If any degree-of-freedom in this set is found to be singular, a warning message is issued and no constraint is applied.
2. Degrees-of-freedom that are specified as both SPC and SPCOFF will be considered as SPC.

**2026 SPCOFF1**  
Excludes DOFs from AUTOSPC Processing, Alternate Form

**SPCOFF1** Excludes DOFs from AUTOSPC Processing, Alternate Form

Defines a set of degrees-of-freedom to be excluded from the AUTOSPC operation. See “Constraint and Mechanism Problem Identification” in “SubDMAP SEKR” in the *NX Nastran User’s Guide* for a description of the AUTOSPC operation.

**Format:**

| 1       | 2  | 3  | 4      | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|----|----|--------|----|----|----|----|----|----|
| SPCOFF1 | C  | G1 | G2     | G3 | G4 | G5 | G6 | G7 |    |
|         | G8 | G9 | -etc.- |    |    |    |    |    |    |

**Example:**

|         |   |   |   |    |   |   |   |   |  |
|---------|---|---|---|----|---|---|---|---|--|
| SPCOFF1 | 2 | 1 | 3 | 10 | 9 | 6 | 5 | 4 |  |
|         | 8 |   |   |    |   |   |   |   |  |

**Alternate Format and Example:**

|         |       |    |        |    |  |  |  |  |  |
|---------|-------|----|--------|----|--|--|--|--|--|
| SPCOFF1 | C     | G1 | “THRU” | G2 |  |  |  |  |  |
| SPCOFF1 | 12456 | 6  | THRU   | 32 |  |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| C     | Component numbers. (Any unique combination of the Integers 1 through 6 with no embedded blanks for grid points; Integer 0 or blank for scalar points.) |
| Gi    | Grid or scalar point identification numbers. (Integer > 0 or “THRU”; for “THRU” option, G1 < G2.)                                                      |

**Remarks:**

- Degrees-of-freedom specified on this entry are to be excluded from the AUTOSPC operation. If any degree-of-freedom in this set is found to be singular, a warning message is issued and no constraint is applied.
- Degrees-of-freedom that are both specified as SPC and SPCOFF will be considered as SPC.

**Excludes DOFs from AUTOSPC Processing, Alternate Form**

3. If the alternate format is used, points in the sequence G1 through G2 are not required to exist. Points which do not exist will collectively produce a warning message but will otherwise be ignored.

**2028 SPLINE1**  
Surface Spline Methods

**SPLINE1** Surface Spline Methods

Defines a surface spline for interpolating motion and/or forces for aeroelastic problems on aerodynamic geometries defined by regular arrays of aerodynamic points.

**Format:**

| 1       | 2     | 3     | 4    | 5    | 6    | 7  | 8    | 9     | 10 |
|---------|-------|-------|------|------|------|----|------|-------|----|
| SPLINE1 | EID   | CAERO | BOX1 | BOX2 | SETG | DZ | METH | USAGE |    |
|         | NELEM | MELEM |      |      |      |    |      |       |    |

**Example:**

|         |   |     |     |     |    |    |  |  |  |
|---------|---|-----|-----|-----|----|----|--|--|--|
| SPLINE1 | 3 | 111 | 115 | 122 | 14 | 0. |  |  |  |
|---------|---|-----|-----|-----|----|----|--|--|--|

**Fields:**

| Field      | Contents                                                                                                                                                                                   |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID        | Element identification number. (Integer > 0)                                                                                                                                               |
| CAERO      | Aero-element (CAEROi entry ID) that defines the plane of the spline. (Integer > 0)                                                                                                         |
| BOX1, BOX2 | First and last box with motions that are interpolated using this spline; see Remark 3 . when using Mach Box method. (Integer > 0, BOX2 ≥ BOX1)                                             |
| SETG       | Refers to the SETi entry that lists the structural grid points to which the spline is attached. (Integer > 0)                                                                              |
| DZ         | Linear attachment flexibility. (Real ≥ 0.0)                                                                                                                                                |
| METH       | Method for the spline fit. IPS,TPS or FPS. See Remark 1 . (Character, Default=IPS)                                                                                                         |
| USAGE      | Spline usage flag to determine whether this spline applies to the force transformation, displacement transformation or both. FORCE, DISP or BOTH. See Remark 5 . (Character, Default=BOTH) |
| NELEM      | The number of FE elements along the local spline x-axis if using the FPS option. (Integer > 0; Default=10)                                                                                 |

| Field | Contents                                                                                                   |
|-------|------------------------------------------------------------------------------------------------------------|
| MELEM | The number of FE elements along the local spline y-axis if using the FPS option. (Integer > 0; Default=10) |

**Remarks:**

1. The default METHOD will result in the use of the Harder-Desmarais Infinite Plate Spline (IPS). The other options are the Thin Plate Spline (TPS) and the Finite Plate Spline (FPS). The continuation applies only to the FPS option and is required only if the defaults are not adequate.
2. The interpolated points (k-set) will be defined by aero boxes. [Figure 18-7](#) shows the cells for which  $u_k$  is interpolated if BOX1=115 and BOX2=118.

|     |     |     |     |
|-----|-----|-----|-----|
| 111 | 114 | 117 | 120 |
| 112 | 115 | 118 | 121 |
| 113 | 116 | 119 | 122 |

**Figure 18-7. SPLINE1 Entry Example**

3. The attachment flexibility (units of area) is used for smoothing the interpolation. If DZ=0.0, the spline will pass through all deflected grid points. If DZ is much greater than the spline area, a least squares plane fit will be applied. Intermediate values will provide smoothing.
4. When using the Mach Box method, BOX1 and BOX2 refer to the ID number of the first and last aerodynamic grids (x,y pairs on the AEFACCT entry) which will be used for interpolation to structural grids. BOX1 and BOX2 do not refer to Mach Boxes.
5. The USAGE field allows you to specify that the particular spline interpolant defined in this entry is to be used for just the force transformation (FORCE) or just the displacement transformation (DISP) or for both (BOTH).

$$Fg=[GPkg]^T \{Pk\} \text{ (FORCE/BOTH splines are in the transform)}$$

$$Uk=[GDkg] \{Ug\} \text{ (DISP/BOTH splines are in the transform)}$$

In general, the two transforms are done with distinct matrices. Only when ALL splines are of type BOTH is the familiar transpose relationship  $[GPkg]^T=[GDkg]$

## 2030 SPLINE1

### Surface Spline Methods

satisfied. The default behavior (BOTH for all splines) is compatible with versions of MSC.Nastran prior to 70.5.

In general, the USAGE field can be used to apply aerodynamic forces to the structure from aerodynamic panels that are intended NOT to move (USAGE=FORCE) or to apply structural displacements to aerodynamic grids whose forces are not to be applied to the structure (USAGE=DISP). The DISP option is somewhat esoteric in that you are then suggesting that the aeroelastic effect of the surface is important while its forces are not. (In other words, only the forces arising from its effects on other surfaces is important.) While there may be circumstances where this is true, it is unlikely. Take care that you included all the FORCEs from aerodynamic panels that are important by including them in either FORCE or BOTH spline(s). NX Nastran will NOT issue a warning unless ALL forces are omitted. All displacements may be omitted without warning (and is a means to perform “rigid aerodynamic” analyses).

## SPLINE2 Linear Spline

Defines a beam spline for interpolating motion and/or forces for aeroelastic problems on aerodynamic geometries defined by regular arrays of aerodynamic points.

### Format:

| 1       | 2    | 3     | 4   | 5     | 6    | 7  | 8    | 9   | 10 |
|---------|------|-------|-----|-------|------|----|------|-----|----|
| SPLINE2 | EID  | CAERO | ID1 | ID2   | SETG | DZ | DTOR | CID |    |
|         | DTHX | DTHY  |     | USAGE |      |    |      |     |    |

### Example:

|         |    |   |    |    |    |    |     |   |  |
|---------|----|---|----|----|----|----|-----|---|--|
| SPLINE2 | 5  | 8 | 12 | 24 | 60 | 0. | 1.0 | 3 |  |
|         | 1. |   |    |    |    |    |     |   |  |

### Fields:

| Field         | Contents                                                                                                                                                                                                                                                      |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID           | Element identification number. (Integer > 0)                                                                                                                                                                                                                  |
| CAERO         | Aero panel or body (CAERO <sub>i</sub> entry ID) that is to be interpolated. (Integer > 0)                                                                                                                                                                    |
| ID1, ID2      | First and last box or body element whose motions are interpolated using this spline. See Remark 6 when using the Mach Box method. (Integer > 0, ID2 ≥ ID1)                                                                                                    |
| SETG          | Refers to an SET <sub>i</sub> entry that lists the structural grid points to which the spline is attached. (Integer > 0)                                                                                                                                      |
| DZ            | Linear attachment flexibility. (Real ≥ 0.0)                                                                                                                                                                                                                   |
| DTOR          | Torsional flexibility ratio ( $EI/GJ$ ). (Real > 0.0; Default=1.0; use 1.0 for bodies.)                                                                                                                                                                       |
| CID           | Rectangular coordinate system for which the y-axis defines the axis of the spline. Not used for bodies, CAERO2. (Integer ≥ 0)                                                                                                                                 |
| DTHX,<br>DTHY | Rotational attachment flexibility. DTHX is for rotation about the spline's x-axis (in-plane bending rotations); however, it is not used for bodies. DTHY is for rotation about the spline's y-axis (torsion); however, it is used for slope of bodies. (Real) |

## 2032 SPLINE2

### Linear Spline

| Field | Contents                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USAGE | Spline usage flag to determine whether this spline applies to the force transformation, displacement transformation or both. FORCE, DISP or BOTH. See Remark 9. (Character, Default=BOTH) |

#### Remarks:

1. The interpolated points (k-set) will be defined by aero boxes.
2. The spline axis for panels is the projection of the y-axis of coordinate system CID, projected onto the plane of the panel. For bodies, the spline axis is parallel to the x-axis of the aerodynamic coordinate system.
3. The flexibilities DZ, DTHX, and DTHY are used for smoothing. (Zero attachment flexibility values will imply rigid attachment (i.e., no smoothing, whereas negative values of DTHX or DTHY will imply infinity, therefore, no attachment). See the *NX Nastran Aeroelastic Analysis User's Guide* for a discussion of special cases.
4. The continuation entry is required.
5. The SPLINE2 EID must be unique with respect to all SPLINEi entries.
6. When using the Mach Box method, ID1 and ID2 refer to the ID number of the first and last aerodynamic grids (x,y pairs on the AEFACCT entry) which will be used for interpolation to the structural grids. ID1 and ID2 do not refer to Mach Boxes.
7. DTOR is the ratio of rotational to linear deflection and, in lieu of a more accurate estimate, a value of 1.0 is recommended. A different value may be used; e.g., if DTOR is much greater than 1.0, primarily rotational deflection will occur; if DTOR is much less than 1.0, primarily linear deflection will occur.
8. If a SPLINE2 element only references one grid point, the job will fail without a message in the GI Module.
9. The USAGE field allows you to specify that the particular spline interpolant defined in this entry is to be used for just the force transformation (FORCE) or just the displacement transformation (DISP) or for both (BOTH).

$Fg=[GPkg]^T \{Pk\}$  (FORCE/BOTH splines are in the transform)

$Uk=[GDkg] \{Ug\}$  (DISP/BOTH splines are in the transform)



In general, the two transforms are done with distinct matrices. Only when ALL splines are of type BOTH is the familiar transpose relationship  $[GPgk]^T=[GDkg]$  satisfied. The default behavior (BOTH for all splines) is compatible with versions of MSC.Nastran prior to Version 70.5.

In general, the USAGE field can be used to apply aerodynamic forces to the structure from aerodynamic panels that are intended NOT to move (USAGE=FORCE) or to apply structural displacements to aerodynamic grids whose forces are not to be applied to the structure (USAGE=DISP). The DISP option is somewhat esoteric in that you are then suggesting that the aeroelastic effect of the surface is important while its forces are not. (In other words, only the forces arising from its effects on other surfaces is important.) While there may be circumstances where this is true, it is unlikely. Take care that you included all the FORCES from aerodynamic panels that are important by including them in either FORCE or BOTH spline(s). NX Nastran will NOT issue a warning unless ALL forces are omitted. All displacements may be omitted without warning (and is a means to perform “rigid aerodynamic” analyses).

## 2034 SPLINE3 Aeroelastic Constraint Equation

### SPLINE3 Aeroelastic Constraint Equation

Defines a constraint equation for aeroelastic problems. Useful for control surface constraints.

#### Format:

| 1       | 2   | 3     | 4     | 5    | 6     | 7  | 8  | 9     | 10 |
|---------|-----|-------|-------|------|-------|----|----|-------|----|
| SPLINE3 | EID | CAERO | BOXID | COMP | G1    | C1 | A1 | USAGE |    |
|         | G2  | C2    | A2    |      | -etc. |    |    |       |    |

#### Example:

|         |      |     |      |   |   |   |     |  |  |
|---------|------|-----|------|---|---|---|-----|--|--|
| SPLINE3 | 7000 | 107 | 109  | 6 | 5 | 3 | 1.0 |  |  |
|         | 43   | 5   | -1.0 |   |   |   |     |  |  |

#### Fields:

| Field | Contents                                                                                                                                                                                   |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID   | Element identification number. (Integer > 0)                                                                                                                                               |
| CAERO | Identification number of the macro-element on which the element to be interpolated lies. (Integer > 0)                                                                                     |
| BOXID | Identification number of the aerodynamic element; i.e., the box number. (Integer > 0)                                                                                                      |
| COMP  | The component of motion to be interpolated. See Remark 4. (One of the Integers 1, 2, 3, 4, 5, or 6.)                                                                                       |
| Gi    | Grid point identification number of the independent grid point. (Integer > 0)                                                                                                              |
| Ci    | Component numbers in the displacement coordinate system. (One of the Integers 1 through 6 for grid points, or 0 for scalar points.)                                                        |
| Ai    | Coefficient of the constraint relationship. (Real)                                                                                                                                         |
| USAGE | Spline usage flag to determine whether this spline applies to the force transformation, displacement transformation or both. FORCE, DISP or BOTH. See Remark 6. (Character, Default=BOTH). |

**Remarks:**

1. The independent grid points and components must refer to degrees-of-freedom in the g-set.
2. The constraint is given by

$$u_d = \sum A_i u_i$$

where

$u_d$  = value of the dependent component of the aerodynamic element

$u_i$  = displacement at grid  $G_i$ , component  $C_i$ .

3. The SPLINE3 EID must be unique with respect to all SPLINEi entries.
4. The allowable components by CAEROi entry type are indicated by an “X” in the table below:

| Entry Type  | COMP |   |   |   |   |
|-------------|------|---|---|---|---|
|             | 1    | 2 | 3 | 5 | 6 |
| CAERO1      |      |   | X | X |   |
| CAERO2      |      | X | X | X | X |
| CAERO3      |      |   | X |   |   |
| CAERO4      |      |   | X | X | X |
| CAERO5      |      |   | X | X | X |
| 3D Geometry | X    | X | X | X | X |

COMP=2: lateral displacement

COMP=3 transverse displacement

COMP=5: pitch angle

COMP=6: relative control angle for CAERO4 and CAERO5 yaw angle for CAERO2.

For general 3D aerodynamic geometries the components numbers refer to axes of the Aerodynamic Coordinate System ( $u_x, u_y, u_z, q_x, q_y, q_z$ ).

5. For Strip theory and Piston theory, the COMP=6 control surface relative angle is positive when the trailing edge has a negative z-deflection in the element coordinate system (see the *NX Nastran Aeroelastic Analysis User's Guide*.)

## 2036 SPLINE3 Aeroelastic Constraint Equation

- The USAGE field allows you to specify that the particular spline interpolant defined in this entry is to be used for just the force transformation (FORCE) or just the displacement transformation (DISP) or for both (BOTH).

$$Fg=[GPkg]^T \{Pk\} \text{ (FORCE/BOTH splines are in the transform)}$$

$$Uk=[GDkg] \{Ug\} \text{ (DISP/BOTH splines are in the transform)}$$

In general, the two transforms are done with distinct matrices. Only when ALL splines are of type BOTH is the familiar transpose relationship  $GPkg]^T]=[GDkg]$  satisfied. The default behavior (BOTH for all splines) is compatible with versions of MSC.Nastran prior to Version 70.5.

In general, the USAGE field can be used to apply aerodynamic forces to the structure from aerodynamic panels that are intended NOT to move (USAGE=FORCE) or to apply structural displacements to aerodynamic grids whose forces are not to be applied to the structure (USAGE=DISP). The DISP option is somewhat esoteric in that you are then suggesting that the aeroelastic effect of the surface is important while its forces are not. (In other words, only the forces arising from its effects on other surfaces is important.) While there may be circumstances where this is true, it is unlikely. Take care that you included all the FORCEs from aerodynamic panels that are important by including them in either FORCE or BOTH spline(s). NX Nastran will NOT issue a warning unless ALL forces are omitted. All displacements may be omitted without warning (and is a means to perform “rigid aerodynamic” analyses).

## SPLINE4     Surface Spline Methods

Defines a curved surface spline for interpolating motion and/or forces for aeroelastic problems on general aerodynamic geometries using either the Infinite Plate, Thin Plate or Finite Plate splining method.

**Format:**

| 1       | 2     | 3     | 4      | 5 | 6    | 7  | 8    | 9     | 10 |
|---------|-------|-------|--------|---|------|----|------|-------|----|
| SPLINE4 | EID   | CAERO | AELIST |   | SETG | DZ | METH | USAGE |    |
|         | NELEM | MELEM |        |   |      |    |      |       |    |

**Example:**

|         |   |     |     |  |    |    |     |  |  |
|---------|---|-----|-----|--|----|----|-----|--|--|
| SPLINE4 | 3 | 111 | 115 |  | 14 | 0. | IPS |  |  |
|---------|---|-----|-----|--|----|----|-----|--|--|

**Fields:**

| Field  | Contents                                                                                                                                                                                   |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID    | Element identification number. (Integer > 0)                                                                                                                                               |
| CAERO  | Aero panel ID that defines the interpolation surface. (Integer > 0)                                                                                                                        |
| AELIST | Identification of an AELIST entry listing boxes with motions that are interpolated using this spline; see Remark 3 when using Mach Box method. (Integer > 0)                               |
| SETG   | Refers to the SETi entry that lists the structural grid points to which the spline is attached. (Integer > 0)                                                                              |
| DZ     | Linear attachment flexibility. (Real ≥ 0.0)                                                                                                                                                |
| METH   | Method for the spline fit. One of IPS, TPS or FPS. See Remark 1 . (Character, Default=IPS)                                                                                                 |
| USAGE  | Spline usage flag to determine whether this spline applies to the force transformation, displacement transformation or both. FORCE, DISP or BOTH. See Remark 4 . (Character, Default=BOTH) |
| NELEM  | The number of FE elements along the local spline x-axis if using the FPS option. (Integer > 0; Default=10)                                                                                 |
| MELEM  | The number of FE elements along the local spline y-axis if using the FPS option. (integer > 0; Default=10)                                                                                 |

## 2038 SPLINE4 Surface Spline Methods

### Remarks:

1. The default METHOD will result in the use of the Harder-Desmarais Infinite Plate Spline (IPS). The other options are the Thin Plate Spline (TPS) and the Finite Plate Spline (FPS). The continuation applies only to the FPS option and is required only if the defaults are not adequate.
2. The attachment flexibility (units of area) is used for smoothing the interpolation. If  $DZ=0.0$ , the spline will pass through all deflected grid points. If  $DZ$  is much greater than the spline area, a least squares plane fit will be applied. Intermediate values will provide smoothing.
3. When using the Mach Box method, the AELIST boxes refer to the ID number of the first and last aerodynamic grids (x,y pairs on the AEFACF entry) which will be used for interpolation to structural grids. They do not refer to Mach Boxes.
4. The USAGE field allows you to specify that the particular spline interpolant defined in this entry is to be used for just the force transformation (FORCE) or just the displacement transformation (DISP) or for both (BOTH).

$Fg=[GPkg]^T \{Pk\}$  (FORCE/BOTH splines are in the transform)

$Uk=[GDkg] \{Ug\}$  (DISP/BOTH splines are in the transform)

In general, the two transforms are done with distinct matrices. Only when ALL splines are of type BOTH is the familiar transpose relationship  $[GPkg]^T=[GDkg]$  satisfied. The default behavior (BOTH for all splines) is compatible with versions of MSC.Nastran prior to Version 70.5.

In general, the USAGE field can be used to apply aerodynamic forces to the structure from aerodynamic panels that are intended NOT to move (USAGE=FORCE) or to apply structural displacements to aerodynamic grids whose forces are not to be applied to the structure (USAGE=DISP). The DISP option is somewhat esoteric in that you are then suggesting that the aeroelastic effect of the surface is important while its forces are not.

(In other words, only the forces arising from its effects on other surfaces is important.) While there may be circumstances where this is true, it is unlikely. Take care that you included all the FORCES from aerodynamic panels that are important by including them in either FORCE or BOTH spline(s). NX Nastran will NOT issue a warning unless ALL forces are omitted. All displacements may be omitted without warning (and is a means to perform "rigid aerodynamic" analyses).

## SPLINE5 Linear Spline

Defines a 1D beam spline for interpolating motion and/or forces for aeroelastic problems on aerodynamic geometries defined by irregular arrays of aerodynamic points. The interpolating beam supports axial rotation and bending in the yz-plane.

### Format:

| 1       | 2    | 3     | 4      | 5     | 6    | 7  | 8    | 9   | 10 |
|---------|------|-------|--------|-------|------|----|------|-----|----|
| SPLINE5 | EID  | CAERO | AELIST |       | SETG | DZ | DTOR | CID |    |
|         | DTHX | DTHY  |        | USAGE |      |    |      |     |    |

### Example:

|         |    |   |    |      |    |  |  |   |  |
|---------|----|---|----|------|----|--|--|---|--|
| SPLINE5 | 5  | 8 | 12 |      | 60 |  |  | 3 |  |
|         | 1. |   |    | BOTH |    |  |  |   |  |

### Fields:

| Field         | Contents                                                                                                                                                                                                               |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EID           | Element identification number. (Integer > 0)                                                                                                                                                                           |
| CAERO         | Aero panel or body (CAEROi entry ID) that is to be interpolated. (Integer > 0)                                                                                                                                         |
| AELIST        | Identification number of an AELIST entry that identifies the aerodynamic boxes whose motions are interpolated using this spline. See Remark 6 when using the Mach Box method. (Integer > 0)                            |
| SETG          | Refers to an SETi entry that lists the structural grid points to which the spline is attached. (Integer > 0)                                                                                                           |
| USAGE         | Spline usage flag to determine whether this spline applies to the force transformation, displacement transformation or both. FORCE, DISP or BOTH. See Remark 8. (Character, Default=BOTH)                              |
| CID           | Rectangular coordinate system that defines the y-axis of the spline and the xy- and yz-planes for bending. Not used for bodies, CAERO2. (Integer ≥ 0)                                                                  |
| DTHX,<br>DTHY | Rotational attachment flexibility. DTHX is for rotation about the spline's x-axis (the bending rotations). DTHY is for rotation about the spline's y-axis (torsion); however, it is used for bending of bodies. (Real) |

## 2040 SPLINE5 Linear Spline

| Field | Contents                                                                                                                                                                                                         |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DZ    | Linear attachment flexibility. (Real $\geq 0.0$ , Default=0.0)                                                                                                                                                   |
| DTOR  | Torsional flexibility ratio (EI/GJ) for the bending in the zy-plane. This value is ignored for slender bodies since they have no torsion; see Remark 7. (Real $> 0.0$ ; Default=1.0; ignored for CAERO2 bodies.) |

### Remarks:

1. The interpolated points (k-set) will be defined by aero boxes.
2. The spline axis for panels is the projection of the y-axis of coordinate system CID, projected onto the plane of the panel. For bodies, the interpolating beam (y-axis) is parallel to the x-axis of the aerodynamic coordinate system; the z-axis is taken from the referenced CID and x is made orthogonal.
3. The flexibilities DZ, DTHX and DTHY are used for smoothing. (Zero attachment flexibility values will imply rigid attachment (i.e., no smoothing, whereas negative values of DTHX or DTHY will imply infinity, therefore, no attachment.) See the *NX Nastran Aeroelastic Analysis User's Guide* for a discussion of special cases.
4. The continuation entry is required.
5. The SPLINE5 EID must be unique with respect to all SPLINEi entries.
6. When using the Mach Box method, the AELIST entries refer to the ID numbers of aerodynamic grids (x,y pairs on the AEFACCT entry) which will be used for interpolation to the structural grids. They do not refer to Mach Boxes.
7. DTOR is the ratio of axial rotational to bending deflection and, in lieu of a more accurate estimate, a value of 1.0 is recommended. A different value may be used; e.g., if DTOR is much greater than 1.0, primarily rotational deflection will occur; if DTOR is much less than 1.0, primarily linear deflection will occur. The values will affect the results only if the structural grids over constrain the motion of the interpolating beam. Slender bodies have no torsional motion, so these values will not be used for CAERO2 entries.
8. The USAGE field allows you to specify that the particular spline interpolant defined in this entry is to be used for just the force transformation (FORCE) or just the displacement transformation (DISP) or for both (BOTH).

$Fg=[GPkg]^T \{Pk\}$  (FORCE/BOTH splines are in the transform)

$Uk=[GDkg] \{Ug\}$  (DISP/BOTH splines are in the transform)



In general, the two transforms are done with distinct matrices. Only when ALL splines are of type BOTH is the familiar transpose relationship  $[GPgk]^T=[GDkg]$  satisfied. The default behavior (BOTH for all splines) is compatible with versions of MSC.Nastran prior to Version 70.5.

In general, the USAGE field can be used to apply aerodynamic forces to the structure from aerodynamic panels that are intended NOT to move (USAGE=FORCE) or to apply structural displacements to aerodynamic grids whose forces are not to be applied to the structure (USAGE=DISP). The DISP option is somewhat esoteric in that you are then suggesting that the aeroelastic effect of the surface is important while its forces are not. (In other words, only the forces arising from its effects on other surfaces is important.) While there may be circumstances where this is true, it is unlikely. Take care that you included all the FORCES from aerodynamic panels that are important by including them in either FORCE or BOTH spline(s). NX Nastran will NOT issue a warning unless ALL forces are omitted. All displacements may be omitted without warning (and is a means to perform “rigid aerodynamic” analyses).

## 2042 SPOINT Scalar Point Definition

### SPOINT Scalar Point Definition

Defines scalar points.

#### Format:

| 1      | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10 |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| SPOINT | ID1 | ID2 | ID3 | ID4 | ID5 | ID6 | ID7 | ID8 |    |

#### Example:

|        |   |    |   |   |    |   |  |  |  |
|--------|---|----|---|---|----|---|--|--|--|
| SPOINT | 3 | 18 | 1 | 4 | 16 | 2 |  |  |  |
|--------|---|----|---|---|----|---|--|--|--|

#### Alternate Format and Example:

|        |     |        |     |  |  |  |  |  |  |
|--------|-----|--------|-----|--|--|--|--|--|--|
| SPOINT | ID1 | “THRU” | ID2 |  |  |  |  |  |  |
| SPOINT | 5   | THRU   | 649 |  |  |  |  |  |  |

#### Fields:

| Field | Contents                                                                                  |
|-------|-------------------------------------------------------------------------------------------|
| IDI   | Scalar point identification number. (0 < Integer < 1000000; For “THRU” option, ID1 < ID2) |

#### Remarks:

1. A scalar point defined by its appearance on the connection entry for a scalar element (see the CELASi, CMASSi, and CDAMPi entries) need not appear on an SPOINT entry.
2. All scalar point identification numbers must be unique with respect to all other structural, scalar, and fluid points. However, duplicate scalar point identification numbers are allowed in the input.
3. This entry is used primarily to define scalar points appearing in single-point or multipoint constraint equations to which no scalar elements are connected.
4. If the alternate format is used, all scalar points ID1 through ID2 are defined.
5. For a discussion of scalar points, see “Understanding Scalar Points” in the *NX Nastran User’s Guide*.

**SUPAX** Conical Shell Fictitious Support

Defines determinate reaction degrees-of-freedom in free bodies for conical shell analysis.

**Format:**

| 1     | 2    | 3    | 4  | 5    | 6    | 7  | 8 | 9 | 10 |
|-------|------|------|----|------|------|----|---|---|----|
| SUPAX | RID1 | HID1 | C1 | RID2 | HID2 | C2 |   |   |    |

**Example:**

|       |   |   |   |  |  |  |  |  |  |
|-------|---|---|---|--|--|--|--|--|--|
| SUPAX | 4 | 3 | 2 |  |  |  |  |  |  |
|-------|---|---|---|--|--|--|--|--|--|

**Fields:**

| Field            | Contents                                                                                       |
|------------------|------------------------------------------------------------------------------------------------|
| RID <sub>i</sub> | Ring identification number. (Integer > 0)                                                      |
| HID <sub>i</sub> | Harmonic identification number. (Integer ≥ 0)                                                  |
| C <sub>i</sub>   | Conical shell degree-of-freedom numbers. (Any unique combination of the Integers 1 through 6.) |

**Remarks:**

1. SUPAX is allowed only if an AXIC entry is also present.
2. Up to 12 degrees-of-freedom may appear on a single entry.
3. Degrees-of-freedom appearing on SUPAX entries may not appear on MPCAX, SPCAX, or OMITAX entries.
4. For a discussion of conical shell analysis, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.

## 2044 SUPORT Fictitious Support

### SUPPORT Fictitious Support

Defines determinate reaction degrees-of-freedom in a free body.

#### Format:

| 1       | 2   | 3  | 4   | 5  | 6   | 7  | 8   | 9  | 10 |
|---------|-----|----|-----|----|-----|----|-----|----|----|
| SUPPORT | ID1 | C1 | ID2 | C2 | ID3 | C3 | ID4 | C4 |    |

#### Example:

|         |    |     |  |  |  |  |  |  |  |
|---------|----|-----|--|--|--|--|--|--|--|
| SUPPORT | 16 | 215 |  |  |  |  |  |  |  |
|---------|----|-----|--|--|--|--|--|--|--|

#### Fields:

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                              |
| Ci    | Component numbers. (Integer 0 or blank for scalar points. Any unique combination of the Integers 1 through 6 for grid points with no embedded blanks.) |

#### Remarks:

- The SUPORT entry specifies reference degrees-of-freedom for rigid body motion. It is not intended to be used in place of a constraint (i.e., SPCi entry or PS on the GRID entry).
- SUPPORT and/or SUPORT1 entries are required to perform inertia relief in static analysis (SOL 101).  
In SOL 101, PARAM,INREL,-1 must also be specified or the SUPORTi entries will be treated as constraints.
- Be careful not to spell SUPORT with two Ps.
- Degrees-of-freedom specified on this entry form members of the mutually exclusive r-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
- From 1 to 24 support degrees-of-freedom may be defined on a single entry.
- See *“Rigid Body Supports”* in the *NX Nastran User’s Guide* for a discussion of supported degrees-of-freedom (members of the r-set).

7. An alternative to SUPPORT is the SUPPORT1 entry, which is requested by the SUPPORT1 Case Control command.

**2046 SUPORT1**  
**Fictitious Support, Alternate Form**

**SUPPORT1** Fictitious Support, Alternate Form

Defines determinate reaction degrees-of-freedom (r-set) in a free body-analysis. SUPORT1 must be requested by the SUPORT1 Case Control command.

**Format:**

| 1        | 2   | 3   | 4  | 5   | 6  | 7   | 8  | 9 | 10 |
|----------|-----|-----|----|-----|----|-----|----|---|----|
| SUPPORT1 | SID | ID1 | C1 | ID2 | C2 | ID3 | C3 |   |    |

**Example:**

|          |   |    |     |  |  |  |  |  |  |
|----------|---|----|-----|--|--|--|--|--|--|
| SUPPORT1 | 5 | 16 | 215 |  |  |  |  |  |  |
|----------|---|----|-----|--|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                               |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Identification number of the support set. See Remark 1. (Integer > 0)                                                                                  |
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                              |
| Ci    | Component numbers. (Integer 0 or blank for scalar points. Any unique combination of the Integers 1 through 6 for grid points with no embedded blanks.) |

**Remarks:**

1. The SUPORT and SUPORT1 entries specify reference degrees-of-freedom for rigid body motion. It is not intended to be used in place of a constraint; (i.e., SPCi entry or PS on the GRID entry).
2. SUPORT and/or SUPORT1 entries are required to perform inertia relief in static analysis; i.e., SOL 101.  
  
 In SOL 101, PARAM,INREL,-1 must also be specified or the SUPORTi entries will be treated as constraints.
3. SUPORT1 must be requested by the SUPORT1 Case Control command. The degrees-of-freedom specified on SUPORT1 will be combined with those on the SUPORT entry.
4. Be careful not to spell SUPORT with two Ps.

5. Degrees-of-freedom specified on this entry form members of the mutually exclusive r-set. They may not be specified on other entries that define mutually exclusive sets. See [“Degree-of-Freedom Sets”](#) for a list of these entries.
6. From 1 to 18 support degrees-of-freedom may be defined on a single entry.
7. See “Rigid Body Supports” in the *NX Nastran User’s Guide* for a discussion of supported degrees-of-freedom (members of the r-set).
8. In superelement analysis, SUPPORT1 may be specified for points belonging to the residual structure only.

**2048 SWLDPRM**  
Parameters for CWELD/CFAST connectors

**SWLDPRM** Parameters for CWELD/CFAST connectors

**Format:**

| 1       | 2      | 3    | 4      | 5    | 6      | 7    | 8      | 9    | 10 |
|---------|--------|------|--------|------|--------|------|--------|------|----|
| SWLDPRM | PARAM1 | VAL1 | PARAM2 | VAL2 | PARAM3 | VAL3 | PARAM4 | VAL4 |    |
|         | PARAM5 | VAL5 | -etc.- |      |        |      |        |      |    |

**Example:**

| 1       | 2      | 3 | 4      | 5    | 6 | 7 | 8 | 9 | 10 |
|---------|--------|---|--------|------|---|---|---|---|----|
| SWLDPRM | CHKRUN | 1 | GSPROJ | 17.0 |   |   |   |   |    |

**Fields:**

| Field  | Contents                                     |
|--------|----------------------------------------------|
| PARAMi | Parameter name. Parameters are listed below. |
| VALi   | Value assigned to parameter.                 |

**Parameter Descriptions**

|        |                                                                                                                                                                                                                                                                                     |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CHKRUN | Integer $\geq 0$ ; Default=0<br><br>Determines if solution continues or ends after connector element generation.<br><br>= 0 Solutions runs to completion.<br><br>= 1 Solution stops after connector elements are generated.                                                         |
| GSMOVE | Integer $\geq 0$ ; Default=0<br><br>Number of times GS (or XS,YS,ZS) is relocated if the projection to patches A and/or B is not found. GSMOVE only applies to the ELPAT and PARTPAT methods.                                                                                       |
| GSPROJ | Real; Default=20.0<br><br>Allowable angle between the normal projection from GS (or XS,YS,ZS) to patch A, and the normal projection from GS (or XS,YS,ZS) to patch B. Connectors are only created when this angle is less than GSPROJ. The angle check is skipped when GSPROJ=-1.0. |



| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                                                                                                                                                 |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GSTOL        | Real $\geq 0.0$ ; Default=Ignored<br><br>Allowable distance from GS (or XS,YS,ZS) to the intersection of patches A and B. Connectors are only created when the distance is less than GSTOL. Only applies to ELPAT and PARTPAT methods.                                                                                                          |
| NREDIA       | 0 $\leq$ Integer $\leq$ 4; Default=0<br><br>Number of times the diameter is reduced in half if the diameter fails to project entirely onto patches A and/or B. The reduced diameter only applies to connection point creation; the CWELD stiffness is calculated with the original value. NREDIA only applies to the ELPAT and PARTPAT methods. |
| PROJTOL      | 0.0 $\leq$ Real $\leq$ 0.2; Default=0.0<br><br>Used to calculate the Tolerance = (PROJTOL) * (Size of shell element), which determines if a projected point located outside of the shell elements in patch A or B is used.                                                                                                                      |
| PRTSW        | Integer $\geq$ 0; Default=0<br><br>Determines if CWELD/CFast diagnostic information is written to the .f06 file.<br><br>= 0 No diagnostic output.<br><br>= 1 Diagnostic output is written to the .f06 file.                                                                                                                                     |

**Remarks:**

1. The SWLDPRM bulk data entry is used to adjust the CWELD/CFast defaults for diagnostic and debug purposes.

**2050 SWLDPRM**  
Parameters for CWELD/CFAST connectors

**18**

Bulk Q-S

Chapter

# 19 Bulk Data Entries T—V

Bulk data entries TABDMP1—VIEW3D

**2052 TABDMP1**  
**Modal Damping Table**

**TABDMP1**      Modal Damping Table

Defines modal damping as a tabular function of natural frequency.

**Format:**

| 1       | 2   | 3    | 4  | 5  | 6  | 7  | 8      | 9 | 10 |
|---------|-----|------|----|----|----|----|--------|---|----|
| TABDMP1 | TID | TYPE |    |    |    |    |        |   |    |
|         | f1  | g1   | f2 | g2 | f3 | g3 | -etc.- |   |    |

**Example:**

|         |     |        |     |        |      |  |  |  |  |
|---------|-----|--------|-----|--------|------|--|--|--|--|
| TABDMP1 | 2   |        |     |        |      |  |  |  |  |
|         | 2.5 | .01057 | 2.6 | .01362 | ENDT |  |  |  |  |

**Fields:**

| Field | Contents                                                                |
|-------|-------------------------------------------------------------------------|
| TID   | Table identification number. (Integer > 0)                              |
| TYPE  | Type of damping units. (Character: "G", "CRIT", or "Q"; Default is "G") |
| fi    | Natural frequency value in cycles per unit time. (Real ≥ 0.0)           |
| gi    | Damping value. (Real)                                                   |


**Remarks:**

1. Modal damping tables must be selected with the Case Control command SDAMPING=TID.
2. The frequency values, fi, must be specified in either ascending or descending order, but not both.
3. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-1](#) discontinuities are allowed only between points f2 through f7. Also, if g is evaluated at a discontinuity, then the average value of g is used. In [Figure 19-1](#), the value of g at f=f3 is  $g=(g3+g4) / 2$ .
4. At least one continuation entry must be specified.

5. Any  $f_i$  or  $g_i$  entry may be ignored by placing “SKIP” in either of the two fields used for that entry.
6. The end of the table is indicated by the existence of “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.
7. The TABDMP1 uses the algorithm

$$g = g_T(f)$$

where  $f$  is input to the table and  $g$  is returned. The table look-up  $g_T(f)$  is performed using linear interpolation within the table and linear extrapolation outside the table using the last two end points. See [Figure 19-1](#). No warning messages are issued if table data is input incorrectly.

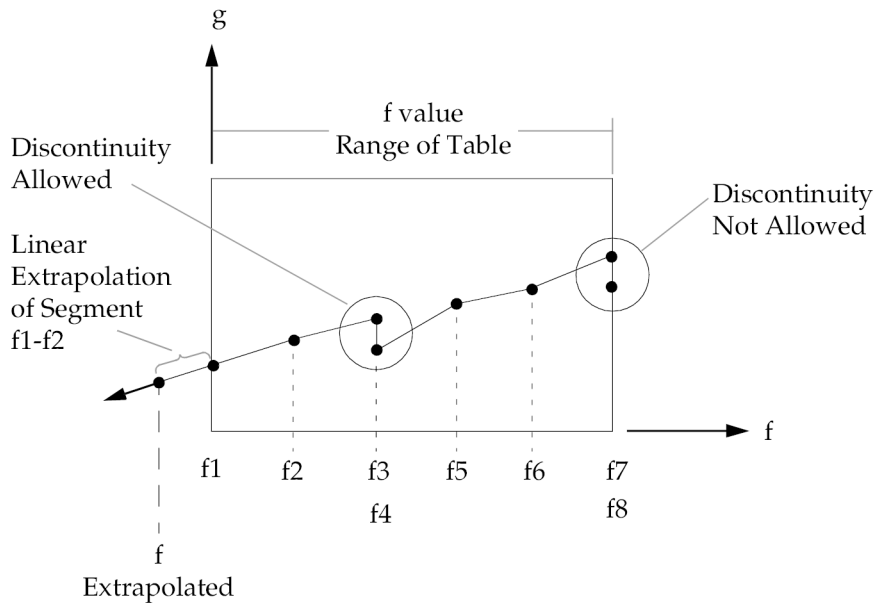

**Figure 19-1. Example of Table Extrapolation and Discontinuity**

8. This form of damping is used only in modal formulations of complex eigenvalue analysis, frequency response analysis, or transient response analysis. The type of damping used depends on the solution sequence (structural damping is displacement-dependent, and viscous damping is velocity-dependent). See “Formulation of Dynamic Equations in SubDMAP GMA” in the *NX Nastran User’s Guide* for the equations used.

**2054 TABDMP1**  
**Modal Damping Table**

9. PARAM,KDAMP may be used in solution sequences that perform modal frequency and modal complex analysis, to select the type of damping.

| KDAMP       | Result          |
|-------------|-----------------|
| 1 (Default) | <i>B</i> Matrix |
| -1          | $(1+ig) K$      |

See “Formulation of Dynamic Equations in SubDMAP GMA” in the *NX Nastran User’s Guide* for a full explanation.

10. If TYPE is “G” or blank, the damping values  $g_i$ , etc., are in units of equivalent viscous dampers, as follows:

$$b_i = \frac{g_i}{\omega_i} K_i$$

(See “Formulation of Dynamic Equations in SubDMAP GMA” in the *NX Nastran User’s Guide*.) If TYPE is “CRIT”, the damping values  $g_i$ , etc., are in the units of fraction of critical damping  $C / C_0$ . If TYPE is “Q”, the damping values  $g_i$  are in the units of the amplification or quality factor,  $Q$ . These constants are related by the following equations:

$$C / C_0 = g / 2$$

$$Q = \begin{cases} 1 / (2C / C_0) \\ 1 / g \end{cases}$$

**TABLE3D** Tabular Function with Three Variables

Specify a function of three variables for the GMBC, GMLOAD, and TEMPF entries only.

**Format:**

| 1       | 2      | 3    | 4  | 5  | 6  | 7  | 8  | 9  | 10 |
|---------|--------|------|----|----|----|----|----|----|----|
| TABLE3D | TID    | X0   | Y0 | Z0 | F0 |    |    |    |    |
|         | X1     | Y1   | Z1 | F1 | X2 | Y2 | Z2 | F2 |    |
|         | X3     | Y3   | Z3 | F3 | X4 | Y4 | Z4 | F4 |    |
|         | -etc.- | ENDT |    |    |    |    |    |    |    |

**Example:**

|         |      |     |     |       |      |      |      |       |  |
|---------|------|-----|-----|-------|------|------|------|-------|--|
| TABLE3D | 128  | 0.  | 0.  | 1.    |      |      |      |       |  |
|         | 7.   | 8.  | 9.  | 100.  | 12.  | 14.  | 11.  | 200.  |  |
|         | 17.  | 18. | 19. | 1100. | 112. | 114. | 111. | 1200. |  |
|         | ENDT |     |     |       |      |      |      |       |  |

**Fields:**

| Field    | Contents                             | Type        | Default  |
|----------|--------------------------------------|-------------|----------|
| TID      | Table identification number.         | Integer > 0 | Required |
| X0,Y0,Z0 | Offset of the independent variables. | Real        | 0.0      |
| F0       | Offset of the dependent variables.   | Real        | 0.0      |
| Xi,Yi,Zi | Independent variables.               | Real        | 0.0      |
| Fi       | Dependent variable.                  | Real        | 0.0      |

**Remarks:**

1. At least two continuation entries must be specified.
2. The value of the function at  $(x,y,z)$  is calculated as

**2056 TABLE3D**  
**Tabular Function with Three Variables**

$$f = \frac{\sum_{i=1}^4 \frac{F_i - F_0}{d_i}}{\sum_{i=1}^4 \frac{1}{d_i}}$$

where  $f$  are the function values at the four points with the lowest value of

$$d_i^2 = (x - X_0 - X_i)^2 + (y - Y_0 - Y_i)^2 + (z - Z_0 - Z_i)^2$$



**TABLED1**      Dynamic Load Tabular Function, Form 1

Defines a tabular function for use in generating frequency-dependent and time-dependent dynamic loads.

**Format:**

| 1       | 2   | 3     | 4     | 5  | 6  | 7  | 8      | 9      | 10 |
|---------|-----|-------|-------|----|----|----|--------|--------|----|
| TABLED1 | TID | XAXIS | YAXIS |    |    |    |        |        |    |
|         | x1  | y1    | x2    | y2 | x3 | y3 | -etc.- | “ENDT” |    |

**Example:**

|         |      |     |     |     |     |     |      |  |  |
|---------|------|-----|-----|-----|-----|-----|------|--|--|
| TABLED1 | 32   |     |     |     |     |     |      |  |  |
|         | -3.0 | 6.9 | 2.0 | 5.6 | 3.0 | 5.6 | ENDT |  |  |

**Fields:**

| Field  | Contents                                                                                                                        |
|--------|---------------------------------------------------------------------------------------------------------------------------------|
| TID    | Table identification number. (Integer > 0)                                                                                      |
| XAXIS  | Specifies a linear or logarithmic interpolation for the x-axis. See Remark 6 . (Character: “LINEAR” or “LOG”; Default=“LINEAR”) |
| YAXIS  | Specifies a linear or logarithmic interpolation for the y-axis. See Remark 6 . (Character: “LINEAR” or “LOG”; Default=“LINEAR”) |
| xi, yi | Tabular values. (Real)                                                                                                          |
| “ENDT” | Flag indicating the end of the table.                                                                                           |

**Remarks:**

1. xi must be in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-2](#) discontinuities are allowed only between points x2 through x7. Also, if y is evaluated at a discontinuity, then the average value of y is used. In [Figure 19-2](#), the value of y at x=x3 is  $y=(y3+y4) / 2$ . If the y-axis is a LOG axis then the jump at the discontinuity is evaluated as

$$y = \sqrt{y3y4}$$

3. At least one continuation must be specified.

**2058 TABLED1**  
**Dynamic Load Tabular Function, Form 1**

4. Any  $x_i$ - $y_i$  pair may be ignored by placing the character string “SKIP” in either of the two fields.
5. The end of the table is indicated by the existence of the character string “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.
6. TABLED1 uses the algorithm


$$y = y_T(x)$$

where  $x$  is input to the table and  $y$  is returned. The table look-up is performed using interpolation within the table and extrapolation outside the table using the two starting or end points. See [Figure 19-2](#). The algorithms used for interpolation or extrapolation are:

| XAXIS  | YAXIS  | $y_T(x)$                                                                                                |
|--------|--------|---------------------------------------------------------------------------------------------------------|
| LINEAR | LINEAR | $\frac{x_j - x}{x_j - x_i} y_i + \frac{x - x_i}{x_j - x_i} y_j$                                         |
| LOG    | LINEAR | $\frac{\ln(x_j/x)}{\ln(x_j/x_i)} y_i + \frac{\ln(x/x_i)}{\ln(x_j/x_i)} y_j$                             |
| LINEAR | LOG    | $\exp \left[ \frac{x_j - x}{x_j - x_i} \ln y_i + \frac{x - x_i}{x_j - x_i} \ln y_j \right]$             |
| LOG    | LOG    | $\exp \left[ \frac{\ln(x_j/x)}{\ln(x_j/x_i)} \ln y_i + \frac{\ln(x/x_i)}{\ln(x_j/x_i)} \ln y_j \right]$ |

where  $x_j$  and  $y_j$  follow  $x_i$  and  $y_i$ .

No warning messages are issued if table data is input incorrectly.

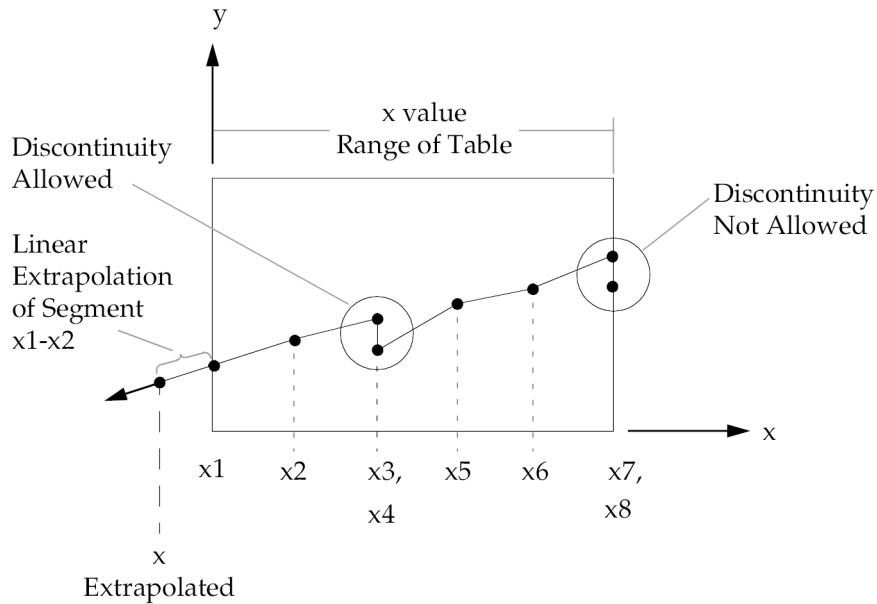

**Figure 19-2. Example of Table Extrapolation and Discontinuity**

7. Linear extrapolation is not used for Fourier transform methods. The function is zero outside the range of the table.
8. For frequency-dependent loads,  $x_i$  is measured in cycles per unit time.
9. Tabular values on an axis if XAXIS or YAXIS=LOG must be positive. A fatal message will be issued if an axis has a tabular value  $\leq 0$ .

**Remarks related to SOLs 601 and 701:**

1. TABLED1 is referenced by the TID field in TLOAD1 entry to model time-dependent loading.  $x_i$  is therefore the time value and  $y_i$  is the multiplier factor for the load.
2. XAXIS and YAXIS are ignored. Both are assumed to be "LINEAR".
3. Discontinuities are not allowed.
4. No table extrapolation is done beyond the range of specified  $x_i$  values. Hence, the range of  $x_i$  values should at least span the solution start and end times. In most cases,  $x_1=0.0$  should be specified since the solution start time is usually 0.0. The solution end time depends on the time steps defined in the TSTEP entry.

**2060 TABLED2**  
**Dynamic Load Tabular Function, Form 2**

**TABLED2** Dynamic Load Tabular Function, Form 2

Defines a tabular function for use in generating frequency-dependent and time-dependent dynamic loads. Also contains parametric data for use with the table.

**Format:**

| 1       | 2   | 3  | 4  | 5  | 6  | 7  | 8      | 9 | 10 |
|---------|-----|----|----|----|----|----|--------|---|----|
| TABLED2 | TID | X1 |    |    |    |    |        |   |    |
|         | x1  | y1 | x2 | y2 | x3 | y3 | -etc.- |   |    |

**Example:**

|         |      |       |     |      |      |     |     |     |  |
|---------|------|-------|-----|------|------|-----|-----|-----|--|
| TABLED2 | 15   | -10.5 |     |      |      |     |     |     |  |
|         | 1.0  | -4.5  | 2.0 | -4.2 | 2.0  | 2.8 | 7.0 | 6.5 |  |
|         | SKIP | SKIP  | 9.0 | 6.5  | ENDT |     |     |     |  |

**Fields:**


| Field  | Contents                                   |
|--------|--------------------------------------------|
| TID    | Table identification number. (Integer > 0) |
| X1     | Table parameter. See Remark 6 . (Real)     |
| xi, yi | Tabular values. (Real)                     |

**Remarks:**

1. xi must be in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-3](#) discontinuities are allowed only between points x2 and x7. Also if y is evaluated at a discontinuity, then the average value of y is used. In [Figure 19-3](#), the value of y at x=x3 is  $y=(y3+y4) / 2$ .
3. At least one continuation entry must be specified.
4. Any xi-yi pair may be ignored by placing “SKIP” in either of the two fields.
5. The end of the table is indicated by the existence of “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.
6. TABLED2 uses the algorithm

$$y = y_T(x - X1)$$

where  $x$  is input to the table and  $y$  is returned. The table look-up is performed using linear interpolation within the table and linear extrapolation outside the table using the two starting or end points. See Figure 19-3. No warning messages are issued if table data is input incorrectly.

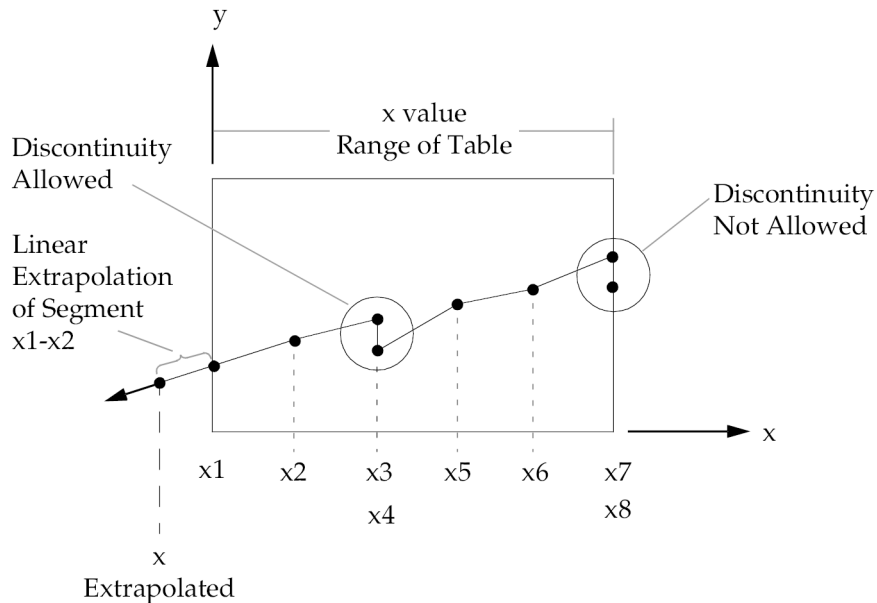

**Figure 19-3. Example of Table Extrapolation and Discontinuity**

7. Linear extrapolation is not used for Fourier transform methods. The function is zero outside the range of the table.
8. For frequency-dependent loads,  $X1$  and  $x_i$  are measured in cycles per unit time.

**Remarks related to SOLs 601 and 701:**

1. TABLED2 is referenced by the TID field in TLOAD1 entry to model time-dependent loading.  $x_i$  is therefore the time value and  $y_i$  is the multiplier factor for the load.
2.  $X1$  is the delay time (or arrival time of the load), i.e., at time  $< X1$ , the load is not active. When using  $X1$  to control the arrival time of an enforced displacement, it is often appropriate to apply it to the deformed configuration. See the DISPOPT parameter on the NXSTRAT bulk entry for information.

**2062 TABLED2**  
**Dynamic Load Tabular Function, Form 2**

3. Discontinuities are not allowed.
4. No table extrapolation is done beyond the range of specified xi values. Hence, the range of xi values should at least span the solution start and end times. In most cases,  $x1=0.0$  should be specified since the solution start time is usually 0.0. The solution end time depends on the time steps defined in the TSTEP entry.

**TABLED3**      Dynamic Load Tabular Function, Form 3

Defines a tabular function for use in generating frequency-dependent and time-dependent dynamic loads. Also contains parametric data for use with the table.

**Format:**

| 1       | 2   | 3  | 4  | 5  | 6  | 7  | 8      | 9 | 10 |
|---------|-----|----|----|----|----|----|--------|---|----|
| TABLED3 | TID | X1 | X2 |    |    |    |        |   |    |
|         | x1  | y1 | x2 | y2 | x3 | y3 | -etc.- |   |    |

**Example:**

|         |     |       |      |     |     |     |      |  |  |
|---------|-----|-------|------|-----|-----|-----|------|--|--|
| TABLED3 | 62  | 126.9 | 30.0 |     |     |     |      |  |  |
|         | 2.9 | 2.9   | 3.6  | 4.7 | 5.2 | 5.7 | ENDT |  |  |

**Fields:**

| Field  | Contents                                   |
|--------|--------------------------------------------|
| TID    | Table identification number. (Integer > 0) |
| X1, X2 | Table parameters. (Real; X2 ≠ 0.0)         |
| xi, yi | Tabular values. (Real)                     |


**Remarks:**

1. xi must be in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-4](#) discontinuities are allowed only between points x2 and x7. Also if y is evaluated at a discontinuity, then the average value of y is used. In [Figure 19-4](#), the value of y at x =x3 is  $y=(y3+y4) / 2$ .
3. At least one continuation entry must be present.
4. Any xi-yi pair may be ignored by placing “SKIP” in either of the two fields.
5. The end of the table is indicated by the existence of “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.
6. TABLED3 uses the algorithm

2064 TABLED3  
Dynamic Load Tabular Function, Form 3

$$y = y_T\left(\frac{x - X1}{X2}\right)$$

where  $x$  is input to the table and  $y$  is returned. The table look-up is performed using interpolation within the table and linear extrapolation outside the table using the two starting or end points. See Figure 19-4. No warning messages are issued if table data is input incorrectly.

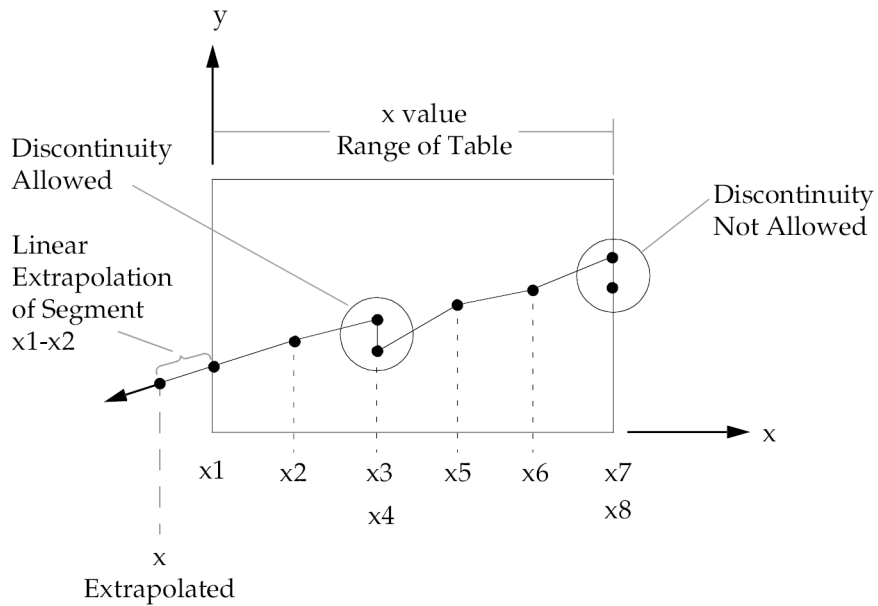

**Figure 19-4. Example of Table Extrapolation and Discontinuity**

7. Linear extrapolation is not used for Fourier transform methods. The function is zero outside the range of the table.
8. For frequency-dependent loads,  $X1$ ,  $X2$ , and  $x_i$  are measured in cycles per unit time.



**TABLED4**      Dynamic Load Tabular Function, Form 4

Defines the coefficients of a power series for use in generating frequency-dependent and time-dependent dynamic loads. Also contains parametric data for use with the table.

**Format:**

|         |     |    |    |    |    |    |        |   |    |
|---------|-----|----|----|----|----|----|--------|---|----|
| 1       | 2   | 3  | 4  | 5  | 6  | 7  | 8      | 9 | 10 |
| TABLED4 | TID | X1 | X2 | X3 | X4 |    |        |   |    |
|         | A0  | A1 | A2 | A3 | A4 | A5 | -etc.- |   |    |

**Example:**

|         |      |         |        |     |        |      |  |  |  |
|---------|------|---------|--------|-----|--------|------|--|--|--|
| TABLED4 | 28   | 0.0     | 1.0    | 0.0 | 100.   |      |  |  |  |
|         | 2.91 | -0.0329 | 6.51-5 | 0.0 | -3.4-7 | ENDT |  |  |  |

**Fields:**

| Field | Contents                                   |
|-------|--------------------------------------------|
| TID   | Table identification number. (Integer > 0) |
| Xi    | Table parameters. (Real; X2 ≠ 0.0; X3<X4)  |
| Ai    | Coefficients. (Real)                       |

**Remarks:**

1. At least one continuation entry must be specified.
2. The end of the table is indicated by the existence of “ENDT” in the field following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.
3. TABLED4 uses the algorithm

$$y = \sum_{i=0}^N A_i \left( \frac{x - X1}{X2} \right)^i$$

**2066 TABLED4**  
**Dynamic Load Tabular Function, Form 4**

where  $x$  is input to the table,  $y$  is returned, and  $N$  is the number of pairs. Whenever  $x < X3$ , use  $X3$  for  $x$ ; whenever  $x > X4$ , use  $X4$  for  $x$ . There are  $N+1$  entries in the table. There are no error returns from this table look-up procedure.

4. For frequency-dependent loads,  $xi$  is measured in cycles per unit time.

**TABLEM1** Material Property Table, Form 1

Defines a tabular function for use in generating temperature-dependent material properties.

**Format:**

| 1       | 2   | 3     | 4     | 5  | 6  | 7  | 8      | 9      | 10 |
|---------|-----|-------|-------|----|----|----|--------|--------|----|
| TABLEM1 | TID | XAXIS | YAXIS |    |    |    |        |        |    |
|         | xI  | y1    | x2    | y2 | x3 | y3 | -etc.- | “ENDT” |    |

**Example:**

|         |      |     |     |     |     |     |      |  |  |
|---------|------|-----|-----|-----|-----|-----|------|--|--|
| TABLEM1 | 32   |     |     |     |     |     |      |  |  |
|         | -3.0 | 6.9 | 2.0 | 5.6 | 3.0 | 5.6 | ENDT |  |  |

**Fields:**

| Field  | Contents                                                                                                                        |
|--------|---------------------------------------------------------------------------------------------------------------------------------|
| TID    | Table identification number. (Integer > 0)                                                                                      |
| XAXIS  | Specifies a linear or logarithmic interpolation for the x-axis. See Remark 6 . (Character: “LINEAR” or “LOG”; Default=“LINEAR”) |
| YAXIS  | Specifies a linear or logarithmic interpolation for the y-axis. See Remark 6 . (Character: “LINEAR” or “LOG”; Default=“LINEAR”) |
| xi, yi | Tabular values. (Real)                                                                                                          |
| “ENDT” | Flag indicating the end of the table.                                                                                           |

**Remarks:**

1. xi must be in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-5](#) discontinuities are allowed only between points x2 through x7. Also, if y is evaluated at a discontinuity, then the average value of y is used. In [Figure 19-5](#), the value of y at x = x3 is  $y = (y3+y4) / 2$ .
3. At least one continuation entry must be specified.
4. Any xi-yi pair may be ignored by placing “SKIP” in either of the two fields.

**2068 TABLEM1**  
**Material Property Table, Form 1**

5. The end of the table is indicated by the existence of “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.
6. TABLEM1 uses the algorithm


$$y = y_T(x)$$

where  $x$  is input to the table and  $y$  is returned. The table look-up is performed using linear interpolation within the table and linear extrapolation outside the table using the two starting or end points. See [Figure 19-5](#). The algorithms used for interpolation or extrapolation are:

| XAXIS  | YAXIS  | $y_T(x)$                                                                                           |
|--------|--------|----------------------------------------------------------------------------------------------------|
| LINEAR | LINEAR | $\frac{xy - x}{x_j - x_i}y_i + \frac{x - x_i}{x_j - x_i}y_j$                                       |
| LOG    | LINEAR | $\frac{\ln(x_j/x)}{\ln(x_j/x_i)}y_i + \frac{\ln(x/x_i)}{\ln(x_j/x_i)}y_j$                          |
| LINEAR | LOG    | $\exp\left[\frac{x_j - x}{x_j - x_i}\ln y_i + \frac{x - x_i}{x_j - x_i}\ln y_j\right]$             |
| LOG    | LOG    | $\exp\left[\frac{\ln(x_j/x)}{\ln(x_j/x_i)}\ln y_i + \frac{\ln(x/x_i)}{\ln(x_j/x_i)}\ln y_j\right]$ |

where  $x_j$  and  $y_j$  follow  $x_i$  and  $y_i$ .

No warning messages are issued if table data is input incorrectly.

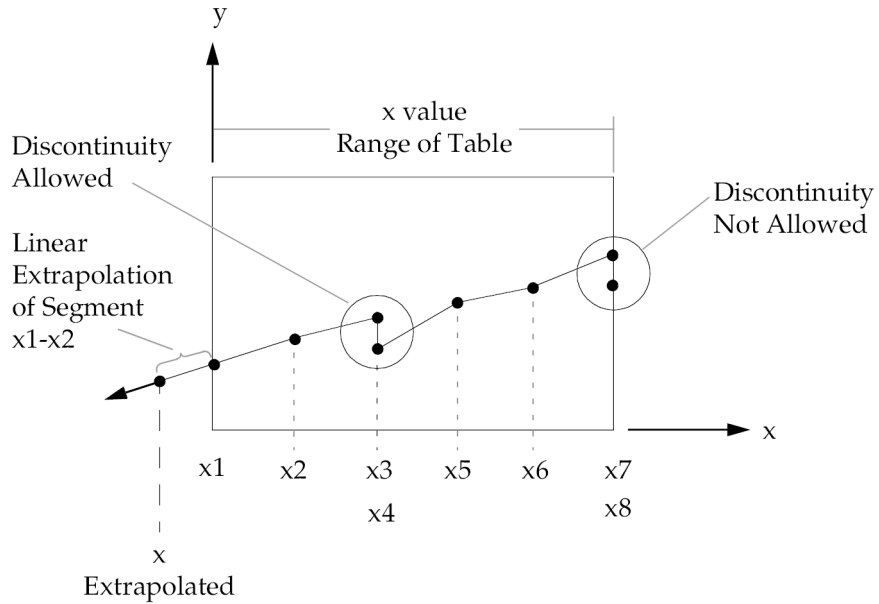

**Figure 19-5. Example of Table Extrapolation and Discontinuity**

7. Tabular values on an axis if XAXIS or YAXIS=LOG must be positive. A fatal message will be issued if an axis has a tabular value  $\leq 0$ .

**Remarks related to SOLs 601 and 701:**

1. YAXIS is only used when TABLEM1 is referenced by the MATTC entry. Otherwise, XAXIS and YAXIS are ignored and both are assumed to be "LINEAR".
2. Discontinuities are not allowed.
3. No table extrapolation is done beyond the range of specified  $x_i$  values. Hence, the  $x_i$  values should at least span the range of applied temperatures.

**2070 TABLEM2**  
**Material Property Table, Form 2**

**TABLEM2** Material Property Table, Form 2

Defines a tabular function for use in generating temperature-dependent material properties. Also contains parametric data for use with the table.

**Format:**

| 1       | 2   | 3  | 4  | 5  | 6  | 7  | 8      | 9 | 10 |
|---------|-----|----|----|----|----|----|--------|---|----|
| TABLEM2 | TID | X1 |    |    |    |    |        |   |    |
|         | x1  | y1 | x2 | y2 | x3 | y3 | -etc.- |   |    |

**Example:**

|         |      |       |     |      |      |     |     |     |  |
|---------|------|-------|-----|------|------|-----|-----|-----|--|
| TABLEM2 | 15   | -10.5 |     |      |      |     |     |     |  |
|         | 1.0  | -4.5  | 2.0 | -4.5 | 2.0  | 2.8 | 7.0 | 6.5 |  |
|         | SKIP | SKIP  | 9.0 | 6.5  | ENDT |     |     |     |  |

**Fields:**


| Field  | Contents                                   |
|--------|--------------------------------------------|
| TID    | Table identification number. (Integer > 0) |
| X1     | Table parameter. (Real)                    |
| xi, yi | Tabular values. (Real)                     |

**Remarks:**

1. xi must be in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-6](#), discontinuities are allowed only between points x2 through x7. Also, if y is evaluated at a discontinuity, then the average value of y is used. In [Figure 19-6](#), is  $y=(y3+y4) / 2$ .
3. At least one continuation entry must be specified.
4. Any xi-yi pair may be ignored by placing “SKIP” in either of the two fields.
5. The end of the table is indicated by the existence of “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.
6. TABLEM2 uses the algorithm

$$y = zy_T(x - X1)$$

where  $x$  is input to the table,  $y$  is returned and  $z$  is supplied from the MATi entry. The table look-up is performed using linear interpolation within the table and linear extrapolation outside the table using the two starting or end points. See [Figure 19-6](#). No warning messages are issued if table data is input incorrectly.

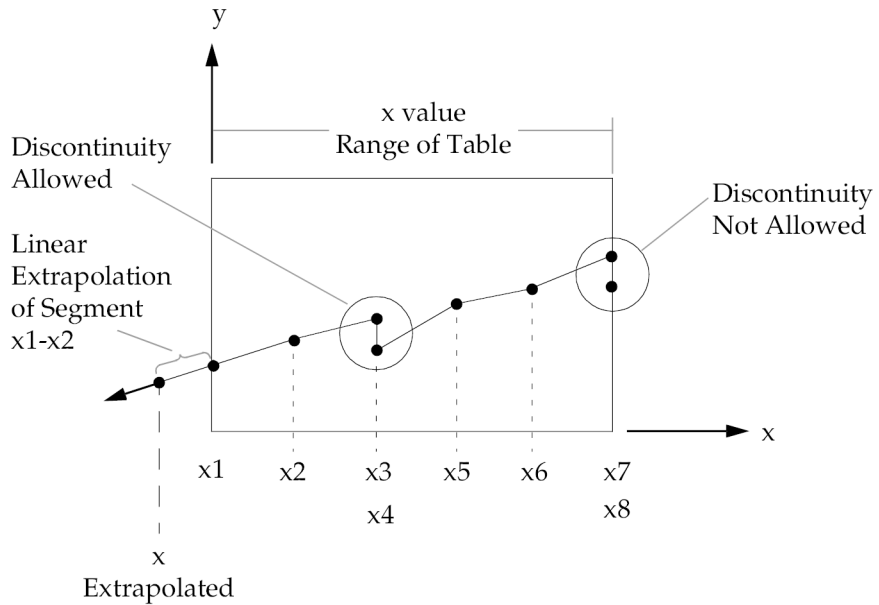

**Figure 19-6. Example of Table Extrapolation and Discontinuity**

**2072 TABLEM3**  
**Material Property Table, Form 3**

**TABLEM3**      Material Property Table, Form 3

Defines a tabular function for use in generating temperature-dependent material properties. Also contains parametric data for use with the table.

**Format:**

| 1       | 2   | 3  | 4  | 5  | 6  | 7  | 8      | 9 | 10 |
|---------|-----|----|----|----|----|----|--------|---|----|
| TABLEM3 | TID | X1 | X2 |    |    |    |        |   |    |
|         | x1  | y1 | x2 | y2 | x3 | y3 | -etc.- |   |    |

**Example:**

|         |     |       |      |     |     |     |      |  |  |
|---------|-----|-------|------|-----|-----|-----|------|--|--|
| TABLEM3 | 62  | 126.9 | 30.0 |     |     |     |      |  |  |
|         | 2.9 | 2.9   | 3.6  | 4.7 | 5.2 | 5.7 | ENDT |  |  |

**Fields:**

| Field  | Contents                                          |
|--------|---------------------------------------------------|
| TID    | Table identification number. (Integer > 0)        |
| X1, X2 | Table parameters. See Remark 6 . (Real; X2 ≠ 0.0) |
| xi, yi | Tabular values. (Real)                            |

**Remarks:**


1. Tabular values for xi must be specified in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-7](#) discontinuities are allowed only between points x2 through x7. Also, if y is evaluated at a discontinuity, then the average value of y is used. In [Figure 19-7](#), the value of y at x=x3 is  $y=(y3+y4) / 2$ .
3. At least one continuation entry must be specified.
4. Any xi-yi pair may be ignored by placing “SKIP” in either of the two fields.
5. The end of the table is indicated by the existence of “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag “ENDT”.



6. TABLEM3 uses the algorithm

$$y = zy_T\left(\frac{x - X1}{X2}\right)$$

where  $x$  is input to the table,  $y$  is returned and  $z$  is supplied from the MAT $i$  entry. The table look-up is performed using linear interpolation within the table and linear extrapolation outside the table using the two starting or end points. See [Figure 19-7](#). No warning messages are issued if table data is input incorrectly.

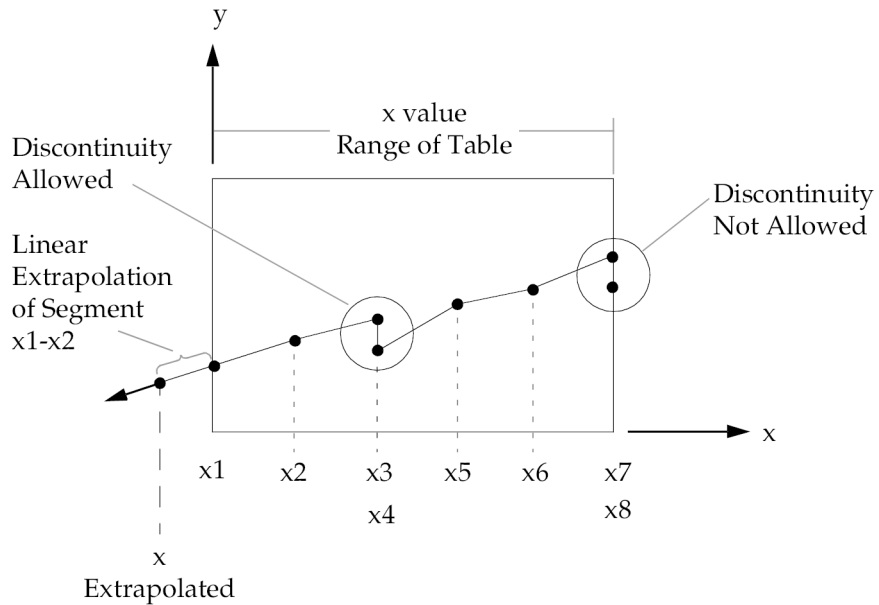

**Figure 19-7. Example of Table Extrapolation and Discontinuity**

**2074 TABLEM4**  
**Material Property Table, Form 4**

**TABLEM4** Material Property Table, Form 4

Defines coefficients of a power series for use in generating temperature-dependent material properties. Also contains parametric data for use with the table.

**Format:**

| 1       | 2   | 3  | 4  | 5  | 6  | 7  | 8      | 9 | 10 |
|---------|-----|----|----|----|----|----|--------|---|----|
| TABLEM4 | TID | X1 | X2 | X3 | X4 |    |        |   |    |
|         | A0  | A1 | A2 | A3 | A4 | A5 | -etc.- |   |    |

**Example:**

|         |      |         |        |     |        |      |  |  |  |
|---------|------|---------|--------|-----|--------|------|--|--|--|
| TABLEM4 | 28   | 0.0     | 1.0    | 0.0 | 100.   |      |  |  |  |
|         | 2.91 | -0.0329 | 6.51-5 | 0.0 | -3.4-7 | ENDT |  |  |  |

**Fields:**

| Field | Contents                                    |
|-------|---------------------------------------------|
| TID   | Table identification number. (Integer > 0)  |
| Xi    | Table parameters. (Real; X2 ≠ 0.0; X3 < X4) |
| Ai    | Coefficients. (Real)                        |

**Remarks:**

1. At least one continuation entry must be specified.
2. The end of the table is indicated by the existence of "ENDT" in the field following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag "ENDT".
3. TABLEM4 uses the algorithm

$$y = z \sum_{i=0}^N A_i \left( \frac{x - X1}{X2} \right)^i$$

where  $x$  is input to the table,  $y$  is returned and  $z$  is supplied from the MAT<sub>i</sub> entry. Whenever  $x < X3$ , use  $X3$  for  $x$ ; whenever  $x > X4$ , use  $X4$  for  $x$ . There are  $N+1$  entries in the table. There are no error returns from this table look-up procedure.

**TABLES1** Material Property Table, Form 1

Defines a tabular function for stress-dependent material properties such as the stress-strain curve (MATS1 entry), creep parameters (CREEP entry) and hyperelastic material parameters (MATHP entry).

**Format:**

| 1       | 2   | 3  | 4  | 5  | 6  | 7  | 8      | 9      | 10 |
|---------|-----|----|----|----|----|----|--------|--------|----|
| TABLES1 | TID |    |    |    |    |    |        |        |    |
|         | x1  | y1 | x2 | y2 | x3 | y3 | -etc.- | “ENDT” |    |

**Example:**

|         |     |     |     |        |     |        |      |  |  |
|---------|-----|-----|-----|--------|-----|--------|------|--|--|
| TABLES1 | 32  |     |     |        |     |        |      |  |  |
|         | 0.0 | 0.0 | .01 | 10000. | .02 | 15000. | ENDT |  |  |

**Fields:**

| Field  | Contents                                   |
|--------|--------------------------------------------|
| TID    | Table identification number. (Integer > 0) |
| xi, yi | Tabular values. (Real)                     |
| “ENDT” | Flag indicating the end of the table.      |

**Remarks:**


1. xi must be in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-8](#) discontinuities are allowed only between points x2 through x7. Also, if y is evaluated at a discontinuity, then the average value of y is used. In [Figure 19-8](#), the value of y at x=x3 is  $y=(y3+y4) / 2$ .
3. At least one continuation entry must be present.
4. Any xi-yi pair may be ignored by placing “SKIP” in either of the two fields used for that entry.
5. The end of the table is indicated by the existence of “ENDT” in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag ENDT.

**2076 TABLES1**  
**Material Property Table, Form 1**

6. TABLES1 is used to input a curve in the form of

$$y = y_T(x)$$

where  $x$  is input to the table and  $y$  is returned. The table look-up is performed using linear interpolation within the table and linear extrapolation outside the table using the two starting or end points. See Figure 19-8. No warning messages are issued if table data is input incorrectly.

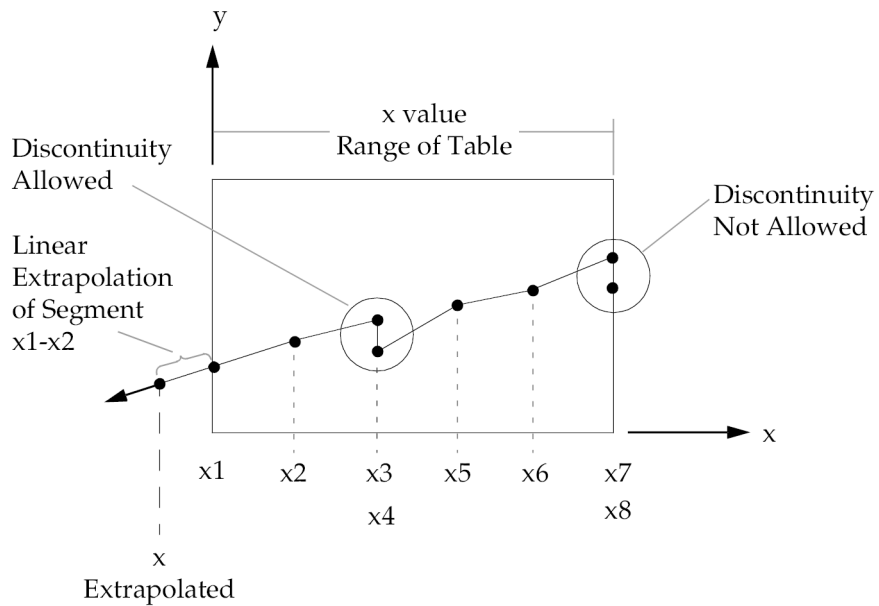

**Figure 19-8. Example of Table Extrapolation and Discontinuity**

7. Discontinuities are not recommended and may lead to unstable results. Discontinuities are not allowed in nonlinear solution sequences.

**Remarks related to SOLs 601 and 701:**

1. Discontinuities are not allowed.
2. By default, the table is extended by linear extrapolation using the last two end points. XTCURVE=0 may be specified in NXSTRAT to choose not to extend the table to allow for element rupture at the last xi value which defines the rupture plastic strain when the multilinear plastic material is used (i.e., TABLES1 is referenced by TID field in MATS1 with TYPE = "PLASTIC"), Upon rupture, an element is removed from the model. If DTDELAY is specified in NXSTRAT

entry, the contribution from the element stiffness is gradually reduced to zero over time DTDELAY.

3. By default,  $\xi_i$ ,  $\eta_i$  are assumed to be true stress-strain values. In case the input is in engineering stress-strain values, specifying CVSSVAL=1 in NXSTRAT provides a convenient way to convert the engineering stress-strain values to true stress-strain values for use in the analysis.

**2078 TABLEST**  
**Material Property Temperature-Dependence Table**

**TABLEST** Material Property Temperature-Dependence Table

Specifies the material property tables for nonlinear elastic temperature-dependent materials.

**Format:**

| 1       | 2   | 3    | 4  | 5    | 6  | 7      | 8 | 9 | 10 |
|---------|-----|------|----|------|----|--------|---|---|----|
| TABLEST | TID |      |    |      |    |        |   |   |    |
|         | T1  | TID1 | T2 | TID2 | T3 | -etc.- |   |   |    |

**Example:**

|         |       |    |       |    |      |  |  |  |  |
|---------|-------|----|-------|----|------|--|--|--|--|
| TABLEST | 101   |    |       |    |      |  |  |  |  |
|         | 150.0 | 10 | 175.0 | 20 | ENDT |  |  |  |  |

**Fields:**

| Field | Contents                                                       |
|-------|----------------------------------------------------------------|
| TID   | Table identification number. (Integer > 0)                     |
| Ti    | Temperature values. (Real)                                     |
| TIDi  | Table identification numbers of TABLES1 entries. (Integer > 0) |

**Remarks:**

1. TIDi must be unique with respect to all TABLES1 and TABLEST table identification numbers.
2. Temperature values must be listed in ascending order.
3. The end of the table is indicated by the existence of ENDT in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag ENDT.
4. This table is referenced only by MATS1 entries that define nonlinear elastic (TYPE="NLELAST") materials.

**Remarks related to SOLs 601 and 701:**

1. TABLEST may be referenced by MATS1 entries that define elasto-plastic (TYPE="PLASTIC") materials but not nonlinear elastic (TYPE="NLELAST") materials.

**TABRND1** Power Spectral Density Table

Defines power spectral density as a tabular function of frequency for use in random analysis. Referenced by the RANDPS entry.

**Format:**

| 1       | 2   | 3     | 4     | 5  | 6  | 7  | 8      | 9 | 10 |
|---------|-----|-------|-------|----|----|----|--------|---|----|
| TABRND1 | TID | XAXIS | YAXIS |    |    |    |        |   |    |
|         | f1  | g1    | f2    | g2 | f3 | g3 | -etc.- |   |    |

**Example:**

|         |     |        |     |        |      |  |  |  |  |
|---------|-----|--------|-----|--------|------|--|--|--|--|
| TABRND1 | 3   |        |     |        |      |  |  |  |  |
|         | 2.5 | .01057 | 2.6 | .01362 | ENDT |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                         |
|-------|------------------------------------------------------------------------------------------------------------------|
| TID   | Table identification number. (Integer > 0)                                                                       |
| XAXIS | Specifies a linear or logarithmic interpolation for the x-axis. (Character: "LINEAR" or "LOG"; Default="LINEAR") |
| YAXIS | Specifies a linear or logarithmic interpolation for the y-axis. (Character: "LINEAR" or "LOG"; Default="LINEAR") |
| fi    | Frequency value in cycles per unit time. (Real ≥ 0.0)                                                            |
| gi    | Power spectral density. (Real)                                                                                   |

**Remarks:**


1. The fi must be in either ascending or descending order, but not both.
2. Discontinuities may be specified between any two points except the two starting points or two end points. For example, in [Figure 19-9](#) discontinuities are allowed only between points f2 through f7. Also, if g is evaluated at a discontinuity, then the average value of g is used. In [Figure 19-9](#), the value of g at f=f3 is  $g=(g3+g4) / 2$ . If the y-axis is a LOG axis then the jump at the discontinuity is evaluated as  $y = \sqrt{y3y4}$ .
3. At least two entries must be present.

**2080 TABRND1**  
**Power Spectral Density Table**

4. Any  $f_i$ - $g_i$  pair may be ignored by placing "SKIP" in either of the two fields used for that entry.
5. The end of the table is indicated by the existence of "ENDT" in either of the two fields following the last entry. An error is detected if any continuations follow the entry containing the end-of-table flag "ENDT".
6. TABRND1 uses the algorithm

$$g = g_T(f)$$

where  $f$  is input to the table and  $g$  is returned. The table look-up is performed using linear interpolation within the table and linear extrapolation outside the table using the two starting or end points. See Figure 19-9. No warning messages are issued if table data is input incorrectly.

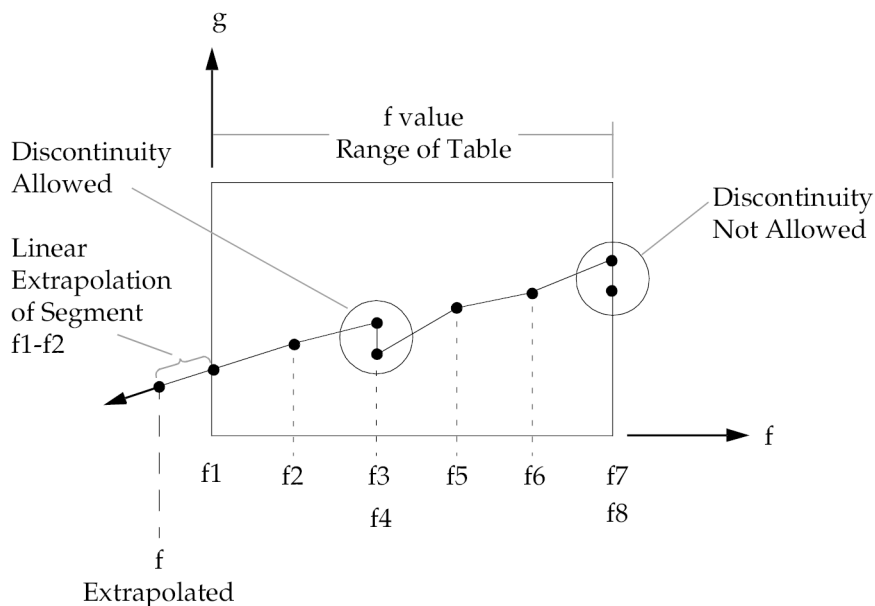

**Figure 19-9. Example of Table Extrapolation and Discontinuity**

7. For auto spectral density, the value of  $g$  returned must be greater than or equal to zero, as shown in Remark 6 .
8. Tabular values on an axis if XAXIS or YAXIS=LOG must be positive. A fatal message will be issued if an axis has a tabular value  $\leq 0$ .



9. The algorithms used are:

| XAXIS  | YAXIS  | f(x)                                                                                                               |
|--------|--------|--------------------------------------------------------------------------------------------------------------------|
| LINEAR | LINEAR | $\frac{f_{i+1}-f}{f_{i+1}-f_i}g_i + \frac{f-f_i}{f_{i+1}-f_i}g_{i+1}$                                              |
| LOG    | LINEAR | $\frac{\ln(f_{i+1}/f)}{\ln(f_{i+1}/f_i)}g_i + \frac{\ln(f/f_i)}{\ln(f_{i+1}/f_i)}g_{i+1}$                          |
| LINEAR | LOG    | $\exp\left[\frac{f_{i+1}-f}{f_{i+1}-f_i}\ln g_i + \frac{f-f_i}{f_{i+1}-f_i}\ln g_{i+1}\right]$                     |
| LOG    | LOG    | $\exp\left[\frac{\ln(f_{i+1}/f)}{\ln(f_{i+1}/f_i)}\ln g_i + \frac{\ln(f/f_i)}{\ln(f_{i+1}/f_i)}\ln g_{i+1}\right]$ |

where  $f_i < f < f_{i+1}$

**2082 TABRNDG**  
Gust Power Spectral Density

**TABRNDG** Gust Power Spectral Density

Defines the power spectral density (PSD) of a gust for aeroelastic response analysis.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| TABRNDG  | TID      | TYPE     | L/U      | WG       |          |          |          |          |           |

**Example:**

|         |      |   |     |    |  |  |  |  |  |
|---------|------|---|-----|----|--|--|--|--|--|
| TABRNDG | 1020 | 1 | 1.3 | .1 |  |  |  |  |  |
|---------|------|---|-----|----|--|--|--|--|--|

**Fields:**

| Field | Contents                                                                              |
|-------|---------------------------------------------------------------------------------------|
| TID   | Table identification number. (Integer >0)                                             |
| TYPE  | PSD type: von Karman (TYPE=1) or Dryden model (TYPE=2). (Integer=1 or 2)              |
| L/U   | Scale of turbulence divided by velocity (units of time). See L/U in Remark 2 . (Real) |
| WG    | Root-mean-square gust velocity. (Real)                                                |

**Remarks:**

1. This entry must be referenced by a RANDPS entry.
2. The power spectral density is given by

$$S_q(\omega) = 2(WG)^2(L/U) \frac{1 + 2(p + 1)k^2(L/U)^2\omega^2}{[1 + k^2(L/U)^2\omega^2]^{p + 3/2}}$$

where

| Type          | p   | k     |
|---------------|-----|-------|
| 1= von Karman | 1/3 | 1.339 |
| 2= Dryden     | 1/2 | 1.0   |

and  $w=2\pi f$ . The units of  $S_q(w)$  are velocity squared per frequency ( $f$ ).

3. Other power spectral density functions may be defined using the TABRND1 entry.

**2084 TEMP**  
**Grid Point Temperature Field**

**TEMP**      Grid Point Temperature Field

Defines temperature at grid points for determination of thermal loading, temperature-dependent material properties, or stress recovery.

**Format:**

|          |          |          |          |          |          |          |          |          |           |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| <b>1</b> | <b>2</b> | <b>3</b> | <b>4</b> | <b>5</b> | <b>6</b> | <b>7</b> | <b>8</b> | <b>9</b> | <b>10</b> |
| TEMP     | SID      | G1       | T1       | G2       | T2       | G3       | T3       |          |           |

**Example:**

|      |   |    |       |    |       |  |  |  |  |
|------|---|----|-------|----|-------|--|--|--|--|
| TEMP | 3 | 94 | 316.2 | 49 | 219.8 |  |  |  |  |
|------|---|----|-------|----|-------|--|--|--|--|

**Fields:**

| <b>Field</b> | <b>Contents</b>                                      |
|--------------|------------------------------------------------------|
| SID          | Temperature set identification number. (Integer > 0) |
| Gi           | Grid point identification number. (Integer > 0)      |
| Ti           | Temperature. (Real)                                  |

**Remarks:**

1. In the static solution sequences, the temperature set ID(SID) is selected by the Case Control command TEMP. In the dynamic solution sequences, SID must be referenced in the TID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET. There is a maximum of 66 unique temperature SIDs that may be specified.
2. Set ID must be unique with respect to all other LOAD type entries if TEMP(LOAD) is specified in the Case Control Section.
3. From one to three grid point temperatures may be defined on a single entry.
4. If thermal effects are requested, all elements must have a temperature field defined either directly on a TEMPP1, TEMPP3, or TEMPRB entry or indirectly as the average of the connected grid point temperatures defined on the TEMP or TEMPD entries. Directly defined element temperatures always take precedence over the average of grid point temperatures.
5. If the element material is temperature dependent, its properties are evaluated at the average temperature.

6. Average element temperatures are obtained as a simple average of the connecting grid point temperatures when no element temperature data are defined. Gauss point temperatures are averaged for solid elements instead of grid point temperature.
7. For steady state heat transfer analysis, this entry together with the TEMPD entry supplies the initialization temperatures for nonlinear analysis. The Case Control command TEMP(INIT)=SID requests selection of this entry. The temperature values specified here must be coincident with any temperature boundary conditions that are specified.
8. For transient heat transfer analysis, this entry together with the TEMPD entry supplies the initial condition temperatures. The Case Control command IC=SID requests selections of this entry. The temperature values specified here must be coincident with any temperature boundary condition specified.
9. In linear and nonlinear buckling analysis, the follower force effects due to loads from this entry are not included in the differential stiffness. See “Buckling Analysis in SubDMAP MODERS” in the *NX Nastran User’s Guide* and the *NX Nastran Basic Nonlinear Analysis User’s Guide*.

**Remarks related to SOLs 601 and 701:**

1. To apply constant temperature loads, SID is selected by Case Control command TEMP=SID for both static and transient analyses. TEMP(INIT)=SID is used to specify initial temperatures.
2. To apply time-dependent temperature loads, SID is referenced by the field EXCITEID=SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.

**2086 TEMPAX**  
Conical Shell Temperature

**TEMPAX** Conical Shell Temperature

Defines temperature sets for conical shell problems.

**Format:**

| 1      | 2    | 3    | 4    | 5  | 6    | 7    | 8    | 9  | 10 |
|--------|------|------|------|----|------|------|------|----|----|
| TEMPAX | SID1 | RID1 | PHI1 | T1 | SID2 | RID2 | PHI2 | T2 |    |

**Example:**

|        |   |   |      |       |  |  |  |  |  |
|--------|---|---|------|-------|--|--|--|--|--|
| TEMPAX | 4 | 7 | 30.0 | 105.3 |  |  |  |  |  |
|--------|---|---|------|-------|--|--|--|--|--|

**Fields:**

| Field | Contents                                                     |
|-------|--------------------------------------------------------------|
| SIDi  | Temperature set identification number. (Integer > 0)         |
| RIDi  | Ring identification number (see RINGAX entry). (Integer > 0) |
| PHIi  | Azimuthal angle in degrees. (Real)                           |
| Ti    | Temperature. (Real)                                          |

**Remarks:**

- TEMPAX is allowed only if an AXIC entry is also present.
- SIDi must be unique with respect to all other LOAD type entries if TEMP(LOAD) is specified in the Case Control Section.
- Temperature sets must be selected with the Case Control command TEMP=SID. There is a maximum of 66 unique temperature SIDs that may be specified.
- One or two temperatures may be defined on each entry.
- For a discussion of the conical shell problem, see “Conical Shell Element (RINGAX)” in the *NX Nastran Element Library*.
- TEMP(INIT) is not used with this entry.

**TEMPBC**      Grid Point Temperatures

Defines the temperature boundary conditions for heat transfer analysis. Applies to steady-state and transient conditions.

**Format:**

| 1      | 2   | 3    | 4     | 5    | 6     | 7    | 8     | 9    | 10 |
|--------|-----|------|-------|------|-------|------|-------|------|----|
| TEMPBC | SID | TYPE | TEMP1 | GID1 | TEMP2 | GID2 | TEMP3 | GID3 |    |

**Example:**

|        |    |      |       |   |       |   |       |   |  |
|--------|----|------|-------|---|-------|---|-------|---|--|
| TEMPBC | 10 | STAT | 100.0 | 1 | 100.0 | 2 | 100.0 | 3 |  |
|--------|----|------|-------|---|-------|---|-------|---|--|

**Alternate Format and Example:**

|        |     |      |       |      |        |      |      |     |  |
|--------|-----|------|-------|------|--------|------|------|-----|--|
| TEMPBC | SID | TYPE | TEMP1 | GID1 | "THRU" | GID2 | "BY" | INC |  |
|--------|-----|------|-------|------|--------|------|------|-----|--|

|        |    |      |       |   |      |    |    |   |  |
|--------|----|------|-------|---|------|----|----|---|--|
| TEMPBC | 20 | STAT | 100.0 | 4 | THRU | 50 | BY | 2 |  |
|--------|----|------|-------|---|------|----|----|---|--|

**Fields:**

**Field      Contents**

SID      Temperature set identification number. (Integer > 0)

TYPE      Type of temperature boundary condition. See Remarks. (Character; Default="STAT");

STAT – Constant temperature boundary condition

TRAN – Time-varying temperature boundary condition

TEMPi      Temperature (Real)

GIDi      Grid point identification number. (Integer > 0 or "THRU" or "BY")

INC      Grid point number increment. (Integer)

**Remarks:**

- For a constant Boundary Condition (TYPE="STAT"), the temperature boundary load set (SID) is selected in the Case Control Section (SPC=SID). TYPE="STAT" may be used in both steady-state (SOL 153) and transient analysis (SOL 159).

## 2088 TEMPBC Grid Point Temperatures

2. For transient analysis (SOL 159), a constant boundary condition should be specified using the SPC Bulk Data entry.
3. For a time-varying boundary condition (TYPE="TRAN"), SID is referenced by a TLOADi Bulk Data entry through the DAREA specification. TYPE="TRAN" is permitted only in transient analysis (SOL 159). A function of time  $F(t - t)$  defined on the TLOADi entry multiplies the general load. t provides any required time delay. The load set identifier on the TLOADi entry must be selected in Case Control (DLOAD=SID) for use in transient analysis.
4. In the alternate format, TEMP1 is the nodal temperature for the grid points GID1,GID1+INC,...,GID2. If "BY" and INC are not specified, then the grid point number increment is unity.
5. If TYPE="STAT", then no SPCi Bulk Data entries may be specified.
6. If TYPE="TRAN", then no CELAS2 or DAREA Bulk Data entries may be specified. Also, "U" must be specified in the CONV field on the TSTEPNL entry to obtain accurate results.
7. All TEMPBC entries in the Bulk Data Section must indicate either TYPE="STAT" or TYPE="TRAN" but not both.

### Remarks related to SOL 601:

1. TYPE="TRAN" can be used in both steady-state (SOL 601,153) and transient analysis (SOL 601,159).
2. Both TYPE="STAT" and TYPE="TRAN" may be specified in one model.



**TEMPD**      Grid Point Temperature Field Default

Defines a temperature value for all grid points of the structural model that have not been given a temperature on a TEMP entry.

**Format:**

|       |      |    |      |    |      |    |      |    |    |
|-------|------|----|------|----|------|----|------|----|----|
| 1     | 2    | 3  | 4    | 5  | 6    | 7  | 8    | 9  | 10 |
| TEMPD | SID1 | T1 | SID2 | T2 | SID3 | T3 | SID4 | T4 |    |

**Example:**

|       |   |       |  |  |  |  |  |  |  |
|-------|---|-------|--|--|--|--|--|--|--|
| TEMPD | 1 | 216.3 |  |  |  |  |  |  |  |
|-------|---|-------|--|--|--|--|--|--|--|

**Fields:**

| Field            | Contents                                             |
|------------------|------------------------------------------------------|
| SID <sub>i</sub> | Temperature set identification number. (Integer > 0) |
| T <sub>i</sub>   | Default temperature value. (Real)                    |

**Remarks:**

1. For structural analysis in the static solution sequences, the temperature set ID (SID) is selected by the Case Control command TEMP. In the dynamic solution sequences, SID must be referenced in the TID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET. There is a maximum of 66 unique temperature SIDs that may be specified.
2. SID<sub>i</sub> must be unique with respect to all other LOAD type entries if TEMP(LOAD) is specified in the Case Control Section.
3. From one to four default temperatures may be defined on a single entry.
4. If thermal effects are requested, all elements must have a temperature field defined either directly on a TEMPP1, TEMPP3, or TEMPRB entry or indirectly as the average of the connected grid point temperatures defined on the TEMP or TEMPD entries. Directly defined element temperatures always take precedence over the average of grid point temperatures.
5. If the element material is temperature dependent, its properties are evaluated at the average temperature.
6. Average element temperatures are obtained as a simple average of the connecting grid point temperatures when no element temperature data is defined.

## 2090 **TEMPD** Grid Point Temperature Field Default

7. For steady-state heat transfer analysis, this entry together with the TEMP entry supplies the initialization temperatures for nonlinear analysis. The Case Control command TEMP(INIT)=SID requests selection of this entry. The temperature values specified here must be coincident with any temperatures boundary conditions that are specified.
8. For transient heat transfer analysis, this entry together with the TEMP entry supplies the initial condition temperatures. The Case Control command IC=SID request selection of this entry. The temperature values specified here must be coincident with any temperature boundary conditions that are specified.
9. In linear and nonlinear buckling analysis, the follower force effects due to loads from this entry are not included in the differential stiffness. See “Buckling Analysis in SubDMAP MODERS” in the *NX Nastran User’s Guide* and the *NX Nastran Basic Nonlinear Analysis User’s Guide*.
10. For partitioned Bulk Data superelements and auxiliary models, TEMPD must be specified in all partitioned Bulk Data Sections.

### **Remarks related to SOLs 601 and 701:**

1. To apply constant temperature loads, SID is selected by Case Control command TEMP=SID for both static and transient analyses. TEMP(INIT)=SID is used to specify initial temperatures.
2. To apply time-dependent temperature loads, SID is referenced by the field EXCITEID=SID in the TLOAD1 entry. Time-dependent loads are selected by Case Control command DLOAD.

**TEMPF**      p-Element Temperature Field with Function Definition

Defines the thermal loading to be applied to a group of elements.

**Format:**

| 1     | 2    | 3    | 4      | 5      | 6 | 7 | 8 | 9 | 10 |
|-------|------|------|--------|--------|---|---|---|---|----|
| TEMPF | SID  | EID1 | FTEMP  | FTABID |   |   |   |   |    |
|       | EID2 | EID3 | -etc.- |        |   |   |   |   |    |

**Example:**

|       |     |    |     |  |  |  |  |  |  |
|-------|-----|----|-----|--|--|--|--|--|--|
| TEMPF | 127 | 12 | 111 |  |  |  |  |  |  |
|-------|-----|----|-----|--|--|--|--|--|--|

**Alternate Format:**

|       |      |        |       |        |  |  |  |  |  |
|-------|------|--------|-------|--------|--|--|--|--|--|
| TEMPF | SID  | EID1   | FTEMP | FTABID |  |  |  |  |  |
|       | EID2 | "THRU" | EIDn  |        |  |  |  |  |  |

**Fields:**

| Field            | Contents                                                                                     | Type        | Default  |
|------------------|----------------------------------------------------------------------------------------------|-------------|----------|
| SID              | Temperature set identification number.                                                       | Integer > 0 | Required |
| FTEMP            | ID of a DEQATN entry describing the temperature field as a function of x,y,z. See Remark 1 . | Integer > 0 |          |
| FTABID           | ID of a TABLE3D entry describing the temperature field. See Remark 1 .                       | Integer > 0 |          |
| EID <sub>i</sub> | Identification numbers of the p-elements to which this thermal load is applied.              | Integer > 0 | Required |

**Remarks:**

1. Either FTEMP or FTABID must be specified but not both.
2. The TEMPF entry overrides the temperature at the element vertices specified on the TEMP or TEMPD entries.

**2092 TEMPP1**  
**Plate Element Temperature Field, Form 1**

**TEMPP1** Plate Element Temperature Field, Form 1

Defines a temperature field for plate, membrane, and combination elements (by an average temperature and a thermal gradient through the thickness) for determination of thermal loading, temperature-dependent material properties, or stress recovery.

**Format:**

| 1      | 2    | 3    | 4    | 5      | 6    | 7    | 8      | 9 | 10 |
|--------|------|------|------|--------|------|------|--------|---|----|
| TEMPP1 | SID  | EID1 | TBAR | TPRIME | T1   | T2   |        |   |    |
|        | EID2 | EID3 | EID4 | EID5   | EID6 | EID7 | -etc.- |   |    |

**Example:**

|        |    |    |      |      |      |      |  |  |  |
|--------|----|----|------|------|------|------|--|--|--|
| TEMPP1 | 2  | 24 | 62.0 | 10.0 | 57.0 | 67.0 |  |  |  |
|        | 26 | 21 | 19   | 30   |      |      |  |  |  |

**Alternate Format and Example of Continuation Entry:**

|  |      |        |      |      |        |      |  |  |  |
|--|------|--------|------|------|--------|------|--|--|--|
|  | EID2 | “THRU” | EIDi | EIDj | “THRU” | EIDk |  |  |  |
|  | 1    | THRU   | 10   | 30   | THRU   | 61   |  |  |  |

**Fields:**

| Field            | Contents                                                                                                                                                            |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID              | Temperature set identification number. (Integer > 0)                                                                                                                |
| EIDi, EIDj, EIDk | Unique element identification number(s). (Integer > 0 or the continuation entries may have “THRU” in fields 3 and/or 6, in which case EID2 < EIDi and EIDj < EIDk.) |
| TBAR             | Temperature at the element’s reference plane as defined by ZOFFS on the connection entry. (Real)                                                                    |
| TPRIME           | Effective linear thermal gradient. Not used for membranes. (Real)                                                                                                   |

| Field  | Contents                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| T1, T2 | Temperatures for an additional membrane stress calculation at points defined on the element property entry (Z1 and Z2 field on PSHELL entry). See Remark 9. T1 may be specified on the lower surface and T2 on the upper surface for the CQUAD4, CQUAD8, CTRIA3, CTRIA6, CQUADR, and CTRIAR elements. These data are not used for membrane elements. See Remark 11. If T1 and T2 are blank, they are ignored, and the additional stress calculation does not occur. (Real) |

**Remarks:**

1. In the static solution sequences, the temperature set ID (SID) is selected by the Case Control command TEMP. In the dynamic solution sequences, SID must be referenced in the TID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET. There is a maximum of 66 unique temperature SIDS that may be specified.
2. Set ID must be unique with respect to all other LOAD type entries if TEMP(LOAD) is specified in the Case Control Section.
3. If continuation entries are present, EID1 and elements specified on the continuation entry are used. Elements must not be specified more than once.
4. If thermal effects are requested, all elements must have a temperature field defined either directly on a TEMPP1 or TEMPRB entry or indirectly as the average of the connected grid point temperatures defined on the TEMP or TEMPD entries. Directly defined element temperatures always take precedence over the average of grid point temperatures.
5. For temperature field other than a constant gradient, the “effective gradient” for a homogeneous plate is

$$T_{PRIME} = \frac{1}{I} \int_z T(z) z dz$$

where  $I$  is the bending inertia and  $z$  is the distance from the neutral surface in the positive normal direction.

6. The “average” temperature for a homogeneous plate is

**2094 TEMPP1**  
**Plate Element Temperature Field, Form 1**

$$T\text{BAR} = \frac{1}{\text{Volume}} \int_{\text{Volume}} T d\text{Volume}$$

7. If the element material is temperature dependent, its properties are evaluated at the average temperature TBAR.
8. Large “THRU” ranges will lead to System Fatal Message 3008 (“Insufficient Core”) and should be avoided, particularly for open sets.
9. If the element material is nonlinear then T1 and T2 should be left blank (see the MATS1 entry).
10. In linear and nonlinear buckling analysis, the follower force effects due to loads from this entry are not included in the differential stiffness. See “Buckling Analysis in SubDMAP MODERS” in the *NX Nastran User’s Guide* and the *NX Nastran Basic Nonlinear Analysis User’s Guide*.
11. If T1 or T2 are defined, an additional membrane stress is calculated by

$$\{\Delta s\} = -[G_e]\{a_e\}(T - T_{\text{fiber}})$$

where T is the explicitly entered temperatures T1,T2 and  $T_{\text{fiber}}$  is the outer fiber temperatures Tfiber1,Tfiber2 computed by  $T_{\text{fiber}} = \text{TBAR} + z \cdot \text{T\text{PRIME}}$  (z is the distance from the center fiber).  $[G_e]$  and  $\{a_e\}$  are evaluated at TBAR. The thermal expansion due to T1,T2 is assumed to be completely restrained by elastic stiffness.

**TEMPP3** Plate Element Temperature Field, Form 3

TEMPP3 is no longer available. Use TEMPP1.

**2096 TEMPRB**  
**One-Dimensional Element Temperature Field**

**TEMPRB**      One-Dimensional Element Temperature Field

Defines a temperature field for the CBAR, CBEAM, CBEND, CROD, CTUBE, and CONROD elements for determination of thermal loading, temperature-dependent material properties, or stress recovery.

**Format:**

| 1      | 2    | 3    | 4    | 5    | 6    | 7    | 8      | 9    | 10 |
|--------|------|------|------|------|------|------|--------|------|----|
| TEMPRB | SID  | EID1 | TA   | TB   | TP1A | TP1B | TP2A   | TP2B |    |
|        | TCA  | TDA  | TEA  | TFA  | TCB  | TDB  | TEB    | TFB  |    |
|        | EID2 | EID3 | EID4 | EID5 | EID6 | EID7 | -etc.- |      |    |

**Example:**

|        |      |      |      |      |      |      |      |     |  |
|--------|------|------|------|------|------|------|------|-----|--|
| TEMPRB | 200  | 1    | 68.0 | 23.0 | 0.0  | 28.0 |      | 2.5 |  |
|        | 68.0 | 91.0 | 45.0 |      | 48.0 | 80.0 | 20.0 |     |  |
|        | 9    | 10   |      |      |      |      |      |     |  |

**Alternate Format and Example of Continuation Entry:**

|  |      |        |      |      |        |      |  |  |  |
|--|------|--------|------|------|--------|------|--|--|--|
|  | EID2 | “THRU” | EIDi | EIDj | “THRU” | EIDk |  |  |  |
|  | 2    | THRU   | 4    | 10   | THRU   | 14   |  |  |  |

**Fields:**

| Field            | Contents                                                                                                                                                                     |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID              | Temperature set identification number. (Integer > 0)                                                                                                                         |
| EIDi, EIDj, EIDk | Unique element identification number(s). (Integer > 0 or the second continuation entry may have “THRU” in fields 3 and/or 6 in which case EID2 < EIDi and EIDj < EIDk.)      |
| TA, TB           | Temperature at end A and end B on the neutral axis. (Real)                                                                                                                   |
| TPij             | Effective linear gradient in direction i on end j; used with CBAR, CBEAM, and CBEND only. (Real)                                                                             |
| Tij              | Temperature at point i as defined on the PBAR, PBEAM, and PBEND entries at end j. This data is used for stress recovery only with CBAR, CBEAM, and CBEND exclusively. (Real) |



**Remarks:**

1. In the static solution sequences, the temperature set ID (SID) is selected by the Case Control command TEMP. In the dynamic solution sequences, SID must be referenced in the TID field of an LSEQ entry, which in turn must be selected by the Case Control command LOADSET. There is a maximum of 66 unique temperature SIDs that may be specified.
2. SID must be unique with respect to all other LOAD type entries if TEMP(LOAD) is specified in the Case Control Section.
3. If at least one nonzero or nonblank T<sub>ij</sub> is present, the point temperatures given are used for stress recovery. If no T<sub>ij</sub> values are given, linear temperature gradients are assumed for stress recovery. The T<sub>ij</sub> values are not used in the calculation of differential stiffness.
4. If the second (and succeeding) continuation is present, EID1 and elements specified on the second (and succeeding) continuations are used. Elements must not be specified more than once.
5. If thermal effects are requested, all elements must have a temperature field defined either directly on a TEMPP1 or TEMPRB entry or indirectly as the average of the connected grid point temperatures defined on the TEMP or TEMPD entries. Directly defined element temperatures always take precedence over the average of grid point temperatures.
6. The effective thermal gradients in the element coordinate system for the CBAR element are defined by the following integrals over the cross section. For end "A" (end "B" is similar).

$$T_A = \frac{1}{A} \int_A T A(y, z) dA$$

$$T_{P1A} = \frac{I_2}{\Delta} \int_A (y - y_n) T A(y, z) dA - \frac{I_{12}}{\Delta} \int_A (z - z_n) T A(y, z) dA$$

$$T_{P2A} = \frac{I_1}{\Delta} \int_A (z - z_n) T A(y, z) dA - \frac{I_{12}}{\Delta} \int_A (y - y_n) T A(y, z) dA$$

$$\Delta = I_1 I_2 - I_{12}^2$$

if  $I_{12}=0$

**2098 TEMPRB**  
**One-Dimensional Element Temperature Field**

$$TP1A = \frac{1}{I_1} \int_A (y - y_n) TA(y, z) dA$$

$$TP2A = \frac{1}{I_2} \int_A (z - z_n) TA(y, z) dA$$

where  $TA(y, z)$  is the temperature at point  $y, z$  (in the element coordinate system) at end “A” of the bar. See the CBAR entry description for the element coordinate system:  $I_1$ ,  $I_2$ , and  $I_{12}$  are the moments of inertia about the  $z$  and  $y$  axes, respectively. The temperatures are assumed to vary linearly along the length ( $x$ -axis). Note that if the temperature varies linearly over the cross section, then TP1A, TP1B, TP2A and TP2B are the actual gradients.

7. If the element material is temperature-dependent, the material properties are evaluated at the average temperature  $(TA+TB) / 2$ .
8. In linear and nonlinear buckling analysis, the follower force effects due to loads from this entry are not included in the differential stiffness. See “Buckling Analysis in SubDMAP MODERS” in the *NX Nastran User’s Guide* and the *NX Nastran Basic Nonlinear Analysis User’s Guide*.
9. If any  $T_y$  is specified the stresses computed by the effective gradient are corrected by  $\Delta\sigma$  such that:

$$\sigma = \sigma \Big|_{T_A + y \cdot TP1A + z \cdot TP2A} + \Delta\sigma$$

where  $\Delta\sigma$  is in the form

$$\Delta\sigma = -\alpha E [T_{CA} - T_o - C_1 \cdot TP1A - C_2 \cdot TP2A] \text{ etc}$$

for CBAR and CBEAM

$$\Delta\sigma = -\alpha E [T_{CA} - T_o - (C_1 + \Delta N) \cdot TP1A - C_2 \cdot TP2A] \text{ etc}$$

for CBEND.

**TF**     Dynamic Transfer Function

Defines a dynamic transfer function of the form:

$$(B0 + B1 \cdot p + B2 \cdot p^2)u_d + \sum_i (A0(i) + A1(i)p + A2(i)p^2)u_i = 0$$

**Equation 19-1.**

Can also be used as a means of direct matrix input. See Remark 4 .

**Format:**

| 1  | 2    | 3    | 4     | 5     | 6     | 7      | 8 | 9 | 10 |
|----|------|------|-------|-------|-------|--------|---|---|----|
| TF | SID  | GD   | CD    | B0    | B1    | B2     |   |   |    |
|    | G(1) | C(1) | A0(1) | A1(1) | A2(1) | -etc.- |   |   |    |

**Example:**

|    |   |   |     |     |     |     |  |  |  |
|----|---|---|-----|-----|-----|-----|--|--|--|
| TF | 1 | 2 | 3   | 4.0 | 5.0 | 6.0 |  |  |  |
|    | 3 | 4 | 5.0 | 6.0 | 7.0 |     |  |  |  |

**Fields:**

| <b>Field</b>                  | <b>Contents</b>                                                                                                              |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| SID                           | Set identification number. (Integer > 0)                                                                                     |
| GD, G(i)                      | Grid, scalar, or extra point identification numbers. (Integer > 0)                                                           |
| CD, C(i)                      | Component numbers. (Integer zero or blank for scalar or extra points, any one of the Integers 1 through 6 for a grid point.) |
| B0, B1, B2A0(i), A1(i), A2(i) | Transfer function coefficients. (Real)                                                                                       |

**Remarks:**

1. Transfer function sets must be selected with the Case Control command TFL=SID.

## 2100 TF Dynamic Transfer Function

2. Continuation entries are optional.
3. The matrix elements defined by this entry are added to the dynamic matrices for the problem.
4. The constraint relation given in [Equation 19-1](#) will hold only if no structural elements or other matrix elements are connected to the dependent coordinate  $u_d$ . In fact, the terms on the left side of [Equation 19-1](#) are simply added to the terms from all other sources in the row for  $u_d$ .
5. See the *NX Nastran Advanced Dynamic Analysis User's Guide* for a discussion of transfer functions.
6. For each SID, only one logical entry is allowed for each GD, CD combination.
7. For heat transfer analysis, the initial conditions must satisfy [Equation 19-1](#).

**TIC** Transient Initial Condition

Defines values for the initial conditions of variables used in structural transient analysis. Both displacement and velocity values may be specified at independent degrees-of-freedom. This entry may not be used for heat transfer analysis.

**Format:**

| 1   | 2   | 3 | 4 | 5  | 6  | 7 | 8 | 9 | 10 |
|-----|-----|---|---|----|----|---|---|---|----|
| TIC | SID | G | C | U0 | V0 |   |   |   |    |

**Example:**

|     |   |   |   |     |      |  |  |  |  |
|-----|---|---|---|-----|------|--|--|--|--|
| TIC | 1 | 3 | 2 | 5.0 | -6.0 |  |  |  |  |
|-----|---|---|---|-----|------|--|--|--|--|

**Fields:**

| Field | Contents                                                                                                                                       |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                                                                       |
| G     | Grid, scalar, or modal coordinate identification number (Integer>0). See Remark 4.                                                             |
| C     | Component numbers. (Any one of the integers 1 through 6 for grid points, integer 0 or blank for scalar, and integer -1 for modal coordinates.) |
| U0    | Initial displacement. (Real)                                                                                                                   |
| V0    | Initial velocity. (Real) See Remark 4.                                                                                                         |

**Remarks:**

1. Transient initial condition sets must be selected with the case control command. Note the use of IC in the case control command versus TIC on the bulk entry. For heat transfer, the IC case control command selects TEMP or TEMPD bulk entries for initial conditions and not the TIC entry.
2. If no TIC set is selected in the case control section, all initial conditions are assumed to be zero.
3. Initial conditions for coordinates not specified on TIC bulk entries will be assumed zero.

## 2102 TIC

### Transient Initial Condition

4. In direct transient analysis (SOL 109 and 129) wherein the TIC bulk entry is selected by an IC or IC(PHYSICAL) case control command, G may reference only grid or scalar points. In modal transient analysis (SOL 112) wherein the TIC bulk entry is selected by an IC or IC(PHYSICAL) case control command, G may reference only grid or scalar points. In modal transient analysis (SOL 112) wherein the TIC bulk entry is selected by an IC(MODAL) case control command, G may reference only modal coordinates and V0 will be ignored (i.e. always 0.0).
5. The initial conditions for the independent degrees-of-freedom specified by this bulk entry are distinct from, and may be used in conjunction with, the initial conditions for the enforced degrees-of-freedom specified by TLOAD1 and/or TLOAD2 bulk entries.
6. Input at extra points will be ignored.

**TLOAD1** Transient Response Dynamic Excitation, Form 1

Defines a time-dependent dynamic load or enforced motion of the form

$$\{P(t)\} = \{A \cdot F(t - \tau)\}$$

for use in transient response analysis.

**Format:**

| 1      | 2   | 3        | 4     | 5    | 6   | 7 | 8 | 9 | 10 |
|--------|-----|----------|-------|------|-----|---|---|---|----|
| TLOAD1 | SID | EXCITEID | DELAY | TYPE | TID |   |   |   |    |

**Example:**

|        |   |   |  |      |    |  |  |  |  |
|--------|---|---|--|------|----|--|--|--|--|
| TLOAD1 | 5 | 7 |  | LOAD | 13 |  |  |  |  |
|--------|---|---|--|------|----|--|--|--|--|

**Fields:**

| Field    | Contents                                                                                                                                                                                            |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID      | Set identification number. (Integer > 0)                                                                                                                                                            |
| EXCITEID | Identification number of a set entry for DAREA, SPCD, static load, or thermal load (for heat transfer analysis). The scale factor A is defined by these entries. See Remarks 2 and 3. (Integer > 0) |
| DELAY    | Identification number of DELAY entry set that defines t. (Integer ≥ 0 or blank)                                                                                                                     |
| TYPE     | Defines the type of the dynamic excitation. See Remarks 2 and 3. (Integer, character or blank; Default=0)                                                                                           |
| TID      | Identification number of TABLEDi entry that gives F(t). (Integer > 0)                                                                                                                               |

**Remarks:**

- Dynamic excitation sets must be selected with the Case Control command DLOAD=SID.
- The type of the dynamic excitation is specified by TYPE (field 5) according to the following table:

**2104 TLOAD1**  
**Transient Response Dynamic Excitation, Form 1**

| TYPE                   | TYPE of Dynamic Excitation                              |
|------------------------|---------------------------------------------------------|
| 0, L, LO, LOA or LOAD  | Applied load (force or moment) (Default)                |
| 1, D, DI, DIS, or DISP | Enforced displacement using large mass or SPC/SPCD data |
| 2, V, VE, VEL or VELO  | Enforced velocity using large mass or SPC/SPCD data     |
| 3, A, AC, ACC or ACCE  | Enforced acceleration using large mass or SPC/SPCD data |

3. TYPE (field 5) also determines the manner in which EXCITEID (field 3) is used by the program as described below

Excitation specified by TYPE is applied load

- There is no LOADSET request in Case Control  
EXCITEID may also reference DAREA, static, and thermal load set entries
- There is a LOADSET request in Case Control  
The program may also reference static and thermal load set entries specified by the LID or TID field in the selected LSEQ entries corresponding to the EXCITEID.

Excitation specified by TYPE is enforced motion

- There is no LOADSET request in Case Control  
EXCITEID will reference SPCD entries. If such entries indicate null enforced motion, the program will then assume that the excitation is enforced motion using large mass and will reference DAREA and static and thermal load set entries just as in the case of applied load excitation.
- There is a LOADSET request in Case Control  
The program will reference SPCD entries specified by the LID field in the selected LSEQ entries corresponding to the EXCITEID. If such entries indicate null enforced motion, the program will then assume that the excitation is enforced motion using large mass and will reference static and thermal load set entries corresponding to the DAREA entry in the selected LSEQ entries, just as in the case of applied load excitation.

4. EXCITEID may reference sets containing QHBDY, QBDYi, QVECT, and QVOL entries when using the heat transfer option.



5. TLOAD1 loads may be combined with TLOAD2 loads only by specification on a DLOAD entry. That is, the SID on a TLOAD1 entry may not be the same as that on a TLOAD2 entry.
6. SID must be unique for all TLOAD1, TLOAD2, RLOAD1, RLOAD2, and ACSRCE entries.
7. If the heat transfer option is used, the referenced QVECT entry may also contain references to functions of time, and therefore A may be a function of time.
8. If TLOADi entries are selected in SOL 111 or 146 then a Fourier analysis is used to transform the time-dependent loads on the TLOADi entries to the frequency domain and then combine them with loads from RLOADi entries. Then the analysis is performed as a frequency response analysis but the solution and the output are converted to and printed in the time domain. Please refer to “Fourier Transform” in the *NX Nastran Advanced Dynamic Analysis User’s Guide*.

**Remarks related to SOLs 601 and 701:**

1. TLOAD1 may be used in a static or transient analysis to specify time-dependent loads. In a nonlinear static analysis, TLOAD1 is frequently used with TSTEP to apply incremental loads to achieve better convergence in the solution.
2. SID may be selected directly with the Case Control command DLOAD=SID, or be combined with other TLOAD1 entries in a DLOAD entry. For the latter case, the SID in the DLOAD entry is then selected by the Case Control command DLOAD.
3. Only TYPE=0 or 1 is supported.
4. For TYPE=0, EXCITEID may reference the SID in a FORCE, FORCE1, FORCE2, MOMENT, MOMENT1, MOMENT2, PLOAD, PLOAD1, PLOAD2, PLOAD4, PLOADX1, GRAV, RFORCE, TEMP, or TEMPD entry.
5. For TYPE=1, EXCITED must reference the SID in an SPCD entry.
6. Delay is ignored.

**2106 TLOAD2**  
**Transient Response Dynamic Excitation, Form 2**

**TLOAD2** Transient Response Dynamic Excitation, Form 2

Defines a time-dependent dynamic excitation or enforced motion of the form

$$\{P(t)\} = \begin{cases} 0 & , \quad t < (T1 + \tau) \text{ or } t > (T2 + \tau) \\ A\tilde{t}^B e^{C\tilde{t}} \cos(2\pi F\tilde{t} + \frac{P\pi}{180}), & (T1 + \tau) \leq t \leq (T2 + \tau) \end{cases}$$

for use in a transient response problem, where

$$\tilde{t} = t - T1 - \tau$$

**Format:**

| 1      | 2   | 3        | 4     | 5    | 6  | 7  | 8 | 9 | 10 |
|--------|-----|----------|-------|------|----|----|---|---|----|
| TLOAD2 | SID | EXCITEID | DELAY | TYPE | T1 | T2 | F | P |    |
|        | C   | B        |       |      |    |    |   |   |    |

**Example:**

|        |     |    |  |  |     |     |      |  |  |
|--------|-----|----|--|--|-----|-----|------|--|--|
| TLOAD2 | 4   | 10 |  |  | 2.1 | 4.7 | 12.0 |  |  |
|        | 2.0 |    |  |  |     |     |      |  |  |

**Fields:**

| Field    | Contents                                                                                                                                                                                            |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SID      | Set identification number. (Integer > 0)                                                                                                                                                            |
| EXCITEID | Identification number of a set entry for DAREA, SPCD, static load, or thermal load (for heat transfer analysis). The scale factor A is defined by these entries. See Remarks 2 and 3. (Integer > 0) |
| DELAY    | Identification number of DELAY entry set that defines t. (Integer ≥ 0 or blank)                                                                                                                     |
| TYPE     | Defines the type of the dynamic excitation. See Remarks 2 and 3. (Integer, character or blank; Default=0)                                                                                           |
| T1       | Time constant. (Real ≥ 0.0)                                                                                                                                                                         |
| T2       | Time constant. (Real; T2 > T1)                                                                                                                                                                      |

| Field | Contents                                                          |
|-------|-------------------------------------------------------------------|
| F     | Frequency in cycles per unit time. (Real $\geq$ 0.0; Default=0.0) |
| P     | Phase angle in degrees. (Real; Default=0.0)                       |
| C     | Exponential coefficient. (Real; Default=0.0)                      |
| B     | Growth coefficient. (Real; Default=0.0)                           |

**Remarks:**

- Dynamic excitation sets must be selected with the Case Control command with DLOAD=SID.
- The type of the dynamic excitation is specified by TYPE (field 5) according to the following table:

| TYPE                   | TYPE of Dynamic Excitation                              |
|------------------------|---------------------------------------------------------|
| 0, L, LO, LOA or LOAD  | Applied load (force or moment) (Default)                |
| 1, D, DI, DIS, or DISP | Enforced displacement using large mass or SPC/SPCD data |
| 2, V, VE, VEL or VELO  | Enforced velocity using large mass or SPC/SPCD data     |
| 3, A, AC, ACC or ACCE  | Enforced acceleration using large mass or SPC/SPCD data |

- TYPE (field 5) also determines the manner in which EXCITEID (field 3) is used by the program as described below

Excitation specified by TYPE is applied load

- There is no LOADSET request in Case Control  
EXCITEID may also reference DAREA, static and thermal load set entries

- There is a LOADSET request in Case Control

The program may also reference static and thermal load set entries specified by the LID or TID field in the selected LSEQ entries corresponding to the EXCITEID.

Excitation specified by TYPE is enforced motion

## 2108 TLOAD2

### Transient Response Dynamic Excitation, Form 2

- There is no LOADSET request in Case Control

EXCITEID will reference SPCD entries. If such entries indicate null enforced motion, the program will then assume that the excitation is enforced motion using large mass and will reference DAREA and static and thermal load set entries just as in the case of applied load excitation.

- There is a LOADSET request in Case Control

The program will reference SPCD entries specified by the LID field in the selected LSEQ entries corresponding to the EXCITEID. If such entries indicate null enforced motion, the program will then assume that the excitation is enforced motion using large mass and will reference static and thermal load set entries specified by the LID or TID field in the selected LSEQ entries corresponding to the EXCITEID, just as in the case of applied load excitation.

4. EXCITEID (field 3) may reference sets containing QHBDY, QBDYi, QVECT, and QVOL entries when using the heat transfer option.
5. If DELAY is blank or zero, t will be zero.
6. TLOAD1 loads may be combined with TLOAD2 loads only by specification on a DLOAD entry. That is, the SID on a TLOAD1 entry may not be the same as that on a TLOAD2 entry.
7. SID must be unique for all TLOAD1, TLOAD2, RLOAD1, RLOAD2, and ACSRCE entries.
8. If the heat transfer option is used, the referenced QVECT entry may also contain references to functions of time, and therefore A may be a function of time.
9. If TLOADi entries are selected in SOL 111 or 146 then a Fourier analysis is used to transform the time-dependent loads on the TLOADi entries to the frequency domain and then combine them with loads from RLOADi entries. Then the analysis is performed as a frequency response analysis but the solution and the output are converted to and printed in the time domain. In this case, B will be rounded to the nearest integer. Please refer to “Fourier Transform” in the *NX Nastran Advanced Dynamic Analysis User’s Guide*.
10. The continuation entry is optional.

**TMCPARA 2109**  
**Parameters for SOL 601 thermo-mechanical coupling analysis.**

**TMCPARA** Parameters for SOL 601 thermo-mechanical coupling analysis.

Defines parameters for SOL 601,153 and SOL 601,159 thermo-mechanical coupling (TMC) analysis.

**Format:**

| 1       | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9 | 10 |
|---------|--------|--------|--------|--------|--------|--------|--------|---|----|
| TMCPARA | ID     | Param1 | Value1 | Param2 | Value2 | Param3 | Value3 |   |    |
|         | Param4 | Value4 | Param5 | Value5 | -etc.- |        |        |   |    |

**Example:**

|         |      |      |   |        |    |        |     |  |  |
|---------|------|------|---|--------|----|--------|-----|--|--|
| TMCPARA | 1    | COUP | 1 | MAXITE | 30 | TRELAX | 0.9 |  |  |
|         | AUTO | 1    |   |        |    |        |     |  |  |

**Fields:**

| Field  | Contents                                                                                             |
|--------|------------------------------------------------------------------------------------------------------|
| ID     | Identification number. Currently not used. (Integer $\geq 0$ )                                       |
| PARAMi | Name of the TMCPARA parameter. Allowable names are given in the parameter listing below. (Character) |
| VALUEi | Value of the parameter. (Real or Integer)                                                            |

**Table 19-1. TMCPARA parameters**

| Name               | Description |
|--------------------|-------------|
| General Parameters |             |

**2110 TMCPARA**  
**Parameters for SOL 601 thermo-mechanical coupling analysis.**

**Table 19-1. TMCPARA parameters**

| <b>Name</b>                    | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| COUP                           | <p>Specifies the type of TMC coupling for SOL 601,153 or SOL 601,159. (Integer, Default = 0)</p> <p>0 – Iterative coupling<br/>           1 – One-way sequential coupling<br/>           2 – No coupling</p> <p>Two subcases are required for TMC analysis, one with ANALYSIS=HEAT and one with ANALYSIS=STRUC (default). If the first two subcases do not satisfy the above, the program will issue error and exit.</p> <p>COUP=0 will run structural analysis first followed by thermal analysis with TMC iterations. This type of coupling is applicable when the structural deformations affect the thermal analysis, e.g., contact, heat generation due to plastic deformation or frictional contact sliding.</p> <p>COUP=1 will run thermal analysis first followed by structural analysis with no TMC iterations. This type of coupling is applicable when the temperature results affect the structural analysis (e.g., thermal expansion and temperature-dependent material properties), but the structural deformations do not have significant effect on the thermal analysis.</p> <p>COUP=2 will run the first subcase (either thermal or structural).</p> |
| TRANOPT                        | <p>Specifies transient or static analysis options for SOL 601,159. (Integer, Default = 0)</p> <p>0 – Transient thermal and structural<br/>           1 – Transient thermal, static structural<br/>           2 – Steady-state thermal, transient structural</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Automatic Time Stepping</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| AUTO                           | <p>Indicates whether automatic time stepping scheme is used for the thermal analysis solution (Integer, Default = 0)</p> <p>0 – No automatic incrementation scheme is used<br/>           1 – Automatic Time Stepping (ATS) scheme is used</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

**Table 19-1. TMCPARA parameters**

| Name                                         | Description                                                                                                                                                                                                                                                                             |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ATSSUBD                                      | Number that limits the smallest time step size when the automatic time stepping (ATS) scheme is used. For a time step size of DT, the program will stop if convergence is not achieved and the next subdivided time step size is less than DT/ATSSUBD. (Integer $\geq$ 1; Default = 10) |
| <b>Transient Analysis</b>                    |                                                                                                                                                                                                                                                                                         |
| TINTEG                                       | Selects the time integration method to be used for transient thermal analysis. (Integer; Default = 0)<br><br>0 – Euler backward method<br>2 – Trapezoidal rule<br>3 – Composite method                                                                                                  |
| HEATCAP                                      | Selects the type of heat capacity matrix to be used in transient thermal analysis. (Integer; Default = 1)<br><br>0 – Lumped heat capacity matrix<br>1 – Consistent heat capacity matrix                                                                                                 |
| <b>Equilibrium Iteration and Convergence</b> |                                                                                                                                                                                                                                                                                         |
| ITSCHEM                                      | Selects the equilibrium iteration scheme used for nonlinear thermal analysis. (Integer; Default = 1)<br><br>0 – Modified Newton iteration<br>1 – Full Newton iteration                                                                                                                  |
| LSEARCH                                      | Flag to indicate the use of line searches within the iteration scheme for nonlinear thermal analysis. (Integer; Default = 0)<br><br>0 – Line search is not used<br>1 – Line search is used                                                                                              |

**2112 TMCPARA**  
**Parameters for SOL 601 thermo-mechanical coupling analysis.**

**Table 19-1. TMCPARA parameters**

| <b>Name</b>          | <b>Description</b>                                                                                                                                                                                                                                                                             |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAXITE               | Maximum number of iterations within a thermal solution time step. If the maximum number of iterations is reached without achieving convergence, the program will stop unless the automatic time stepping (ATS) scheme is selected (AUTO=1). ( $1 \leq \text{Integer} \leq 999$ ; Default = 15) |
| TTOL                 | Relative temperature tolerance used to determine if the thermal solution has converged. (Real; Default = 0.001)                                                                                                                                                                                |
| TMCTOL               | Relative tolerance used to determine if the TMC iteration has converged. Applicable only for iterative TMC coupling solution, i.e., COUP=0. (Real; Default = TTOL)                                                                                                                             |
| TRELAX               | Temperature relaxation factor that may be used to help in the convergence of thermal solution. ( $0.0 \leq \text{Real} \leq 1.0$ ; Default = 1.0)                                                                                                                                              |
| <b>Miscellaneous</b> |                                                                                                                                                                                                                                                                                                |
| HGENPL               | Proportion of internal heat generated in shell, 2D and 3D solid elements due to plastic deformation. ( $0.0 \leq \text{Real} \leq 1.0$ ; Default = 1.0)                                                                                                                                        |

**Remarks:**

1. The TMCPARA bulk entry is not required. When it is not present, the default values are used. At least one parameter should be defined when a TMCPARA entry exists.



**TRIM** Trim Variable Constraint

Specifies constraints for aeroelastic trim variables. The SPLINE1 and SPLINE4 entries need to be here for the finite plate spline.

**Format:**

| 1    | 2      | 3    | 4      | 5      | 6   | 7      | 8   | 9    | 10 |
|------|--------|------|--------|--------|-----|--------|-----|------|----|
| TRIM | ID     | MACH | Q      | LABEL1 | UX1 | LABEL2 | UX2 | AEQR |    |
|      | LABEL3 | UX3  | -etc.- |        |     |        |     |      |    |

**Example:**

|      |      |     |      |       |     |        |     |     |  |
|------|------|-----|------|-------|-----|--------|-----|-----|--|
| TRIM | 1    | 0.9 | 100. | URDD3 | 1.0 | ANGLEA | 7.0 | 0.0 |  |
|      | ELEV | 0.2 |      |       |     |        |     |     |  |

**Fields:**

| Field  | Contents                                                                                                                                           |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| SID    | Trim set identification number. (Integer > 0)                                                                                                      |
| MACH   | Mach number. (Real $\geq 0.0$ and $\neq 1.0$ )                                                                                                     |
| Q      | Dynamic pressure. (Real > 0.0)                                                                                                                     |
| LABELi | The label identifying aerodynamic trim variables defined on an AESTAT or AESURF entry. (Character)                                                 |
| UXi    | The magnitude of the aerodynamic extra point degree-of-freedom. (Real)                                                                             |
| AEQR   | Flag to request a rigid trim analysis (Real $\geq 0.0$ and $\leq 1.0$ , Default 1.0. A value of 0.0 provides a rigid trim analysis, see Remark 4 . |

**Remarks:**

1. The TRIM entry must be selected with the Case Control command TRIM=SID.
2. The selected TRIM entry specifies the constrained values of the listed extra point degrees-of-freedom (“trim variables”) for a particular loading condition. These variables are listed on AESTAT and/or AESURF entries.
3. If MACH is less than 1.0, then the Doublet-Lattice theory is used. If MACH is greater than 1.0, then the ZONA51 theory is used.

## 2114 TRIM

### Trim Variable Constraint

4.  $AEQR=0.0$  can be used to perform a rigid trim analysis (ignoring the effects of structural deformation on the loading).  $AEQR=1.0$  provides standard aeroelastic trim analysis. Intermediate values are permissible, but have no physical interpretation (they may be useful for model checkout).

## TSTEP      Transient Time Step

Defines time step intervals at which a solution will be generated and output in transient analysis.


**Format:**

| 1     | 2   | 3      | 4   | 5   | 6 | 7 | 8 | 9 | 10 |
|-------|-----|--------|-----|-----|---|---|---|---|----|
| TSTEP | SID | N1     | DT1 | NO1 |   |   |   |   |    |
|       |     | N2     | DT2 | NO2 |   |   |   |   |    |
|       |     | -etc.- |     |     |   |   |   |   |    |

**Example:**

|       |     |      |      |      |  |  |  |  |  |
|-------|-----|------|------|------|--|--|--|--|--|
| TSTEP | 101 | 9000 | .001 | 9000 |  |  |  |  |  |
|       |     | 1000 | .001 | 1    |  |  |  |  |  |

In the above example, 10000 time steps with increment .001 seconds are computed, the first 9000 time steps are skipped, and time steps 9001 thru 10000 are output.

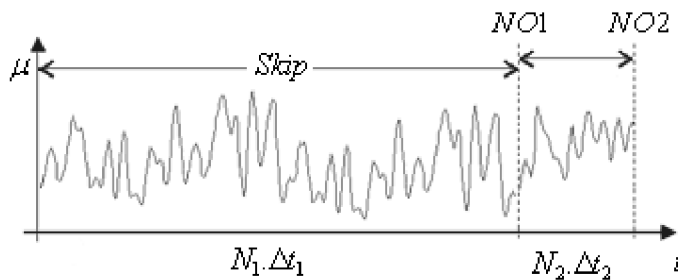

**Fields:**

| Field | Contents                                                                                     |
|-------|----------------------------------------------------------------------------------------------|
| SID   | Set identification number. (Integer > 0)                                                     |
| Ni    | Number of time steps of value DTi. (Integer ≥ 1)                                             |
| DTi   | Time increment. (Real > 0.0)                                                                 |
| NOi   | Skip factor for output. Every NOi-th step will be saved for output. (Integer > 0; Default=1) |

## 2116 TSTEP Transient Time Step

### Remarks:

1. TSTEP entries must be selected with the Case Control command TSTEP=SID.
2. Note that the entry permits changes in the size of the time step during the course of the solution. Thus, in the example shown, there are 10 time steps of value .001 followed by 9 time steps of value .01. Also, the user has requested that output be recorded for  $t=0.0, .005, .01, .02, .03$ , etc.
3. See “Guidelines for Effective Dynamic Analysis ” in the *NX Nastran Basic Dynamic Analysis User’s Guide* for a discussion of considerations leading to the selection of time steps.
4. In modal frequency response analysis (SOLs 111 and 146), this entry is required only when TLOADi is requested; i.e., when Fourier methods are selected.
5. The maximum and minimum displacement at each time step and the SIL numbers of these variables can be printed by altering DIAGON(30) before the transient module TRD1 and by altering DIAGOFF(30) after the module. This is useful for runs that terminate due to overflow or excessive run times.
6. For heat transfer analysis in SOL 159, use the TSTEPNL entry.

### Remarks related to SOLs 601 and 701:

1. TSTEP may be used in a static or transient analysis. In a nonlinear static analysis, TSTEP is frequently used with TLOAD1 to apply incremental loads to achieve better convergence in the solution.
2. If no TSTEP is selected with the Case Control command TSTEP, the program assumes 1 time step with time increment of 1.0.
3. For SOL 701, the actual time step size used may be determined by the program based on the critical time step size for stability. To request that the program use the time step size DTi here, specify XSTEP=1 in NXSTRAT entry. In all cases, the total solution time is used, i.e., total solution time is the sum of all  $N_i * DT_i$
4. For SOL 701, please see Section 7.1 in the Advanced Nonlinear Theory and Modeling Guide on the critical time step size and when results are output.
5. Note that TSTEPNL is not used in SOLs 601 or 701.

**TSTEPNL** Parameters for Nonlinear Transient Analysis

Defines parametric controls and data for nonlinear transient structural or heat transfer analysis. TSTEPNL is intended for SOLs 129 and 159.

**Format:**

| 1       | 2      | 3      | 4     | 5      | 6     | 7     | 8       | 9    | 10 |
|---------|--------|--------|-------|--------|-------|-------|---------|------|----|
| TSTEPNL | ID     | NDT    | DT    | NO     |       | KSTEP | MAXITER | CONV |    |
|         | EPSU   | EPSP   | EPSW  | MAXDIV | MAXQN | MAXLS | FSTRESS |      |    |
|         | MAXBIS | ADJUST | MSTEP | RB     | MAXR  | UTOL  | RTOLB   |      |    |

**Example:**

|         |       |       |       |      |      |     |     |    |  |
|---------|-------|-------|-------|------|------|-----|-----|----|--|
| TSTEPNL | 250   | 100   | .01   | 1    |      | 2   | 10  | PW |  |
|         | 1.E-2 | 1.E-3 | 1.E-6 | 2    | 10   | 2   | .02 |    |  |
|         | 5     | 5     | 0     | 0.75 | 16.0 | 0.1 | 20. |    |  |

**Fields:**

| Field   | Contents                                                                                                           |
|---------|--------------------------------------------------------------------------------------------------------------------|
| ID      | Identification number. (Integer > 0)                                                                               |
| NDT     | Number of time steps of value DT. See Remark 2 . (Integer ≥ 4)                                                     |
| DT      | Time increment. See Remark 2 . (Real > 0.0)                                                                        |
| NO      | Time step interval for output. Every NO-th step will be saved for output. See Remark 3 . (Integer > 0; Default=1)  |
| KSTEP   | KSTEP is the number of converged bisection solutions between stiffness updates. (Integer > 0; Default=2)           |
| MAXITER | Limit on number of iterations for each time step. See Remark 4 . (Integer ≠ 0; Default=10)                         |
| CONV    | Flags to select convergence criteria. See Remark 5 . (Character: “U”, “P”, “W”, or any combination; Default=“PW.”) |
| EPSU    | Error tolerance for displacement (U) criterion. (Real > 0.0; Default=1.0E-2)                                       |
| EPSP    | Error tolerance for load (P) criterion. (Real > 0.0; Default=1.0E-3)                                               |

## 2118 TSTEPNL Parameters for Nonlinear Transient Analysis

| Field   | Contents                                                                                                                                                              |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPSW    | Error tolerance for work (W) criterion. (Real > 0.0; Default=1.0E-6)                                                                                                  |
| MAXDIV  | Limit on the number of diverging conditions for a time step before the solution is assumed to diverge. See Remark 6 . (Integer > 0; Default=2)                        |
| MAXQN   | Maximum number of quasi-Newton correction vectors to be saved on the database. See Remark 7 . (Integer ≥ 0; Default=10)                                               |
| MAXLS   | Maximum number of line searches allowed per iteration. See Remark 7 . (Integer ≥ 0; Default=2)                                                                        |
| FSTRESS | Fraction of effective stress ( $\bar{\sigma}$ ) used to limit the subincrement size in the material routines. See Remark 8 . (0.0 < Real < 1.0; Default=0.2)          |
| MAXBIS  | Maximum number of bisections allowed for each time step. See Remark 9 . (-9 ≤ Integer ≤ 9; Default=5)                                                                 |
| ADJUST  | Time step skip factor for automatic time step adjustment. See Remark 10 . (Integer ≥ 0; Default=5)                                                                    |
| MSTEP   | Number of steps to obtain the dominant period response. See Remark 11 . (10 ≤ Integer ≤ 200; Default=variable between 20 and 40.)                                     |
| RB      | Define bounds for maintaining the same time step for the stepping function during the adaptive process. See Remark 11 . (0.1 ≤ Real ≤ 1.0; Default=0.75)              |
| MAXR    | Maximum ratio for the adjusted incremental time relative to DT allowed for time step adjustment. See Remark 12 . (1.0 ≤ Real ≤ 32.0; Default=16.0)                    |
| UTOL    | Tolerance on displacement or temperature increment below which a special provision is made for numerical stability. See Remark 13 . (0.001 < Real ≤ 1.0; Default=0.1) |
| RTOLB   | Maximum value of incremental rotation (in degrees) allowed per iteration to activate bisection. See Remark 14 . (Real > 2.0; Default=20.0)                            |

**Remarks:**

1. The TSTEPNL Bulk Data entry is selected by the Case Control command TSTEP=ID. Each residual structure subcase requires a TSTEP entry and either applied loads via TLOADi data or initial values from a previous subcase. Multiple subcases are assumed to occur sequentially in time with the initial values of time and displacement conditions of each subcase defined by the end conditions of the previous subcase.
2. NDT is used to define the total duration for analysis, which is  $NDT * DT$ . Since DT is adjusted during the analysis, the actual number of time steps, in general, will not be equal to NDT. Also, DT is used only as an initial value for the time increment.
3. For printing and plotting the solution, data recovery is performed at time steps 0, NO, 2 \* NO, ..., and the last converged step. The Case Control command OTIME may also be used to control the output times.
4. The number of iterations for a time step is limited to MAXITER. If MAXITER is negative, the analysis is terminated when the divergence condition is encountered twice during the same time step or the solution diverges for five consecutive time steps. If MAXITER is positive, the program computes the best solution and continues the analysis until divergence occurs again. If the solution does not converge in MAXITER iterations, the process is treated as a divergent process. See Remark 6 .
5. The convergence test flags (U=displacement error test, P=load equilibrium error test, W=work error test) and the error tolerances (EPSU, EPSP, and EPSW) define the convergence criteria. All requested criteria (combination of U, P, and/or W) are satisfied upon convergence. Note that at least two iterations are necessary to check the displacement convergence criterion.
6. MAXDIV provides control over diverging solutions. Depending on the rate of divergence, the number of diverging solutions (NDIV) is incremented by 1 or 2. The solution is assumed to diverge when NDIV reaches MAXDIV during the iteration. If the bisection option is used (allowed MAXBIS times) the time step is bisected upon divergence. Otherwise, the solution for the time step is repeated with a new stiffness based on the converged state at the beginning of the time step. If NDIV reaches MAXDIV again within the same time step, the analysis is terminated.
7. Nonzero values of MAXQN and MAXLS will activate the quasi-Newton update and the line search process, respectively.
8. The number of subincrements in the material routines is determined such that the subincrement size is approximately FSTRESS,

## 2120 TSTEPNL Parameters for Nonlinear Transient Analysis

$\bar{\sigma}$ . FSTRESS is also used to establish a tolerance for error correction in elastoplastic material, i.e.,

$$\text{error in yield function} < \text{FSTRESS} \cdot \text{yield stress}$$

If the limit is exceeded at the converging state, the program will terminate with a fatal error message. Otherwise, the stress state is adjusted to the current yield surface, resulting in  $d=0$ .

9. The bisection process is activated when divergence occurs and  $\text{MAXBIS} \neq 0$ . The number of bisections for a time increment is limited to  $|\text{MAXBIS}|$ . If  $\text{MAXBIS}$  is positive and the solution does not converge after  $\text{MAXBIS}$  bisections, the best solution is computed and the analysis is continued to the next time step. If  $\text{MAXBIS}$  is negative and the solution does not converge in  $|\text{MAXBIS}|$  bisection, the analysis is terminated.
10. ADJUST controls the automatic time stepping. Since the automatic time step adjustment is based on the mode of response and not on the loading pattern, it may be necessary to limit the adjustable step size when the period of the forcing function is much shorter than the period of dominant response frequency of the structure. It is the user's responsibility to ensure that the loading history is properly traced with the ADJUST option. The ADJUST option should be suppressed for the duration of short pulse loading. If unsure, start with a value for DT that is much smaller than the pulse duration in order to properly represent the loading pattern.
  - If  $\text{ADJUST}=0$ , then the automatic adjustment is deactivated. This is recommended when the loading consists of short duration pulses.
  - If  $\text{ADJUST} > 0$ , the time increment is continually adjusted for the first few steps until a good value of  $\Delta t$  is obtained. After this initial adjustment, the time increment is adjusted every ADJUST-th time step only.
  - If ADJUST is one order greater than NDT, then automatic adjustment is deactivated after the initial adjustment.
11. MSTEP and RB are used to adjust the time increment during analysis. The recommended value of MSTEP for nearly linear problems is 20. A larger value (e.g., 40) is required for highly nonlinear problems. By default, the program automatically computes the value of MSTEP based on the changes in the stiffness.

The time increment adjustment is based on the number of time steps desired to capture the dominant frequency response accurately. The time increment is adjusted as follows:



$$\Delta t_{n+1} = f(r)\Delta t_n$$

where

$$r = \frac{1}{\text{MSTEP}} \left( \frac{2\pi}{\omega_n} \right) \left( \frac{1}{\Delta t_n} \right)$$

with

|   |   |      |     |                                          |
|---|---|------|-----|------------------------------------------|
| f | = | 0.25 | for | $r < 0.5 \cdot \text{RB}$                |
| f | = | 0.5  | for | $0.5 \cdot \text{RB} \leq r < \text{RB}$ |
| f | = | 1.0  | for | $\text{RB} \leq r < 2.0$                 |
| f | = | 2.0  | for | $2.0 \leq r < 3.0/\text{RB}$             |
| f | = | 4.0  | for | $r \geq 3.0/\text{RB}$                   |

12. MAXR is used to define the upper and lower bounds for adjusted time step size, i.e.,

$$\text{MIN} \left( \frac{\text{DT}}{2 \cdot \text{MAXBIS}}, \frac{\text{DT}}{\text{MAXR}} \right) \leq \Delta t \leq \text{MAXR} \cdot \text{DT}$$

13. UTOL is a tolerance used to filter undesirable time step adjustments; i.e.,

$$\frac{\|\dot{U}_n\|}{\|\dot{U}\|_{\max}} < \text{UTOL}$$

Under this condition no time step adjustment is performed in a structural analysis (SOL 129). In a heat transfer analysis (SOL 159) the time step is doubled.

14. The bisection is activated if the incremental rotation for any degree-of-freedom ( $\Delta q_x, \Delta q_y, \Delta q_z$ ) exceeds the value specified by RTOLB. This bisection strategy is based on the incremental rotation and controlled by MAXBIS.

## 2122 USET Degree-of-Freedom Set Definition

### USET Degree-of-Freedom Set Definition

Defines a degree-of-freedom set.

#### Format:

| 1    | 2     | 3   | 4  | 5   | 6  | 7   | 8  | 9 | 10 |
|------|-------|-----|----|-----|----|-----|----|---|----|
| USET | SNAME | ID1 | C1 | ID2 | C2 | ID3 | C3 |   |    |

#### Example:

|      |    |     |    |    |   |  |  |  |  |
|------|----|-----|----|----|---|--|--|--|--|
| USET | U4 | 333 | 26 | 17 | 0 |  |  |  |  |
|------|----|-----|----|----|---|--|--|--|--|

#### Fields:

| Field | Contents                                                                                                                                                     |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAME | Set name. (One to four characters, or the string "ZERO" followed by the set name.)                                                                           |
| IDI   | Grid or scalar point identification number. (Integer > 0)                                                                                                    |
| CI    | Component number. (Integer zero or blank for scalar points, or any unique combinations of the Integers 1 through 6 for grid points with no embedded blanks.) |

#### Remarks:

1. SNAME may refer to any of the set names given in ["Degree-of-Freedom Sets"](#) or their new names on the DEFUSET entry. However, it is recommended that SNAME refer only to the set names U1 through U9 or their new names on the DEFUSET entry. If set names a through v are used then the degrees-of-freedom may also have to be defined in the applicable super sets on other USETi entries.
2. If SNAME="ZEROi", where i is a set name, then the degrees-of-freedom are omitted from set i.
3. A maximum of 18 degrees-of-freedom may be designated on a single entry.
4. If degrees-of-freedom defined by USET entries are found to be singular and AUTOSPC is requested for a degree-of-freedom that is also in a set that AUTOSPC may change, then the set defined by the USET entry will be removed by the AUTOSPC operation. An avoidance is to use PARAM,AUTOSPC,NO.

5. The USET entry is processed by the GP4 module with its effect appearing in the USET table. User-written DMAPs must therefore include the GP1 and GP4 modules if USET entries are used.
6. If a USETi Bulk Data entry lists a standard NX Nastran set, such as S or M, the program may fail in the PARTN module with the message “SYSTEM FATAL MESSAGE 3007, ILLEGAL INPUT TO SUBROUTINE”. This entry should only reference new sets defined on DEFUSET Bulk Data entries.
7. The user defined degree-of-freedom sets U1 – U9 are created with the USET and USET1 bulk entries. Be aware that the user defined sets U2 - U8 are used by NX Nastran in some special cases. You may use U2 – U8 as long as it doesn’t conflict with these cases. See [“User Defined Degree-of-Freedom Sets”](#) for the list of these special cases.

**2124 USET1**  
**Degree-of-Freedom Set Definition, Alternate Form**

**USET1** Degree-of-Freedom Set Definition, Alternate Form

Defines a degrees-of-freedom set.

**Format:**

| 1     | 2     | 3   | 4      | 5   | 6   | 7   | 8   | 9   | 10 |
|-------|-------|-----|--------|-----|-----|-----|-----|-----|----|
| USET1 | SNAME | C   | ID1    | ID2 | ID3 | ID4 | ID5 | ID6 |    |
|       | ID7   | ID8 | -etc.- |     |     |     |     |     |    |

**Example:**

|       |    |     |   |   |    |   |   |   |  |
|-------|----|-----|---|---|----|---|---|---|--|
| USET1 | SB | 345 | 2 | 1 | 36 | 5 | 9 | 7 |  |
|       | 40 |     |   |   |    |   |   |   |  |

**Alternate Format and Example:**

|       |       |     |     |        |     |  |  |  |  |
|-------|-------|-----|-----|--------|-----|--|--|--|--|
| USET1 | SNAME | C   | ID1 | “THRU” | ID2 |  |  |  |  |
| USET1 | SB    | 123 | 170 | THRU   | 180 |  |  |  |  |

**Fields:**

| Field | Contents                                                                                                                                                     |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAME | Set name. (One to four characters or the word “ZERO” followed by the set name.)                                                                              |
| C     | Component numbers. (Integer zero or blank for scalar points or any unique combinations of the Integers 1 through 6 for grid points with no embedded blanks.) |
| IDI   | Grid or scalar point identification number. (Integer > 0; for “THRU” option, ID1 < ID2.)                                                                     |

**Remarks:**

1. SNAME may refer to any of the set names given in [“Degree-of-Freedom Sets”](#) or their new names on the DEFUSET entry. However, it is recommended that SNAME refer only to the set names U1 through U9 or their new names on the DEFUSET entry. If set names a through v are used then the degrees-of-freedom may also have to be defined in the applicable super sets on other USETi entries.
2. If SNAME= “ZEROi”, where i is a set name, then the degrees-of-freedom are omitted from set i.

**USET1 2125**

**Degree-of-Freedom Set Definition, Alternate Form**

3. If the alternate format is used, all of the points ID1 through ID2 are assigned to the set.
4. If degrees-of-freedom defined by USET entries are found to be singular and AUTOSPC is requested for a degree-of-freedom that is also in a set that AUTOSPC may change, then the set defined by the USET entry will be removed by the AUTOSPC operation. An avoidance is to use PARAM,AUTOSPC,NO.
5. The USET1 entry is processed by the GP4 module with its effect appearing in the USET table. User-written DMAPs must therefore include the GP1 and GP4 modules if USET entries are used.
6. If a USETi Bulk Data entry lists a standard NX Nastran set, such as S or M, the program may fail in the PARTN module with the message “SYSTEM FATAL MESSAGE 3007, ILLEGAL INPUT TO SUBROUTINE”. This entry should only reference new sets defined on DEFUSET Bulk Data entries.
7. The user defined degree-of-freedom sets U1 – U9 are created with the USET and USET1 bulk entries. Be aware that the user defined sets U2 - U8 are used by NX Nastran in some special cases. You may use U2 – U8 as long as it doesn't conflict with these cases. See [“User Defined Degree-of-Freedom Sets”](#) for the list of these special cases.

**2126 UXVEC**  
**Control Parameter State**

**UXVEC** Control Parameter State

Specification of a vector of aerodynamic control point (extra point) values. These data define the control positions corresponding to user defined nonlinear control forces that have been defined by AEDW, AEPRESS and AEFORCE entries. Only nonzero values need to be defined.

**Format:**

| 1     | 2      | 3   | 4      | 5   | 6      | 7 | 8 | 9 | 10 |
|-------|--------|-----|--------|-----|--------|---|---|---|----|
| UXVEC | ID     |     |        |     |        |   |   |   |    |
|       | LABEL1 | UX1 | LABEL2 | UX2 | -etc.- |   |   |   |    |

**Example:**

|       |        |      |        |      |  |  |  |  |  |
|-------|--------|------|--------|------|--|--|--|--|--|
| UXVEC | 1001   |      |        |      |  |  |  |  |  |
|       | THRUST | 1.E4 | ANGLEA | .015 |  |  |  |  |  |

**Fields:**

| Field  | Contents                                                                                         |
|--------|--------------------------------------------------------------------------------------------------|
| ID     | Control vector identification number, see Remark 1. (Integer > 0)                                |
| LABELi | Controller name. This must correspond to an existing AESURF, AESTAT or AEPARM label (Character). |
| UXi    | The magnitude of the aerodynamic extra point degree of freedom (Real)                            |

For ETOL, when the error estimate exceeds the value input for the ETOL entry

1. The contour method is employed to develop an improved view
2. The units of the user defined AEPARM controllers are implied by their use on this entry and the corresponding values on the force vector definition. The user must be self-consistent in all uses of the same controller. AESURF controllers are expressed in radians as are the rigid body angles ANGLEA and BETA. The rigid body rates, ROLL, PITCH and YAW are nondimensional rates  $pb/2V$ ,  $qc/2V$ ,  $rb/2V$ ; respectively. V is the velocity and b and c are the reference span and chord lengths, respectively.
3. LABELs that are part of the UX vector that are omitted in the UXVEC specification are assigned a value of 0.0.

**VIEW** View Factor Definition

Defines radiation cavity and shadowing for radiation view factor calculations.

**Format:**

| 1    | 2     | 3       | 4     | 5  | 6  | 7      | 8 | 9 | 10 |
|------|-------|---------|-------|----|----|--------|---|---|----|
| VIEW | IVIEW | ICAVITY | SHADE | NB | NG | DISLIN |   |   |    |

**Example:**

|      |   |   |      |   |   |      |  |  |  |
|------|---|---|------|---|---|------|--|--|--|
| VIEW | 1 | 1 | BOTH | 2 | 3 | 0.25 |  |  |  |
|------|---|---|------|---|---|------|--|--|--|

**Fields:**

**Field Contents**

IVIEW Identification number. (Integer > 0)

ICAVITY Cavity identification number for grouping the radiant exchange faces of CHBDYi elements. (Integer > 0)

SHADE Shadowing flag for the face of CHBDYi element. (Character, Default="BOTH")

NONE means the face can neither shade nor be shaded by other faces.

KSHD means the face can shade other faces.

KBSHD means the face can be shaded by other faces.

BOTH means the face can both shade and be shaded by other faces. (Default)

NB Subelement mesh size in the beta direction. (Integer > 0; Default=1)

NG Subelement mesh size in the gamma direction. (Integer > 0; Default=1)

DISLIN The displacement of a surface perpendicular to the surface. See [Figure 19-10](#). (Real; Default=0.0)


**Remarks:**

1. VIEW must be referenced by CHBDYE, CHBDYG, or CHBDYP elements to be used.

## 2128 VIEW

### View Factor Definition

2. ICAVITY references the cavity to which the face of the CHBDYi element belongs; a zero or blank value indicates this face does not participate in a cavity.
3. NB, NG, and DISLIN are used in the calculation of view factors by finite difference or contour integration techniques. They are not used with the VIEW3D entry.
4. A summary of the shadowing conditions can be requested by the PARAM,MESH,YES Bulk Data entry.
5. SHADE references shadowing for CHBDYi elements participating in a radiation cavity, the VIEW calculation can involve shadowing.
6. DISLIN should only be used with LINE type CHBDYE and CHBDYP surface elements.  $DISLIN > 0.0$  means into the cavity. See [Figure 19-10](#).

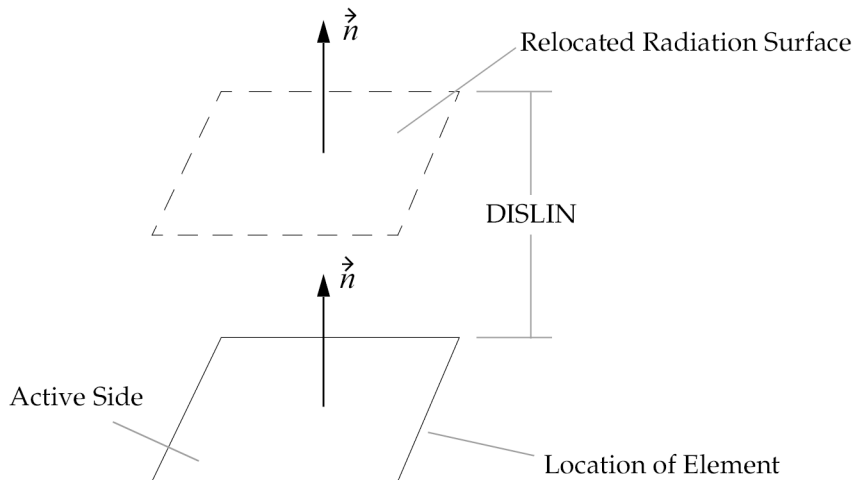

**Figure 19-10. DISLIN Convention**

7. NB and NG define the subelement mesh refinement when using the VIEW module (as opposed to the VIEW3D module) for the calculation of view factors.



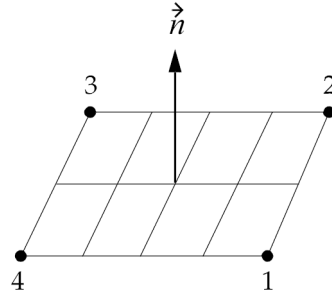


Figure 19-11. Typical AREA4 surface element where NB=2 and NG=4

**2130 VIEW3D**  
View Factor Definition - Gaussian Integration Method

**VIEW3D** View Factor Definition - Gaussian Integration Method

Defines parameters to control and/or request the Gaussian Integration method of view factor calculation for a specified cavity.

**Format:**

| 1      | 2       | 3    | 4    | 5    | 6    | 7    | 8    | 9      | 10 |
|--------|---------|------|------|------|------|------|------|--------|----|
| VIEW3D | ICAVITY | GITB | GIPS | CIER | ETOL | ZTOL | WTOL | RADCHK |    |

**Example:**

|        |   |   |   |   |  |        |  |  |  |
|--------|---|---|---|---|--|--------|--|--|--|
| VIEW3D | 1 | 2 | 2 | 4 |  | 1.0E-6 |  |  |  |
|--------|---|---|---|---|--|--------|--|--|--|

**Fields:**

| Field   | Contents                                                                                                                                                                 |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ICAVITY | Radiant cavity identification number on RADCAV entry. (Integer > 0)                                                                                                      |
| GITB    | Gaussian integration order to be implemented in calculating net effective view factors in the presence of third-body shadowing. (Integer 2, 3, 4, 5, 6 or 10; Default=4) |
| GIPS    | Gaussian integration order to be implemented in calculating net effective view factors in the presence of self-shadowing. (Integer 2, 3, 4, 5, 6 or 10; Default=4)       |
| CIER    | Discretization level used in the semi-analytic contour integration method. ( $1 \leq \text{Integer} \leq 20$ ; Default=4)                                                |
| ETOL    | Error estimate above which a corrected view factor is calculated using the semi-analytic contour integration method. (Real $\geq 0.0$ ; Default=0.1)                     |
| ZTOL    | Assumed level of calculation below which the numbers are considered to be zero. (Real $\geq 0.0$ ; Default=1.E-10)                                                       |
| WTOL    | Assumed degree of warpage above which the actual value of $F_{ii}$ will be calculated. ( $0.0 \leq \text{Real} \leq 1.0$ ; Default=0.01)                                 |
| RADCHK  | Type of diagnostic output desired for the radiation exchange surfaces. (Integer; Default=3)                                                                              |

| <b>Field</b> | <b>Contents</b>                                                                                                                                                                                                      |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | RADCHK=-1, No diagnostic output requested                                                                                                                                                                            |
|              | RADCHK=1, Grid table and element connectivity                                                                                                                                                                        |
|              | RADCHK=2, Surface Diagnostics - Surface type, area, skewness, taper, warpage, grid point sequencing, aspect ratio, and shading flags.                                                                                |
|              | RADCHK=3, Area, view factor, area-view factor product with error estimate, existence flags for partial self-shadowing, third-body shadowing with error estimate, and enclosure summations for view factor. (Default) |
|              | RADCHK=0, Same as RADCHK=1, 2, and 3                                                                                                                                                                                 |
|              | RADCHK=12, Same as RADCHK=1 and 2                                                                                                                                                                                    |
|              | RADCHK=13, Same as RADCHK=1 and 3                                                                                                                                                                                    |
|              | RADCHK=23, Same as RADCHK=2 and 3                                                                                                                                                                                    |

**Remarks:**

1. For ETOL, when the error estimate exceeds the value input for the ETOL entry, the contour method is employed to develop an improved view factor.
2. For ZTOL, the use of a geometry scale that results in small numerical values of  $A_i F_{ij}$  should be avoided.
3. When WTOL is exceeded, the actual value of  $F_{ii}$  will be calculated when using the adaptive view module. Warpage will not be considered in the calculation of factor  $F_{ij}$ .